

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333332-840

Luminaire Tested: **S125DIP-S1270D1205U840-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333332-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1270D1205U840-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9444.7 lumens
Efficiency: N/A
Efficacy: 131.7 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

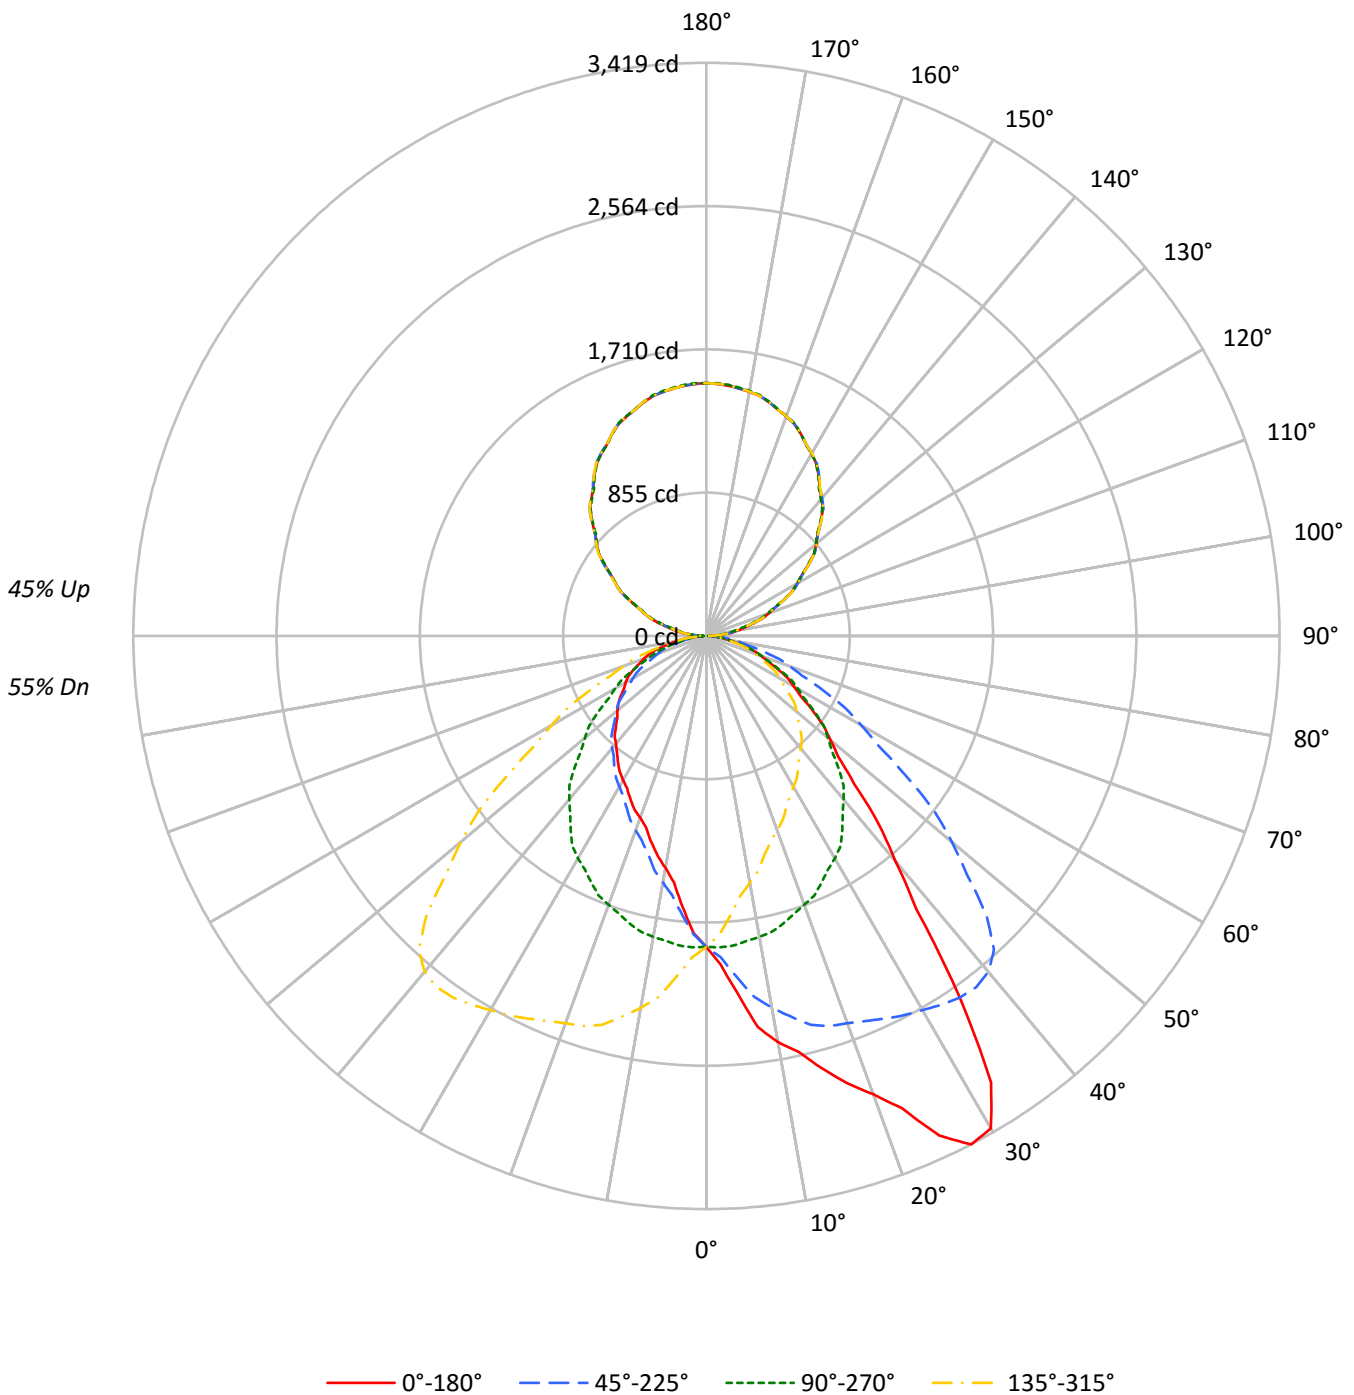



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	88	92	88	85	82	76	74	72	65	63	62	54	53	52	47
2	91	83	77	72	84	78	72	68	67	63	60	57	54	52	48	46	44	40
3	83	73	66	60	77	68	62	57	59	54	50	51	47	44	43	40	38	34
4	76	65	57	51	70	61	54	48	53	47	43	45	41	38	38	35	33	29
5	70	58	50	44	64	54	47	42	47	42	37	41	36	33	35	31	29	26
6	64	52	44	38	59	49	42	36	43	37	33	37	32	29	31	28	25	22
7	59	47	39	34	55	44	37	32	39	33	29	34	29	26	29	25	22	20
8	55	43	35	30	51	40	33	28	35	30	26	31	26	23	26	23	20	18
9	51	39	32	26	48	37	30	25	32	27	23	28	24	21	24	21	18	16
10	48	36	29	24	45	34	27	23	30	24	21	26	22	19	23	19	16	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	11978	11978	11978	11978
5°	13871	12019	10524	12019
10°	16138	11956	9220	11956
15°	17864	11869	8505	11869
20°	19996	11730	7932	11730
25°	23426	11573	7652	11573
30°	25302	11419	7409	11419
35°	20805	11129	7250	11129
40°	14787	10725	7075	10725
45°	11359	10181	6974	10181
50°	9697	9507	6961	9507
55°	8634	8847	7020	8847
60°	7789	8123	7198	8123
65°	7195	7398	7386	7398
70°	6541	6643	7493	6643
75°	5777	5854	7426	5854
80°	4861	4775	6791	4775
85°	3846	3446	5483	3446



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	178.6	1.9
10°-20°	531.6	5.6
20°-30°	863.2	9.1
30°-40°	1053.0	11.1
40°-50°	957.9	10.1
50°-60°	763.0	8.1
60°-70°	531.4	5.6
70°-80°	283.4	3.0
80°-90°	74.8	0.8
90°-100°	101.0	1.1
100°-110°	298.2	3.2
110°-120°	505.2	5.3
120°-130°	664.8	7.0
130°-140°	745.0	7.9
140°-150°	730.1	7.7
150°-160°	613.2	6.5
160°-170°	407.6	4.3
170°-180°	142.7	1.5
0°-30°	1573.4	16.7
0°-40°	2626.3	27.8
0°-60°	4347.2	46.0
0°-90°	5236.8	55.4
90°-120°	904.4	9.6
90°-150°	3044.3	32.2
90°-180°	4208.0	44.6
0°-180°	9444.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1855	1855	1855	1855	1855	
5°	2140	1854	1623	1854	2140	216
15°	2672	1775	1272	1775	2672	765
25°	3287	1624	1074	1624	3287	1502
35°	2639	1412	920	1412	2639	1615
45°	1244	1115	764	1115	1244	995
55°	767	786	624	786	767	691
65°	471	484	483	484	471	467
75°	232	235	298	235	232	249
85°	52	46	74	46	52	61
90°	28	1	28	1	28	18
95°	101	76	101	76	101	103
105°	291	268	291	268	291	308
115°	510	506	510	506	510	505
125°	743	738	743	738	743	663
135°	963	960	963	960	963	743
145°	1168	1163	1168	1163	1168	729
155°	1331	1331	1331	1331	1331	612
165°	1443	1447	1443	1447	1443	407
175°	1498	1504	1498	1504	1498	142
180°	1508	1508	1508	1508	1508	



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7
2.5°	1961.8	1959.2	1956.7	1951.7	1955.4	1944.7	1939.6	1930.9	1920.2	1916.4	1912.0
5°	2139.6	2143.5	2147.5	2131.0	2132.5	2121.5	2096.4	2075.9	2059.3	2038.1	2023.2
7.5°	2353.8	2344.5	2343.7	2333.0	2314.6	2299.8	2273.3	2239.6	2207.1	2169.9	2139.2
10°	2460.8	2461.6	2454.6	2442.0	2422.3	2408.1	2373.5	2340.4	2300.3	2253.0	2219.2
12.5°	2541.4	2544.8	2535.8	2518.8	2509.1	2477.4	2450.2	2411.0	2363.2	2325.4	2273.9
15°	2671.8	2663.1	2656.9	2635.5	2619.1	2586.0	2542.7	2501.7	2449.8	2401.8	2353.8
17.5°	2797.4	2804.4	2792.6	2773.2	2721.9	2683.3	2625.2	2569.1	2504.5	2440.0	2382.8
20°	2909.5	2915.9	2897.7	2863.9	2802.5	2763.9	2687.6	2615.1	2540.3	2457.7	2394.7
22.5°	3049.4	3044.3	3019.9	2968.4	2915.2	2843.9	2761.3	2673.0	2579.4	2486.0	2402.3
25°	3287.4	3254.3	3239.3	3175.6	3105.5	3000.8	2887.5	2758.3	2641.9	2518.3	2411.3
27.5°	3419.3	3408.9	3392.2	3347.9	3274.2	3162.2	3028.6	2871.2	2706.9	2550.9	2410.7
30°	3392.8	3394.5	3396.1	3381.8	3334.7	3250.4	3117.4	2948.1	2752.9	2577.4	2415.2
32.5°	3158.7	3187.2	3214.7	3247.1	3260.3	3244.1	3160.8	3008.0	2807.0	2607.6	2412.7
35°	2638.8	2647.4	2736.3	2824.5	2944.2	3037.1	3099.3	3031.5	2862.3	2633.2	2409.6
37.5°	2057.5	2100.0	2161.5	2261.2	2433.9	2588.5	2787.3	2878.8	2824.2	2641.6	2404.2
40°	1753.9	1793.3	1833.4	1935.0	2080.6	2268.0	2493.9	2686.7	2731.6	2615.1	2385.3
42.5°	1519.6	1550.8	1595.4	1671.7	1793.4	1959.3	2175.2	2427.3	2582.3	2538.3	2345.6
45°	1243.7	1263.4	1298.1	1358.8	1446.9	1576.8	1767.3	2042.9	2282.9	2362.4	2251.4
47.5°	1064.6	1064.5	1091.4	1133.3	1196.9	1307.3	1448.1	1664.1	1920.5	2110.2	2101.4
50°	965.1	961.2	982.4	1018.7	1069.0	1142.3	1276.9	1449.3	1695.7	1910.6	1970.3
52.5°	879.5	879.9	893.0	919.8	962.0	1024.5	1125.1	1280.5	1491.0	1711.5	1824.3
55°	766.8	763.6	778.5	796.7	827.4	868.3	940.7	1059.6	1230.4	1447.6	1594.1
57.5°	663.5	672.2	678.1	690.7	716.2	743.6	804.7	891.9	1027.4	1213.9	1368.7
60°	603.0	611.7	616.4	628.9	649.4	673.1	720.3	791.1	905.3	1065.9	1219.4
62.5°	548.9	555.6	557.1	568.6	585.2	608.2	645.4	704.9	795.1	935.5	1085.9
65°	470.8	470.8	473.9	485.7	493.6	514.0	542.4	585.7	658.1	767.5	895.9
67.5°	395.5	399.3	398.5	403.6	410.9	426.9	447.2	482.9	536.5	616.4	719.0
70°	346.4	349.5	348.7	352.6	360.5	370.8	387.3	421.1	459.7	528.3	616.4
72.5°	302.3	303.6	301.5	306.7	311.4	320.4	338.8	356.9	392.9	450.8	523.2
75°	231.5	233.0	234.6	237.7	242.5	247.2	256.6	274.8	298.3	341.6	388.1
77.5°	173.5	170.5	174.3	173.8	176.5	180.2	188.4	198.0	217.4	244.8	280.7
80°	130.7	131.5	131.5	132.3	136.2	138.6	145.6	152.7	167.6	188.1	213.4
82.5°	95.4	97.5	96.2	97.7	100.9	102.6	106.5	112.4	121.1	137.1	155.4
85°	51.9	48.1	49.6	51.2	51.2	51.9	55.1	57.5	62.2	68.5	75.5
87.5°	20.7	21.8	22.3	22.2	22.6	22.4	24.6	24.4	26.1	27.7	29.8
90°	28.2	27.4	26.6	25.9	25.0	24.0	22.7	21.4	20.1	18.8	17.0
92.5°	55.3	54.8	54.2	53.6	53.1	51.9	50.2	48.5	46.8	45.0	42.8
95°	100.9	100.4	99.9	99.4	98.9	97.7	95.8	94.0	92.2	90.4	87.8
97.5°	153.0	152.7	152.4	152.1	151.8	150.8	149.1	147.3	145.6	143.9	140.3
100°	192.5	192.0	191.4	190.9	190.4	188.9	186.6	184.2	181.9	179.6	176.1
102.5°	231.9	231.2	230.5	229.7	228.9	227.3	224.8	222.2	219.6	217.1	215.4
105°	291.0	290.2	289.4	288.7	287.9	286.7	285.2	283.6	282.1	280.4	278.9
107.5°	351.5	351.6	351.7	351.7	351.8	351.4	350.6	349.8	349.1	348.3	347.1
110°	396.7	396.9	397.2	397.4	397.7	397.4	396.7	395.9	395.1	394.3	393.5



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	440.8	441.2	441.7	442.2	442.6	442.7	442.3	442.0	441.6	441.2	440.2
115°	510.5	510.7	511.0	511.3	511.5	511.8	512.0	512.3	512.6	512.8	512.3
117.5°	578.6	579.6	580.7	581.7	582.7	583.1	582.9	582.7	582.5	582.3	581.8
120°	625.5	626.5	627.5	628.6	629.7	630.2	630.2	630.2	630.2	630.2	630.0
122.5°	672.5	673.3	674.1	674.9	675.8	676.3	676.5	676.7	676.9	677.1	676.4
125°	742.9	743.1	743.4	743.7	743.9	744.3	744.8	745.3	745.8	746.4	746.1
127.5°	810.4	810.9	811.4	812.0	812.5	812.9	813.1	813.4	813.6	814.0	813.6
130°	855.5	856.0	856.6	857.1	857.6	858.0	858.2	858.5	858.8	859.0	858.5
132.5°	897.8	898.5	899.2	899.9	900.7	901.1	901.4	901.7	901.9	902.2	902.3
135°	963.4	964.5	965.5	966.5	967.7	968.2	968.2	968.2	968.2	968.2	967.9
137.5°	1027.7	1029.1	1030.4	1031.7	1033.0	1033.5	1033.2	1032.9	1032.5	1032.2	1031.7
140°	1069.0	1070.4	1071.7	1073.0	1074.3	1074.7	1074.2	1073.6	1073.1	1072.6	1071.8
142.5°	1108.5	1109.8	1111.2	1112.4	1113.7	1114.2	1113.9	1113.6	1113.3	1113.0	1112.0
145°	1167.6	1168.4	1169.2	1170.0	1170.7	1171.1	1171.1	1171.1	1171.1	1171.1	1170.3
147.5°	1218.1	1219.9	1221.6	1223.5	1225.2	1225.8	1225.2	1224.6	1223.9	1223.2	1222.6
150°	1255.7	1256.2	1256.7	1257.2	1257.8	1258.0	1258.0	1258.0	1258.0	1258.0	1257.0
152.5°	1286.7	1287.6	1288.5	1289.5	1290.4	1290.5	1289.9	1289.3	1288.7	1288.1	1287.7
155°	1330.8	1332.1	1333.3	1334.6	1336.0	1336.2	1335.0	1334.0	1333.0	1331.9	1331.7
157.5°	1367.7	1369.4	1371.1	1372.8	1374.5	1374.8	1373.8	1372.7	1371.7	1370.7	1370.4
160°	1393.0	1394.2	1395.5	1396.8	1398.2	1398.3	1397.2	1396.2	1395.1	1394.1	1393.9
162.5°	1414.5	1416.0	1417.5	1419.1	1420.6	1420.8	1419.5	1418.3	1416.9	1415.7	1415.6
165°	1443.4	1445.0	1446.5	1448.1	1449.7	1450.0	1448.9	1447.8	1446.8	1445.7	1445.5
167.5°	1466.4	1468.0	1469.7	1471.3	1472.9	1472.9	1471.4	1469.8	1468.2	1466.6	1466.6
170°	1478.6	1480.5	1482.3	1484.1	1485.9	1486.0	1484.5	1482.9	1481.4	1479.8	1479.8
172.5°	1488.9	1490.6	1492.2	1493.8	1495.4	1495.4	1493.9	1492.3	1490.8	1489.1	1489.1
175°	1498.5	1500.4	1502.3	1504.1	1505.9	1506.0	1504.4	1502.9	1501.3	1499.8	1499.8
177.5°	1504.2	1505.7	1507.1	1508.6	1510.1	1510.2	1508.9	1507.6	1506.4	1505.1	1505.3
180°	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7
2.5°	1908.2	1903.8	1898.7	1890.0	1879.3	1873.6	1864.7	1859.1	1847.8	1838.3	1828.3
5°	2005.0	1984.6	1965.7	1941.3	1914.5	1897.1	1876.7	1853.9	1830.3	1805.8	1779.1
7.5°	2105.4	2069.1	2029.7	1987.4	1946.0	1907.8	1871.5	1835.7	1802.4	1762.1	1728.0
10°	2172.7	2127.1	2078.2	2020.7	1964.9	1916.1	1866.4	1823.2	1779.1	1731.8	1690.1
12.5°	2240.1	2179.3	2110.3	2047.2	1980.0	1921.1	1862.7	1807.5	1752.0	1699.7	1651.1
15°	2287.6	2234.1	2170.3	2080.6	2005.0	1924.0	1846.8	1775.1	1708.3	1650.0	1588.6
17.5°	2319.0	2250.0	2181.5	2095.4	1996.4	1905.7	1818.3	1736.3	1660.8	1587.0	1527.8
20°	2324.6	2253.8	2182.1	2097.9	1996.4	1892.5	1805.0	1706.7	1625.6	1549.2	1476.8
22.5°	2322.8	2242.4	2164.5	2077.8	1978.7	1883.0	1777.4	1677.1	1589.0	1514.0	1438.4
25°	2304.9	2219.2	2121.5	2034.2	1936.5	1835.0	1728.0	1624.1	1534.3	1448.4	1373.7
27.5°	2290.2	2178.9	2068.3	1966.4	1872.2	1779.1	1676.6	1570.1	1470.7	1383.7	1313.2
30°	2271.9	2149.9	2025.5	1919.2	1822.4	1731.8	1635.1	1531.2	1427.2	1342.2	1266.7
32.5°	2255.5	2113.3	1982.1	1866.3	1763.8	1675.8	1586.5	1487.6	1385.6	1299.4	1223.8
35°	2223.9	2059.3	1908.9	1778.3	1668.9	1578.3	1503.6	1411.5	1317.8	1234.4	1162.0
37.5°	2183.7	1988.5	1827.1	1690.1	1570.1	1474.8	1405.1	1334.4	1244.6	1164.2	1098.6
40°	2152.2	1938.1	1767.3	1627.2	1502.8	1403.6	1339.1	1272.1	1197.4	1122.6	1053.3
42.5°	2112.5	1892.8	1706.9	1556.0	1432.9	1336.3	1268.5	1211.6	1145.7	1076.0	1011.7
45°	2039.6	1810.6	1609.0	1446.9	1322.5	1227.3	1157.2	1114.7	1065.1	999.0	944.6
47.5°	1932.5	1711.8	1503.4	1336.1	1207.7	1119.4	1053.8	1013.0	978.1	928.9	879.6
50°	1837.3	1638.2	1427.2	1261.1	1132.8	1043.8	983.2	946.2	916.4	878.5	836.8
52.5°	1730.9	1545.6	1352.3	1188.1	1061.0	973.3	913.9	881.4	856.5	829.4	788.3
55°	1561.9	1404.4	1224.9	1069.0	951.7	866.0	814.0	785.7	765.2	744.7	719.5
57.5°	1375.5	1252.4	1093.5	951.0	842.9	764.9	716.4	688.8	672.9	662.4	647.5
60°	1244.6	1139.1	1002.1	872.2	766.8	697.5	650.3	628.9	615.6	606.9	595.9
62.5°	1123.1	1036.4	909.6	791.0	698.7	633.2	591.1	570.4	557.6	553.4	544.3
65°	943.8	877.0	772.2	673.9	595.1	539.3	503.8	484.1	476.3	471.5	472.3
67.5°	767.4	726.6	642.5	558.6	495.7	448.9	420.5	405.5	401.5	395.2	395.1
70°	659.6	628.9	558.2	484.9	429.0	392.8	367.6	351.8	347.9	344.8	344.1
72.5°	564.6	537.7	476.3	417.6	367.3	335.5	314.8	305.3	298.8	296.9	296.8
75°	424.3	409.4	360.5	314.1	279.4	257.4	243.3	234.6	229.8	229.0	229.8
77.5°	301.6	288.6	257.6	224.7	202.8	186.1	174.1	171.2	165.8	165.9	165.1
80°	226.7	218.0	198.3	172.4	154.3	140.2	133.8	128.4	126.7	124.4	126.7
82.5°	164.4	155.1	141.7	125.1	110.2	101.7	95.4	93.7	92.7	91.6	92.1
85°	81.1	81.9	74.0	61.4	55.1	50.4	46.5	46.5	45.6	44.8	45.6
87.5°	30.7	29.1	26.3	23.9	20.4	18.1	17.1	17.3	15.8	15.6	16.6
90°	15.1	13.3	11.5	9.5	7.5	5.4	3.2	1.2	3.2	5.4	7.5
92.5°	40.6	38.4	36.1	34.2	32.8	31.3	29.9	28.4	29.9	31.3	32.8
95°	85.1	82.5	79.9	78.4	77.9	77.4	76.7	76.2	76.7	77.4	77.9
97.5°	136.6	133.1	129.5	127.5	127.3	127.1	126.9	126.7	126.9	127.1	127.3
100°	172.8	169.4	166.0	164.3	164.3	164.3	164.3	164.3	164.3	164.3	164.3
102.5°	213.7	212.0	210.3	208.8	207.8	206.7	205.7	204.7	205.7	206.7	207.8
105°	277.3	275.8	274.2	272.8	271.5	270.1	268.8	267.5	268.8	270.1	271.5
107.5°	345.9	344.7	343.5	342.2	340.9	339.6	338.3	337.0	338.3	339.6	340.9
110°	392.7	391.9	391.1	390.1	388.8	387.5	386.2	385.0	386.2	387.5	388.8



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	439.3	438.3	437.3	436.5	435.8	435.0	434.4	433.7	434.4	435.0	435.8
115°	511.8	511.3	510.7	510.0	508.9	507.9	506.9	505.7	506.9	507.9	508.9
117.5°	581.4	580.9	580.4	580.0	579.5	579.1	578.6	578.0	578.6	579.1	579.5
120°	629.7	629.3	629.1	628.3	627.0	625.7	624.4	623.1	624.4	625.7	627.0
122.5°	675.8	675.1	674.4	673.8	673.4	672.9	672.5	672.0	672.5	672.9	673.4
125°	745.8	745.6	745.3	744.4	742.9	741.2	739.7	738.1	739.7	741.2	742.9
127.5°	813.3	813.0	812.7	812.1	811.2	810.3	809.4	808.6	809.4	810.3	811.2
130°	858.0	857.5	857.0	856.0	854.7	853.4	852.1	850.8	852.1	853.4	854.7
132.5°	902.4	902.5	902.6	901.6	899.5	897.4	895.1	893.0	895.1	897.4	899.5
135°	967.7	967.3	967.1	966.2	964.6	963.1	961.5	960.0	961.5	963.1	964.6
137.5°	1031.1	1030.5	1030.0	1028.9	1027.3	1025.8	1024.3	1022.8	1024.3	1025.8	1027.3
140°	1071.1	1070.3	1069.4	1068.4	1067.1	1065.8	1064.5	1063.2	1064.5	1065.8	1067.1
142.5°	1111.0	1109.9	1109.0	1107.9	1106.8	1105.8	1104.7	1103.6	1104.7	1105.8	1106.8
145°	1169.6	1168.8	1168.0	1167.1	1166.1	1165.1	1164.0	1163.0	1164.0	1165.1	1166.1
147.5°	1222.0	1221.4	1220.7	1220.1	1219.6	1219.0	1218.4	1217.9	1218.4	1219.0	1219.6
150°	1255.9	1254.9	1253.8	1253.4	1253.7	1253.9	1254.3	1254.5	1254.3	1253.9	1253.7
152.5°	1287.2	1286.8	1286.4	1286.0	1285.7	1285.3	1284.9	1284.5	1284.9	1285.3	1285.7
155°	1331.4	1331.2	1330.9	1330.8	1330.8	1330.8	1330.8	1330.8	1330.8	1330.8	1330.8
157.5°	1370.2	1369.9	1369.6	1369.8	1370.4	1370.9	1371.5	1372.1	1371.5	1370.9	1370.4
160°	1393.6	1393.3	1393.1	1393.3	1394.1	1394.9	1395.7	1396.4	1395.7	1394.9	1394.1
162.5°	1415.6	1415.5	1415.5	1415.7	1416.3	1416.9	1417.5	1418.1	1417.5	1416.9	1416.3
165°	1445.2	1445.0	1444.7	1444.8	1445.4	1445.9	1446.4	1446.9	1446.4	1445.9	1445.4
167.5°	1466.6	1466.6	1466.6	1467.1	1468.2	1469.3	1470.3	1471.4	1470.3	1469.3	1468.2
170°	1479.8	1479.8	1479.8	1480.4	1481.4	1482.4	1483.5	1484.5	1483.5	1482.4	1481.4
172.5°	1489.1	1489.1	1489.1	1489.8	1490.8	1491.8	1492.9	1493.9	1492.9	1491.8	1490.8
175°	1499.8	1499.8	1499.8	1500.3	1501.3	1502.4	1503.4	1504.4	1503.4	1502.4	1501.3
177.5°	1505.6	1505.8	1506.0	1506.5	1507.3	1508.1	1509.0	1509.8	1509.0	1508.1	1507.3
180°	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7
2.5°	1822.5	1815.6	1810.0	1797.4	1790.4	1781.0	1773.4	1781.6	1772.8	1776.6	1770.9
5°	1765.7	1743.6	1728.0	1705.1	1685.5	1667.3	1654.0	1651.5	1645.3	1642.1	1632.6
7.5°	1697.4	1669.8	1642.7	1612.9	1587.6	1562.0	1545.6	1532.1	1523.1	1511.3	1503.3
10°	1657.1	1620.1	1588.6	1552.4	1520.9	1493.4	1471.3	1460.3	1450.1	1435.1	1429.6
12.5°	1607.3	1569.0	1530.7	1492.0	1461.7	1431.0	1412.1	1395.4	1388.4	1371.5	1369.8
15°	1547.6	1490.2	1452.4	1413.0	1371.3	1346.2	1330.4	1312.3	1304.4	1292.6	1283.9
17.5°	1476.5	1425.1	1378.0	1337.2	1301.4	1280.2	1260.6	1248.2	1234.7	1227.0	1212.7
20°	1424.8	1376.0	1328.8	1285.6	1258.0	1233.6	1217.8	1206.0	1191.8	1187.9	1173.8
22.5°	1381.4	1327.6	1282.2	1245.9	1215.8	1188.2	1171.2	1163.2	1153.5	1141.3	1138.4
25°	1310.7	1254.9	1216.3	1180.0	1153.3	1128.1	1116.3	1106.0	1096.6	1087.9	1084.8
27.5°	1249.6	1199.7	1153.9	1121.2	1097.8	1074.9	1064.5	1052.1	1045.1	1038.1	1029.7
30°	1206.8	1155.6	1115.5	1084.0	1058.8	1038.3	1027.3	1018.7	1012.4	1006.0	1001.4
32.5°	1162.8	1115.3	1076.4	1045.6	1020.4	1004.9	995.2	989.1	982.1	974.5	968.6
35°	1104.5	1052.5	1014.7	988.0	968.3	956.4	945.4	939.9	932.1	932.1	925.7
37.5°	1038.8	993.9	960.6	936.1	918.5	908.0	896.1	892.2	887.2	883.8	881.7
40°	999.8	958.1	926.6	902.1	883.2	874.5	865.2	858.9	855.7	851.7	850.2
42.5°	959.5	919.6	889.4	866.9	850.5	843.1	834.2	829.9	823.5	818.4	817.5
45°	898.2	859.6	832.1	814.0	799.8	791.1	785.7	776.2	773.1	766.8	766.0
47.5°	840.1	803.1	776.1	761.2	748.8	741.7	733.1	723.6	720.0	716.8	716.5
50°	796.7	762.9	737.6	723.5	711.7	701.5	692.8	686.4	684.1	684.1	685.7
52.5°	752.6	723.8	702.4	685.0	673.9	663.0	655.0	651.2	647.5	651.4	654.2
55°	688.0	658.9	643.2	626.6	615.6	603.0	599.1	597.5	595.1	601.5	604.6
57.5°	619.7	599.3	580.8	564.4	554.5	547.2	541.9	541.0	545.4	548.4	558.6
60°	576.2	552.6	536.1	523.5	511.7	507.0	505.4	503.8	507.0	515.6	529.0
62.5°	528.4	509.2	491.4	481.9	473.2	465.4	465.0	466.1	472.3	482.2	495.6
65°	458.2	441.6	429.8	418.8	411.7	407.0	408.6	411.7	418.8	432.2	447.2
67.5°	386.9	375.5	365.0	356.0	349.2	349.2	350.8	355.5	363.9	379.3	392.9
70°	340.8	328.3	319.6	315.7	310.1	307.0	311.7	319.6	326.7	340.8	352.6
72.5°	294.9	284.2	277.4	274.8	272.4	269.8	271.5	279.9	289.5	303.7	317.4
75°	226.7	222.8	218.0	214.9	212.6	214.1	215.7	223.6	231.5	246.4	262.2
77.5°	165.5	161.4	158.5	157.7	156.5	157.2	161.7	167.5	175.2	186.1	198.0
80°	125.1	123.6	122.0	121.2	121.2	122.0	128.4	132.3	139.4	149.6	159.1
82.5°	91.2	90.2	89.9	89.8	90.4	90.5	94.3	99.5	105.3	113.0	121.2
85°	48.1	46.5	48.8	49.6	48.1	50.4	51.9	55.1	57.5	61.4	65.3
87.5°	17.7	19.3	19.0	20.0	20.4	22.0	21.6	24.4	26.0	27.5	27.1
90°	9.5	11.5	13.3	15.1	17.0	18.8	20.1	21.4	22.7	24.0	25.0
92.5°	34.2	36.1	38.4	40.6	42.8	45.0	46.8	48.5	50.2	51.9	53.1
95°	78.4	79.9	82.5	85.1	87.8	90.4	92.2	94.0	95.8	97.7	98.9
97.5°	127.5	129.5	133.1	136.6	140.3	143.9	145.6	147.3	149.1	150.8	151.8
100°	164.3	166.0	169.4	172.8	176.1	179.6	181.9	184.2	186.6	188.9	190.4
102.5°	208.8	210.3	212.0	213.7	215.4	217.1	219.6	222.2	224.8	227.3	228.9
105°	272.8	274.2	275.8	277.3	278.9	280.4	282.1	283.6	285.2	286.7	287.9
107.5°	342.2	343.5	344.7	345.9	347.1	348.3	349.1	349.8	350.6	351.4	351.8
110°	390.1	391.1	391.9	392.7	393.5	394.3	395.1	395.9	396.7	397.4	397.7



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	436.5	437.3	438.3	439.3	440.2	441.2	441.6	442.0	442.3	442.7	442.6
115°	510.0	510.7	511.3	511.8	512.3	512.8	512.6	512.3	512.0	511.8	511.5
117.5°	580.0	580.4	580.9	581.4	581.8	582.3	582.5	582.7	582.9	583.1	582.7
120°	628.3	629.1	629.3	629.7	630.0	630.2	630.2	630.2	630.2	630.2	629.7
122.5°	673.8	674.4	675.1	675.8	676.4	677.1	676.9	676.7	676.5	676.3	675.8
125°	744.4	745.3	745.6	745.8	746.1	746.4	745.8	745.3	744.8	744.3	743.9
127.5°	812.1	812.7	813.0	813.3	813.6	814.0	813.6	813.4	813.1	812.9	812.5
130°	856.0	857.0	857.5	858.0	858.5	859.0	858.8	858.5	858.2	858.0	857.6
132.5°	901.6	902.6	902.5	902.4	902.3	902.2	901.9	901.7	901.4	901.1	900.7
135°	966.2	967.1	967.3	967.7	967.9	968.2	968.2	968.2	968.2	968.2	967.7
137.5°	1028.9	1030.0	1030.5	1031.1	1031.7	1032.2	1032.5	1032.9	1033.2	1033.5	1033.0
140°	1068.4	1069.4	1070.3	1071.1	1071.8	1072.6	1073.1	1073.6	1074.2	1074.7	1074.3
142.5°	1107.9	1109.0	1109.9	1111.0	1112.0	1113.0	1113.3	1113.6	1113.9	1114.2	1113.7
145°	1167.1	1168.0	1168.8	1169.6	1170.3	1171.1	1171.1	1171.1	1171.1	1171.1	1170.7
147.5°	1220.1	1220.7	1221.4	1222.0	1222.6	1223.2	1223.9	1224.6	1225.2	1225.8	1225.2
150°	1253.4	1253.8	1254.9	1255.9	1257.0	1258.0	1258.0	1258.0	1258.0	1258.0	1257.8
152.5°	1286.0	1286.4	1286.8	1287.2	1287.7	1288.1	1288.7	1289.3	1289.9	1290.5	1290.4
155°	1330.8	1330.9	1331.2	1331.4	1331.7	1331.9	1333.0	1334.0	1335.0	1336.2	1336.0
157.5°	1369.8	1369.6	1369.9	1370.2	1370.4	1370.7	1371.7	1372.7	1373.8	1374.8	1374.5
160°	1393.3	1393.1	1393.3	1393.6	1393.9	1394.1	1395.1	1396.2	1397.2	1398.3	1398.2
162.5°	1415.7	1415.5	1415.5	1415.6	1415.6	1415.7	1416.9	1418.3	1419.5	1420.8	1420.6
165°	1444.8	1444.7	1445.0	1445.2	1445.5	1445.7	1446.8	1447.8	1448.9	1450.0	1449.7
167.5°	1467.1	1466.6	1466.6	1466.6	1466.6	1466.6	1468.2	1469.8	1471.4	1472.9	1472.9
170°	1480.4	1479.8	1479.8	1479.8	1479.8	1479.8	1481.4	1482.9	1484.5	1486.0	1485.9
172.5°	1489.8	1489.1	1489.1	1489.1	1489.1	1489.1	1490.8	1492.3	1493.9	1495.4	1495.4
175°	1500.3	1499.8	1499.8	1499.8	1499.8	1499.8	1501.3	1502.9	1504.4	1506.0	1505.9
177.5°	1506.5	1506.0	1505.8	1505.6	1505.3	1505.1	1506.4	1507.6	1508.9	1510.2	1510.1
180°	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7
2.5°	1767.2	1771.5	1767.8	1772.8	1767.8	1771.5	1767.2	1770.9	1776.6	1772.8	1781.6
5°	1628.7	1621.6	1626.4	1623.3	1626.4	1621.6	1628.7	1632.6	1642.1	1645.3	1651.5
7.5°	1500.9	1494.1	1486.4	1482.8	1486.4	1494.1	1500.9	1503.3	1511.3	1523.1	1532.1
10°	1420.9	1412.3	1411.5	1405.9	1411.5	1412.3	1420.9	1429.6	1435.1	1450.1	1460.3
12.5°	1362.3	1354.3	1345.3	1343.0	1345.3	1354.3	1362.3	1369.8	1371.5	1388.4	1395.4
15°	1279.2	1272.9	1267.4	1272.1	1267.4	1272.9	1279.2	1283.9	1292.6	1304.4	1312.3
17.5°	1210.1	1204.9	1204.0	1198.1	1204.0	1204.9	1210.1	1212.7	1227.0	1234.7	1248.2
20°	1166.7	1162.8	1164.3	1154.1	1164.3	1162.8	1166.7	1173.8	1187.9	1191.8	1206.0
22.5°	1132.1	1124.3	1123.4	1121.4	1123.4	1124.3	1132.1	1138.4	1141.3	1153.5	1163.2
25°	1077.7	1073.8	1069.9	1073.8	1069.9	1073.8	1077.7	1084.8	1087.9	1096.6	1106.0
27.5°	1030.3	1025.6	1024.5	1024.9	1024.5	1025.6	1030.3	1029.7	1038.1	1045.1	1052.1
30°	1001.4	993.5	994.2	993.5	994.2	993.5	1001.4	1001.4	1006.0	1012.4	1018.7
32.5°	969.9	964.5	963.4	962.0	963.4	964.5	969.9	968.6	974.5	982.1	989.1
35°	923.4	923.4	919.5	919.5	919.5	923.4	923.4	925.7	932.1	932.1	939.9
37.5°	879.8	879.0	876.7	877.0	876.7	879.0	879.8	881.7	883.8	887.2	892.2
40°	847.1	846.3	843.8	839.2	843.8	846.3	847.1	850.2	851.7	855.7	858.9
42.5°	815.6	812.8	811.7	810.2	811.7	812.8	815.6	817.5	818.4	823.5	829.9
45°	766.0	766.0	764.4	763.6	764.4	766.0	766.0	766.0	766.8	773.1	776.2
47.5°	717.8	719.2	722.2	721.8	722.2	719.2	717.8	716.5	716.8	720.0	723.6
50°	688.8	689.6	692.0	692.8	692.0	689.6	688.8	685.7	684.1	684.1	686.4
52.5°	656.7	661.3	664.3	663.8	664.3	661.3	656.7	654.2	651.4	647.5	651.2
55°	611.7	617.1	622.7	623.5	622.7	617.1	611.7	604.6	601.5	595.1	597.5
57.5°	567.1	574.8	580.7	582.5	580.7	574.8	567.1	558.6	548.4	545.4	541.0
60°	536.8	547.1	554.2	557.3	554.2	547.1	536.8	529.0	515.6	507.0	503.8
62.5°	507.9	519.4	526.4	527.1	526.4	519.4	507.9	495.6	482.2	472.3	466.1
65°	460.5	472.3	478.6	483.3	478.6	472.3	460.5	447.2	432.2	418.8	411.7
67.5°	409.5	421.3	428.3	432.0	428.3	421.3	409.5	392.9	379.3	363.9	355.5
70°	372.3	384.2	393.6	396.8	393.6	384.2	372.3	352.6	340.8	326.7	319.6
72.5°	335.8	346.4	354.0	357.7	354.0	346.4	335.8	317.4	303.7	289.5	279.9
75°	272.4	286.5	293.7	297.6	293.7	286.5	272.4	262.2	246.4	231.5	223.6
77.5°	210.1	223.0	227.2	229.2	227.2	223.0	210.1	198.0	186.1	175.2	167.5
80°	168.4	176.3	181.9	182.6	181.9	176.3	168.4	159.1	149.6	139.4	132.3
82.5°	129.5	136.0	137.7	139.8	137.7	136.0	129.5	121.2	113.0	105.3	99.5
85°	70.9	74.0	74.8	74.0	74.8	74.0	70.9	65.3	61.4	57.5	55.1
87.5°	28.5	28.0	28.2	29.6	28.2	28.0	28.5	27.1	27.5	26.0	24.4
90°	25.9	26.6	27.4	28.2	27.4	26.6	25.9	25.0	24.0	22.7	21.4
92.5°	53.6	54.2	54.8	55.3	54.8	54.2	53.6	53.1	51.9	50.2	48.5
95°	99.4	99.9	100.4	100.9	100.4	99.9	99.4	98.9	97.7	95.8	94.0
97.5°	152.1	152.4	152.7	153.0	152.7	152.4	152.1	151.8	150.8	149.1	147.3
100°	190.9	191.4	192.0	192.5	192.0	191.4	190.9	190.4	188.9	186.6	184.2
102.5°	229.7	230.5	231.2	231.9	231.2	230.5	229.7	228.9	227.3	224.8	222.2
105°	288.7	289.4	290.2	291.0	290.2	289.4	288.7	287.9	286.7	285.2	283.6
107.5°	351.7	351.7	351.6	351.5	351.6	351.7	351.7	351.8	351.4	350.6	349.8
110°	397.4	397.2	396.9	396.7	396.9	397.2	397.4	397.7	397.4	396.7	395.9



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	442.2	441.7	441.2	440.8	441.2	441.7	442.2	442.6	442.7	442.3	442.0
115°	511.3	511.0	510.7	510.5	510.7	511.0	511.3	511.5	511.8	512.0	512.3
117.5°	581.7	580.7	579.6	578.6	579.6	580.7	581.7	582.7	583.1	582.9	582.7
120°	628.6	627.5	626.5	625.5	626.5	627.5	628.6	629.7	630.2	630.2	630.2
122.5°	674.9	674.1	673.3	672.5	673.3	674.1	674.9	675.8	676.3	676.5	676.7
125°	743.7	743.4	743.1	742.9	743.1	743.4	743.7	743.9	744.3	744.8	745.3
127.5°	812.0	811.4	810.9	810.4	810.9	811.4	812.0	812.5	812.9	813.1	813.4
130°	857.1	856.6	856.0	855.5	856.0	856.6	857.1	857.6	858.0	858.2	858.5
132.5°	899.9	899.2	898.5	897.8	898.5	899.2	899.9	900.7	901.1	901.4	901.7
135°	966.5	965.5	964.5	963.4	964.5	965.5	966.5	967.7	968.2	968.2	968.2
137.5°	1031.7	1030.4	1029.1	1027.7	1029.1	1030.4	1031.7	1033.0	1033.5	1033.2	1032.9
140°	1073.0	1071.7	1070.4	1069.0	1070.4	1071.7	1073.0	1074.3	1074.7	1074.2	1073.6
142.5°	1112.4	1111.2	1109.8	1108.5	1109.8	1111.2	1112.4	1113.7	1114.2	1113.9	1113.6
145°	1170.0	1169.2	1168.4	1167.6	1168.4	1169.2	1170.0	1170.7	1171.1	1171.1	1171.1
147.5°	1223.5	1221.6	1219.9	1218.1	1219.9	1221.6	1223.5	1225.2	1225.8	1225.2	1224.6
150°	1257.2	1256.7	1256.2	1255.7	1256.2	1256.7	1257.2	1257.8	1258.0	1258.0	1258.0
152.5°	1289.5	1288.5	1287.6	1286.7	1287.6	1288.5	1289.5	1290.4	1290.5	1289.9	1289.3
155°	1334.6	1333.3	1332.1	1330.8	1332.1	1333.3	1334.6	1336.0	1336.2	1335.0	1334.0
157.5°	1372.8	1371.1	1369.4	1367.7	1369.4	1371.1	1372.8	1374.5	1374.8	1373.8	1372.7
160°	1396.8	1395.5	1394.2	1393.0	1394.2	1395.5	1396.8	1398.2	1398.3	1397.2	1396.2
162.5°	1419.1	1417.5	1416.0	1414.5	1416.0	1417.5	1419.1	1420.6	1420.8	1419.5	1418.3
165°	1448.1	1446.5	1445.0	1443.4	1445.0	1446.5	1448.1	1449.7	1450.0	1448.9	1447.8
167.5°	1471.3	1469.7	1468.0	1466.4	1468.0	1469.7	1471.3	1472.9	1472.9	1471.4	1469.8
170°	1484.1	1482.3	1480.5	1478.6	1480.5	1482.3	1484.1	1485.9	1486.0	1484.5	1482.9
172.5°	1493.8	1492.2	1490.6	1488.9	1490.6	1492.2	1493.8	1495.4	1495.4	1493.9	1492.3
175°	1504.1	1502.3	1500.4	1498.5	1500.4	1502.3	1504.1	1505.9	1506.0	1504.4	1502.9
177.5°	1508.6	1507.1	1505.7	1504.2	1505.7	1507.1	1508.6	1510.1	1510.2	1508.9	1507.6
180°	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7
2.5°	1773.4	1781.0	1790.4	1797.4	1810.0	1815.6	1822.5	1828.3	1838.3	1847.8	1859.1
5°	1654.0	1667.3	1685.5	1705.1	1728.0	1743.6	1765.7	1779.1	1805.8	1830.3	1853.9
7.5°	1545.6	1562.0	1587.6	1612.9	1642.7	1669.8	1697.4	1728.0	1762.1	1802.4	1835.7
10°	1471.3	1493.4	1520.9	1552.4	1588.6	1620.1	1657.1	1690.1	1731.8	1779.1	1823.2
12.5°	1412.1	1431.0	1461.7	1492.0	1530.7	1569.0	1607.3	1651.1	1699.7	1752.0	1807.5
15°	1330.4	1346.2	1371.3	1413.0	1452.4	1490.2	1547.6	1588.6	1650.0	1708.3	1775.1
17.5°	1260.6	1280.2	1301.4	1337.2	1378.0	1425.1	1476.5	1527.8	1587.0	1660.8	1736.3
20°	1217.8	1233.6	1258.0	1285.6	1328.8	1376.0	1424.8	1476.8	1549.2	1625.6	1706.7
22.5°	1171.2	1188.2	1215.8	1245.9	1282.2	1327.6	1381.4	1438.4	1514.0	1589.0	1677.1
25°	1116.3	1128.1	1153.3	1180.0	1216.3	1254.9	1310.7	1373.7	1448.4	1534.3	1624.1
27.5°	1064.5	1074.9	1097.8	1121.2	1153.9	1199.7	1249.6	1313.2	1383.7	1470.7	1570.1
30°	1027.3	1038.3	1058.8	1084.0	1115.5	1155.6	1206.8	1266.7	1342.2	1427.2	1531.2
32.5°	995.2	1004.9	1020.4	1045.6	1076.4	1115.3	1162.8	1223.8	1299.4	1385.6	1487.6
35°	945.4	956.4	968.3	988.0	1014.7	1052.5	1104.5	1162.0	1234.4	1317.8	1411.5
37.5°	896.1	908.0	918.5	936.1	960.6	993.9	1038.8	1098.6	1164.2	1244.6	1334.4
40°	865.2	874.5	883.2	902.1	926.6	958.1	999.8	1053.3	1122.6	1197.4	1272.1
42.5°	834.2	843.1	850.5	866.9	889.4	919.6	959.5	1011.7	1076.0	1145.7	1211.6
45°	785.7	791.1	799.8	814.0	832.1	859.6	898.2	944.6	999.0	1065.1	1114.7
47.5°	733.1	741.7	748.8	761.2	776.1	803.1	840.1	879.6	928.9	978.1	1013.0
50°	692.8	701.5	711.7	723.5	737.6	762.9	796.7	836.8	878.5	916.4	946.2
52.5°	655.0	663.0	673.9	685.0	702.4	723.8	752.6	788.3	829.4	856.5	881.4
55°	599.1	603.0	615.6	626.6	643.2	658.9	688.0	719.5	744.7	765.2	785.7
57.5°	541.9	547.2	554.5	564.4	580.8	599.3	619.7	647.5	662.4	672.9	688.8
60°	505.4	507.0	511.7	523.5	536.1	552.6	576.2	595.9	606.9	615.6	628.9
62.5°	465.0	465.4	473.2	481.9	491.4	509.2	528.4	544.3	553.4	557.6	570.4
65°	408.6	407.0	411.7	418.8	429.8	441.6	458.2	472.3	471.5	476.3	484.1
67.5°	350.8	349.2	349.2	356.0	365.0	375.5	386.9	395.1	395.2	401.5	405.5
70°	311.7	307.0	310.1	315.7	319.6	328.3	340.8	344.1	344.8	347.9	351.8
72.5°	271.5	269.8	272.4	274.8	277.4	284.2	294.9	296.8	296.9	298.8	305.3
75°	215.7	214.1	212.6	214.9	218.0	222.8	226.7	229.8	229.0	229.8	234.6
77.5°	161.7	157.2	156.5	157.7	158.5	161.4	165.5	165.1	165.9	165.8	171.2
80°	128.4	122.0	121.2	121.2	122.0	123.6	125.1	126.7	124.4	126.7	128.4
82.5°	94.3	90.5	90.4	89.8	89.9	90.2	91.2	92.1	91.6	92.7	93.7
85°	51.9	50.4	48.1	49.6	48.8	46.5	48.1	45.6	44.8	45.6	46.5
87.5°	21.6	22.0	20.4	20.0	19.0	19.3	17.7	16.6	15.6	15.8	17.3
90°	20.1	18.8	17.0	15.1	13.3	11.5	9.5	7.5	5.4	3.2	1.2
92.5°	46.8	45.0	42.8	40.6	38.4	36.1	34.2	32.8	31.3	29.9	28.4
95°	92.2	90.4	87.8	85.1	82.5	79.9	78.4	77.9	77.4	76.7	76.2
97.5°	145.6	143.9	140.3	136.6	133.1	129.5	127.5	127.3	127.1	126.9	126.7
100°	181.9	179.6	176.1	172.8	169.4	166.0	164.3	164.3	164.3	164.3	164.3
102.5°	219.6	217.1	215.4	213.7	212.0	210.3	208.8	207.8	206.7	205.7	204.7
105°	282.1	280.4	278.9	277.3	275.8	274.2	272.8	271.5	270.1	268.8	267.5
107.5°	349.1	348.3	347.1	345.9	344.7	343.5	342.2	340.9	339.6	338.3	337.0
110°	395.1	394.3	393.5	392.7	391.9	391.1	390.1	388.8	387.5	386.2	385.0



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	441.6	441.2	440.2	439.3	438.3	437.3	436.5	435.8	435.0	434.4	433.7
115°	512.6	512.8	512.3	511.8	511.3	510.7	510.0	508.9	507.9	506.9	505.7
117.5°	582.5	582.3	581.8	581.4	580.9	580.4	580.0	579.5	579.1	578.6	578.0
120°	630.2	630.2	630.0	629.7	629.3	629.1	628.3	627.0	625.7	624.4	623.1
122.5°	676.9	677.1	676.4	675.8	675.1	674.4	673.8	673.4	672.9	672.5	672.0
125°	745.8	746.4	746.1	745.8	745.6	745.3	744.4	742.9	741.2	739.7	738.1
127.5°	813.6	814.0	813.6	813.3	813.0	812.7	812.1	811.2	810.3	809.4	808.6
130°	858.8	859.0	858.5	858.0	857.5	857.0	856.0	854.7	853.4	852.1	850.8
132.5°	901.9	902.2	902.3	902.4	902.5	902.6	901.6	899.5	897.4	895.1	893.0
135°	968.2	968.2	967.9	967.7	967.3	967.1	966.2	964.6	963.1	961.5	960.0
137.5°	1032.5	1032.2	1031.7	1031.1	1030.5	1030.0	1028.9	1027.3	1025.8	1024.3	1022.8
140°	1073.1	1072.6	1071.8	1071.1	1070.3	1069.4	1068.4	1067.1	1065.8	1064.5	1063.2
142.5°	1113.3	1113.0	1112.0	1111.0	1109.9	1109.0	1107.9	1106.8	1105.8	1104.7	1103.6
145°	1171.1	1171.1	1170.3	1169.6	1168.8	1168.0	1167.1	1166.1	1165.1	1164.0	1163.0
147.5°	1223.9	1223.2	1222.6	1222.0	1221.4	1220.7	1220.1	1219.6	1219.0	1218.4	1217.9
150°	1258.0	1258.0	1257.0	1255.9	1254.9	1253.8	1253.4	1253.7	1253.9	1254.3	1254.5
152.5°	1288.7	1288.1	1287.7	1287.2	1286.8	1286.4	1286.0	1285.7	1285.3	1284.9	1284.5
155°	1333.0	1331.9	1331.7	1331.4	1331.2	1330.9	1330.8	1330.8	1330.8	1330.8	1330.8
157.5°	1371.7	1370.7	1370.4	1370.2	1369.9	1369.6	1369.8	1370.4	1370.9	1371.5	1372.1
160°	1395.1	1394.1	1393.9	1393.6	1393.3	1393.1	1393.3	1394.1	1394.9	1395.7	1396.4
162.5°	1416.9	1415.7	1415.6	1415.6	1415.5	1415.5	1415.7	1416.3	1416.9	1417.5	1418.1
165°	1446.8	1445.7	1445.5	1445.2	1445.0	1444.7	1444.8	1445.4	1445.9	1446.4	1446.9
167.5°	1468.2	1466.6	1466.6	1466.6	1466.6	1466.6	1467.1	1468.2	1469.3	1470.3	1471.4
170°	1481.4	1479.8	1479.8	1479.8	1479.8	1479.8	1480.4	1481.4	1482.4	1483.5	1484.5
172.5°	1490.8	1489.1	1489.1	1489.1	1489.1	1489.1	1489.8	1490.8	1491.8	1492.9	1493.9
175°	1501.3	1499.8	1499.8	1499.8	1499.8	1499.8	1500.3	1501.3	1502.4	1503.4	1504.4
177.5°	1506.4	1505.1	1505.3	1505.6	1505.8	1506.0	1506.5	1507.3	1508.1	1509.0	1509.8
180°	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7
2.5°	1864.7	1873.6	1879.3	1890.0	1898.7	1903.8	1908.2	1912.0	1916.4	1920.2	1930.9
5°	1876.7	1897.1	1914.5	1941.3	1965.7	1984.6	2005.0	2023.2	2038.1	2059.3	2075.9
7.5°	1871.5	1907.8	1946.0	1987.4	2029.7	2069.1	2105.4	2139.2	2169.9	2207.1	2239.6
10°	1866.4	1916.1	1964.9	2020.7	2078.2	2127.1	2172.7	2219.2	2253.0	2300.3	2340.4
12.5°	1862.7	1921.1	1980.0	2047.2	2110.3	2179.3	2240.1	2273.9	2325.4	2363.2	2411.0
15°	1846.8	1924.0	2005.0	2080.6	2170.3	2234.1	2287.6	2353.8	2401.8	2449.8	2501.7
17.5°	1818.3	1905.7	1996.4	2095.4	2181.5	2250.0	2319.0	2382.8	2440.0	2504.5	2569.1
20°	1805.0	1892.5	1996.4	2097.9	2182.1	2253.8	2324.6	2394.7	2457.7	2540.3	2615.1
22.5°	1777.4	1883.0	1978.7	2077.8	2164.5	2242.4	2322.8	2402.3	2486.0	2579.4	2673.0
25°	1728.0	1835.0	1936.5	2034.2	2121.5	2219.2	2304.9	2411.3	2518.3	2641.9	2758.3
27.5°	1676.6	1779.1	1872.2	1966.4	2068.3	2178.9	2290.2	2410.7	2550.9	2706.9	2871.2
30°	1635.1	1731.8	1822.4	1919.2	2025.5	2149.9	2271.9	2415.2	2577.4	2752.9	2948.1
32.5°	1586.5	1675.8	1763.8	1866.3	1982.1	2113.3	2255.5	2412.7	2607.6	2807.0	3008.0
35°	1503.6	1578.3	1668.9	1778.3	1908.9	2059.3	2223.9	2409.6	2633.2	2862.3	3031.5
37.5°	1405.1	1474.8	1570.1	1690.1	1827.1	1988.5	2183.7	2404.2	2641.6	2824.2	2878.8
40°	1339.1	1403.6	1502.8	1627.2	1767.3	1938.1	2152.2	2385.3	2615.1	2731.6	2686.7
42.5°	1268.5	1336.3	1432.9	1556.0	1706.9	1892.8	2112.5	2345.6	2538.3	2582.3	2427.3
45°	1157.2	1227.3	1322.5	1446.9	1609.0	1810.6	2039.6	2251.4	2362.4	2282.9	2042.9
47.5°	1053.8	1119.4	1207.7	1336.1	1503.4	1711.8	1932.5	2101.4	2110.2	1920.5	1664.1
50°	983.2	1043.8	1132.8	1261.1	1427.2	1638.2	1837.3	1970.3	1910.6	1695.7	1449.3
52.5°	913.9	973.3	1061.0	1188.1	1352.3	1545.6	1730.9	1824.3	1711.5	1491.0	1280.5
55°	814.0	866.0	951.7	1069.0	1224.9	1404.4	1561.9	1594.1	1447.6	1230.4	1059.6
57.5°	716.4	764.9	842.9	951.0	1093.5	1252.4	1375.5	1368.7	1213.9	1027.4	891.9
60°	650.3	697.5	766.8	872.2	1002.1	1139.1	1244.6	1219.4	1065.9	905.3	791.1
62.5°	591.1	633.2	698.7	791.0	909.6	1036.4	1123.1	1085.9	935.5	795.1	704.9
65°	503.8	539.3	595.1	673.9	772.2	877.0	943.8	895.9	767.5	658.1	585.7
67.5°	420.5	448.9	495.7	558.6	642.5	726.6	767.4	719.0	616.4	536.5	482.9
70°	367.6	392.8	429.0	484.9	558.2	628.9	659.6	616.4	528.3	459.7	421.1
72.5°	314.8	335.5	367.3	417.6	476.3	537.7	564.6	523.2	450.8	392.9	356.9
75°	243.3	257.4	279.4	314.1	360.5	409.4	424.3	388.1	341.6	298.3	274.8
77.5°	174.1	186.1	202.8	224.7	257.6	288.6	301.6	280.7	244.8	217.4	198.0
80°	133.8	140.2	154.3	172.4	198.3	218.0	226.7	213.4	188.1	167.6	152.7
82.5°	95.4	101.7	110.2	125.1	141.7	155.1	164.4	155.4	137.1	121.1	112.4
85°	46.5	50.4	55.1	61.4	74.0	81.9	81.1	75.5	68.5	62.2	57.5
87.5°	17.1	18.1	20.4	23.9	26.3	29.1	30.7	29.8	27.7	26.1	24.4
90°	3.2	5.4	7.5	9.5	11.5	13.3	15.1	17.0	18.8	20.1	21.4
92.5°	29.9	31.3	32.8	34.2	36.1	38.4	40.6	42.8	45.0	46.8	48.5
95°	76.7	77.4	77.9	78.4	79.9	82.5	85.1	87.8	90.4	92.2	94.0
97.5°	126.9	127.1	127.3	127.5	129.5	133.1	136.6	140.3	143.9	145.6	147.3
100°	164.3	164.3	164.3	164.3	166.0	169.4	172.8	176.1	179.6	181.9	184.2
102.5°	205.7	206.7	207.8	208.8	210.3	212.0	213.7	215.4	217.1	219.6	222.2
105°	268.8	270.1	271.5	272.8	274.2	275.8	277.3	278.9	280.4	282.1	283.6
107.5°	338.3	339.6	340.9	342.2	343.5	344.7	345.9	347.1	348.3	349.1	349.8
110°	386.2	387.5	388.8	390.1	391.1	391.9	392.7	393.5	394.3	395.1	395.9



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	434.4	435.0	435.8	436.5	437.3	438.3	439.3	440.2	441.2	441.6	442.0
115°	506.9	507.9	508.9	510.0	510.7	511.3	511.8	512.3	512.8	512.6	512.3
117.5°	578.6	579.1	579.5	580.0	580.4	580.9	581.4	581.8	582.3	582.5	582.7
120°	624.4	625.7	627.0	628.3	629.1	629.3	629.7	630.0	630.2	630.2	630.2
122.5°	672.5	672.9	673.4	673.8	674.4	675.1	675.8	676.4	677.1	676.9	676.7
125°	739.7	741.2	742.9	744.4	745.3	745.6	745.8	746.1	746.4	745.8	745.3
127.5°	809.4	810.3	811.2	812.1	812.7	813.0	813.3	813.6	814.0	813.6	813.4
130°	852.1	853.4	854.7	856.0	857.0	857.5	858.0	858.5	859.0	858.8	858.5
132.5°	895.1	897.4	899.5	901.6	902.6	902.5	902.4	902.3	902.2	901.9	901.7
135°	961.5	963.1	964.6	966.2	967.1	967.3	967.7	967.9	968.2	968.2	968.2
137.5°	1024.3	1025.8	1027.3	1028.9	1030.0	1030.5	1031.1	1031.7	1032.2	1032.5	1032.9
140°	1064.5	1065.8	1067.1	1068.4	1069.4	1070.3	1071.1	1071.8	1072.6	1073.1	1073.6
142.5°	1104.7	1105.8	1106.8	1107.9	1109.0	1109.9	1111.0	1112.0	1113.0	1113.3	1113.6
145°	1164.0	1165.1	1166.1	1167.1	1168.0	1168.8	1169.6	1170.3	1171.1	1171.1	1171.1
147.5°	1218.4	1219.0	1219.6	1220.1	1220.7	1221.4	1222.0	1222.6	1223.2	1223.9	1224.6
150°	1254.3	1253.9	1253.7	1253.4	1253.8	1254.9	1255.9	1257.0	1258.0	1258.0	1258.0
152.5°	1284.9	1285.3	1285.7	1286.0	1286.4	1286.8	1287.2	1287.7	1288.1	1288.7	1289.3
155°	1330.8	1330.8	1330.8	1330.8	1330.9	1331.2	1331.4	1331.7	1331.9	1333.0	1334.0
157.5°	1371.5	1370.9	1370.4	1369.8	1369.6	1369.9	1370.2	1370.4	1370.7	1371.7	1372.7
160°	1395.7	1394.9	1394.1	1393.3	1393.1	1393.3	1393.6	1393.9	1394.1	1395.1	1396.2
162.5°	1417.5	1416.9	1416.3	1415.7	1415.5	1415.5	1415.6	1415.6	1415.7	1416.9	1418.3
165°	1446.4	1445.9	1445.4	1444.8	1444.7	1445.0	1445.2	1445.5	1445.7	1446.8	1447.8
167.5°	1470.3	1469.3	1468.2	1467.1	1466.6	1466.6	1466.6	1466.6	1466.6	1468.2	1469.8
170°	1483.5	1482.4	1481.4	1480.4	1479.8	1479.8	1479.8	1479.8	1479.8	1481.4	1482.9
172.5°	1492.9	1491.8	1490.8	1489.8	1489.1	1489.1	1489.1	1489.1	1489.1	1490.8	1492.3
175°	1503.4	1502.4	1501.3	1500.3	1499.8	1499.8	1499.8	1499.8	1499.8	1501.3	1502.9
177.5°	1509.0	1508.1	1507.3	1506.5	1506.0	1505.8	1505.6	1505.3	1505.1	1506.4	1507.6
180°	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7	1854.7
2.5°	1939.6	1944.7	1955.4	1951.7	1956.7	1959.2	1961.8
5°	2096.4	2121.5	2132.5	2131.0	2147.5	2143.5	2139.6
7.5°	2273.3	2299.8	2314.6	2333.0	2343.7	2344.5	2353.8
10°	2373.5	2408.1	2422.3	2442.0	2454.6	2461.6	2460.8
12.5°	2450.2	2477.4	2509.1	2518.8	2535.8	2544.8	2541.4
15°	2542.7	2586.0	2619.1	2635.5	2656.9	2663.1	2671.8
17.5°	2625.2	2683.3	2721.9	2773.2	2792.6	2804.4	2797.4
20°	2687.6	2763.9	2802.5	2863.9	2897.7	2915.9	2909.5
22.5°	2761.3	2843.9	2915.2	2968.4	3019.9	3044.3	3049.4
25°	2887.5	3000.8	3105.5	3175.6	3239.3	3254.3	3287.4
27.5°	3028.6	3162.2	3274.2	3347.9	3392.2	3408.9	3419.3
30°	3117.4	3250.4	3334.7	3381.8	3396.1	3394.5	3392.8
32.5°	3160.8	3244.1	3260.3	3247.1	3214.7	3187.2	3158.7
35°	3099.3	3037.1	2944.2	2824.5	2736.3	2647.4	2638.8
37.5°	2787.3	2588.5	2433.9	2261.2	2161.5	2100.0	2057.5
40°	2493.9	2268.0	2080.6	1935.0	1833.4	1793.3	1753.9
42.5°	2175.2	1959.3	1793.4	1671.7	1595.4	1550.8	1519.6
45°	1767.3	1576.8	1446.9	1358.8	1298.1	1263.4	1243.7
47.5°	1448.1	1307.3	1196.9	1133.3	1091.4	1064.5	1064.6
50°	1276.9	1142.3	1069.0	1018.7	982.4	961.2	965.1
52.5°	1125.1	1024.5	962.0	919.8	893.0	879.9	879.5
55°	940.7	868.3	827.4	796.7	778.5	763.6	766.8
57.5°	804.7	743.6	716.2	690.7	678.1	672.2	663.5
60°	720.3	673.1	649.4	628.9	616.4	611.7	603.0
62.5°	645.4	608.2	585.2	568.6	557.1	555.6	548.9
65°	542.4	514.0	493.6	485.7	473.9	470.8	470.8
67.5°	447.2	426.9	410.9	403.6	398.5	399.3	395.5
70°	387.3	370.8	360.5	352.6	348.7	349.5	346.4
72.5°	338.8	320.4	311.4	306.7	301.5	303.6	302.3
75°	256.6	247.2	242.5	237.7	234.6	233.0	231.5
77.5°	188.4	180.2	176.5	173.8	174.3	170.5	173.5
80°	145.6	138.6	136.2	132.3	131.5	131.5	130.7
82.5°	106.5	102.6	100.9	97.7	96.2	97.5	95.4
85°	55.1	51.9	51.2	51.2	49.6	48.1	51.9
87.5°	24.6	22.4	22.6	22.2	22.3	21.8	20.7
90°	22.7	24.0	25.0	25.9	26.6	27.4	28.2
92.5°	50.2	51.9	53.1	53.6	54.2	54.8	55.3
95°	95.8	97.7	98.9	99.4	99.9	100.4	100.9
97.5°	149.1	150.8	151.8	152.1	152.4	152.7	153.0
100°	186.6	188.9	190.4	190.9	191.4	192.0	192.5
102.5°	224.8	227.3	228.9	229.7	230.5	231.2	231.9
105°	285.2	286.7	287.9	288.7	289.4	290.2	291.0
107.5°	350.6	351.4	351.8	351.7	351.7	351.6	351.5
110°	396.7	397.4	397.7	397.4	397.2	396.9	396.7



TEST NUMBER: P333332-840

CATALOG NUMBER: S125DIP-S1270D1205U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	442.3	442.7	442.6	442.2	441.7	441.2	440.8
115°	512.0	511.8	511.5	511.3	511.0	510.7	510.5
117.5°	582.9	583.1	582.7	581.7	580.7	579.6	578.6
120°	630.2	630.2	629.7	628.6	627.5	626.5	625.5
122.5°	676.5	676.3	675.8	674.9	674.1	673.3	672.5
125°	744.8	744.3	743.9	743.7	743.4	743.1	742.9
127.5°	813.1	812.9	812.5	812.0	811.4	810.9	810.4
130°	858.2	858.0	857.6	857.1	856.6	856.0	855.5
132.5°	901.4	901.1	900.7	899.9	899.2	898.5	897.8
135°	968.2	968.2	967.7	966.5	965.5	964.5	963.4
137.5°	1033.2	1033.5	1033.0	1031.7	1030.4	1029.1	1027.7
140°	1074.2	1074.7	1074.3	1073.0	1071.7	1070.4	1069.0
142.5°	1113.9	1114.2	1113.7	1112.4	1111.2	1109.8	1108.5
145°	1171.1	1171.1	1170.7	1170.0	1169.2	1168.4	1167.6
147.5°	1225.2	1225.8	1225.2	1223.5	1221.6	1219.9	1218.1
150°	1258.0	1258.0	1257.8	1257.2	1256.7	1256.2	1255.7
152.5°	1289.9	1290.5	1290.4	1289.5	1288.5	1287.6	1286.7
155°	1335.0	1336.2	1336.0	1334.6	1333.3	1332.1	1330.8
157.5°	1373.8	1374.8	1374.5	1372.8	1371.1	1369.4	1367.7
160°	1397.2	1398.3	1398.2	1396.8	1395.5	1394.2	1393.0
162.5°	1419.5	1420.8	1420.6	1419.1	1417.5	1416.0	1414.5
165°	1448.9	1450.0	1449.7	1448.1	1446.5	1445.0	1443.4
167.5°	1471.4	1472.9	1472.9	1471.3	1469.7	1468.0	1466.4
170°	1484.5	1486.0	1485.9	1484.1	1482.3	1480.5	1478.6
172.5°	1493.9	1495.4	1495.4	1493.8	1492.2	1490.6	1488.9
175°	1504.4	1506.0	1505.9	1504.1	1502.3	1500.4	1498.5
177.5°	1508.9	1510.2	1510.1	1508.6	1507.1	1505.7	1504.2
180°	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9

(END OF REPORT)