

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333158-840

Luminaire Tested: **S125DIP-S375D1205U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333158-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S375D1205U840-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5746.3 lumens  
Efficiency: N/A  
Efficacy: 136.2 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 42.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333158-840

CATALOG NUMBER: S125DIP-S375D1205U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

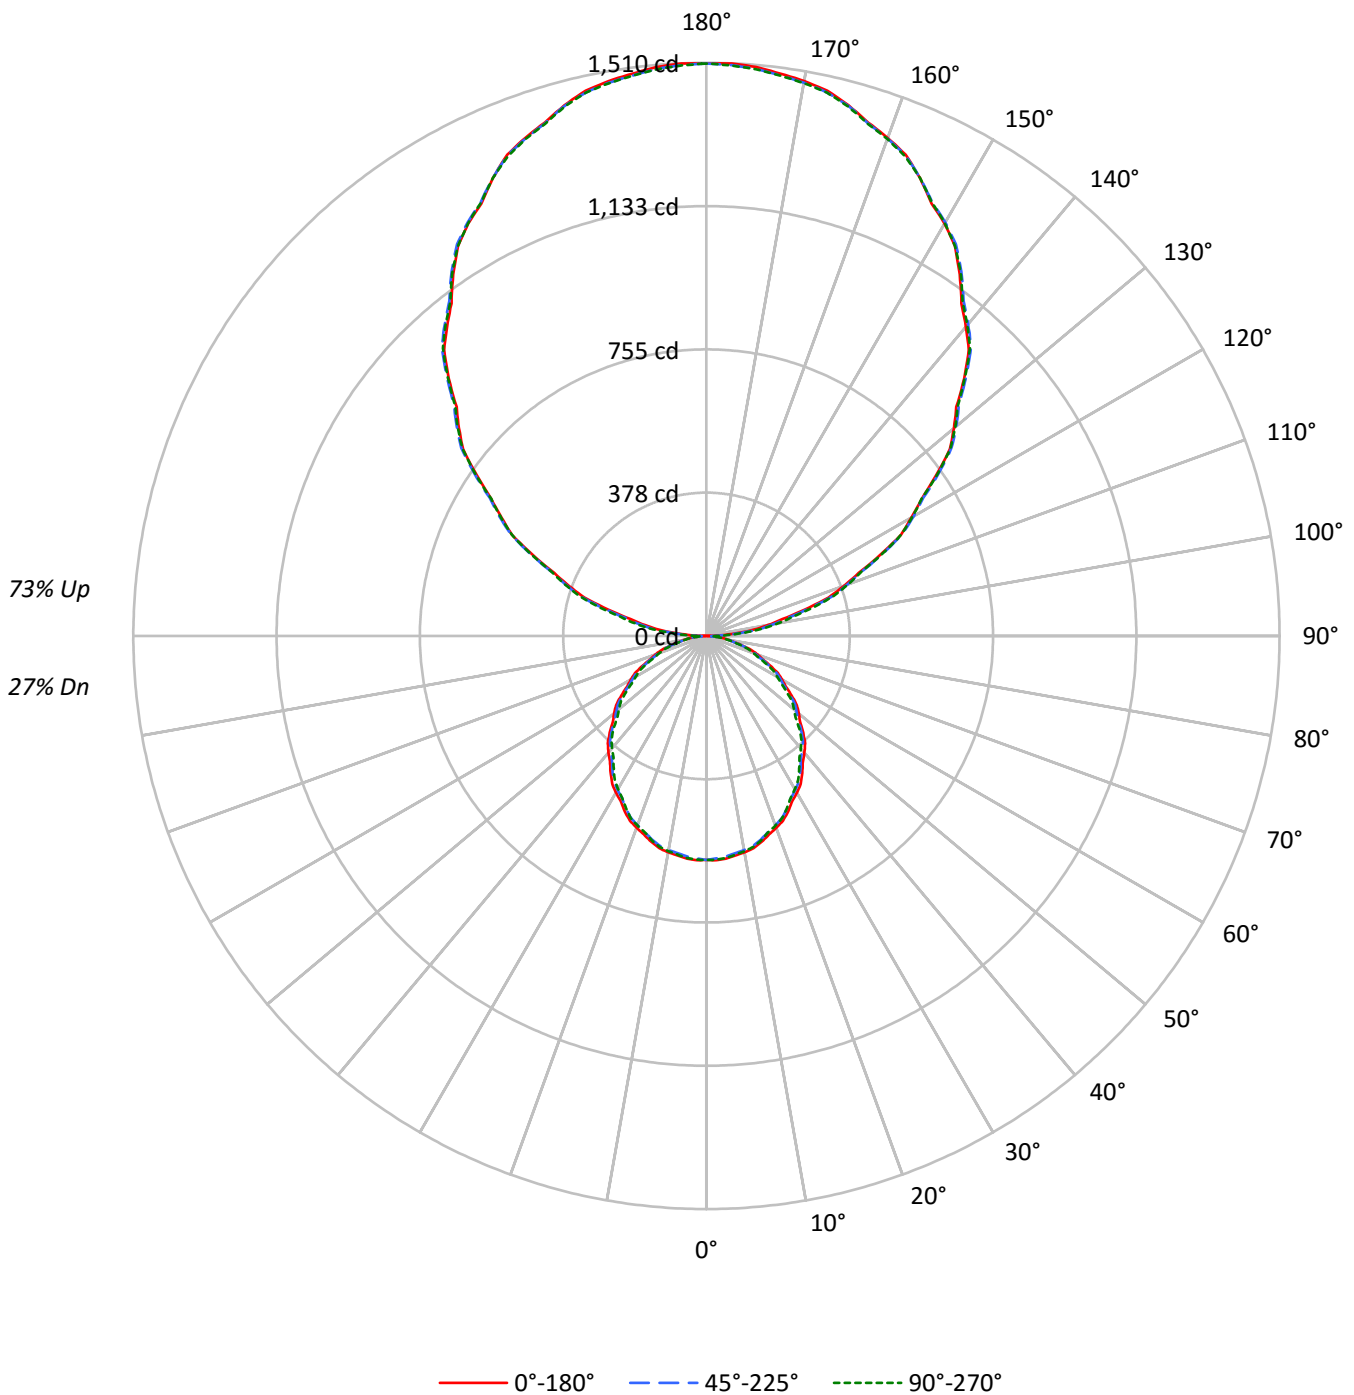



TEST NUMBER: P333158-840

CATALOG NUMBER: S125DIP-S375D1205U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	35	35	35	27
1	93	88	85	81	82	79	76	73	62	59	57	45	44	43	31	30	29	22
2	84	77	71	66	75	69	64	60	54	50	48	40	38	36	27	26	25	19
3	77	68	61	55	68	61	55	50	47	43	40	35	32	30	24	22	21	16
4	70	60	52	46	62	54	47	42	42	37	34	31	28	26	21	19	18	14
5	64	53	45	40	57	48	41	36	37	33	29	28	25	22	19	17	16	12
6	59	47	40	34	53	43	36	31	34	29	25	25	22	19	17	15	14	10
7	54	43	35	30	48	38	32	27	30	26	22	23	20	17	16	14	12	9
8	50	39	31	26	45	35	28	24	28	23	19	21	18	15	14	12	11	8
9	47	35	28	23	42	32	25	21	25	21	17	19	16	13	13	11	10	7
10	44	32	25	20	39	29	23	19	23	19	15	18	14	12	12	10	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3810	3810	3810
5°	3818	3782	3806
10°	3796	3756	3777
15°	3754	3710	3726
20°	3696	3647	3654
25°	3632	3572	3569
30°	3554	3491	3473
35°	3470	3404	3356
40°	3384	3309	3262
45°	3291	3222	3159
50°	3189	3118	3024
55°	3090	3001	2916
60°	2971	2882	2780
65°	2832	2740	2647
70°	2696	2574	2485
75°	2458	2376	2293
80°	2187	2153	2101
85°	1904	1941	1830



TEST NUMBER: P333158-840

CATALOG NUMBER: S125DIP-S375D1205U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	55.6	1.0
10°-20°	157.1	2.7
20°-30°	232.0	4.0
30°-40°	270.7	4.7
40°-50°	271.9	4.7
50°-60°	238.7	4.2
60°-70°	177.8	3.1
70°-80°	101.7	1.8
80°-90°	32.9	0.6
90°-100°	101.0	1.8
100°-110°	298.2	5.2
110°-120°	505.2	8.8
120°-130°	664.8	11.6
130°-140°	745.0	13.0
140°-150°	730.1	12.7
150°-160°	613.2	10.7
160°-170°	407.6	7.1
170°-180°	142.7	2.5
0°-30°	444.7	7.7
0°-40°	715.5	12.5
0°-60°	1226.0	21.3
0°-90°	1538.4	26.8
90°-120°	904.4	15.7
90°-150°	3044.3	53.0
90°-180°	4208.0	73.2
0°-180°	5746.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	590	590	590	590	590	
5°	589	588	583	587	587	56
15°	562	560	555	557	557	158
25°	510	507	501	502	501	234
35°	440	438	432	429	426	275
45°	360	358	353	348	346	278
55°	274	273	266	262	259	245
65°	185	184	179	175	173	184
75°	98	98	95	94	92	105
85°	26	26	26	26	25	29
90°	1	10	19	24	28	6
95°	76	79	90	98	101	81
105°	268	274	280	287	291	286
115°	506	510	513	512	510	500
125°	738	745	746	744	743	661
135°	960	967	968	968	963	740
145°	1163	1168	1171	1171	1168	727
155°	1331	1331	1332	1336	1331	613
165°	1447	1445	1446	1450	1443	408
175°	1504	1500	1500	1506	1498	143
180°	1508	1508	1508	1508	1508	



TEST NUMBER: P333158-840

CATALOG NUMBER: S125DIP-S375D1205U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0
2.5°	591.4	591.2	591.0	590.7	590.5	589.9	589.1	588.2	587.4	586.5	587.4
5°	589.0	588.8	588.5	588.3	588.1	587.5	586.5	585.5	584.4	583.4	584.3
7.5°	583.6	583.4	583.2	583.0	582.8	582.1	581.0	579.8	578.7	577.5	578.5
10°	578.8	578.6	578.3	578.1	577.9	577.2	576.1	574.9	573.8	572.7	573.5
12.5°	572.8	572.4	572.0	571.7	571.3	570.6	569.5	568.5	567.3	566.3	566.9
15°	561.5	561.2	560.9	560.6	560.2	559.5	558.4	557.2	556.0	554.9	555.4
17.5°	548.5	548.1	547.5	547.1	546.6	545.8	544.6	543.5	542.3	541.1	541.8
20°	537.7	537.5	537.2	537.0	536.8	536.0	534.7	533.3	532.0	530.7	531.4
22.5°	526.8	526.4	526.0	525.7	525.3	524.5	523.2	522.0	520.7	519.5	520.0
25°	509.7	509.2	508.6	508.1	507.6	506.6	505.3	503.9	502.6	501.3	501.5
27.5°	489.6	489.3	489.0	488.7	488.4	487.5	486.1	484.7	483.3	481.9	482.0
30°	476.6	476.3	475.8	475.5	475.2	474.3	472.8	471.2	469.7	468.1	467.9
32.5°	462.3	461.8	461.4	460.9	460.4	459.5	458.1	456.7	455.3	453.9	453.5
35°	440.1	439.7	439.3	438.9	438.5	437.5	436.1	434.6	433.1	431.7	431.2
37.5°	417.1	416.6	416.1	415.5	415.0	414.0	412.6	411.3	409.9	408.6	407.8
40°	401.4	400.8	400.3	399.8	399.3	398.3	396.9	395.5	393.9	392.5	391.6
42.5°	384.6	384.2	383.7	383.2	382.8	381.9	380.4	379.0	377.5	376.1	375.3
45°	360.3	359.9	359.5	359.1	358.6	357.8	356.6	355.4	354.1	352.8	351.6
47.5°	334.2	334.2	334.2	334.3	334.3	333.6	332.0	330.5	329.0	327.5	326.3
50°	317.4	317.1	316.8	316.4	316.1	315.4	314.1	312.9	311.6	310.3	309.0
52.5°	300.2	299.9	299.7	299.5	299.3	298.5	297.2	295.9	294.5	293.2	292.1
55°	274.4	274.1	273.8	273.5	273.2	272.3	270.8	269.4	267.9	266.5	265.6
57.5°	247.3	247.1	246.9	246.8	246.6	245.9	244.7	243.5	242.3	241.1	239.8
60°	230.0	229.6	229.2	228.8	228.4	227.6	226.5	225.4	224.2	223.1	222.1
62.5°	212.2	211.9	211.5	211.2	210.9	210.2	209.2	208.2	207.2	206.3	205.2
65°	185.3	185.1	184.9	184.7	184.5	183.8	182.7	181.5	180.4	179.3	178.2
67.5°	159.3	158.9	158.3	157.9	157.5	156.8	156.0	155.1	154.3	153.5	152.7
70°	142.8	142.3	141.8	141.3	140.8	140.0	139.1	138.1	137.2	136.3	135.6
72.5°	124.9	124.5	124.2	123.8	123.5	123.0	122.4	121.8	121.2	120.6	119.9
75°	98.5	98.3	98.1	97.9	97.7	97.3	96.7	96.2	95.7	95.2	94.9
77.5°	74.1	74.0	73.9	73.8	73.8	73.6	73.3	73.0	72.7	72.4	72.2
80°	58.8	58.8	58.8	58.8	58.8	58.7	58.5	58.3	58.1	57.9	57.8
82.5°	45.3	45.2	45.0	44.8	44.7	44.6	44.5	44.5	44.4	44.4	44.2
85°	25.7	25.8	25.9	26.0	26.1	26.2	26.2	26.2	26.2	26.2	26.1
87.5°	10.3	10.7	11.1	11.6	12.0	12.3	12.6	12.9	13.2	13.4	13.7
90°	1.2	3.2	5.4	7.5	9.5	11.5	13.3	15.1	17.0	18.8	20.1
92.5°	28.4	29.9	31.3	32.8	34.2	36.1	38.4	40.6	42.8	45.0	46.8
95°	76.2	76.7	77.4	77.9	78.4	79.9	82.5	85.1	87.8	90.4	92.2
97.5°	126.7	126.9	127.1	127.3	127.5	129.5	133.1	136.6	140.3	143.9	145.6
100°	164.3	164.3	164.3	164.3	164.3	166.0	169.4	172.8	176.1	179.6	181.9
102.5°	204.7	205.7	206.7	207.8	208.8	210.3	212.0	213.7	215.4	217.1	219.6
105°	267.5	268.8	270.1	271.5	272.8	274.2	275.8	277.3	278.9	280.4	282.1
107.5°	337.0	338.3	339.6	340.9	342.2	343.5	344.7	345.9	347.1	348.3	349.1
110°	385.0	386.2	387.5	388.8	390.1	391.1	391.9	392.7	393.5	394.3	395.1



TEST NUMBER: P333158-840

CATALOG NUMBER: S125DIP-S375D1205U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	433.7	434.4	435.0	435.8	436.5	437.3	438.3	439.3	440.2	441.2	441.6
115°	505.7	506.9	507.9	508.9	510.0	510.7	511.3	511.8	512.3	512.8	512.6
117.5°	578.0	578.6	579.1	579.5	580.0	580.4	580.9	581.4	581.8	582.3	582.5
120°	623.1	624.4	625.7	627.0	628.3	629.1	629.3	629.7	630.0	630.2	630.2
122.5°	672.0	672.5	672.9	673.4	673.8	674.4	675.1	675.8	676.4	677.1	676.9
125°	738.1	739.7	741.2	742.9	744.4	745.3	745.6	745.8	746.1	746.4	745.8
127.5°	808.6	809.4	810.3	811.2	812.1	812.7	813.0	813.3	813.6	814.0	813.6
130°	850.8	852.1	853.4	854.7	856.0	857.0	857.5	858.0	858.5	859.0	858.8
132.5°	893.0	895.1	897.4	899.5	901.6	902.6	902.5	902.4	902.3	902.2	901.9
135°	960.0	961.5	963.1	964.6	966.2	967.1	967.3	967.7	967.9	968.2	968.2
137.5°	1022.8	1024.3	1025.8	1027.3	1028.9	1030.0	1030.5	1031.1	1031.7	1032.2	1032.5
140°	1063.2	1064.5	1065.8	1067.1	1068.4	1069.4	1070.3	1071.1	1071.8	1072.6	1073.1
142.5°	1103.6	1104.7	1105.8	1106.8	1107.9	1109.0	1109.9	1111.0	1112.0	1113.0	1113.3
145°	1163.0	1164.0	1165.1	1166.1	1167.1	1168.0	1168.8	1169.6	1170.3	1171.1	1171.1
147.5°	1217.9	1218.4	1219.0	1219.6	1220.1	1220.7	1221.4	1222.0	1222.6	1223.2	1223.9
150°	1254.5	1254.3	1253.9	1253.7	1253.4	1253.8	1254.9	1255.9	1257.0	1258.0	1258.0
152.5°	1284.5	1284.9	1285.3	1285.7	1286.0	1286.4	1286.8	1287.2	1287.7	1288.1	1288.7
155°	1330.8	1330.8	1330.8	1330.8	1330.8	1330.9	1331.2	1331.4	1331.7	1331.9	1333.0
157.5°	1372.1	1371.5	1370.9	1370.4	1369.8	1369.6	1369.9	1370.2	1370.4	1370.7	1371.7
160°	1396.4	1395.7	1394.9	1394.1	1393.3	1393.1	1393.3	1393.6	1393.9	1394.1	1395.1
162.5°	1418.1	1417.5	1416.9	1416.3	1415.7	1415.5	1415.5	1415.6	1415.6	1415.7	1416.9
165°	1446.9	1446.4	1445.9	1445.4	1444.8	1444.7	1445.0	1445.2	1445.5	1445.7	1446.8
167.5°	1471.4	1470.3	1469.3	1468.2	1467.1	1466.6	1466.6	1466.6	1466.6	1466.6	1468.2
170°	1484.5	1483.5	1482.4	1481.4	1480.4	1479.8	1479.8	1479.8	1479.8	1479.8	1481.4
172.5°	1493.9	1492.9	1491.8	1490.8	1489.8	1489.1	1489.1	1489.1	1489.1	1489.1	1490.8
175°	1504.4	1503.4	1502.4	1501.3	1500.3	1499.8	1499.8	1499.8	1499.8	1499.8	1501.3
177.5°	1509.8	1509.0	1508.1	1507.3	1506.5	1506.0	1505.8	1505.6	1505.3	1505.1	1506.4
180°	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9



TEST NUMBER: P333158-840

CATALOG NUMBER: S125DIP-S375D1205U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0
2.5°	588.2	589.1	589.9	590.3	590.2	590.1	590.1	590.0
5°	585.2	586.2	587.1	587.5	587.4	587.3	587.2	587.1
7.5°	579.4	580.3	581.2	581.6	581.5	581.4	581.3	581.2
10°	574.3	575.1	576.0	576.3	576.2	576.1	576.0	575.9
12.5°	567.6	568.4	569.0	569.3	569.3	569.3	569.3	569.2
15°	555.9	556.4	557.0	557.2	557.2	557.2	557.2	557.2
17.5°	542.4	543.0	543.7	543.7	543.2	542.7	542.2	541.7
20°	532.1	532.8	533.5	533.7	533.1	532.6	532.1	531.6
22.5°	520.4	520.9	521.4	521.4	521.1	520.7	520.4	520.0
25°	501.7	501.9	502.1	502.0	501.7	501.4	501.1	500.8
27.5°	482.0	482.0	482.1	482.0	481.6	481.3	481.0	480.7
30°	467.7	467.5	467.3	467.1	466.8	466.5	466.1	465.7
32.5°	453.2	452.8	452.4	452.0	451.4	450.8	450.3	449.7
35°	430.7	430.2	429.6	429.0	428.2	427.3	426.5	425.7
37.5°	407.1	406.3	405.5	404.9	404.3	403.9	403.4	402.9
40°	390.6	389.7	388.8	388.2	387.9	387.5	387.2	386.9
42.5°	374.4	373.5	372.6	372.0	371.5	371.0	370.6	370.1
45°	350.3	349.1	347.9	347.1	346.8	346.5	346.2	345.9
47.5°	325.0	323.8	322.4	321.4	320.7	320.0	319.3	318.6
50°	307.7	306.3	305.0	304.0	303.2	302.5	301.7	301.0
52.5°	290.8	289.6	288.4	287.5	286.7	285.9	285.1	284.3
55°	264.6	263.7	262.8	262.0	261.3	260.4	259.7	259.0
57.5°	238.6	237.4	236.2	235.4	235.0	234.6	234.2	233.8
60°	221.1	219.9	218.9	218.0	217.3	216.6	215.9	215.2
62.5°	204.1	202.9	201.8	201.0	200.5	199.9	199.2	198.7
65°	177.3	176.4	175.5	174.8	174.4	174.0	173.6	173.2
67.5°	151.9	151.1	150.3	149.8	149.6	149.3	149.1	148.8
70°	135.0	134.4	133.8	133.3	132.9	132.5	132.0	131.6
72.5°	119.2	118.5	117.8	117.2	116.8	116.4	115.9	115.5
75°	94.6	94.3	93.9	93.6	93.2	92.8	92.4	91.9
77.5°	72.1	71.9	71.7	71.5	71.2	70.9	70.6	70.3
80°	57.7	57.6	57.5	57.3	57.1	56.9	56.7	56.5
82.5°	44.0	43.8	43.7	43.5	43.5	43.5	43.4	43.4
85°	26.0	25.9	25.8	25.5	25.3	25.1	24.9	24.7
87.5°	13.9	14.2	14.5	14.6	14.6	14.6	14.6	14.6
90°	21.4	22.7	24.0	25.0	25.9	26.6	27.4	28.2
92.5°	48.5	50.2	51.9	53.1	53.6	54.2	54.8	55.3
95°	94.0	95.8	97.7	98.9	99.4	99.9	100.4	100.9
97.5°	147.3	149.1	150.8	151.8	152.1	152.4	152.7	153.0
100°	184.2	186.6	188.9	190.4	190.9	191.4	192.0	192.5
102.5°	222.2	224.8	227.3	228.9	229.7	230.5	231.2	231.9
105°	283.6	285.2	286.7	287.9	288.7	289.4	290.2	291.0
107.5°	349.8	350.6	351.4	351.8	351.7	351.7	351.6	351.5
110°	395.9	396.7	397.4	397.7	397.4	397.2	396.9	396.7





TEST NUMBER: P333158-840

CATALOG NUMBER: S125DIP-S375D1205U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	442.0	442.3	442.7	442.6	442.2	441.7	441.2	440.8
115°	512.3	512.0	511.8	511.5	511.3	511.0	510.7	510.5
117.5°	582.7	582.9	583.1	582.7	581.7	580.7	579.6	578.6
120°	630.2	630.2	630.2	629.7	628.6	627.5	626.5	625.5
122.5°	676.7	676.5	676.3	675.8	674.9	674.1	673.3	672.5
125°	745.3	744.8	744.3	743.9	743.7	743.4	743.1	742.9
127.5°	813.4	813.1	812.9	812.5	812.0	811.4	810.9	810.4
130°	858.5	858.2	858.0	857.6	857.1	856.6	856.0	855.5
132.5°	901.7	901.4	901.1	900.7	899.9	899.2	898.5	897.8
135°	968.2	968.2	968.2	967.7	966.5	965.5	964.5	963.4
137.5°	1032.9	1033.2	1033.5	1033.0	1031.7	1030.4	1029.1	1027.7
140°	1073.6	1074.2	1074.7	1074.3	1073.0	1071.7	1070.4	1069.0
142.5°	1113.6	1113.9	1114.2	1113.7	1112.4	1111.2	1109.8	1108.5
145°	1171.1	1171.1	1171.1	1170.7	1170.0	1169.2	1168.4	1167.6
147.5°	1224.6	1225.2	1225.8	1225.2	1223.5	1221.6	1219.9	1218.1
150°	1258.0	1258.0	1258.0	1257.8	1257.2	1256.7	1256.2	1255.7
152.5°	1289.3	1289.9	1290.5	1290.4	1289.5	1288.5	1287.6	1286.7
155°	1334.0	1335.0	1336.2	1336.0	1334.6	1333.3	1332.1	1330.8
157.5°	1372.7	1373.8	1374.8	1374.5	1372.8	1371.1	1369.4	1367.7
160°	1396.2	1397.2	1398.3	1398.2	1396.8	1395.5	1394.2	1393.0
162.5°	1418.3	1419.5	1420.8	1420.6	1419.1	1417.5	1416.0	1414.5
165°	1447.8	1448.9	1450.0	1449.7	1448.1	1446.5	1445.0	1443.4
167.5°	1469.8	1471.4	1472.9	1472.9	1471.3	1469.7	1468.0	1466.4
170°	1482.9	1484.5	1486.0	1485.9	1484.1	1482.3	1480.5	1478.6
172.5°	1492.3	1493.9	1495.4	1495.4	1493.8	1492.2	1490.6	1488.9
175°	1502.9	1504.4	1506.0	1505.9	1504.1	1502.3	1500.4	1498.5
177.5°	1507.6	1508.9	1510.2	1510.1	1508.6	1507.1	1505.7	1504.2
180°	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9	1507.9

(END OF REPORT)