

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333184-840

Luminaire Tested: **S125DIP-S610D810U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333184-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S610D810U840-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 810 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5797.5 lumens  
Efficiency: N/A  
Efficacy: 151.0 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 38.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333184-840

CATALOG NUMBER: S125DIP-S610D810U840-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

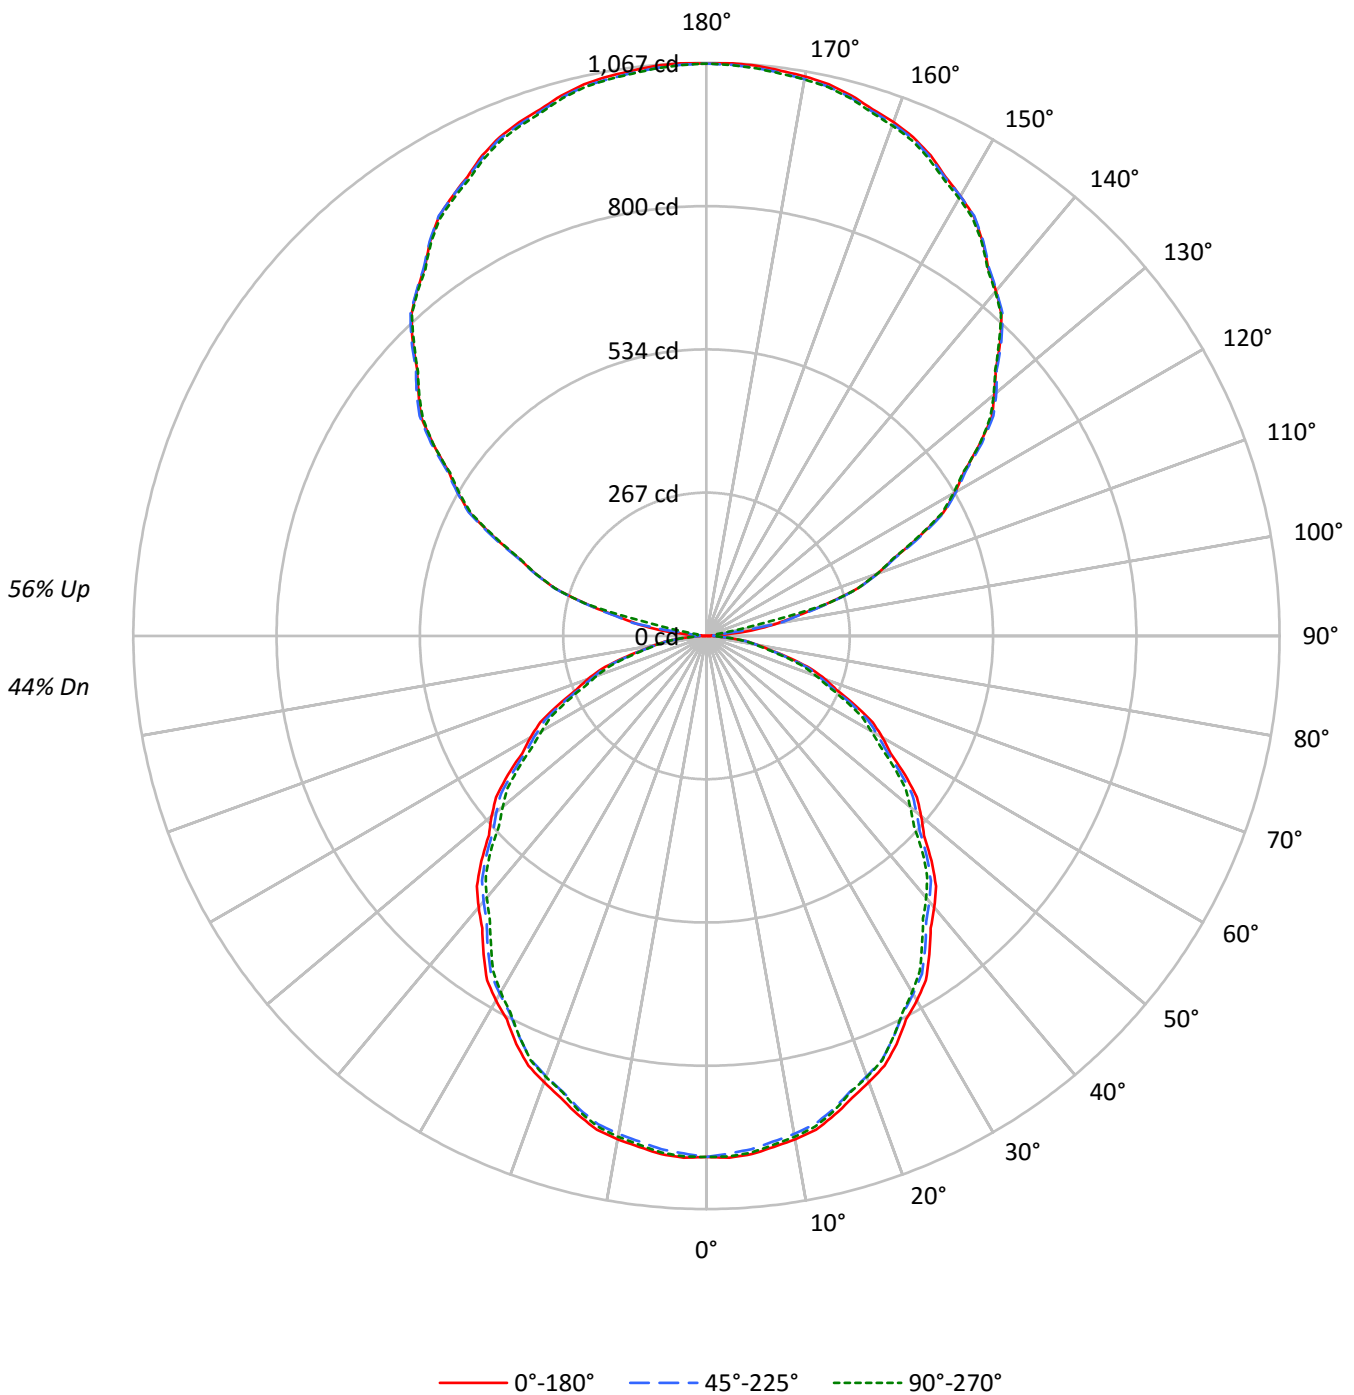



TEST NUMBER: P333184-840

CATALOG NUMBER: S125DIP-S610D810U840-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	44
1	96	92	88	85	88	84	81	78	70	67	65	57	55	53	44	43	42	37
2	88	80	74	69	80	74	68	64	61	57	54	50	47	45	39	37	36	31
3	80	71	63	57	73	65	58	53	54	49	45	44	40	38	34	32	30	26
4	73	62	55	49	67	57	50	45	48	43	39	39	35	32	31	28	26	22
5	67	55	47	41	61	51	44	39	43	37	33	35	31	28	28	25	23	19
6	62	50	42	36	56	46	39	34	38	33	29	32	27	24	25	22	20	17
7	57	45	37	31	52	41	34	29	35	29	25	29	25	22	23	20	18	15
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16	13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	27	22	18	22	18	16	18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6264	6264	6264
5°	6278	6218	6257
10°	6239	6174	6209
15°	6171	6100	6125
20°	6075	5996	6006
25°	5971	5872	5867
30°	5842	5739	5711
35°	5705	5595	5517
40°	5563	5440	5363
45°	5411	5298	5193
50°	5243	5127	4972
55°	5080	4933	4796
60°	4886	4738	4570
65°	4655	4504	4351
70°	4434	4232	4086
75°	4040	3905	3773
80°	3593	3537	3451
85°	3127	3179	3016



TEST NUMBER: P333184-840

CATALOG NUMBER: S125DIP-S610D810U840-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	91.4	1.6
10°-20°	258.3	4.5
20°-30°	381.4	6.6
30°-40°	445.0	7.7
40°-50°	447.0	7.7
50°-60°	392.4	6.8
60°-70°	292.4	5.0
70°-80°	167.2	2.9
80°-90°	50.8	0.9
90°-100°	38.7	0.7
100°-110°	238.6	4.1
110°-120°	432.8	7.5
120°-130°	555.4	9.6
130°-140°	597.4	10.3
140°-150°	560.7	9.7
150°-160°	453.6	7.8
160°-170°	293.3	5.1
170°-180°	101.2	1.7
0°-30°	731.2	12.6
0°-40°	1176.2	20.3
0°-60°	2015.6	34.8
0°-90°	2525.9	43.6
90°-120°	710.1	12.2
90°-150°	2423.5	41.8
90°-180°	3272.0	56.4
0°-180°	5797.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	970	970	970	970	970	
5°	968	966	959	966	965	92
15°	923	920	912	916	916	260
25°	838	834	824	825	823	385
35°	724	720	710	706	700	452
45°	592	589	580	571	569	456
55°	451	448	438	431	426	403
65°	305	303	295	288	285	302
75°	162	160	156	154	151	173
85°	42	43	43	42	41	47
90°	1	7	13	17	19	4
95°	45	41	13	16	17	57
105°	232	235	235	235	235	246
115°	436	440	441	437	433	432
125°	620	625	626	622	620	554
135°	773	778	776	775	770	596
145°	896	898	898	898	894	560
155°	987	983	984	986	980	455
165°	1042	1037	1038	1042	1036	294
175°	1065	1061	1062	1067	1061	101
180°	1065	1065	1065	1065	1065	



TEST NUMBER: P333184-840

CATALOG NUMBER: S125DIP-S610D810U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	969.9	969.9	969.9	969.9	969.9	969.9	969.9	969.9	969.9	969.9	969.9
2.5°	972.3	971.9	971.5	971.1	970.7	969.8	968.5	967.0	965.7	964.3	965.7
5°	968.4	968.0	967.7	967.2	966.9	965.9	964.2	962.5	960.8	959.1	960.7
7.5°	959.4	959.1	958.8	958.4	958.1	956.9	955.0	953.2	951.3	949.5	950.9
10°	951.4	951.1	950.8	950.4	950.1	949.0	947.1	945.2	943.3	941.5	942.8
12.5°	941.6	941.0	940.4	939.8	939.2	938.0	936.2	934.5	932.7	931.0	932.1
15°	923.0	922.5	922.0	921.5	921.0	919.8	918.0	916.0	914.1	912.3	913.1
17.5°	901.7	901.0	900.2	899.5	898.7	897.4	895.4	893.4	891.5	889.6	890.6
20°	883.9	883.5	883.2	882.9	882.5	881.3	879.1	876.9	874.6	872.4	873.6
22.5°	866.1	865.5	864.8	864.2	863.6	862.3	860.2	858.2	856.1	853.9	854.7
25°	837.9	837.0	836.2	835.4	834.5	832.9	830.7	828.5	826.3	824.0	824.5
27.5°	804.9	804.4	803.9	803.3	802.8	801.4	799.1	796.9	794.6	792.3	792.3
30°	783.4	782.8	782.3	781.8	781.3	779.8	777.3	774.7	772.1	769.6	769.2
32.5°	760.0	759.3	758.5	757.7	756.9	755.4	753.2	750.8	748.5	746.3	745.7
35°	723.6	722.9	722.2	721.5	720.8	719.3	716.9	714.5	712.2	709.7	708.9
37.5°	685.6	684.8	684.0	683.1	682.3	680.6	678.4	676.2	673.9	671.7	670.4
40°	659.8	659.0	658.1	657.3	656.4	654.8	652.5	650.1	647.6	645.3	643.8
42.5°	632.3	631.6	630.8	630.1	629.3	627.8	625.4	623.1	620.7	618.2	616.9
45°	592.4	591.7	591.0	590.3	589.7	588.2	586.2	584.2	582.1	580.1	578.0
47.5°	549.4	549.4	549.5	549.5	549.5	548.3	545.8	543.4	541.0	538.5	536.4
50°	521.8	521.2	520.7	520.2	519.7	518.5	516.3	514.3	512.3	510.3	508.1
52.5°	493.5	493.1	492.8	492.4	492.0	490.7	488.6	486.4	484.2	482.0	480.1
55°	451.2	450.6	450.1	449.6	449.1	447.7	445.2	442.9	440.5	438.1	436.6
57.5°	406.5	406.3	406.0	405.7	405.5	404.2	402.2	400.2	398.2	396.3	394.3
60°	378.3	377.6	376.9	376.2	375.6	374.3	372.4	370.5	368.6	366.8	365.1
62.5°	348.8	348.3	347.7	347.2	346.6	345.6	344.0	342.3	340.7	339.1	337.3
65°	304.6	304.3	304.0	303.6	303.3	302.2	300.2	298.4	296.5	294.7	293.1
67.5°	261.8	261.1	260.3	259.6	258.9	257.9	256.5	255.1	253.7	252.3	251.0
70°	234.8	234.0	233.1	232.3	231.4	230.1	228.6	227.1	225.6	224.1	223.0
72.5°	205.3	204.7	204.2	203.6	203.0	202.2	201.3	200.3	199.2	198.2	197.1
75°	161.9	161.6	161.2	160.9	160.6	160.0	159.1	158.2	157.3	156.5	156.0
77.5°	121.9	121.7	121.6	121.4	121.3	121.0	120.5	120.1	119.6	119.1	118.8
80°	96.6	96.6	96.6	96.6	96.6	96.5	96.1	95.8	95.5	95.1	94.9
82.5°	74.6	74.3	74.0	73.7	73.5	73.3	73.2	73.2	73.1	73.0	72.7
85°	42.2	42.4	42.5	42.7	42.9	42.9	42.9	42.9	42.9	42.9	42.8
87.5°	16.8	17.0	17.3	17.6	17.9	18.1	18.2	18.3	18.4	18.5	18.7
90°	0.8	2.2	3.6	5.0	6.4	7.7	9.0	10.2	11.4	12.6	13.5
92.5°	12.1	11.2	10.2	9.2	8.3	8.3	9.4	10.5	11.5	12.6	13.5
95°	45.0	44.5	43.9	43.4	42.9	39.3	32.6	26.0	19.3	12.6	13.5
97.5°	94.0	94.9	95.8	96.8	97.8	91.7	78.5	65.2	52.0	38.9	33.9
100°	131.9	132.4	132.9	133.5	134.0	134.6	135.3	136.0	136.7	137.4	111.3
102.5°	170.5	171.1	171.8	172.4	173.1	173.6	174.1	174.5	174.9	175.3	170.4
105°	232.2	232.9	233.6	234.3	235.0	235.3	235.3	235.3	235.3	235.3	235.3
107.5°	296.3	296.3	296.3	296.3	296.3	296.5	296.8	297.2	297.5	297.9	297.9
110°	338.0	338.0	338.0	338.0	338.0	338.2	338.5	338.9	339.2	339.6	339.1



TEST NUMBER: P333184-840

CATALOG NUMBER: S125DIP-S610D810U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	377.2	377.6	378.0	378.5	378.9	379.2	379.4	379.6	379.8	380.0	379.4
115°	436.0	436.9	437.7	438.6	439.5	440.0	440.2	440.3	440.5	440.7	440.0
117.5°	496.8	496.8	496.7	496.7	496.7	497.0	497.6	498.3	499.0	499.6	498.7
120°	534.6	534.5	534.3	534.1	533.9	534.1	534.6	535.2	535.7	536.2	535.9
122.5°	568.2	568.9	569.5	570.2	570.8	571.3	571.5	571.8	572.0	572.3	571.9
125°	620.0	621.2	622.4	623.7	624.9	625.5	625.5	625.5	625.5	625.5	624.8
127.5°	669.4	670.2	671.2	672.1	672.9	673.3	673.2	673.1	673.0	672.9	672.5
130°	699.7	700.6	701.5	702.4	703.3	703.8	704.0	704.1	704.3	704.5	704.0
132.5°	730.0	731.0	732.1	733.1	734.2	734.5	734.1	733.7	733.3	732.9	732.8
135°	773.2	774.3	775.3	776.4	777.4	777.7	777.4	777.0	776.7	776.4	776.0
137.5°	812.8	813.7	814.7	815.6	816.5	816.8	816.5	816.2	815.9	815.5	815.6
140°	838.7	839.1	839.4	839.8	840.1	840.2	840.0	839.9	839.7	839.5	839.9
142.5°	862.1	862.3	862.5	862.7	862.9	863.1	863.4	863.6	863.9	864.1	864.2
145°	896.4	896.8	897.1	897.5	897.8	898.0	898.0	898.0	898.0	898.0	898.2
147.5°	926.3	926.3	926.2	926.1	926.1	926.1	926.3	926.6	926.9	927.1	927.3
150°	945.3	945.0	944.6	944.3	943.9	943.9	944.3	944.6	945.0	945.3	945.7
152.5°	963.7	962.9	962.1	961.4	960.6	960.4	960.7	961.1	961.4	961.8	962.1
155°	987.2	986.1	985.1	984.0	983.0	982.6	983.0	983.3	983.7	984.0	984.5
157.5°	1005.3	1004.7	1004.1	1003.5	1002.8	1002.5	1002.6	1002.6	1002.6	1002.7	1003.2
160°	1018.0	1016.9	1015.9	1014.8	1013.8	1013.4	1013.5	1013.7	1013.9	1014.0	1014.7
162.5°	1028.1	1027.0	1026.0	1024.9	1023.9	1023.5	1023.6	1023.8	1024.0	1024.2	1025.1
165°	1041.7	1040.7	1039.6	1038.5	1037.4	1037.0	1037.2	1037.4	1037.5	1037.7	1038.8
167.5°	1051.8	1050.8	1049.7	1048.5	1047.4	1047.0	1047.1	1047.3	1047.5	1047.7	1048.9
170°	1057.5	1056.2	1055.0	1053.8	1052.6	1052.1	1052.2	1052.4	1052.6	1052.8	1054.2
172.5°	1061.3	1060.1	1058.8	1057.6	1056.3	1055.9	1056.2	1056.5	1056.8	1057.1	1058.4
175°	1065.4	1064.3	1063.3	1062.3	1061.2	1060.8	1060.9	1061.1	1061.3	1061.5	1062.9
177.5°	1067.3	1066.4	1065.6	1064.8	1063.9	1063.6	1063.7	1063.8	1064.0	1064.1	1065.1
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4



TEST NUMBER: P333184-840

CATALOG NUMBER: S125DIP-S610D810U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	969.9	969.9	969.9	969.9	969.9	969.9	969.9	969.9
2.5°	967.0	968.5	969.8	970.4	970.3	970.1	970.0	969.9
5°	962.2	963.7	965.2	965.9	965.7	965.6	965.4	965.2
7.5°	952.4	953.9	955.4	956.1	955.9	955.7	955.6	955.4
10°	944.2	945.5	947.0	947.6	947.4	947.2	947.0	946.8
12.5°	933.2	934.3	935.3	935.9	935.8	935.8	935.8	935.7
15°	914.0	914.8	915.7	916.1	916.1	916.1	916.1	916.1
17.5°	891.7	892.7	893.8	893.9	893.0	892.2	891.4	890.5
20°	874.7	876.0	877.2	877.4	876.5	875.7	874.7	873.9
22.5°	855.6	856.4	857.2	857.3	856.7	856.1	855.5	855.0
25°	824.8	825.1	825.5	825.4	824.9	824.4	823.8	823.3
27.5°	792.4	792.5	792.5	792.3	791.8	791.3	790.8	790.3
30°	768.9	768.6	768.2	767.8	767.3	766.8	766.3	765.8
32.5°	745.1	744.4	743.8	743.1	742.1	741.2	740.2	739.3
35°	708.0	707.2	706.3	705.2	703.9	702.5	701.1	699.7
37.5°	669.1	667.9	666.6	665.6	664.8	664.1	663.3	662.5
40°	642.2	640.7	639.1	638.1	637.6	637.1	636.6	636.1
42.5°	615.5	614.1	612.7	611.6	610.8	610.1	609.3	608.4
45°	575.9	573.9	571.9	570.6	570.1	569.6	569.1	568.6
47.5°	534.3	532.2	530.2	528.6	527.4	526.1	524.9	523.7
50°	505.8	503.6	501.4	499.7	498.5	497.3	496.0	494.9
52.5°	478.1	476.2	474.2	472.6	471.3	469.9	468.6	467.3
55°	435.0	433.5	432.0	430.6	429.4	428.2	427.1	425.9
57.5°	392.2	390.3	388.3	387.0	386.4	385.7	385.1	384.5
60°	363.3	361.6	359.9	358.5	357.3	356.1	354.9	353.8
62.5°	335.5	333.7	331.7	330.4	329.5	328.5	327.6	326.7
65°	291.5	290.0	288.5	287.4	286.7	286.0	285.4	284.7
67.5°	249.7	248.4	247.1	246.2	245.8	245.4	245.0	244.6
70°	222.0	221.0	219.9	219.1	218.4	217.7	217.0	216.4
72.5°	195.9	194.8	193.6	192.7	192.0	191.4	190.7	190.0
75°	155.5	155.0	154.5	153.9	153.2	152.5	151.9	151.2
77.5°	118.5	118.2	117.9	117.4	116.9	116.5	116.0	115.5
80°	94.8	94.6	94.4	94.2	93.8	93.5	93.2	92.8
82.5°	72.4	72.1	71.8	71.6	71.6	71.5	71.4	71.4
85°	42.6	42.4	42.3	42.0	41.7	41.3	41.0	40.7
87.5°	18.9	19.0	19.2	19.2	19.0	18.9	18.7	18.5
90°	14.4	15.2	16.2	16.9	17.4	17.9	18.4	19.0
92.5°	14.4	15.2	16.2	16.7	17.0	17.2	17.5	17.7
95°	14.4	15.2	16.2	16.6	16.6	16.6	16.6	16.6
97.5°	29.0	24.0	19.1	16.6	16.6	16.6	16.6	16.6
100°	85.1	59.0	32.8	19.4	18.7	18.0	17.3	16.6
102.5°	165.4	160.5	155.5	147.1	135.1	123.2	111.3	99.4
105°	235.3	235.3	235.3	235.3	235.1	234.9	234.7	234.6
107.5°	298.0	298.0	298.0	297.8	297.3	296.7	296.2	295.7
110°	338.5	338.0	337.5	337.3	337.5	337.7	337.8	338.0





TEST NUMBER: P333184-840

CATALOG NUMBER: S125DIP-S610D810U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	378.7	378.0	377.4	376.9	376.7	376.4	376.2	376.0
115°	439.3	438.6	437.9	437.0	436.0	434.8	433.8	432.8
117.5°	497.8	496.9	495.9	495.2	494.8	494.3	493.9	493.4
120°	535.5	535.2	534.8	534.2	533.3	532.5	531.6	530.7
122.5°	571.6	571.2	570.9	570.2	569.2	568.2	567.1	566.1
125°	624.1	623.4	622.7	622.1	621.6	621.0	620.5	620.0
127.5°	672.1	671.8	671.4	670.4	669.2	667.9	666.6	665.3
130°	703.4	702.9	702.4	701.7	700.7	699.9	699.0	698.1
132.5°	732.7	732.6	732.5	732.0	731.1	730.2	729.3	728.5
135°	775.7	775.3	775.0	774.3	773.2	772.1	771.0	770.0
137.5°	815.7	815.7	815.8	815.4	814.5	813.5	812.6	811.7
140°	840.2	840.6	840.9	840.6	839.5	838.5	837.4	836.4
142.5°	864.3	864.3	864.4	863.9	862.9	861.8	860.8	859.7
145°	898.3	898.5	898.7	898.2	897.2	896.2	895.0	894.0
147.5°	927.5	927.7	927.9	927.4	926.0	924.8	923.5	922.3
150°	946.0	946.4	946.7	946.2	944.8	943.4	942.0	940.6
152.5°	962.5	962.8	963.2	962.7	961.5	960.2	959.0	957.7
155°	985.1	985.6	986.1	985.7	984.3	982.9	981.5	980.1
157.5°	1003.8	1004.4	1004.9	1004.5	1003.1	1001.7	1000.3	998.9
160°	1015.4	1016.1	1016.8	1016.5	1015.1	1013.7	1012.3	1010.9
162.5°	1026.1	1027.1	1028.0	1027.8	1026.2	1024.7	1023.2	1021.7
165°	1039.9	1040.9	1042.0	1041.8	1040.4	1038.9	1037.5	1036.1
167.5°	1050.3	1051.5	1052.8	1052.6	1051.0	1049.5	1047.8	1046.3
170°	1055.5	1056.9	1058.3	1058.2	1056.7	1055.1	1053.5	1052.0
172.5°	1059.7	1061.0	1062.3	1062.1	1060.5	1058.9	1057.3	1055.7
175°	1064.2	1065.6	1067.0	1066.9	1065.4	1063.8	1062.3	1060.7
177.5°	1066.1	1067.0	1068.0	1068.0	1066.8	1065.7	1064.6	1063.5
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4

(END OF REPORT)