

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333205-840

Luminaire Tested: **S125DIP-S850D365U840-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333205-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S850D365U840-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4965.9 lumens
Efficiency: N/A
Efficacy: 141.9 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

Luminous Intensity Polar Plot

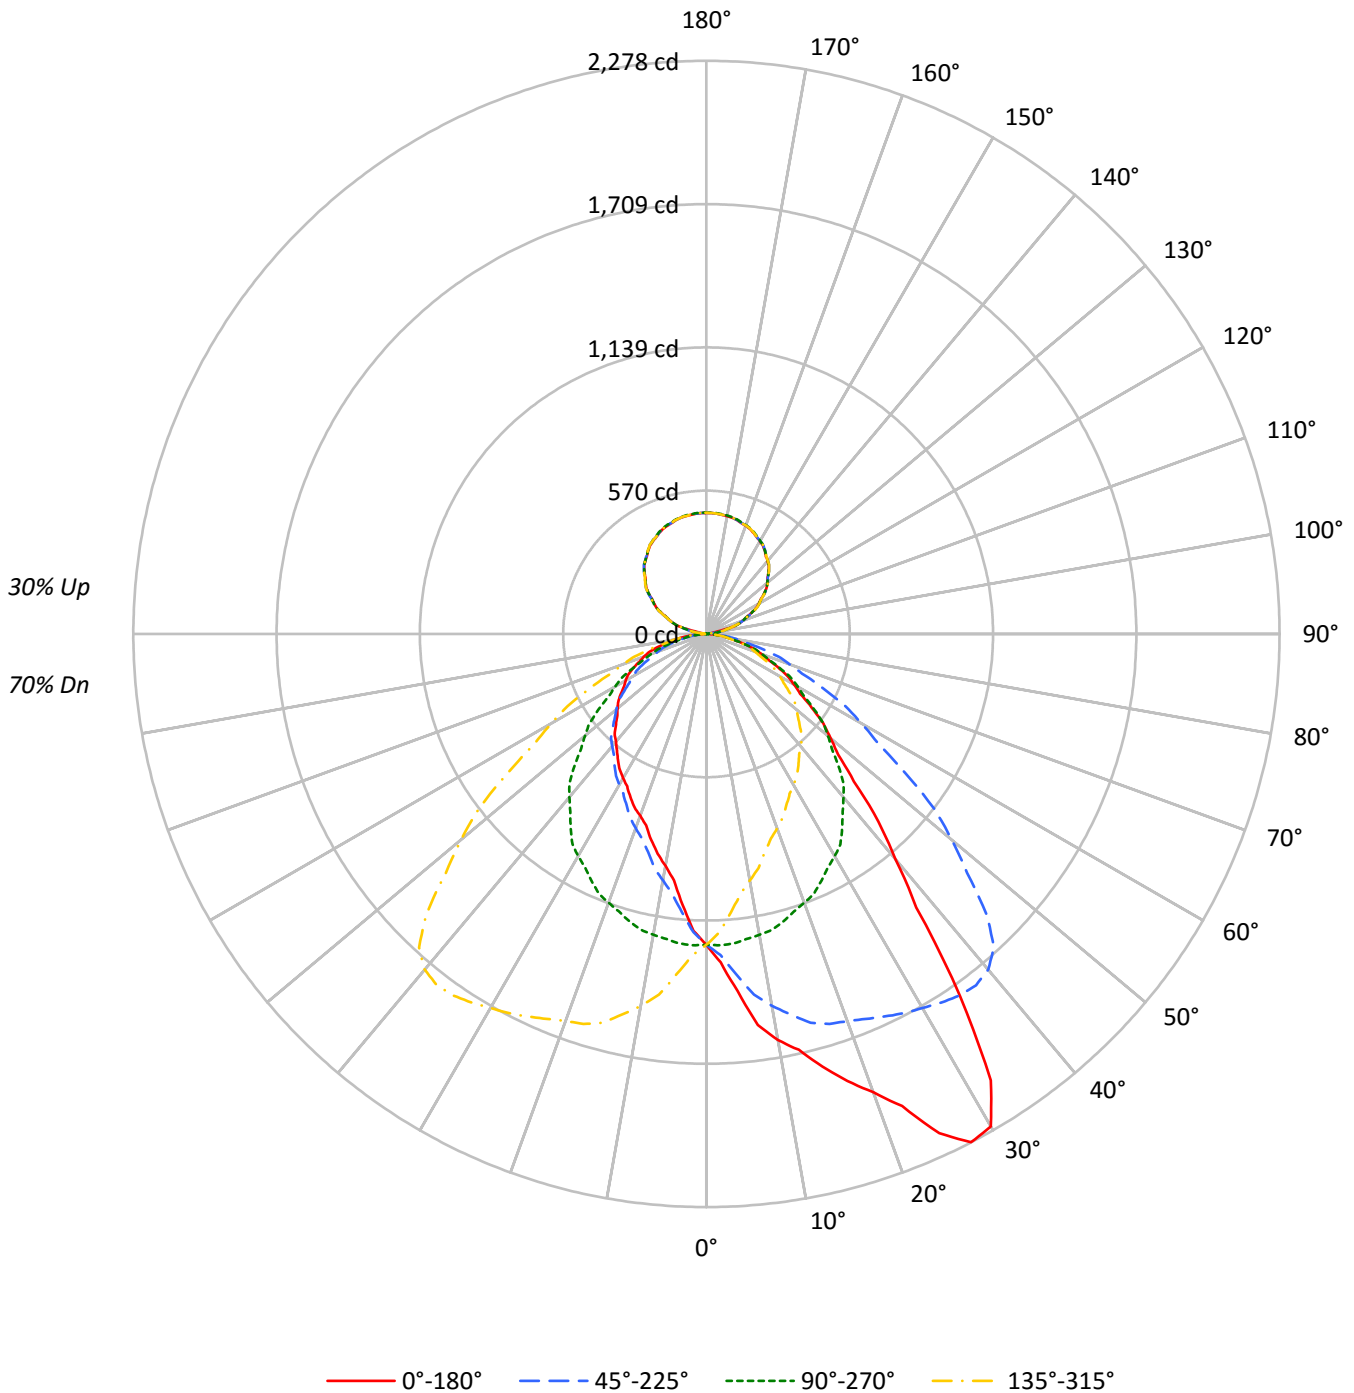



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	95	95	95	84	84	84	75	75	75	70
1	103	98	94	91	97	93	90	87	84	81	79	75	73	71	67	65	64	60
2	94	86	80	75	88	82	76	72	74	69	66	66	63	60	59	56	54	51
3	86	76	69	63	81	72	66	60	65	60	55	59	54	51	52	49	46	43
4	79	68	59	53	74	64	57	51	58	52	48	52	48	44	47	43	40	37
5	72	60	52	46	68	58	50	44	52	46	41	47	42	38	42	38	35	32
6	67	54	46	40	63	52	44	39	47	41	36	43	38	34	39	34	31	28
7	62	49	41	35	58	47	40	34	43	37	32	39	34	30	35	31	28	25
8	57	45	37	31	54	43	36	30	39	33	28	36	30	27	32	28	25	23
9	54	41	33	28	51	39	32	27	36	30	26	33	28	24	30	26	22	20
10	50	38	30	25	47	36	29	25	33	27	23	30	25	22	28	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	7979	7979	7979	7979
5°	9240	8006	7010	8006
10°	10750	7965	6142	7965
15°	11900	7906	5666	7906
20°	13320	7813	5283	7813
25°	15605	7709	5097	7709
30°	16855	7607	4935	7607
35°	13858	7413	4829	7413
40°	9850	7144	4713	7144
45°	7567	6783	4646	6783
50°	6459	6333	4636	6333
55°	5751	5892	4677	5892
60°	5187	5412	4795	5412
65°	4792	4927	4919	4927
70°	4358	4426	4991	4426
75°	3848	3898	4946	3898
80°	3239	3176	4526	3176
85°	2564	2290	3653	2290



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.9	2.4
10°-20°	354.1	7.1
20°-30°	575.0	11.6
30°-40°	701.4	14.1
40°-50°	638.1	12.8
50°-60°	508.2	10.2
60°-70°	354.0	7.1
70°-80°	188.8	3.8
80°-90°	48.6	1.0
90°-100°	17.5	0.4
100°-110°	107.8	2.2
110°-120°	195.6	3.9
120°-130°	251.0	5.1
130°-140°	270.0	5.4
140°-150°	253.4	5.1
150°-160°	205.0	4.1
160°-170°	132.6	2.7
170°-180°	45.7	0.9
0°-30°	1048.1	21.1
0°-40°	1749.5	35.2
0°-60°	2895.8	58.3
0°-90°	3487.2	70.2
90°-120°	321.0	6.5
90°-150°	1095.4	22.1
90°-180°	1479.0	29.8
0°-180°	4965.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1236	1236	1236	1236	1236	
5°	1425	1235	1081	1235	1425	144
15°	1780	1182	847	1182	1780	509
25°	2190	1082	715	1082	2190	1000
35°	1758	940	612	940	1758	1076
45°	828	743	509	743	828	663
55°	511	523	415	523	511	460
65°	314	322	322	322	314	311
75°	154	156	198	156	154	166
85°	35	31	49	31	35	40
90°	9	0	9	0	9	5
95°	8	20	8	20	8	6
105°	106	105	106	105	106	96
115°	196	197	196	197	196	194
125°	280	280	280	280	280	249
135°	348	350	348	350	348	269
145°	404	405	404	405	404	252
155°	443	446	443	446	443	204
165°	468	471	468	471	468	132
175°	479	482	479	482	479	46
180°	482	482	482	482	482	



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5
2.5°	1306.8	1305.0	1303.4	1300.0	1302.5	1295.5	1292.0	1286.2	1279.1	1276.6	1273.6
5°	1425.2	1427.8	1430.5	1419.5	1420.6	1413.2	1396.4	1382.8	1371.8	1357.7	1347.7
7.5°	1567.9	1561.7	1561.2	1554.1	1541.8	1532.0	1514.3	1491.9	1470.2	1445.4	1424.9
10°	1639.2	1639.7	1635.0	1626.6	1613.6	1604.1	1581.0	1558.9	1532.3	1500.8	1478.2
12.5°	1692.9	1695.1	1689.1	1677.8	1671.4	1650.2	1632.1	1606.0	1574.2	1549.0	1514.7
15°	1779.8	1773.9	1769.8	1755.7	1744.6	1722.6	1693.7	1666.5	1631.8	1599.8	1567.9
17.5°	1863.4	1868.0	1860.2	1847.2	1813.1	1787.4	1748.7	1711.3	1668.3	1625.4	1587.2
20°	1938.1	1942.3	1930.3	1907.7	1866.8	1841.1	1790.2	1742.0	1692.1	1637.1	1595.2
22.5°	2031.2	2027.9	2011.7	1977.3	1941.9	1894.4	1839.3	1780.6	1718.2	1656.0	1600.2
25°	2189.8	2167.8	2157.8	2115.4	2068.7	1998.9	1923.4	1837.4	1759.8	1677.5	1606.2
27.5°	2277.6	2270.8	2259.7	2230.1	2181.0	2106.5	2017.4	1912.6	1803.1	1699.2	1605.9
30°	2260.1	2261.1	2262.2	2252.7	2221.3	2165.2	2076.6	1963.8	1833.7	1716.8	1608.8
32.5°	2104.1	2123.1	2141.3	2162.9	2171.7	2161.0	2105.5	2003.7	1869.9	1737.0	1607.1
35°	1757.7	1763.5	1822.7	1881.5	1961.2	2023.1	2064.5	2019.4	1906.6	1754.0	1605.1
37.5°	1370.5	1398.9	1439.9	1506.2	1621.2	1724.2	1856.7	1917.6	1881.3	1759.6	1601.4
40°	1168.3	1194.6	1221.2	1288.9	1385.9	1510.8	1661.2	1789.7	1819.6	1742.0	1588.8
42.5°	1012.3	1033.0	1062.7	1113.6	1194.7	1305.1	1449.0	1616.9	1720.2	1690.8	1562.5
45°	828.5	841.6	864.7	905.0	963.8	1050.4	1177.2	1360.8	1520.7	1573.7	1499.8
47.5°	709.1	709.0	727.0	754.9	797.3	870.8	964.6	1108.4	1279.3	1405.6	1399.8
50°	642.9	640.3	654.4	678.5	712.1	760.8	850.5	965.3	1129.5	1272.6	1312.5
52.5°	585.8	586.1	594.8	612.7	640.8	682.5	749.4	852.9	993.2	1140.1	1215.2
55°	510.8	508.7	518.6	530.7	551.1	578.3	626.6	705.8	819.6	964.3	1061.9
57.5°	441.9	447.7	451.7	460.1	477.1	495.3	536.0	594.1	684.4	808.6	911.7
60°	401.6	407.5	410.6	419.0	432.6	448.4	479.8	527.0	603.0	710.0	812.2
62.5°	365.6	370.1	371.1	378.7	389.8	405.2	429.9	469.5	529.6	623.2	723.4
65°	313.6	313.6	315.7	323.6	328.8	342.4	361.3	390.1	438.4	511.3	596.7
67.5°	263.5	266.0	265.4	268.9	273.8	284.3	297.8	321.6	357.4	410.6	479.0
70°	230.8	232.8	232.3	234.9	240.1	247.0	258.0	280.5	306.2	351.8	410.6
72.5°	201.4	202.2	200.9	204.3	207.4	213.4	225.7	237.7	261.8	300.2	348.5
75°	154.2	155.2	156.2	158.3	161.5	164.6	171.0	183.0	198.7	227.6	258.5
77.5°	115.5	113.6	116.1	115.8	117.5	120.0	125.5	131.9	144.8	163.1	187.0
80°	87.1	87.6	87.6	88.1	90.7	92.3	97.0	101.7	111.7	125.3	142.1
82.5°	63.5	64.9	64.1	65.0	67.3	68.4	71.0	74.8	80.7	91.4	103.5
85°	34.6	32.0	33.0	34.1	34.1	34.6	36.7	38.3	41.4	45.6	50.3
87.5°	11.8	12.6	12.9	12.9	13.2	13.2	14.8	14.7	15.9	17.1	18.7
90°	8.6	8.3	8.1	7.9	7.6	7.3	6.9	6.5	6.1	5.8	5.2
92.5°	8.0	7.9	7.8	7.7	7.6	7.3	6.9	6.5	6.1	5.8	5.3
95°	7.5	7.5	7.5	7.5	7.5	7.3	6.9	6.5	6.1	5.8	8.7
97.5°	7.5	7.5	7.5	7.5	7.5	8.6	10.8	13.1	15.3	17.6	23.5
100°	7.5	7.8	8.2	8.5	8.8	14.8	26.7	38.5	50.3	62.1	61.8
102.5°	44.9	50.3	55.7	61.1	66.4	70.3	72.5	74.7	77.1	79.3	79.1
105°	106.0	106.1	106.1	106.2	106.3	106.3	106.3	106.3	106.3	106.3	106.3
107.5°	133.6	133.9	134.1	134.4	134.6	134.7	134.7	134.7	134.6	134.6	134.5
110°	152.8	152.7	152.6	152.6	152.5	152.6	152.8	153.0	153.3	153.5	153.3



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	170.0	170.1	170.2	170.3	170.4	170.6	170.9	171.2	171.5	171.8	171.7
115°	195.6	196.1	196.6	197.0	197.5	197.9	198.2	198.5	198.8	199.1	199.1
117.5°	223.1	223.3	223.5	223.7	223.9	224.2	224.6	225.0	225.4	225.8	225.5
120°	239.8	240.2	240.7	241.1	241.5	241.8	241.9	242.1	242.3	242.4	242.2
122.5°	255.9	256.3	256.8	257.2	257.7	258.0	258.2	258.3	258.5	258.6	258.5
125°	280.2	280.4	280.7	280.9	281.1	281.4	281.8	282.1	282.4	282.8	282.8
127.5°	300.7	301.3	301.8	302.5	303.1	303.5	303.6	303.8	304.0	304.2	304.2
130°	315.6	316.0	316.4	316.8	317.1	317.5	317.7	317.9	318.2	318.4	318.3
132.5°	329.3	329.6	330.0	330.4	330.8	331.0	331.1	331.1	331.2	331.2	331.4
135°	348.0	348.5	349.0	349.5	349.9	350.2	350.4	350.6	350.7	350.9	351.0
137.5°	366.9	367.3	367.7	368.1	368.5	368.7	368.7	368.7	368.6	368.6	368.7
140°	378.0	378.5	379.0	379.5	379.9	380.1	379.9	379.8	379.6	379.5	379.5
142.5°	388.6	389.1	389.5	390.0	390.5	390.7	390.7	390.6	390.6	390.6	390.5
145°	404.0	404.6	405.1	405.6	406.0	406.2	406.1	406.1	406.0	405.9	405.9
147.5°	416.9	417.5	418.0	418.6	419.2	419.4	419.3	419.2	419.1	419.0	418.9
150°	425.2	425.8	426.5	427.1	427.7	427.9	427.8	427.6	427.5	427.3	427.2
152.5°	432.8	433.4	434.0	434.5	435.2	435.4	435.2	435.0	434.8	434.7	434.5
155°	443.0	443.6	444.2	444.9	445.6	445.8	445.5	445.2	445.0	444.7	444.6
157.5°	451.5	452.1	452.7	453.4	454.0	454.2	453.9	453.7	453.4	453.2	453.2
160°	457.0	457.6	458.2	458.8	459.5	459.6	459.3	459.0	458.7	458.4	458.3
162.5°	461.8	462.5	463.1	463.8	464.5	464.7	464.2	463.8	463.3	462.9	462.8
165°	468.4	469.0	469.6	470.3	470.9	471.0	470.5	470.0	469.5	469.1	469.0
167.5°	472.9	473.6	474.3	475.0	475.7	475.8	475.2	474.7	474.1	473.5	473.5
170°	475.4	476.2	477.0	477.7	478.4	478.4	477.8	477.1	476.5	475.8	475.7
172.5°	477.2	477.9	478.6	479.4	480.1	480.1	479.6	479.0	478.4	477.9	477.7
175°	479.4	480.1	480.8	481.5	482.3	482.3	481.7	481.0	480.4	479.8	479.7
177.5°	480.7	481.2	481.7	482.2	482.7	482.7	482.3	481.9	481.4	481.0	480.9
180°	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5
2.5°	1271.1	1268.2	1264.8	1258.9	1251.8	1248.0	1242.1	1238.4	1230.8	1224.6	1217.8
5°	1335.5	1321.9	1309.4	1293.1	1275.3	1263.7	1250.1	1234.9	1219.2	1203.0	1185.1
7.5°	1402.4	1378.3	1352.0	1323.8	1296.3	1270.9	1246.7	1222.8	1200.6	1173.8	1151.0
10°	1447.2	1416.8	1384.3	1346.0	1308.9	1276.4	1243.3	1214.5	1185.1	1153.7	1125.8
12.5°	1492.2	1451.7	1405.7	1363.7	1318.9	1279.7	1240.8	1204.0	1167.1	1132.3	1099.8
15°	1523.9	1488.1	1445.7	1385.9	1335.5	1281.6	1230.2	1182.5	1137.9	1099.1	1058.2
17.5°	1544.7	1498.7	1453.2	1395.8	1329.8	1269.4	1211.2	1156.6	1106.3	1057.1	1017.7
20°	1548.5	1501.3	1453.6	1397.5	1329.8	1260.6	1202.4	1136.8	1082.9	1032.0	983.7
22.5°	1547.2	1493.8	1441.8	1384.0	1318.1	1254.4	1184.0	1117.1	1058.5	1008.5	958.2
25°	1535.4	1478.2	1413.2	1355.0	1290.0	1222.3	1151.0	1081.8	1022.0	964.8	915.0
27.5°	1525.5	1451.4	1377.8	1309.9	1247.1	1185.1	1116.8	1045.9	979.7	921.7	874.7
30°	1513.4	1432.1	1349.2	1278.4	1214.0	1153.7	1089.1	1020.0	950.7	894.0	843.7
32.5°	1502.5	1407.8	1320.3	1243.2	1174.9	1116.3	1056.8	991.0	923.0	865.6	815.2
35°	1481.4	1371.8	1271.6	1184.6	1111.7	1051.4	1001.6	940.2	877.8	822.2	774.0
37.5°	1454.6	1324.5	1217.1	1125.8	1045.9	982.4	936.0	888.9	829.0	775.5	731.8
40°	1433.6	1291.0	1177.2	1083.9	1001.1	934.9	892.0	847.4	797.6	747.8	701.7
42.5°	1407.2	1260.8	1137.0	1036.5	954.4	890.1	845.0	807.1	763.2	716.7	673.9
45°	1358.7	1206.1	1071.9	963.8	880.9	817.5	770.8	742.6	709.5	665.4	629.2
47.5°	1287.3	1140.3	1001.5	890.0	804.5	745.7	702.0	674.8	651.5	618.7	585.9
50°	1223.9	1091.3	950.7	840.0	754.6	695.3	655.0	630.3	610.4	585.2	557.4
52.5°	1153.0	1029.6	900.8	791.4	706.8	648.3	608.8	587.1	570.6	552.5	525.1
55°	1040.4	935.5	816.0	712.1	634.0	576.8	542.2	523.3	509.7	496.0	479.3
57.5°	916.3	834.2	728.3	633.5	561.5	509.5	477.2	458.8	448.3	441.2	431.3
60°	829.0	758.8	667.5	581.0	510.8	464.6	433.1	419.0	410.1	404.2	397.0
62.5°	748.1	690.4	605.8	526.8	465.4	421.8	393.7	380.0	371.4	368.6	362.5
65°	628.7	584.2	514.4	448.9	396.5	359.2	335.6	322.4	317.2	314.1	314.7
67.5°	511.2	484.0	428.0	372.1	330.2	299.0	280.1	270.0	267.4	263.3	263.2
70°	439.4	419.0	371.8	323.1	285.8	261.7	244.9	234.4	231.8	229.6	229.1
72.5°	376.1	358.2	317.2	278.1	244.7	223.5	209.6	203.4	199.0	197.8	197.7
75°	282.7	272.7	240.1	209.2	186.1	171.5	162.1	156.2	153.1	152.6	153.1
77.5°	201.0	192.3	171.6	149.7	135.1	124.0	116.0	114.0	110.5	110.6	110.0
80°	151.0	145.2	132.2	114.8	102.8	93.3	89.2	85.4	84.4	82.8	84.4
82.5°	109.5	103.3	94.4	83.4	73.4	67.8	63.5	62.4	61.8	61.0	61.4
85°	54.0	54.5	49.3	40.9	36.7	33.5	30.9	30.9	30.4	29.9	30.4
87.5°	19.4	18.4	16.7	15.2	13.0	11.6	11.1	11.4	10.3	10.0	10.5
90°	4.6	4.0	3.5	2.9	2.2	1.6	1.0	0.4	1.0	1.6	2.2
92.5°	4.7	4.2	3.7	3.7	4.1	4.6	5.0	5.5	5.0	4.6	4.1
95°	11.7	14.7	17.8	19.4	19.6	19.9	20.1	20.3	20.1	19.9	19.6
97.5°	29.5	35.4	41.4	44.2	43.7	43.3	42.9	42.5	42.9	43.3	43.7
100°	61.5	61.2	60.8	60.6	60.3	60.1	59.9	59.6	59.9	60.1	60.3
102.5°	78.9	78.7	78.5	78.3	78.0	77.7	77.4	77.1	77.4	77.7	78.0
105°	106.3	106.3	106.3	106.2	105.9	105.6	105.2	104.9	105.2	105.6	105.9
107.5°	134.3	134.2	134.0	133.9	133.9	133.9	133.9	133.9	133.9	133.9	133.9
110°	153.2	153.0	152.9	152.8	152.8	152.8	152.8	152.8	152.8	152.8	152.8



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	171.6	171.5	171.4	171.3	171.1	170.9	170.7	170.5	170.7	170.9	171.1
115°	199.0	198.9	198.8	198.6	198.2	197.8	197.4	197.0	197.4	197.8	198.2
117.5°	225.2	224.9	224.6	224.5	224.5	224.5	224.5	224.5	224.5	224.5	224.5
120°	241.9	241.7	241.5	241.4	241.5	241.6	241.6	241.7	241.6	241.6	241.5
122.5°	258.4	258.3	258.2	258.0	257.7	257.4	257.1	256.8	257.1	257.4	257.7
125°	282.8	282.8	282.8	282.5	281.9	281.3	280.7	280.2	280.7	281.3	281.9
127.5°	304.3	304.3	304.4	304.2	303.8	303.4	303.0	302.6	303.0	303.4	303.8
130°	318.2	318.2	318.1	317.9	317.5	317.1	316.7	316.3	316.7	317.1	317.5
132.5°	331.6	331.8	331.9	331.8	331.3	330.9	330.4	330.0	330.4	330.9	331.3
135°	351.2	351.3	351.5	351.3	350.9	350.4	349.9	349.5	349.9	350.4	350.9
137.5°	368.9	369.0	369.2	369.0	368.6	368.2	367.8	367.4	367.8	368.2	368.6
140°	379.6	379.7	379.8	379.7	379.6	379.4	379.3	379.1	379.3	379.4	379.6
142.5°	390.4	390.3	390.1	390.0	389.9	389.9	389.8	389.7	389.8	389.9	389.9
145°	405.9	405.9	405.9	405.8	405.7	405.5	405.4	405.2	405.4	405.5	405.7
147.5°	418.8	418.7	418.6	418.6	418.6	418.7	418.7	418.7	418.7	418.7	418.6
150°	427.0	426.8	426.7	426.7	426.8	427.0	427.2	427.3	427.2	427.0	426.8
152.5°	434.4	434.2	434.0	434.1	434.5	434.8	435.3	435.6	435.3	434.8	434.5
155°	444.4	444.3	444.1	444.3	444.7	445.2	445.8	446.3	445.8	445.2	444.7
157.5°	453.2	453.1	453.1	453.3	453.5	453.8	454.1	454.4	454.1	453.8	453.5
160°	458.2	458.1	458.1	458.3	458.7	459.2	459.7	460.1	459.7	459.2	458.7
162.5°	462.7	462.7	462.6	462.8	463.2	463.7	464.2	464.7	464.2	463.7	463.2
165°	468.9	468.8	468.8	469.0	469.4	469.9	470.4	470.8	470.4	469.9	469.4
167.5°	473.4	473.3	473.2	473.4	473.9	474.4	474.9	475.4	474.9	474.4	473.9
170°	475.6	475.6	475.5	475.7	476.4	476.9	477.5	478.0	477.5	476.9	476.4
172.5°	477.6	477.4	477.3	477.5	478.1	478.6	479.2	479.7	479.2	478.6	478.1
175°	479.6	479.5	479.5	479.7	480.1	480.6	481.1	481.5	481.1	480.6	480.1
177.5°	480.9	480.8	480.7	480.9	481.3	481.6	482.0	482.4	482.0	481.6	481.3
180°	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5
2.5°	1214.1	1209.4	1205.7	1197.3	1192.7	1186.4	1181.3	1186.8	1180.9	1183.5	1179.6
5°	1176.2	1161.5	1151.0	1135.8	1122.7	1110.6	1101.8	1100.1	1095.9	1093.9	1087.5
7.5°	1130.6	1112.3	1094.3	1074.4	1057.5	1040.5	1029.6	1020.6	1014.6	1006.7	1001.4
10°	1103.8	1079.1	1058.2	1034.1	1013.1	994.7	980.1	972.7	965.9	955.9	952.3
12.5°	1070.7	1045.2	1019.6	993.8	973.7	953.2	940.6	929.5	924.8	913.5	912.4
15°	1031.0	992.7	967.5	941.3	913.4	896.7	886.2	874.1	868.9	861.0	855.3
17.5°	983.5	949.4	917.9	890.7	866.9	852.7	839.7	831.4	822.4	817.3	807.9
20°	949.2	916.7	885.1	856.3	838.0	821.7	811.2	803.3	794.0	791.3	781.8
22.5°	920.2	884.3	854.1	829.9	809.8	791.5	780.1	774.9	768.3	760.2	758.3
25°	873.1	835.9	810.2	786.1	768.2	751.4	743.6	736.8	730.4	724.7	722.6
27.5°	832.4	799.1	768.6	746.8	731.3	716.0	709.0	700.7	696.2	691.6	685.9
30°	803.9	769.8	743.1	722.1	705.3	691.7	684.3	678.5	674.4	670.1	667.0
32.5°	774.5	743.0	717.0	696.5	679.7	669.4	662.9	658.8	654.2	649.1	645.2
35°	735.7	701.0	675.9	658.1	645.0	637.1	629.8	626.1	620.9	620.9	616.6
37.5°	692.0	662.1	639.9	623.6	611.9	604.8	596.8	594.3	591.0	588.8	587.3
40°	666.0	638.1	617.2	601.0	588.3	582.6	576.3	572.1	570.0	567.3	566.3
42.5°	639.1	612.6	592.5	577.4	566.5	561.6	555.7	552.8	548.6	545.1	544.5
45°	598.3	572.6	554.3	542.2	532.8	527.0	523.3	517.1	514.9	510.8	510.2
47.5°	559.6	534.9	516.9	507.1	498.8	494.0	488.3	482.0	479.6	477.5	477.3
50°	530.7	508.2	491.3	481.9	474.0	467.3	461.4	457.3	455.7	455.7	456.8
52.5°	501.3	482.1	467.9	456.4	448.9	441.6	436.3	433.7	431.3	433.8	435.8
55°	458.3	438.9	428.4	417.4	410.1	401.6	399.1	398.0	396.5	400.6	402.7
57.5°	412.8	399.2	386.9	376.0	369.4	364.6	361.0	360.3	363.2	365.3	372.1
60°	383.8	368.1	357.1	348.7	340.8	337.7	336.7	335.6	337.7	343.5	352.3
62.5°	351.9	339.2	327.3	321.0	315.3	310.0	309.8	310.4	314.7	321.2	330.1
65°	305.2	294.2	286.3	278.9	274.3	271.1	272.2	274.3	278.9	287.9	297.8
67.5°	257.7	250.1	243.1	237.1	232.6	232.6	233.7	236.8	242.4	252.7	261.8
70°	227.0	218.6	212.9	210.3	206.6	204.5	207.6	212.9	217.6	227.0	234.9
72.5°	196.4	189.3	184.8	183.0	181.5	179.8	180.8	186.4	192.9	202.3	211.5
75°	151.0	148.3	145.2	143.2	141.6	142.6	143.7	149.0	154.2	164.1	174.6
77.5°	110.2	107.4	105.6	105.1	104.2	104.7	107.8	111.6	116.7	124.0	131.9
80°	83.4	82.3	81.3	80.8	80.8	81.3	85.4	88.1	92.8	99.7	105.9
82.5°	60.7	60.1	59.9	59.8	60.2	60.3	62.8	66.2	70.2	75.3	80.8
85°	32.0	30.9	32.5	33.0	32.0	33.5	34.6	36.7	38.3	40.9	43.5
87.5°	11.1	12.0	11.7	12.2	12.3	13.3	12.9	14.7	15.7	16.6	16.2
90°	2.9	3.5	4.0	4.6	5.2	5.8	6.1	6.5	6.9	7.3	7.6
92.5°	3.7	3.7	4.2	4.7	5.3	5.8	6.1	6.5	6.9	7.3	7.6
95°	19.4	17.8	14.7	11.7	8.7	5.8	6.1	6.5	6.9	7.3	7.5
97.5°	44.2	41.4	35.4	29.5	23.5	17.6	15.3	13.1	10.8	8.6	7.5
100°	60.6	60.8	61.2	61.5	61.8	62.1	50.3	38.5	26.7	14.8	8.8
102.5°	78.3	78.5	78.7	78.9	79.1	79.3	77.1	74.7	72.5	70.3	66.4
105°	106.2	106.3	106.3	106.3	106.3	106.3	106.3	106.3	106.3	106.3	106.3
107.5°	133.9	134.0	134.2	134.3	134.5	134.6	134.6	134.7	134.7	134.7	134.6
110°	152.8	152.9	153.0	153.2	153.3	153.5	153.3	153.0	152.8	152.6	152.5



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	171.3	171.4	171.5	171.6	171.7	171.8	171.5	171.2	170.9	170.6	170.4
115°	198.6	198.8	198.9	199.0	199.1	199.1	198.8	198.5	198.2	197.9	197.5
117.5°	224.5	224.6	224.9	225.2	225.5	225.8	225.4	225.0	224.6	224.2	223.9
120°	241.4	241.5	241.7	241.9	242.2	242.4	242.3	242.1	241.9	241.8	241.5
122.5°	258.0	258.2	258.3	258.4	258.5	258.6	258.5	258.3	258.2	258.0	257.7
125°	282.5	282.8	282.8	282.8	282.8	282.8	282.4	282.1	281.8	281.4	281.1
127.5°	304.2	304.4	304.3	304.3	304.2	304.2	304.0	303.8	303.6	303.5	303.1
130°	317.9	318.1	318.2	318.2	318.3	318.4	318.2	317.9	317.7	317.5	317.1
132.5°	331.8	331.9	331.8	331.6	331.4	331.2	331.2	331.1	331.1	331.0	330.8
135°	351.3	351.5	351.3	351.2	351.0	350.9	350.7	350.6	350.4	350.2	349.9
137.5°	369.0	369.2	369.0	368.9	368.7	368.6	368.6	368.7	368.7	368.7	368.5
140°	379.7	379.8	379.7	379.6	379.5	379.5	379.6	379.8	379.9	380.1	379.9
142.5°	390.0	390.1	390.3	390.4	390.5	390.6	390.6	390.6	390.7	390.7	390.5
145°	405.8	405.9	405.9	405.9	405.9	405.9	406.0	406.1	406.1	406.2	406.0
147.5°	418.6	418.6	418.7	418.8	418.9	419.0	419.1	419.2	419.3	419.4	419.2
150°	426.7	426.7	426.8	427.0	427.2	427.3	427.5	427.6	427.8	427.9	427.7
152.5°	434.1	434.0	434.2	434.4	434.5	434.7	434.8	435.0	435.2	435.4	435.2
155°	444.3	444.1	444.3	444.4	444.6	444.7	445.0	445.2	445.5	445.8	445.6
157.5°	453.3	453.1	453.1	453.2	453.2	453.2	453.4	453.7	453.9	454.2	454.0
160°	458.3	458.1	458.1	458.2	458.3	458.4	458.7	459.0	459.3	459.6	459.5
162.5°	462.8	462.6	462.7	462.7	462.8	462.9	463.3	463.8	464.2	464.7	464.5
165°	469.0	468.8	468.8	468.9	469.0	469.1	469.5	470.0	470.5	471.0	470.9
167.5°	473.4	473.2	473.3	473.4	473.5	473.5	474.1	474.7	475.2	475.8	475.7
170°	475.7	475.5	475.6	475.6	475.7	475.8	476.5	477.1	477.8	478.4	478.4
172.5°	477.5	477.3	477.4	477.6	477.7	477.9	478.4	479.0	479.6	480.1	480.1
175°	479.7	479.5	479.5	479.6	479.7	479.8	480.4	481.0	481.7	482.3	482.3
177.5°	480.9	480.7	480.8	480.9	480.9	481.0	481.4	481.9	482.3	482.7	482.7
180°	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5
2.5°	1177.1	1180.0	1177.5	1180.9	1177.5	1180.0	1177.1	1179.6	1183.5	1180.9	1186.8
5°	1084.9	1080.3	1083.4	1081.3	1083.4	1080.3	1084.9	1087.5	1093.9	1095.9	1100.1
7.5°	999.8	995.2	990.2	987.7	990.2	995.2	999.8	1001.4	1006.7	1014.6	1020.6
10°	946.5	940.7	940.2	936.5	940.2	940.7	946.5	952.3	955.9	965.9	972.7
12.5°	907.5	902.1	896.2	894.6	896.2	902.1	907.5	912.4	913.5	924.8	929.5
15°	852.1	847.9	844.2	847.4	844.2	847.9	852.1	855.3	861.0	868.9	874.1
17.5°	806.1	802.6	801.9	798.1	801.9	802.6	806.1	807.9	817.3	822.4	831.4
20°	777.1	774.5	775.6	768.7	775.6	774.5	777.1	781.8	791.3	794.0	803.3
22.5°	754.1	748.9	748.3	746.9	748.3	748.9	754.1	758.3	760.2	768.3	774.9
25°	717.9	715.3	712.7	715.3	712.7	715.3	717.9	722.6	724.7	730.4	736.8
27.5°	686.3	683.2	682.5	682.8	682.5	683.2	686.3	685.9	691.6	696.2	700.7
30°	667.0	661.8	662.3	661.8	662.3	661.8	667.0	667.0	670.1	674.4	678.5
32.5°	646.0	642.5	641.8	640.8	641.8	642.5	646.0	645.2	649.1	654.2	658.8
35°	615.1	615.1	612.5	612.5	612.5	615.1	615.1	616.6	620.9	620.9	626.1
37.5°	586.0	585.5	583.9	584.2	583.9	585.5	586.0	587.3	588.8	591.0	594.3
40°	564.2	563.7	562.1	559.0	562.1	563.7	564.2	566.3	567.3	570.0	572.1
42.5°	543.2	541.5	540.8	539.7	540.8	541.5	543.2	544.5	545.1	548.6	552.8
45°	510.2	510.2	509.2	508.7	509.2	510.2	510.2	510.2	510.8	514.9	517.1
47.5°	478.2	479.1	481.1	480.8	481.1	479.1	478.2	477.3	477.5	479.6	482.0
50°	458.8	459.4	460.9	461.4	460.9	459.4	458.8	456.8	455.7	455.7	457.3
52.5°	437.5	440.5	442.4	442.1	442.4	440.5	437.5	435.8	433.8	431.3	433.7
55°	407.5	411.1	414.8	415.4	414.8	411.1	407.5	402.7	400.6	396.5	398.0
57.5°	377.8	382.9	386.8	388.0	386.8	382.9	377.8	372.1	365.3	363.2	360.3
60°	357.6	364.5	369.2	371.2	369.2	364.5	357.6	352.3	343.5	337.7	335.6
62.5°	338.3	346.0	350.7	351.1	350.7	346.0	338.3	330.1	321.2	314.7	310.4
65°	306.8	314.7	318.8	321.9	318.8	314.7	306.8	297.8	287.9	278.9	274.3
67.5°	272.8	280.6	285.3	287.8	285.3	280.6	272.8	261.8	252.7	242.4	236.8
70°	248.0	255.9	262.2	264.3	262.2	255.9	248.0	234.9	227.0	217.6	212.9
72.5°	223.7	230.8	235.8	238.2	235.8	230.8	223.7	211.5	202.3	192.9	186.4
75°	181.5	190.9	195.6	198.2	195.6	190.9	181.5	174.6	164.1	154.2	149.0
77.5°	139.9	148.6	151.4	152.7	151.4	148.6	139.9	131.9	124.0	116.7	111.6
80°	112.2	117.4	121.1	121.7	121.1	117.4	112.2	105.9	99.7	92.8	88.1
82.5°	86.2	90.6	91.8	93.1	91.8	90.6	86.2	80.8	75.3	70.2	66.2
85°	47.2	49.3	49.8	49.3	49.8	49.3	47.2	43.5	40.9	38.3	36.7
87.5°	17.1	16.8	16.8	17.7	16.8	16.8	17.1	16.2	16.6	15.7	14.7
90°	7.9	8.1	8.3	8.6	8.3	8.1	7.9	7.6	7.3	6.9	6.5
92.5°	7.7	7.8	7.9	8.0	7.9	7.8	7.7	7.6	7.3	6.9	6.5
95°	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.3	6.9	6.5
97.5°	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	8.6	10.8	13.1
100°	8.5	8.2	7.8	7.5	7.8	8.2	8.5	8.8	14.8	26.7	38.5
102.5°	61.1	55.7	50.3	44.9	50.3	55.7	61.1	66.4	70.3	72.5	74.7
105°	106.2	106.1	106.1	106.0	106.1	106.1	106.2	106.3	106.3	106.3	106.3
107.5°	134.4	134.1	133.9	133.6	133.9	134.1	134.4	134.6	134.7	134.7	134.7
110°	152.6	152.6	152.7	152.8	152.7	152.6	152.6	152.5	152.6	152.8	153.0



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	170.3	170.2	170.1	170.0	170.1	170.2	170.3	170.4	170.6	170.9	171.2
115°	197.0	196.6	196.1	195.6	196.1	196.6	197.0	197.5	197.9	198.2	198.5
117.5°	223.7	223.5	223.3	223.1	223.3	223.5	223.7	223.9	224.2	224.6	225.0
120°	241.1	240.7	240.2	239.8	240.2	240.7	241.1	241.5	241.8	241.9	242.1
122.5°	257.2	256.8	256.3	255.9	256.3	256.8	257.2	257.7	258.0	258.2	258.3
125°	280.9	280.7	280.4	280.2	280.4	280.7	280.9	281.1	281.4	281.8	282.1
127.5°	302.5	301.8	301.3	300.7	301.3	301.8	302.5	303.1	303.5	303.6	303.8
130°	316.8	316.4	316.0	315.6	316.0	316.4	316.8	317.1	317.5	317.7	317.9
132.5°	330.4	330.0	329.6	329.3	329.6	330.0	330.4	330.8	331.0	331.1	331.1
135°	349.5	349.0	348.5	348.0	348.5	349.0	349.5	349.9	350.2	350.4	350.6
137.5°	368.1	367.7	367.3	366.9	367.3	367.7	368.1	368.5	368.7	368.7	368.7
140°	379.5	379.0	378.5	378.0	378.5	379.0	379.5	379.9	380.1	379.9	379.8
142.5°	390.0	389.5	389.1	388.6	389.1	389.5	390.0	390.5	390.7	390.7	390.6
145°	405.6	405.1	404.6	404.0	404.6	405.1	405.6	406.0	406.2	406.1	406.1
147.5°	418.6	418.0	417.5	416.9	417.5	418.0	418.6	419.2	419.4	419.3	419.2
150°	427.1	426.5	425.8	425.2	425.8	426.5	427.1	427.7	427.9	427.8	427.6
152.5°	434.5	434.0	433.4	432.8	433.4	434.0	434.5	435.2	435.4	435.2	435.0
155°	444.9	444.2	443.6	443.0	443.6	444.2	444.9	445.6	445.8	445.5	445.2
157.5°	453.4	452.7	452.1	451.5	452.1	452.7	453.4	454.0	454.2	453.9	453.7
160°	458.8	458.2	457.6	457.0	457.6	458.2	458.8	459.5	459.6	459.3	459.0
162.5°	463.8	463.1	462.5	461.8	462.5	463.1	463.8	464.5	464.7	464.2	463.8
165°	470.3	469.6	469.0	468.4	469.0	469.6	470.3	470.9	471.0	470.5	470.0
167.5°	475.0	474.3	473.6	472.9	473.6	474.3	475.0	475.7	475.8	475.2	474.7
170°	477.7	477.0	476.2	475.4	476.2	477.0	477.7	478.4	478.4	477.8	477.1
172.5°	479.4	478.6	477.9	477.2	477.9	478.6	479.4	480.1	480.1	479.6	479.0
175°	481.5	480.8	480.1	479.4	480.1	480.8	481.5	482.3	482.3	481.7	481.0
177.5°	482.2	481.7	481.2	480.7	481.2	481.7	482.2	482.7	482.7	482.3	481.9
180°	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5
2.5°	1181.3	1186.4	1192.7	1197.3	1205.7	1209.4	1214.1	1217.8	1224.6	1230.8	1238.4
5°	1101.8	1110.6	1122.7	1135.8	1151.0	1161.5	1176.2	1185.1	1203.0	1219.2	1234.9
7.5°	1029.6	1040.5	1057.5	1074.4	1094.3	1112.3	1130.6	1151.0	1173.8	1200.6	1222.8
10°	980.1	994.7	1013.1	1034.1	1058.2	1079.1	1103.8	1125.8	1153.7	1185.1	1214.5
12.5°	940.6	953.2	973.7	993.8	1019.6	1045.2	1070.7	1099.8	1132.3	1167.1	1204.0
15°	886.2	896.7	913.4	941.3	967.5	992.7	1031.0	1058.2	1099.1	1137.9	1182.5
17.5°	839.7	852.7	866.9	890.7	917.9	949.4	983.5	1017.7	1057.1	1106.3	1156.6
20°	811.2	821.7	838.0	856.3	885.1	916.7	949.2	983.7	1032.0	1082.9	1136.8
22.5°	780.1	791.5	809.8	829.9	854.1	884.3	920.2	958.2	1008.5	1058.5	1117.1
25°	743.6	751.4	768.2	786.1	810.2	835.9	873.1	915.0	964.8	1022.0	1081.8
27.5°	709.0	716.0	731.3	746.8	768.6	799.1	832.4	874.7	921.7	979.7	1045.9
30°	684.3	691.7	705.3	722.1	743.1	769.8	803.9	843.7	894.0	950.7	1020.0
32.5°	662.9	669.4	679.7	696.5	717.0	743.0	774.5	815.2	865.6	923.0	991.0
35°	629.8	637.1	645.0	658.1	675.9	701.0	735.7	774.0	822.2	877.8	940.2
37.5°	596.8	604.8	611.9	623.6	639.9	662.1	692.0	731.8	775.5	829.0	888.9
40°	576.3	582.6	588.3	601.0	617.2	638.1	666.0	701.7	747.8	797.6	847.4
42.5°	555.7	561.6	566.5	577.4	592.5	612.6	639.1	673.9	716.7	763.2	807.1
45°	523.3	527.0	532.8	542.2	554.3	572.6	598.3	629.2	665.4	709.5	742.6
47.5°	488.3	494.0	498.8	507.1	516.9	534.9	559.6	585.9	618.7	651.5	674.8
50°	461.4	467.3	474.0	481.9	491.3	508.2	530.7	557.4	585.2	610.4	630.3
52.5°	436.3	441.6	448.9	456.4	467.9	482.1	501.3	525.1	552.5	570.6	587.1
55°	399.1	401.6	410.1	417.4	428.4	438.9	458.3	479.3	496.0	509.7	523.3
57.5°	361.0	364.6	369.4	376.0	386.9	399.2	412.8	431.3	441.2	448.3	458.8
60°	336.7	337.7	340.8	348.7	357.1	368.1	383.8	397.0	404.2	410.1	419.0
62.5°	309.8	310.0	315.3	321.0	327.3	339.2	351.9	362.5	368.6	371.4	380.0
65°	272.2	271.1	274.3	278.9	286.3	294.2	305.2	314.7	314.1	317.2	322.4
67.5°	233.7	232.6	232.6	237.1	243.1	250.1	257.7	263.2	263.3	267.4	270.0
70°	207.6	204.5	206.6	210.3	212.9	218.6	227.0	229.1	229.6	231.8	234.4
72.5°	180.8	179.8	181.5	183.0	184.8	189.3	196.4	197.7	197.8	199.0	203.4
75°	143.7	142.6	141.6	143.2	145.2	148.3	151.0	153.1	152.6	153.1	156.2
77.5°	107.8	104.7	104.2	105.1	105.6	107.4	110.2	110.0	110.6	110.5	114.0
80°	85.4	81.3	80.8	80.8	81.3	82.3	83.4	84.4	82.8	84.4	85.4
82.5°	62.8	60.3	60.2	59.8	59.9	60.1	60.7	61.4	61.0	61.8	62.4
85°	34.6	33.5	32.0	33.0	32.5	30.9	32.0	30.4	29.9	30.4	30.9
87.5°	12.9	13.3	12.3	12.2	11.7	12.0	11.1	10.5	10.0	10.3	11.4
90°	6.1	5.8	5.2	4.6	4.0	3.5	2.9	2.2	1.6	1.0	0.4
92.5°	6.1	5.8	5.3	4.7	4.2	3.7	3.7	4.1	4.6	5.0	5.5
95°	6.1	5.8	8.7	11.7	14.7	17.8	19.4	19.6	19.9	20.1	20.3
97.5°	15.3	17.6	23.5	29.5	35.4	41.4	44.2	43.7	43.3	42.9	42.5
100°	50.3	62.1	61.8	61.5	61.2	60.8	60.6	60.3	60.1	59.9	59.6
102.5°	77.1	79.3	79.1	78.9	78.7	78.5	78.3	78.0	77.7	77.4	77.1
105°	106.3	106.3	106.3	106.3	106.3	106.3	106.2	105.9	105.6	105.2	104.9
107.5°	134.6	134.6	134.5	134.3	134.2	134.0	133.9	133.9	133.9	133.9	133.9
110°	153.3	153.5	153.3	153.2	153.0	152.9	152.8	152.8	152.8	152.8	152.8



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	171.5	171.8	171.7	171.6	171.5	171.4	171.3	171.1	170.9	170.7	170.5
115°	198.8	199.1	199.1	199.0	198.9	198.8	198.6	198.2	197.8	197.4	197.0
117.5°	225.4	225.8	225.5	225.2	224.9	224.6	224.5	224.5	224.5	224.5	224.5
120°	242.3	242.4	242.2	241.9	241.7	241.5	241.4	241.5	241.6	241.6	241.7
122.5°	258.5	258.6	258.5	258.4	258.3	258.2	258.0	257.7	257.4	257.1	256.8
125°	282.4	282.8	282.8	282.8	282.8	282.8	282.5	281.9	281.3	280.7	280.2
127.5°	304.0	304.2	304.2	304.3	304.3	304.4	304.2	303.8	303.4	303.0	302.6
130°	318.2	318.4	318.3	318.2	318.2	318.1	317.9	317.5	317.1	316.7	316.3
132.5°	331.2	331.2	331.4	331.6	331.8	331.9	331.8	331.3	330.9	330.4	330.0
135°	350.7	350.9	351.0	351.2	351.3	351.5	351.3	350.9	350.4	349.9	349.5
137.5°	368.6	368.6	368.7	368.9	369.0	369.2	369.0	368.6	368.2	367.8	367.4
140°	379.6	379.5	379.5	379.6	379.7	379.8	379.7	379.6	379.4	379.3	379.1
142.5°	390.6	390.6	390.5	390.4	390.3	390.1	390.0	389.9	389.9	389.8	389.7
145°	406.0	405.9	405.9	405.9	405.9	405.9	405.8	405.7	405.5	405.4	405.2
147.5°	419.1	419.0	418.9	418.8	418.7	418.6	418.6	418.6	418.7	418.7	418.7
150°	427.5	427.3	427.2	427.0	426.8	426.7	426.7	426.8	427.0	427.2	427.3
152.5°	434.8	434.7	434.5	434.4	434.2	434.0	434.1	434.5	434.8	435.3	435.6
155°	445.0	444.7	444.6	444.4	444.3	444.1	444.3	444.7	445.2	445.8	446.3
157.5°	453.4	453.2	453.2	453.2	453.1	453.1	453.3	453.5	453.8	454.1	454.4
160°	458.7	458.4	458.3	458.2	458.1	458.1	458.3	458.7	459.2	459.7	460.1
162.5°	463.3	462.9	462.8	462.7	462.7	462.6	462.8	463.2	463.7	464.2	464.7
165°	469.5	469.1	469.0	468.9	468.8	468.8	469.0	469.4	469.9	470.4	470.8
167.5°	474.1	473.5	473.5	473.4	473.3	473.2	473.4	473.9	474.4	474.9	475.4
170°	476.5	475.8	475.7	475.6	475.6	475.5	475.7	476.4	476.9	477.5	478.0
172.5°	478.4	477.9	477.7	477.6	477.4	477.3	477.5	478.1	478.6	479.2	479.7
175°	480.4	479.8	479.7	479.6	479.5	479.5	479.7	480.1	480.6	481.1	481.5
177.5°	481.4	481.0	480.9	480.9	480.8	480.7	480.9	481.3	481.6	482.0	482.4
180°	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5
2.5°	1242.1	1248.0	1251.8	1258.9	1264.8	1268.2	1271.1	1273.6	1276.6	1279.1	1286.2
5°	1250.1	1263.7	1275.3	1293.1	1309.4	1321.9	1335.5	1347.7	1357.7	1371.8	1382.8
7.5°	1246.7	1270.9	1296.3	1323.8	1352.0	1378.3	1402.4	1424.9	1445.4	1470.2	1491.9
10°	1243.3	1276.4	1308.9	1346.0	1384.3	1416.8	1447.2	1478.2	1500.8	1532.3	1558.9
12.5°	1240.8	1279.7	1318.9	1363.7	1405.7	1451.7	1492.2	1514.7	1549.0	1574.2	1606.0
15°	1230.2	1281.6	1335.5	1385.9	1445.7	1488.1	1523.9	1567.9	1599.8	1631.8	1666.5
17.5°	1211.2	1269.4	1329.8	1395.8	1453.2	1498.7	1544.7	1587.2	1625.4	1668.3	1711.3
20°	1202.4	1260.6	1329.8	1397.5	1453.6	1501.3	1548.5	1595.2	1637.1	1692.1	1742.0
22.5°	1184.0	1254.4	1318.1	1384.0	1441.8	1493.8	1547.2	1600.2	1656.0	1718.2	1780.6
25°	1151.0	1222.3	1290.0	1355.0	1413.2	1478.2	1535.4	1606.2	1677.5	1759.8	1837.4
27.5°	1116.8	1185.1	1247.1	1309.9	1377.8	1451.4	1525.5	1605.9	1699.2	1803.1	1912.6
30°	1089.1	1153.7	1214.0	1278.4	1349.2	1432.1	1513.4	1608.8	1716.8	1833.7	1963.8
32.5°	1056.8	1116.3	1174.9	1243.2	1320.3	1407.8	1502.5	1607.1	1737.0	1869.9	2003.7
35°	1001.6	1051.4	1111.7	1184.6	1271.6	1371.8	1481.4	1605.1	1754.0	1906.6	2019.4
37.5°	936.0	982.4	1045.9	1125.8	1217.1	1324.5	1454.6	1601.4	1759.6	1881.3	1917.6
40°	892.0	934.9	1001.1	1083.9	1177.2	1291.0	1433.6	1588.8	1742.0	1819.6	1789.7
42.5°	845.0	890.1	954.4	1036.5	1137.0	1260.8	1407.2	1562.5	1690.8	1720.2	1616.9
45°	770.8	817.5	880.9	963.8	1071.9	1206.1	1358.7	1499.8	1573.7	1520.7	1360.8
47.5°	702.0	745.7	804.5	890.0	1001.5	1140.3	1287.3	1399.8	1405.6	1279.3	1108.4
50°	655.0	695.3	754.6	840.0	950.7	1091.3	1223.9	1312.5	1272.6	1129.5	965.3
52.5°	608.8	648.3	706.8	791.4	900.8	1029.6	1153.0	1215.2	1140.1	993.2	852.9
55°	542.2	576.8	634.0	712.1	816.0	935.5	1040.4	1061.9	964.3	819.6	705.8
57.5°	477.2	509.5	561.5	633.5	728.3	834.2	916.3	911.7	808.6	684.4	594.1
60°	433.1	464.6	510.8	581.0	667.5	758.8	829.0	812.2	710.0	603.0	527.0
62.5°	393.7	421.8	465.4	526.8	605.8	690.4	748.1	723.4	623.2	529.6	469.5
65°	335.6	359.2	396.5	448.9	514.4	584.2	628.7	596.7	511.3	438.4	390.1
67.5°	280.1	299.0	330.2	372.1	428.0	484.0	511.2	479.0	410.6	357.4	321.6
70°	244.9	261.7	285.8	323.1	371.8	419.0	439.4	410.6	351.8	306.2	280.5
72.5°	209.6	223.5	244.7	278.1	317.2	358.2	376.1	348.5	300.2	261.8	237.7
75°	162.1	171.5	186.1	209.2	240.1	272.7	282.7	258.5	227.6	198.7	183.0
77.5°	116.0	124.0	135.1	149.7	171.6	192.3	201.0	187.0	163.1	144.8	131.9
80°	89.2	93.3	102.8	114.8	132.2	145.2	151.0	142.1	125.3	111.7	101.7
82.5°	63.5	67.8	73.4	83.4	94.4	103.3	109.5	103.5	91.4	80.7	74.8
85°	30.9	33.5	36.7	40.9	49.3	54.5	54.0	50.3	45.6	41.4	38.3
87.5°	11.1	11.6	13.0	15.2	16.7	18.4	19.4	18.7	17.1	15.9	14.7
90°	1.0	1.6	2.2	2.9	3.5	4.0	4.6	5.2	5.8	6.1	6.5
92.5°	5.0	4.6	4.1	3.7	3.7	4.2	4.7	5.3	5.8	6.1	6.5
95°	20.1	19.9	19.6	19.4	17.8	14.7	11.7	8.7	5.8	6.1	6.5
97.5°	42.9	43.3	43.7	44.2	41.4	35.4	29.5	23.5	17.6	15.3	13.1
100°	59.9	60.1	60.3	60.6	60.8	61.2	61.5	61.8	62.1	50.3	38.5
102.5°	77.4	77.7	78.0	78.3	78.5	78.7	78.9	79.1	79.3	77.1	74.7
105°	105.2	105.6	105.9	106.2	106.3	106.3	106.3	106.3	106.3	106.3	106.3
107.5°	133.9	133.9	133.9	133.9	134.0	134.2	134.3	134.5	134.6	134.6	134.7
110°	152.8	152.8	152.8	152.8	152.9	153.0	153.2	153.3	153.5	153.3	153.0



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	170.7	170.9	171.1	171.3	171.4	171.5	171.6	171.7	171.8	171.5	171.2
115°	197.4	197.8	198.2	198.6	198.8	198.9	199.0	199.1	199.1	198.8	198.5
117.5°	224.5	224.5	224.5	224.5	224.6	224.9	225.2	225.5	225.8	225.4	225.0
120°	241.6	241.6	241.5	241.4	241.5	241.7	241.9	242.2	242.4	242.3	242.1
122.5°	257.1	257.4	257.7	258.0	258.2	258.3	258.4	258.5	258.6	258.5	258.3
125°	280.7	281.3	281.9	282.5	282.8	282.8	282.8	282.8	282.8	282.4	282.1
127.5°	303.0	303.4	303.8	304.2	304.4	304.3	304.3	304.2	304.2	304.0	303.8
130°	316.7	317.1	317.5	317.9	318.1	318.2	318.2	318.3	318.4	318.2	317.9
132.5°	330.4	330.9	331.3	331.8	331.9	331.8	331.6	331.4	331.2	331.2	331.1
135°	349.9	350.4	350.9	351.3	351.5	351.3	351.2	351.0	350.9	350.7	350.6
137.5°	367.8	368.2	368.6	369.0	369.2	369.0	368.9	368.7	368.6	368.6	368.7
140°	379.3	379.4	379.6	379.7	379.8	379.7	379.6	379.5	379.5	379.6	379.8
142.5°	389.8	389.9	389.9	390.0	390.1	390.3	390.4	390.5	390.6	390.6	390.6
145°	405.4	405.5	405.7	405.8	405.9	405.9	405.9	405.9	405.9	406.0	406.1
147.5°	418.7	418.7	418.6	418.6	418.6	418.7	418.8	418.9	419.0	419.1	419.2
150°	427.2	427.0	426.8	426.7	426.7	426.8	427.0	427.2	427.3	427.5	427.6
152.5°	435.3	434.8	434.5	434.1	434.0	434.2	434.4	434.5	434.7	434.8	435.0
155°	445.8	445.2	444.7	444.3	444.1	444.3	444.4	444.6	444.7	445.0	445.2
157.5°	454.1	453.8	453.5	453.3	453.1	453.1	453.2	453.2	453.2	453.4	453.7
160°	459.7	459.2	458.7	458.3	458.1	458.1	458.2	458.3	458.4	458.7	459.0
162.5°	464.2	463.7	463.2	462.8	462.6	462.7	462.7	462.8	462.9	463.3	463.8
165°	470.4	469.9	469.4	469.0	468.8	468.8	468.9	469.0	469.1	469.5	470.0
167.5°	474.9	474.4	473.9	473.4	473.2	473.3	473.4	473.5	473.5	474.1	474.7
170°	477.5	476.9	476.4	475.7	475.5	475.6	475.6	475.7	475.8	476.5	477.1
172.5°	479.2	478.6	478.1	477.5	477.3	477.4	477.6	477.7	477.9	478.4	479.0
175°	481.1	480.6	480.1	479.7	479.5	479.5	479.6	479.7	479.8	480.4	481.0
177.5°	482.0	481.6	481.3	480.9	480.7	480.8	480.9	480.9	481.0	481.4	481.9
180°	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5	1235.5
2.5°	1292.0	1295.5	1302.5	1300.0	1303.4	1305.0	1306.8
5°	1396.4	1413.2	1420.6	1419.5	1430.5	1427.8	1425.2
7.5°	1514.3	1532.0	1541.8	1554.1	1561.2	1561.7	1567.9
10°	1581.0	1604.1	1613.6	1626.6	1635.0	1639.7	1639.2
12.5°	1632.1	1650.2	1671.4	1677.8	1689.1	1695.1	1692.9
15°	1693.7	1722.6	1744.6	1755.7	1769.8	1773.9	1779.8
17.5°	1748.7	1787.4	1813.1	1847.2	1860.2	1868.0	1863.4
20°	1790.2	1841.1	1866.8	1907.7	1930.3	1942.3	1938.1
22.5°	1839.3	1894.4	1941.9	1977.3	2011.7	2027.9	2031.2
25°	1923.4	1998.9	2068.7	2115.4	2157.8	2167.8	2189.8
27.5°	2017.4	2106.5	2181.0	2230.1	2259.7	2270.8	2277.6
30°	2076.6	2165.2	2221.3	2252.7	2262.2	2261.1	2260.1
32.5°	2105.5	2161.0	2171.7	2162.9	2141.3	2123.1	2104.1
35°	2064.5	2023.1	1961.2	1881.5	1822.7	1763.5	1757.7
37.5°	1856.7	1724.2	1621.2	1506.2	1439.9	1398.9	1370.5
40°	1661.2	1510.8	1385.9	1288.9	1221.2	1194.6	1168.3
42.5°	1449.0	1305.1	1194.7	1113.6	1062.7	1033.0	1012.3
45°	1177.2	1050.4	963.8	905.0	864.7	841.6	828.5
47.5°	964.6	870.8	797.3	754.9	727.0	709.0	709.1
50°	850.5	760.8	712.1	678.5	654.4	640.3	642.9
52.5°	749.4	682.5	640.8	612.7	594.8	586.1	585.8
55°	626.6	578.3	551.1	530.7	518.6	508.7	510.8
57.5°	536.0	495.3	477.1	460.1	451.7	447.7	441.9
60°	479.8	448.4	432.6	419.0	410.6	407.5	401.6
62.5°	429.9	405.2	389.8	378.7	371.1	370.1	365.6
65°	361.3	342.4	328.8	323.6	315.7	313.6	313.6
67.5°	297.8	284.3	273.8	268.9	265.4	266.0	263.5
70°	258.0	247.0	240.1	234.9	232.3	232.8	230.8
72.5°	225.7	213.4	207.4	204.3	200.9	202.2	201.4
75°	171.0	164.6	161.5	158.3	156.2	155.2	154.2
77.5°	125.5	120.0	117.5	115.8	116.1	113.6	115.5
80°	97.0	92.3	90.7	88.1	87.6	87.6	87.1
82.5°	71.0	68.4	67.3	65.0	64.1	64.9	63.5
85°	36.7	34.6	34.1	34.1	33.0	32.0	34.6
87.5°	14.8	13.2	13.2	12.9	12.9	12.6	11.8
90°	6.9	7.3	7.6	7.9	8.1	8.3	8.6
92.5°	6.9	7.3	7.6	7.7	7.8	7.9	8.0
95°	6.9	7.3	7.5	7.5	7.5	7.5	7.5
97.5°	10.8	8.6	7.5	7.5	7.5	7.5	7.5
100°	26.7	14.8	8.8	8.5	8.2	7.8	7.5
102.5°	72.5	70.3	66.4	61.1	55.7	50.3	44.9
105°	106.3	106.3	106.3	106.2	106.1	106.1	106.0
107.5°	134.7	134.7	134.6	134.4	134.1	133.9	133.6
110°	152.8	152.6	152.5	152.6	152.6	152.7	152.8



TEST NUMBER: P333205-840

CATALOG NUMBER: S125DIP-S850D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	170.9	170.6	170.4	170.3	170.2	170.1	170.0
115°	198.2	197.9	197.5	197.0	196.6	196.1	195.6
117.5°	224.6	224.2	223.9	223.7	223.5	223.3	223.1
120°	241.9	241.8	241.5	241.1	240.7	240.2	239.8
122.5°	258.2	258.0	257.7	257.2	256.8	256.3	255.9
125°	281.8	281.4	281.1	280.9	280.7	280.4	280.2
127.5°	303.6	303.5	303.1	302.5	301.8	301.3	300.7
130°	317.7	317.5	317.1	316.8	316.4	316.0	315.6
132.5°	331.1	331.0	330.8	330.4	330.0	329.6	329.3
135°	350.4	350.2	349.9	349.5	349.0	348.5	348.0
137.5°	368.7	368.7	368.5	368.1	367.7	367.3	366.9
140°	379.9	380.1	379.9	379.5	379.0	378.5	378.0
142.5°	390.7	390.7	390.5	390.0	389.5	389.1	388.6
145°	406.1	406.2	406.0	405.6	405.1	404.6	404.0
147.5°	419.3	419.4	419.2	418.6	418.0	417.5	416.9
150°	427.8	427.9	427.7	427.1	426.5	425.8	425.2
152.5°	435.2	435.4	435.2	434.5	434.0	433.4	432.8
155°	445.5	445.8	445.6	444.9	444.2	443.6	443.0
157.5°	453.9	454.2	454.0	453.4	452.7	452.1	451.5
160°	459.3	459.6	459.5	458.8	458.2	457.6	457.0
162.5°	464.2	464.7	464.5	463.8	463.1	462.5	461.8
165°	470.5	471.0	470.9	470.3	469.6	469.0	468.4
167.5°	475.2	475.8	475.7	475.0	474.3	473.6	472.9
170°	477.8	478.4	478.4	477.7	477.0	476.2	475.4
172.5°	479.6	480.1	480.1	479.4	478.6	477.9	477.2
175°	481.7	482.3	482.3	481.5	480.8	480.1	479.4
177.5°	482.3	482.7	482.7	482.2	481.7	481.2	480.7
180°	481.5	481.5	481.5	481.5	481.5	481.5	481.5

(END OF REPORT)