

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333221-840

Luminaire Tested: **S125DIP-S850D590U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333221-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S850D590U840-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5517.0 lumens
Efficiency: N/A
Efficacy: 136.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333221-840

CATALOG NUMBER: S125DIP-S850D590U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

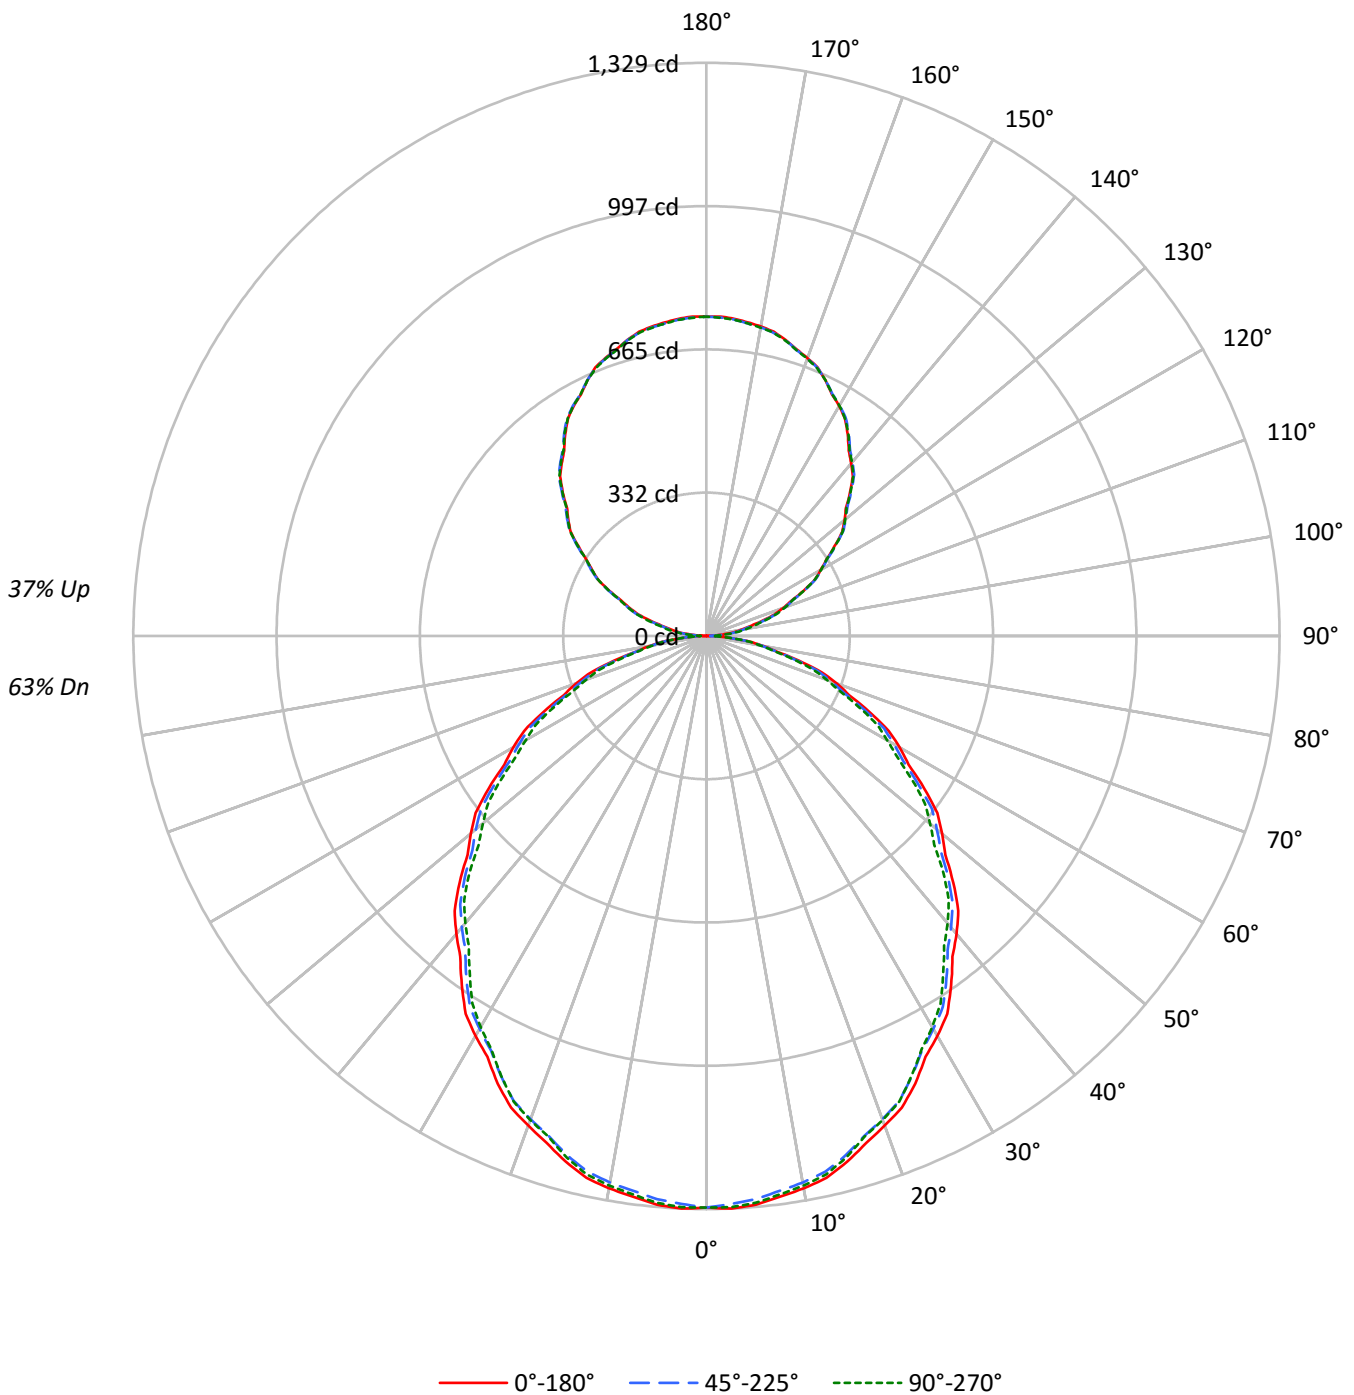



TEST NUMBER: P333221-840

CATALOG NUMBER: S125DIP-S850D590U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	110	110	110	110	103	103	103	103	90	90	90		79	79	79		68	68	68	63
1	101	96	92	88	94	90	87	84	79	77	74		69	67	65		60	58	57	53
2	92	84	78	72	85	79	73	69	69	65	61		61	57	54		52	50	48	44
3	83	74	66	60	78	69	63	57	61	56	52		54	49	46		46	43	41	37
4	76	65	57	51	71	62	54	49	54	49	44		48	43	39		42	38	35	32
5	70	58	50	44	66	55	47	42	49	43	38		43	38	34		37	34	31	28
6	65	52	44	38	60	49	42	36	44	38	33		39	34	30		34	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29		35	30	27		31	27	24	22
8	56	43	35	30	52	41	33	28	36	30	26		32	27	24		29	25	22	19
9	52	39	32	26	49	37	30	25	33	28	23		30	25	21		26	22	19	17
10	49	36	29	24	45	34	28	23	31	25	21		28	23	19		24	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8561	8561	8561
5°	8581	8499	8554
10°	8529	8439	8487
15°	8436	8338	8372
20°	8304	8195	8210
25°	8161	8027	8020
30°	7986	7845	7806
35°	7798	7649	7541
40°	7605	7436	7331
45°	7395	7242	7099
50°	7166	7007	6797
55°	6944	6742	6554
60°	6679	6475	6245
65°	6363	6154	5946
70°	6060	5784	5586
75°	5522	5340	5155
80°	4917	4839	4720
85°	4276	4357	4113



TEST NUMBER: P333221-840

CATALOG NUMBER: S125DIP-S850D590U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.0	2.3
10°-20°	353.1	6.4
20°-30°	521.3	9.4
30°-40°	608.3	11.0
40°-50°	611.0	11.1
50°-60°	536.3	9.7
60°-70°	399.6	7.2
70°-80°	228.5	4.1
80°-90°	68.1	1.2
90°-100°	49.6	0.9
100°-110°	146.4	2.7
110°-120°	248.0	4.5
120°-130°	326.4	5.9
130°-140°	365.7	6.6
140°-150°	358.4	6.5
150°-160°	301.1	5.5
160°-170°	200.1	3.6
170°-180°	70.0	1.3
0°-30°	999.4	18.1
0°-40°	1607.8	29.1
0°-60°	2755.1	49.9
0°-90°	3451.3	62.6
90°-120°	444.0	8.0
90°-150°	1494.5	27.1
90°-180°	2066.0	37.4
0°-180°	5517.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1326	1326	1326	1326	1326	
5°	1324	1321	1311	1320	1319	125
15°	1262	1258	1247	1252	1252	355
25°	1145	1140	1126	1128	1125	527
35°	989	984	970	965	956	618
45°	810	805	793	781	777	624
55°	617	613	599	590	582	550
65°	416	414	403	394	389	413
75°	221	219	214	211	207	236
85°	58	59	59	58	56	64
90°	1	5	9	12	14	5
95°	38	39	44	48	50	40
105°	131	134	138	141	143	140
115°	248	250	252	251	251	245
125°	362	366	366	365	365	324
135°	471	474	475	475	473	363
145°	571	573	575	575	573	357
155°	653	653	654	656	653	301
165°	710	709	710	712	709	200
175°	738	736	736	739	736	70
180°	740	740	740	740	740	



TEST NUMBER: P333221-840

CATALOG NUMBER: S125DIP-S850D590U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1325.6	1325.6	1325.6	1325.6	1325.6	1325.6	1325.6	1325.6	1325.6	1325.6	1325.6
2.5°	1329.1	1328.5	1328.0	1327.4	1326.8	1325.5	1323.7	1321.9	1320.0	1318.2	1320.0
5°	1323.6	1323.1	1322.6	1322.2	1321.7	1320.3	1318.0	1315.7	1313.3	1311.0	1313.1
7.5°	1311.4	1311.0	1310.5	1310.0	1309.6	1308.1	1305.5	1302.9	1300.4	1297.8	1299.8
10°	1300.5	1300.1	1299.6	1299.1	1298.7	1297.2	1294.5	1292.0	1289.5	1286.9	1288.8
12.5°	1287.1	1286.3	1285.5	1284.5	1283.7	1282.1	1279.8	1277.4	1275.0	1272.6	1274.1
15°	1261.7	1261.0	1260.3	1259.6	1258.9	1257.3	1254.8	1252.1	1249.6	1247.0	1248.2
17.5°	1232.5	1231.5	1230.5	1229.5	1228.5	1226.6	1224.0	1221.3	1218.6	1216.0	1217.4
20°	1208.2	1207.8	1207.3	1206.8	1206.4	1204.6	1201.5	1198.5	1195.5	1192.4	1194.2
22.5°	1183.9	1183.1	1182.2	1181.3	1180.5	1178.7	1175.9	1173.0	1170.1	1167.3	1168.4
25°	1145.3	1144.2	1143.0	1141.8	1140.6	1138.5	1135.5	1132.5	1129.4	1126.4	1126.9
27.5°	1100.1	1099.5	1098.8	1098.1	1097.4	1095.5	1092.4	1089.2	1086.1	1083.0	1083.1
30°	1070.9	1070.2	1069.4	1068.7	1068.0	1065.9	1062.5	1058.9	1055.4	1052.0	1051.5
32.5°	1038.9	1037.8	1036.8	1035.7	1034.7	1032.6	1029.5	1026.3	1023.2	1020.1	1019.3
35°	989.1	988.1	987.1	986.2	985.3	983.2	980.0	976.6	973.4	970.2	969.0
37.5°	937.3	936.0	934.8	933.7	932.5	930.4	927.4	924.2	921.2	918.2	916.4
40°	902.0	900.8	899.7	898.5	897.3	895.1	891.8	888.6	885.3	882.0	880.0
42.5°	864.2	863.2	862.2	861.3	860.3	858.2	855.0	851.6	848.4	845.2	843.2
45°	809.7	808.7	807.8	806.9	806.0	804.1	801.3	798.5	795.7	792.9	790.1
47.5°	750.9	751.0	751.0	751.0	751.1	749.5	746.1	742.8	739.4	736.1	733.2
50°	713.2	712.5	711.8	711.0	710.4	708.6	705.9	703.1	700.2	697.4	694.4
52.5°	674.6	674.1	673.6	673.1	672.6	670.8	667.8	664.8	661.9	658.8	656.2
55°	616.7	616.0	615.3	614.6	613.9	611.9	608.6	605.4	602.1	598.8	596.7
57.5°	555.6	555.3	554.9	554.5	554.2	552.6	549.9	547.1	544.3	541.6	538.9
60°	517.1	516.1	515.2	514.2	513.3	511.6	509.0	506.4	503.9	501.3	499.0
62.5°	476.8	476.1	475.3	474.5	473.8	472.3	470.2	468.0	465.7	463.5	461.1
65°	416.4	415.9	415.5	415.0	414.5	413.0	410.4	407.9	405.3	402.7	400.6
67.5°	357.9	356.9	355.9	354.9	354.0	352.4	350.6	348.7	346.8	344.9	343.1
70°	320.9	319.7	318.6	317.4	316.3	314.7	312.6	310.4	308.3	306.3	304.9
72.5°	280.6	279.8	279.0	278.3	277.5	276.4	275.1	273.7	272.4	271.0	269.4
75°	221.3	220.9	220.4	219.9	219.4	218.6	217.4	216.3	215.1	214.0	213.3
77.5°	166.5	166.3	166.2	166.0	165.8	165.4	164.7	164.1	163.4	162.8	162.4
80°	132.2	132.2	132.2	132.2	132.2	131.9	131.5	131.0	130.5	130.1	129.9
82.5°	101.9	101.6	101.2	100.8	100.5	100.2	100.1	100.1	100.0	99.9	99.5
85°	57.7	58.0	58.2	58.4	58.6	58.8	58.8	58.8	58.8	58.8	58.5
87.5°	22.7	22.9	23.2	23.4	23.6	23.7	23.6	23.6	23.6	23.6	23.8
90°	0.6	1.6	2.6	3.6	4.6	5.7	6.6	7.5	8.3	9.2	9.9
92.5°	13.9	14.6	15.3	16.1	16.8	17.7	18.8	19.9	21.0	22.1	22.9
95°	37.5	37.7	38.0	38.2	38.5	39.3	40.5	41.8	43.1	44.3	45.2
97.5°	62.2	62.3	62.4	62.5	62.6	63.5	65.3	67.1	68.9	70.6	71.5
100°	80.7	80.7	80.7	80.7	80.7	81.5	83.1	84.8	86.4	88.2	89.3
102.5°	100.5	101.0	101.5	102.0	102.5	103.2	104.0	104.9	105.7	106.5	107.9
105°	131.4	132.0	132.6	133.3	133.9	134.6	135.4	136.1	136.9	137.6	138.5
107.5°	165.4	166.1	166.7	167.3	168.0	168.6	169.3	169.8	170.4	171.0	171.4
110°	188.9	189.6	190.3	190.9	191.6	192.1	192.4	192.8	193.2	193.6	194.0



TEST NUMBER: P333221-840

CATALOG NUMBER: S125DIP-S850D590U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	212.9	213.3	213.6	213.9	214.3	214.7	215.2	215.6	216.1	216.6	216.8
115°	248.3	248.8	249.3	249.8	250.3	250.7	251.0	251.3	251.5	251.8	251.7
117.5°	283.8	284.0	284.3	284.5	284.7	285.0	285.2	285.4	285.6	285.9	286.0
120°	305.9	306.6	307.2	307.8	308.5	308.8	309.0	309.1	309.2	309.3	309.3
122.5°	329.9	330.1	330.3	330.5	330.8	331.0	331.4	331.7	332.0	332.4	332.3
125°	362.3	363.1	363.9	364.7	365.5	365.9	366.0	366.2	366.3	366.4	366.2
127.5°	397.0	397.4	397.8	398.2	398.7	399.0	399.1	399.3	399.4	399.6	399.5
130°	417.7	418.3	419.0	419.6	420.2	420.7	420.9	421.2	421.4	421.7	421.6
132.5°	438.4	439.5	440.5	441.5	442.6	443.1	443.0	443.0	442.9	442.9	442.8
135°	471.2	472.0	472.8	473.5	474.3	474.7	474.9	475.0	475.1	475.2	475.2
137.5°	502.1	502.9	503.6	504.3	505.1	505.6	505.9	506.1	506.4	506.8	506.9
140°	521.9	522.6	523.2	523.8	524.5	525.0	525.4	525.8	526.1	526.5	526.8
142.5°	541.8	542.3	542.8	543.4	543.9	544.4	544.9	545.4	545.9	546.3	546.5
145°	570.9	571.4	572.0	572.5	573.0	573.4	573.8	574.2	574.6	574.9	574.9
147.5°	597.8	598.1	598.4	598.7	599.1	599.3	599.6	600.0	600.3	600.6	600.9
150°	615.8	615.7	615.6	615.5	615.3	615.5	616.0	616.5	617.0	617.5	617.5
152.5°	630.6	630.8	631.0	631.2	631.3	631.5	631.7	631.9	632.1	632.4	632.7
155°	653.3	653.3	653.3	653.3	653.3	653.4	653.5	653.6	653.8	653.9	654.4
157.5°	673.6	673.3	673.0	672.8	672.5	672.4	672.5	672.7	672.8	672.9	673.4
160°	685.6	685.2	684.8	684.4	684.0	683.9	684.0	684.2	684.3	684.4	684.9
162.5°	696.2	695.9	695.6	695.3	695.0	694.9	694.9	695.0	695.0	695.0	695.6
165°	710.3	710.0	709.8	709.5	709.3	709.2	709.3	709.5	709.6	709.7	710.2
167.5°	722.4	721.9	721.2	720.7	720.2	720.0	720.0	720.0	720.0	720.0	720.7
170°	728.7	728.2	727.7	727.2	726.7	726.5	726.5	726.5	726.5	726.5	727.2
172.5°	733.4	732.9	732.4	731.8	731.3	731.0	731.0	731.0	731.0	731.0	731.8
175°	738.5	738.0	737.5	737.0	736.5	736.3	736.3	736.3	736.3	736.3	737.0
177.5°	741.2	740.8	740.4	740.0	739.5	739.3	739.2	739.1	739.0	738.9	739.5
180°	740.3	740.3	740.3	740.3	740.3	740.3	740.3	740.3	740.3	740.3	740.3



TEST NUMBER: P333221-840

CATALOG NUMBER: S125DIP-S850D590U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1325.6	1325.6	1325.6	1325.6	1325.6	1325.6	1325.6	1325.6
2.5°	1321.9	1323.7	1325.5	1326.5	1326.3	1326.1	1325.9	1325.6
5°	1315.2	1317.3	1319.4	1320.3	1320.1	1319.9	1319.6	1319.4
7.5°	1301.9	1303.9	1306.0	1306.9	1306.7	1306.5	1306.2	1306.0
10°	1290.6	1292.5	1294.3	1295.2	1294.9	1294.6	1294.4	1294.2
12.5°	1275.6	1277.1	1278.6	1279.3	1279.3	1279.2	1279.2	1279.1
15°	1249.4	1250.5	1251.7	1252.2	1252.2	1252.2	1252.2	1252.2
17.5°	1218.9	1220.3	1221.7	1221.9	1220.7	1219.6	1218.4	1217.3
20°	1195.8	1197.4	1199.0	1199.2	1198.1	1196.9	1195.8	1194.6
22.5°	1169.4	1170.5	1171.6	1171.7	1170.9	1170.1	1169.3	1168.6
25°	1127.3	1127.8	1128.3	1128.1	1127.5	1126.8	1126.1	1125.4
27.5°	1083.2	1083.3	1083.4	1083.1	1082.4	1081.7	1081.0	1080.3
30°	1051.1	1050.6	1050.1	1049.6	1048.8	1048.1	1047.4	1046.7
32.5°	1018.3	1017.5	1016.7	1015.6	1014.4	1013.1	1011.9	1010.7
35°	967.9	966.6	965.5	964.0	962.1	960.3	958.4	956.5
37.5°	914.6	912.9	911.2	909.8	908.8	907.7	906.7	905.5
40°	877.9	875.8	873.6	872.2	871.5	870.9	870.2	869.5
42.5°	841.3	839.4	837.5	836.0	835.0	833.8	832.7	831.7
45°	787.3	784.5	781.7	779.9	779.3	778.6	777.9	777.2
47.5°	730.3	727.5	724.7	722.5	720.8	719.2	717.5	715.9
50°	691.4	688.3	685.3	683.0	681.4	679.7	678.1	676.5
52.5°	653.6	650.9	648.2	646.0	644.2	642.4	640.6	638.7
55°	594.7	592.6	590.5	588.7	586.9	585.3	583.7	582.1
57.5°	536.2	533.5	530.8	529.0	528.1	527.3	526.3	525.4
60°	496.7	494.3	492.0	490.0	488.4	486.8	485.1	483.5
62.5°	458.6	456.1	453.5	451.6	450.4	449.1	447.9	446.6
65°	398.6	396.5	394.4	392.8	391.9	391.0	390.0	389.1
67.5°	341.3	339.5	337.8	336.6	336.1	335.5	334.9	334.4
70°	303.5	302.1	300.6	299.5	298.5	297.6	296.7	295.8
72.5°	267.8	266.3	264.7	263.4	262.5	261.6	260.6	259.6
75°	212.6	211.9	211.2	210.4	209.4	208.4	207.5	206.6
77.5°	162.0	161.5	161.1	160.6	159.9	159.3	158.6	157.9
80°	129.6	129.4	129.2	128.8	128.4	127.8	127.3	126.9
82.5°	99.0	98.6	98.2	98.0	97.9	97.8	97.7	97.6
85°	58.3	58.1	57.8	57.5	57.0	56.6	56.0	55.5
87.5°	23.9	24.0	24.1	24.1	23.8	23.5	23.2	22.9
90°	10.5	11.1	11.8	12.3	12.7	13.0	13.4	13.8
92.5°	23.8	24.6	25.5	26.1	26.4	26.7	26.9	27.2
95°	46.2	47.1	48.0	48.5	48.8	49.1	49.3	49.6
97.5°	72.3	73.2	74.0	74.5	74.6	74.8	74.9	75.1
100°	90.5	91.6	92.7	93.4	93.7	94.0	94.2	94.5
102.5°	109.1	110.4	111.6	112.4	112.8	113.1	113.5	113.8
105°	139.3	140.0	140.8	141.4	141.7	142.1	142.5	142.9
107.5°	171.8	172.2	172.5	172.7	172.7	172.7	172.6	172.6
110°	194.3	194.7	195.1	195.2	195.1	195.0	194.8	194.7



TEST NUMBER: P333221-840

CATALOG NUMBER: S125DIP-S850D590U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	217.0	217.1	217.3	217.3	217.1	216.8	216.6	216.4
115°	251.5	251.4	251.3	251.2	251.0	250.9	250.7	250.6
117.5°	286.1	286.2	286.3	286.1	285.6	285.1	284.6	284.0
120°	309.3	309.3	309.3	309.1	308.6	308.1	307.6	307.1
122.5°	332.2	332.1	332.0	331.7	331.3	330.9	330.5	330.1
125°	365.9	365.7	365.4	365.2	365.1	365.0	364.8	364.7
127.5°	399.3	399.2	399.1	398.9	398.6	398.4	398.1	397.9
130°	421.4	421.3	421.2	421.0	420.7	420.5	420.2	420.0
132.5°	442.6	442.5	442.4	442.1	441.8	441.4	441.1	440.7
135°	475.2	475.2	475.2	475.0	474.5	474.0	473.5	473.0
137.5°	507.1	507.2	507.4	507.2	506.4	505.8	505.2	504.5
140°	527.0	527.4	527.6	527.4	526.7	526.1	525.4	524.8
142.5°	546.6	546.8	546.9	546.7	546.1	545.4	544.8	544.2
145°	574.9	574.9	574.9	574.7	574.4	574.0	573.6	573.2
147.5°	601.2	601.5	601.8	601.5	600.6	599.8	598.8	598.0
150°	617.5	617.5	617.5	617.4	617.2	616.9	616.7	616.4
152.5°	633.0	633.3	633.6	633.5	633.0	632.6	632.1	631.7
155°	654.9	655.4	655.9	655.9	655.2	654.6	653.9	653.3
157.5°	673.9	674.4	674.9	674.8	673.9	673.1	672.3	671.4
160°	685.4	685.9	686.4	686.4	685.8	685.1	684.5	683.9
162.5°	696.2	696.8	697.5	697.4	696.7	695.9	695.2	694.4
165°	710.7	711.2	711.9	711.7	710.9	710.1	709.3	708.6
167.5°	721.5	722.4	723.1	723.1	722.3	721.4	720.6	719.9
170°	728.0	728.7	729.5	729.4	728.6	727.7	726.8	725.9
172.5°	732.7	733.4	734.2	734.2	733.4	732.6	731.7	730.9
175°	737.8	738.5	739.3	739.2	738.4	737.5	736.6	735.7
177.5°	740.1	740.7	741.3	741.3	740.6	739.9	739.1	738.4
180°	740.3	740.3	740.3	740.3	740.3	740.3	740.3	740.3

(END OF REPORT)