

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333603-840

Luminaire Tested: **S125RDIP-S1090D1035U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333603-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1090D1035U840-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8016.8 lumens
Efficiency: N/A
Efficacy: 132.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333603-840

CATALOG NUMBER: S125RDIP-S1090D1035U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

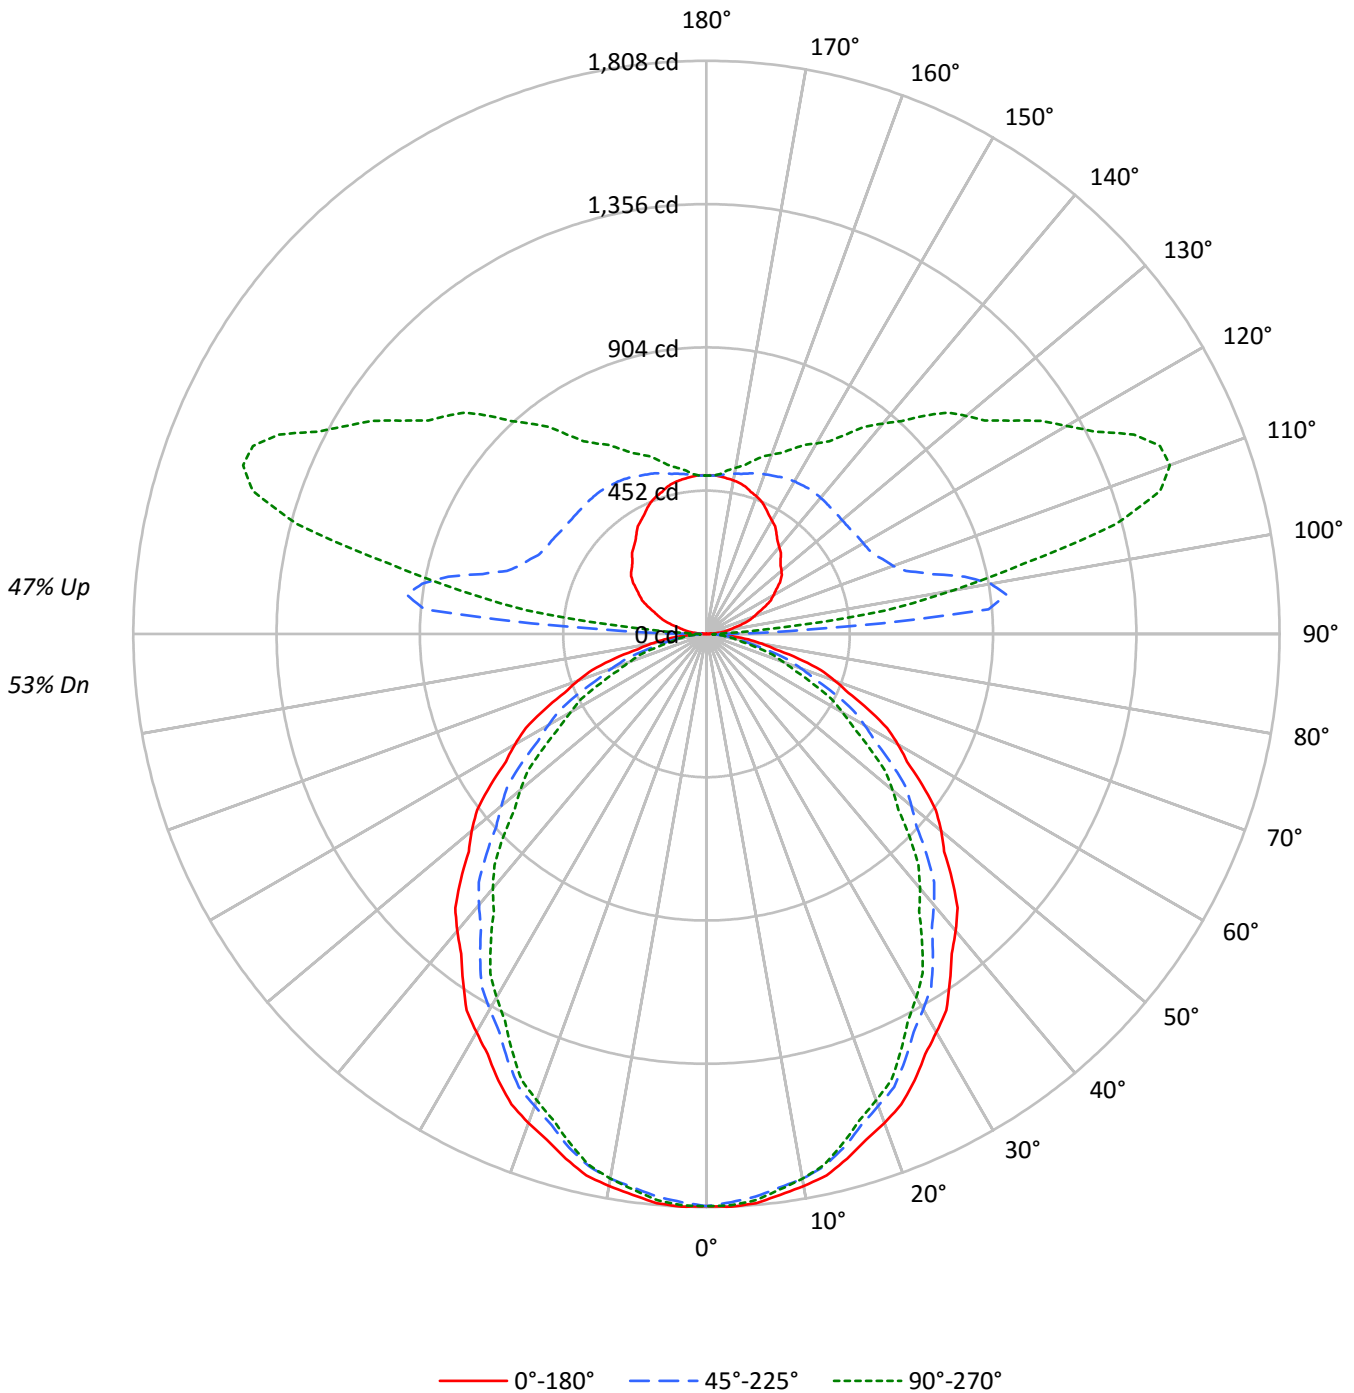



TEST NUMBER: P333603-840

CATALOG NUMBER: S125RDIP-S1090D1035U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59
1	99	94	91	87	91	88	84	81	75	73	70	63	62	60	53	51	50
2	90	83	77	72	83	77	72	67	66	62	59	56	53	51	47	45	43
3	82	73	66	60	76	68	62	56	58	54	50	50	46	43	41	39	37
4	75	65	57	51	70	60	53	48	52	47	42	44	40	37	37	34	32
5	69	58	50	44	64	54	47	41	47	41	37	40	36	32	34	30	28
6	64	52	44	38	59	49	41	36	42	36	32	36	32	28	31	27	25
7	59	47	39	33	55	44	37	32	38	33	28	33	28	25	28	24	22
8	55	43	35	30	51	40	33	28	35	29	25	30	26	22	26	22	20
9	51	39	32	26	47	37	30	25	32	27	23	28	23	20	24	20	18
10	48	36	29	24	44	34	27	23	30	24	21	26	21	18	22	19	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11657	11657	11657
5°	11684	11551	11622
10°	11596	11444	11444
15°	11457	11212	11120
20°	11281	10888	10757
25°	11075	10570	10337
30°	10818	10197	9871
35°	10555	9813	9351
40°	10309	9413	8838
45°	10011	8965	8280
50°	9711	8478	7698
55°	9364	8014	7076
60°	9016	7448	6409
65°	8604	6791	5645
70°	8135	5973	4864
75°	7483	5036	4047
80°	6590	3954	3396
85°	5550	3231	3031



TEST NUMBER: P333603-840

CATALOG NUMBER: S125RDIP-S1090D1035U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.7	2.1
10°-20°	474.3	5.9
20°-30°	687.8	8.6
30°-40°	783.9	9.8
40°-50°	764.1	9.5
50°-60°	643.2	8.0
60°-70°	450.9	5.6
70°-80°	231.8	2.9
80°-90°	61.3	0.8
90°-100°	362.4	4.5
100°-110°	779.1	9.7
110°-120°	731.2	9.1
120°-130°	592.6	7.4
130°-140°	475.6	5.9
140°-150°	358.9	4.5
150°-160°	252.6	3.2
160°-170°	148.9	1.9
170°-180°	48.4	0.6
0°-30°	1331.9	16.6
0°-40°	2115.8	26.4
0°-60°	3523.1	43.9
0°-90°	4267.0	53.2
90°-120°	1872.8	23.4
90°-150°	3299.8	41.2
90°-180°	3750.0	46.8
0°-180°	8016.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1805	1805	1805	1805	1805	
5°	1802	1796	1782	1794	1793	171
15°	1714	1704	1677	1675	1663	483
25°	1554	1532	1483	1466	1451	715
35°	1339	1304	1245	1206	1186	838
45°	1096	1055	982	929	907	845
55°	832	786	712	652	628	744
65°	563	515	444	392	369	558
75°	300	258	202	173	162	317
85°	75	51	44	42	41	84
90°	1	9	16	21	23	5
95°	33	98	893	405	237	35
105°	114	159	731	1439	1336	120
115°	204	246	587	1265	1488	200
125°	282	331	562	1006	1172	250
135°	331	398	558	843	974	257
145°	385	441	560	698	768	241
155°	440	473	546	618	644	202
165°	480	493	524	556	564	135
175°	499	499	503	509	507	47
180°	500	500	500	500	500	



TEST NUMBER: P333603-840

CATALOG NUMBER: S125RDIP-S1090D1035U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0
2.5°	1808.3	1807.6	1806.9	1806.0	1805.3	1803.8	1801.4	1799.0	1796.5	1794.1	1796.5
5°	1802.3	1801.1	1799.9	1798.7	1797.5	1795.1	1791.8	1788.5	1785.1	1781.8	1784.8
7.5°	1784.5	1783.4	1782.2	1781.1	1779.9	1777.4	1773.3	1769.4	1765.3	1761.4	1763.5
10°	1768.2	1767.3	1766.4	1765.4	1764.5	1762.0	1757.8	1753.5	1749.3	1745.0	1746.0
12.5°	1749.6	1748.5	1747.4	1746.2	1745.0	1741.6	1736.0	1730.2	1724.5	1718.8	1719.5
15°	1713.6	1711.8	1710.0	1708.2	1706.4	1702.3	1696.0	1689.6	1683.2	1676.9	1676.6
17.5°	1673.0	1670.2	1667.5	1664.7	1661.8	1656.5	1648.5	1640.5	1632.4	1624.5	1623.0
20°	1641.4	1638.4	1635.4	1632.3	1629.3	1623.0	1613.3	1603.6	1593.9	1584.2	1582.7
22.5°	1606.5	1603.5	1600.4	1597.4	1594.4	1587.8	1577.6	1567.4	1557.2	1547.0	1544.1
25°	1554.2	1549.6	1545.1	1540.5	1536.0	1528.1	1516.9	1505.7	1494.5	1483.3	1479.4
27.5°	1494.2	1488.6	1483.1	1477.6	1472.1	1463.4	1451.4	1439.4	1427.3	1415.3	1409.9
30°	1450.6	1444.8	1439.1	1433.3	1427.5	1418.3	1405.5	1392.8	1380.1	1367.4	1360.4
32.5°	1408.0	1401.3	1394.5	1387.9	1381.1	1371.3	1358.3	1345.3	1332.3	1319.4	1311.7
35°	1338.8	1331.5	1324.2	1317.0	1309.7	1299.2	1285.6	1271.9	1258.3	1244.7	1235.9
37.5°	1270.8	1262.0	1253.1	1244.4	1235.5	1224.1	1209.9	1195.9	1181.8	1167.8	1157.2
40°	1222.8	1213.8	1204.7	1195.6	1186.5	1174.7	1160.1	1145.6	1131.0	1116.5	1105.0
42.5°	1172.7	1163.4	1154.1	1144.7	1135.4	1123.2	1108.1	1093.2	1078.1	1063.1	1052.1
45°	1096.1	1087.3	1078.5	1069.8	1061.0	1048.2	1031.6	1014.9	998.3	981.6	969.5
47.5°	1016.7	1007.4	998.2	989.0	979.7	966.6	949.9	933.0	916.3	899.5	887.0
50°	966.5	956.5	946.5	936.5	926.6	912.9	895.6	878.4	861.1	843.8	831.1
52.5°	912.0	901.8	891.5	881.3	871.1	857.8	841.5	825.2	808.9	792.6	778.9
55°	831.6	821.9	812.2	802.5	792.8	779.5	762.5	745.6	728.6	711.7	698.0
57.5°	750.3	740.0	729.6	719.2	708.9	695.6	679.2	662.9	646.5	630.2	616.8
60°	698.0	687.4	676.8	666.2	655.6	642.1	625.7	609.4	593.0	576.6	563.3
62.5°	642.4	632.3	622.2	612.0	601.9	588.5	572.0	555.3	538.8	522.1	509.8
65°	563.0	552.7	542.4	532.1	521.8	508.7	492.6	476.6	460.5	444.4	432.3
67.5°	484.2	473.9	463.6	453.3	443.0	430.2	414.8	399.4	384.1	368.6	357.6
70°	430.8	420.5	410.2	399.9	389.6	376.9	361.7	346.6	331.4	316.3	306.9
72.5°	378.5	368.4	358.3	348.3	338.2	326.1	311.9	297.7	283.6	269.4	260.7
75°	299.9	290.8	281.8	272.7	263.6	252.7	239.9	227.2	214.5	201.8	195.1
77.5°	222.0	214.7	207.4	200.2	192.9	184.1	174.0	163.8	153.6	143.4	138.8
80°	177.2	170.0	162.7	155.4	148.1	140.3	131.8	123.3	114.8	106.3	103.6
82.5°	133.6	127.0	120.5	114.0	107.4	101.3	95.4	89.6	83.8	78.0	76.7
85°	74.9	69.5	64.0	58.6	53.1	49.7	48.2	46.7	45.1	43.6	43.3
87.5°	25.2	23.8	22.5	21.2	19.9	19.4	19.3	19.5	19.4	19.6	19.8
90°	1.0	2.0	4.0	6.1	8.1	10.1	11.1	13.1	14.1	16.2	17.2
92.5°	12.3	14.9	23.4	35.9	53.2	82.7	137.7	230.0	330.2	325.0	263.1
95°	33.2	34.2	42.3	53.4	75.6	121.0	228.8	450.6	728.9	893.2	874.0
97.5°	55.2	56.5	62.1	73.2	93.1	125.8	197.2	359.7	650.9	953.9	1105.9
100°	70.6	72.6	76.6	87.7	106.8	137.1	195.6	326.6	580.7	910.3	1162.4
102.5°	87.6	88.7	91.9	103.8	121.4	150.8	202.9	313.0	527.5	833.7	1128.5
105°	113.9	113.9	119.0	129.1	145.2	173.4	217.7	307.5	475.8	730.8	1020.3
107.5°	139.8	141.8	146.5	154.8	171.6	197.0	239.9	316.8	454.0	660.1	909.7
110°	158.2	160.3	164.3	173.4	188.5	214.7	256.1	325.6	447.6	627.0	846.8



TEST NUMBER: P333603-840

CATALOG NUMBER: S125RDIP-S1090D1035U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	176.8	178.8	182.1	191.2	206.2	231.7	271.4	336.9	447.6	607.7	800.0
115°	203.7	205.6	208.6	217.7	232.9	258.1	295.4	353.9	450.6	586.7	749.0
117.5°	227.8	230.9	234.1	243.2	260.3	284.7	320.0	373.2	457.3	576.4	718.6
120°	244.0	247.0	251.1	260.1	277.2	302.5	337.7	386.1	463.7	571.6	701.7
122.5°	260.9	263.1	266.3	275.4	294.2	319.4	354.7	400.6	469.4	567.5	687.1
125°	282.3	284.3	289.3	298.4	317.6	343.8	377.1	420.4	478.9	562.5	667.4
127.5°	299.0	302.1	308.5	320.0	340.3	366.6	398.6	438.5	489.6	560.1	649.2
130°	309.5	312.6	320.6	333.7	354.9	381.0	412.3	450.6	496.0	558.5	637.1
132.5°	317.6	321.3	331.0	345.8	367.8	393.9	425.3	461.1	503.2	558.5	627.4
135°	330.6	334.7	346.8	362.9	384.1	411.3	442.5	475.8	513.1	558.5	615.9
137.5°	347.2	350.2	361.5	377.7	398.4	426.5	454.8	486.8	522.2	559.7	605.7
140°	356.9	359.9	372.0	388.1	407.3	434.5	463.7	494.0	526.2	560.5	600.9
142.5°	368.2	370.4	381.6	397.8	416.2	441.7	469.4	498.0	528.7	561.3	596.8
145°	385.1	387.1	397.2	411.3	429.5	452.6	478.9	504.0	531.3	560.5	590.8
147.5°	402.8	404.0	412.7	425.9	441.5	461.9	484.9	507.7	532.3	557.8	584.5
150°	413.3	415.4	422.4	435.6	449.6	466.8	489.0	510.1	532.3	555.4	579.7
152.5°	424.6	425.9	432.1	443.5	456.9	472.4	493.0	511.7	531.5	552.3	574.0
155°	439.5	439.5	445.6	455.7	465.7	479.9	497.0	513.1	529.3	546.4	564.5
157.5°	452.8	452.6	457.5	466.2	475.0	485.7	500.4	514.1	526.6	540.4	555.6
160°	461.7	460.7	464.7	471.8	479.9	489.0	502.0	514.1	524.2	536.3	548.5
162.5°	469.0	468.0	472.0	478.3	484.7	492.2	503.6	513.3	521.8	531.5	542.0
165°	479.9	477.9	480.9	485.9	490.0	496.0	504.0	512.1	518.2	524.2	532.3
167.5°	487.2	486.1	488.0	490.8	493.6	497.4	504.0	509.7	512.5	517.2	522.8
170°	492.0	491.0	492.0	494.0	496.0	499.0	504.0	508.1	510.1	513.1	517.2
172.5°	495.2	493.4	494.4	496.3	497.6	499.0	503.2	506.4	506.9	508.3	511.5
175°	499.0	497.0	498.0	499.0	499.0	499.0	502.0	504.0	503.0	503.0	504.0
177.5°	500.8	499.2	499.2	500.0	499.2	499.2	500.8	501.6	500.0	500.0	500.8
180°	500.0	500.0	500.0	500.0	500.0	500.0	500.0	500.0	500.0	500.0	500.0



TEST NUMBER: P333603-840

CATALOG NUMBER: S125RDIP-S1090D1035U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0
2.5°	1799.0	1801.4	1803.8	1804.8	1804.6	1804.4	1804.1	1803.9
5°	1787.9	1790.9	1793.9	1795.1	1794.5	1793.9	1793.3	1792.7
7.5°	1765.6	1767.8	1769.9	1770.6	1769.9	1769.3	1768.6	1767.9
10°	1746.9	1747.8	1748.7	1748.7	1747.8	1746.9	1746.0	1745.0
12.5°	1720.2	1720.8	1721.5	1721.1	1719.7	1718.4	1717.0	1715.6
15°	1676.3	1676.0	1675.7	1674.2	1671.4	1668.7	1666.0	1663.2
17.5°	1621.4	1619.9	1618.4	1616.6	1614.3	1612.0	1609.8	1607.6
20°	1581.1	1579.6	1578.1	1576.0	1573.3	1570.5	1567.8	1565.1
22.5°	1541.2	1538.1	1535.2	1532.6	1530.3	1528.1	1525.8	1523.6
25°	1475.4	1471.5	1467.5	1463.9	1460.6	1457.2	1453.9	1450.6
27.5°	1404.3	1398.9	1393.3	1389.0	1385.7	1382.5	1379.3	1376.1
30°	1353.4	1346.5	1339.5	1334.6	1331.9	1329.2	1326.5	1323.7
32.5°	1304.0	1296.3	1288.6	1283.0	1279.6	1276.2	1272.6	1269.2
35°	1227.1	1218.3	1209.5	1203.1	1198.8	1194.6	1190.3	1186.1
37.5°	1146.7	1136.2	1125.6	1118.3	1114.2	1110.0	1105.9	1101.8
40°	1093.5	1082.0	1070.5	1062.9	1059.2	1055.6	1052.0	1048.3
42.5°	1041.1	1030.0	1019.0	1010.8	1005.4	1000.2	994.8	989.5
45°	957.4	945.2	933.1	924.7	920.2	915.6	911.1	906.6
47.5°	874.5	862.0	849.6	840.8	835.8	830.7	825.8	820.7
50°	818.4	805.7	792.9	784.4	779.8	775.3	770.7	766.2
52.5°	765.3	751.5	737.8	728.7	724.2	719.6	715.1	710.5
55°	684.4	670.8	657.1	647.8	643.0	638.1	633.3	628.4
57.5°	603.5	590.2	576.8	567.9	563.7	559.4	555.0	550.8
60°	550.0	536.6	523.3	514.4	509.9	505.3	500.8	496.2
62.5°	497.5	485.0	472.7	464.2	459.7	455.1	450.6	446.1
65°	420.2	408.1	396.0	387.6	383.0	378.5	374.0	369.4
67.5°	346.5	335.4	324.3	316.9	313.3	309.6	306.0	302.4
70°	297.5	288.1	278.7	272.2	268.5	264.9	261.3	257.6
72.5°	252.1	243.4	234.7	229.1	226.7	224.3	221.9	219.4
75°	188.4	181.8	175.1	170.7	168.5	166.4	164.3	162.2
77.5°	134.1	129.5	124.7	121.6	120.1	118.5	116.9	115.3
80°	100.9	98.2	95.4	93.7	93.1	92.5	91.9	91.3
82.5°	75.4	74.1	72.9	72.1	71.7	71.3	71.0	70.6
85°	43.0	42.7	42.4	42.1	41.8	41.5	41.2	40.9
87.5°	20.0	20.2	20.4	20.7	20.4	20.2	20.2	19.9
90°	18.2	19.2	20.2	22.2	22.2	22.2	23.2	23.2
92.5°	178.6	129.7	97.6	82.7	69.8	67.4	65.9	64.3
95°	724.9	571.6	447.6	362.9	291.3	261.2	253.1	236.9
97.5°	1079.5	972.0	851.2	733.5	671.3	614.7	585.5	572.6
100°	1240.0	1190.6	1086.7	981.9	912.3	839.8	802.4	786.4
102.5°	1294.0	1324.4	1274.7	1203.7	1129.3	1077.7	1037.1	1025.0
105°	1262.1	1400.3	1444.6	1433.5	1401.3	1368.1	1347.9	1335.7
107.5°	1148.4	1332.7	1446.6	1499.2	1515.6	1515.4	1508.7	1500.7
110°	1064.6	1256.1	1398.3	1484.0	1529.3	1548.4	1555.5	1555.5



TEST NUMBER: P333603-840

CATALOG NUMBER: S125RDIP-S1090D1035U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	998.5	1180.3	1324.0	1425.1	1491.4	1524.3	1541.9	1549.0
115°	915.3	1071.7	1209.7	1319.6	1398.3	1446.6	1474.9	1488.0
117.5°	861.7	996.4	1115.4	1216.2	1294.8	1344.8	1372.8	1380.9
120°	832.7	953.7	1064.6	1153.3	1227.9	1276.3	1303.5	1311.6
122.5°	810.9	923.0	1021.8	1104.9	1171.4	1215.8	1243.0	1250.3
125°	779.3	882.1	969.8	1042.4	1098.8	1140.1	1162.4	1172.5
127.5°	747.0	843.0	924.8	992.8	1044.0	1080.5	1101.5	1105.9
130°	726.9	815.6	894.2	959.8	1010.2	1043.4	1063.6	1069.6
132.5°	706.7	789.7	861.1	924.2	974.6	1007.9	1026.4	1033.3
135°	680.4	750.0	814.6	872.0	916.4	949.7	967.8	973.8
137.5°	658.3	714.6	768.2	817.0	856.7	887.0	903.7	910.3
140°	646.2	693.6	739.9	782.3	819.6	845.9	860.9	866.0
142.5°	635.7	675.8	715.8	752.5	784.2	806.3	820.6	824.9
145°	622.0	653.3	684.5	711.8	735.9	753.1	764.2	768.2
147.5°	609.2	634.5	658.5	679.0	698.2	712.0	718.4	720.2
150°	601.9	624.0	643.2	661.4	676.4	688.5	692.6	693.6
152.5°	593.8	613.5	631.1	645.2	657.9	667.6	671.6	672.6
155°	581.7	597.8	612.0	623.0	633.1	640.2	643.2	644.2
157.5°	569.6	582.9	593.8	602.5	610.4	616.1	618.9	618.7
160°	561.5	571.6	581.7	588.8	595.8	600.9	602.9	601.9
162.5°	552.7	561.9	570.4	576.6	582.1	586.3	586.7	586.5
165°	540.4	547.4	553.5	558.5	562.5	564.5	564.5	564.5
167.5°	528.7	533.3	538.0	541.6	543.6	545.4	544.6	544.4
170°	522.2	525.2	528.3	530.3	532.3	533.3	533.3	532.3
172.5°	514.9	518.0	520.2	521.4	521.8	523.6	522.0	521.0
175°	507.1	507.1	509.1	509.1	509.1	510.1	508.1	507.1
177.5°	501.6	502.4	502.4	502.4	501.6	502.4	500.0	500.0
180°	500.0	500.0	500.0	500.0	500.0	500.0	500.0	500.0

(END OF REPORT)