

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333592-840

Luminaire Tested: **S125RDIP-S1090D810U840-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333592-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1090D810U840-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 810 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7575.6 lumens
Efficiency: N/A
Efficacy: 139.3 lumens/watt
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

Luminous Intensity Polar Plot

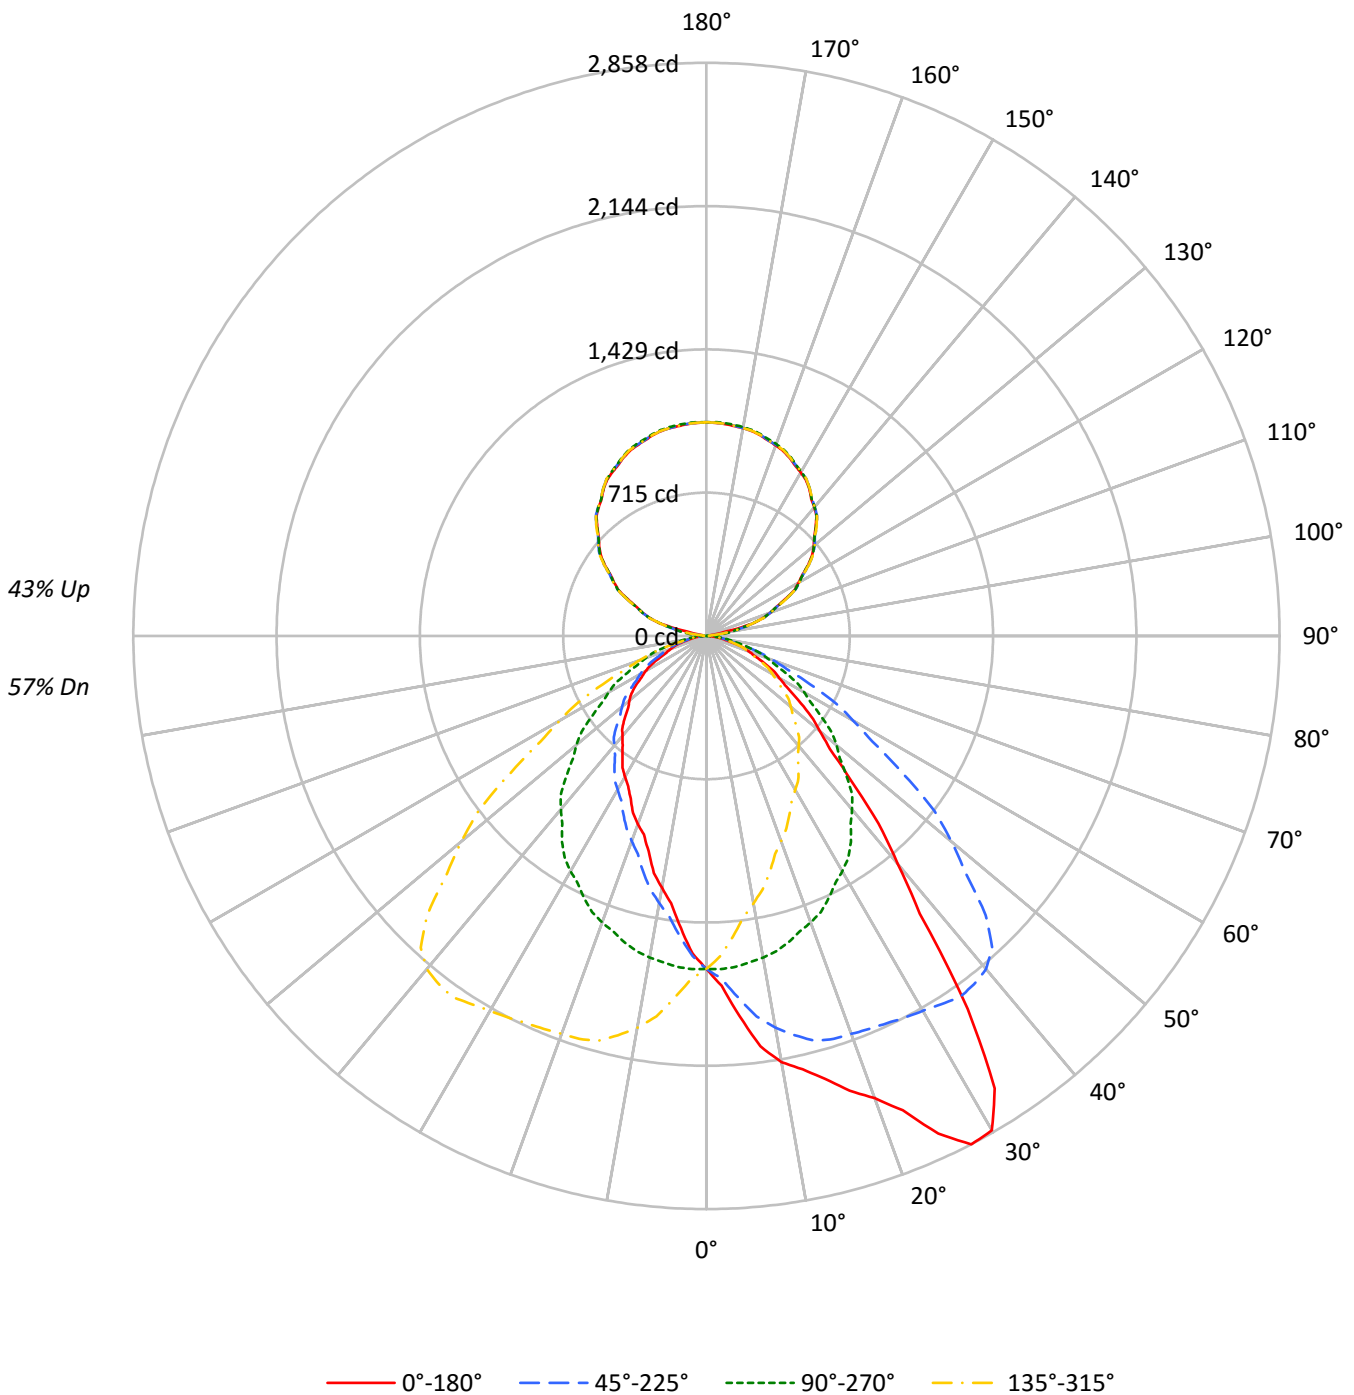



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	57
1	100	96	92	89	93	89	86	83	77	75	73	66	64	63	56	55	54	49
2	91	84	78	73	85	79	73	69	68	64	61	59	56	53	50	48	46	42
3	84	74	67	61	78	69	63	58	60	56	52	52	49	45	44	42	40	36
4	77	66	58	52	71	62	55	50	54	49	44	47	43	39	40	37	34	31
5	70	59	51	45	65	55	48	43	48	43	38	42	38	34	36	33	30	27
6	65	53	45	39	60	50	43	37	44	38	34	38	34	30	33	29	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	34	29	36	31	27	32	27	24	28	24	21	19
9	52	40	32	27	49	38	31	26	33	28	24	29	25	22	26	22	19	17
10	49	37	29	25	45	35	28	24	31	25	22	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10723	10723	10723	10723
5°	12337	10738	9483	10738
10°	14152	10683	8368	10683
15°	15285	10573	7438	10573
20°	16855	10446	6868	10446
25°	19506	10278	6372	10278
30°	21227	10100	6049	10100
35°	17906	9894	5750	9894
40°	12505	9522	5493	9522
45°	9276	9020	5242	9020
50°	7396	8499	5027	8499
55°	6277	7851	4835	7851
60°	5424	7272	4525	7272
65°	4834	6645	3895	6645
70°	4247	6086	3552	6086
75°	3673	5273	3334	5273
80°	2786	4437	2786	4437
85°	2319	3490	2623	3490



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.2	2.1
10°-20°	466.6	6.2
20°-30°	739.8	9.8
30°-40°	892.2	11.8
40°-50°	796.7	10.5
50°-60°	611.0	8.1
60°-70°	397.1	5.2
70°-80°	193.0	2.5
80°-90°	48.3	0.6
90°-100°	38.7	0.5
100°-110°	238.6	3.1
110°-120°	432.8	5.7
120°-130°	555.4	7.3
130°-140°	597.4	7.9
140°-150°	560.7	7.4
150°-160°	453.6	6.0
160°-170°	293.3	3.9
170°-180°	101.2	1.3
0°-30°	1365.7	18.0
0°-40°	2257.9	29.8
0°-60°	3665.6	48.4
0°-90°	4304.0	56.8
90°-120°	710.1	9.4
90°-150°	2423.5	32.0
90°-180°	3272.0	43.2
0°-180°	7575.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1660	1660	1660	1660	1660	
5°	1903	1656	1463	1656	1903	190
15°	2286	1581	1112	1581	2286	655
25°	2737	1442	894	1442	2737	1257
35°	2271	1255	729	1255	2271	1372
45°	1016	988	574	988	1016	810
55°	558	697	429	697	558	506
65°	316	435	255	435	316	315
75°	147	211	134	211	147	157
85°	31	47	35	47	31	37
90°	19	1	19	1	19	10
95°	17	45	17	45	17	14
105°	235	232	235	232	235	212
115°	433	436	433	436	433	430
125°	620	620	620	620	620	552
135°	770	773	770	773	770	594
145°	894	896	894	896	894	558
155°	980	987	980	987	980	452
165°	1036	1042	1036	1042	1036	292
175°	1061	1065	1061	1065	1061	101
180°	1065	1065	1065	1065	1065	

TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4
2.5°	1746.6	1745.5	1747.7	1741.6	1742.2	1732.9	1732.9	1725.9	1716.6	1709.5	1706.2
5°	1903.0	1904.4	1901.7	1891.5	1884.6	1874.4	1862.8	1842.4	1825.3	1809.0	1796.0
7.5°	2064.2	2065.1	2056.1	2053.0	2035.8	2023.3	1997.5	1969.6	1945.0	1913.7	1889.7
10°	2158.0	2157.3	2147.7	2140.2	2125.3	2106.2	2080.9	2048.2	2017.5	1983.5	1950.8
12.5°	2212.5	2210.7	2207.7	2198.6	2184.6	2167.8	2146.4	2114.2	2076.4	2039.1	2000.9
15°	2286.1	2281.3	2272.5	2260.9	2241.1	2221.3	2197.5	2168.9	2132.7	2090.4	2055.1
17.5°	2377.1	2377.3	2363.7	2347.5	2320.7	2285.8	2249.0	2202.8	2153.7	2107.3	2069.5
20°	2452.4	2450.3	2436.7	2405.4	2374.7	2331.1	2288.9	2232.2	2172.2	2111.6	2064.6
22.5°	2560.4	2555.1	2540.8	2499.7	2452.2	2396.0	2331.4	2262.2	2189.7	2120.8	2059.1
25°	2737.3	2733.2	2705.2	2657.6	2590.8	2504.2	2419.6	2324.9	2220.7	2130.0	2055.1
27.5°	2858.3	2853.9	2833.2	2793.5	2731.9	2640.8	2526.4	2399.7	2269.6	2144.9	2036.8
30°	2846.4	2856.6	2853.9	2835.5	2789.1	2707.3	2601.7	2459.2	2304.5	2158.0	2029.1
32.5°	2675.1	2684.3	2708.3	2744.4	2747.1	2714.4	2635.4	2504.0	2343.8	2177.1	2023.2
35°	2271.1	2283.4	2329.8	2402.7	2498.1	2577.8	2594.1	2523.2	2379.4	2200.2	2014.2
37.5°	1746.0	1813.0	1852.1	1928.8	2073.1	2219.7	2360.8	2412.8	2351.5	2190.7	1999.5
40°	1483.2	1499.5	1569.0	1655.6	1777.0	1929.7	2130.7	2275.8	2280.7	2168.9	1976.6
42.5°	1269.4	1290.1	1337.9	1406.9	1510.9	1663.6	1871.2	2062.6	2151.4	2108.9	1946.6
45°	1015.6	1031.3	1066.0	1119.2	1198.9	1325.0	1503.6	1725.2	1901.0	1969.8	1866.2
47.5°	834.2	842.7	873.0	913.5	972.5	1064.4	1202.6	1394.9	1605.9	1753.7	1739.2
50°	736.1	745.7	768.8	799.5	849.3	927.0	1037.4	1197.6	1415.0	1595.6	1631.7
52.5°	659.7	667.7	682.2	711.1	752.2	811.9	901.1	1046.0	1241.6	1433.7	1517.2
55°	557.5	563.0	574.6	591.0	623.7	666.6	743.7	843.8	1002.0	1195.5	1318.2
57.5°	473.3	476.1	483.4	498.6	521.2	552.5	608.1	693.1	806.5	980.8	1116.2
60°	419.9	422.6	432.1	442.3	460.1	488.7	532.3	591.6	700.6	844.6	981.5
62.5°	377.3	379.0	383.0	393.2	408.8	430.9	465.2	513.6	600.4	726.7	856.1
65°	316.3	316.9	318.3	326.5	336.0	352.3	374.9	409.0	474.4	569.9	684.3
67.5°	257.6	258.6	263.4	266.2	276.2	284.8	298.0	324.1	370.1	434.4	523.5
70°	224.9	224.3	229.0	232.5	235.8	246.1	254.9	276.1	304.7	353.8	428.1
72.5°	194.4	192.6	194.7	195.9	200.4	207.3	216.2	229.1	251.3	285.1	341.9
75°	147.2	147.9	147.9	149.3	152.7	155.4	158.1	164.9	177.2	199.8	230.4
77.5°	103.3	102.2	105.1	105.5	107.6	110.6	112.9	115.6	120.7	129.9	145.7
80°	74.9	74.9	75.6	77.7	77.1	78.4	81.8	84.5	90.7	96.1	101.6
82.5°	57.6	57.0	57.7	58.1	58.0	59.3	60.5	61.1	63.4	66.1	69.9
85°	31.3	31.3	32.0	32.0	32.7	32.7	33.4	33.4	33.4	34.0	34.7
87.5°	15.8	15.1	14.4	14.3	14.8	15.8	15.0	14.3	14.1	13.9	14.2
90°	19.0	18.4	17.9	17.4	16.9	16.2	15.2	14.4	13.5	12.6	11.4
92.5°	17.7	17.5	17.2	17.0	16.7	16.2	15.2	14.4	13.5	12.6	11.5
95°	16.6	16.6	16.6	16.6	16.6	16.2	15.2	14.4	13.5	12.6	19.3
97.5°	16.6	16.6	16.6	16.6	16.6	19.1	24.0	29.0	33.9	38.9	52.0
100°	16.6	17.3	18.0	18.7	19.4	32.8	59.0	85.1	111.3	137.4	136.7
102.5°	99.4	111.3	123.2	135.1	147.1	155.5	160.5	165.4	170.4	175.3	174.9
105°	234.6	234.7	234.9	235.1	235.3	235.3	235.3	235.3	235.3	235.3	235.3
107.5°	295.7	296.2	296.7	297.3	297.8	298.0	298.0	298.0	297.9	297.9	297.5
110°	338.0	337.8	337.7	337.5	337.3	337.5	338.0	338.5	339.1	339.6	339.2



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	376.0	376.2	376.4	376.7	376.9	377.4	378.0	378.7	379.4	380.0	379.8
115°	432.8	433.8	434.8	436.0	437.0	437.9	438.6	439.3	440.0	440.7	440.5
117.5°	493.4	493.9	494.3	494.8	495.2	495.9	496.9	497.8	498.7	499.6	499.0
120°	530.7	531.6	532.5	533.3	534.2	534.8	535.2	535.5	535.9	536.2	535.7
122.5°	566.1	567.1	568.2	569.2	570.2	570.9	571.2	571.6	571.9	572.3	572.0
125°	620.0	620.5	621.0	621.6	622.1	622.7	623.4	624.1	624.8	625.5	625.5
127.5°	665.3	666.6	667.9	669.2	670.4	671.4	671.8	672.1	672.5	672.9	673.0
130°	698.1	699.0	699.9	700.7	701.7	702.4	702.9	703.4	704.0	704.5	704.3
132.5°	728.5	729.3	730.2	731.1	732.0	732.5	732.6	732.7	732.8	732.9	733.3
135°	770.0	771.0	772.1	773.2	774.3	775.0	775.3	775.7	776.0	776.4	776.7
137.5°	811.7	812.6	813.5	814.5	815.4	815.8	815.7	815.7	815.6	815.5	815.9
140°	836.4	837.4	838.5	839.5	840.6	840.9	840.6	840.2	839.9	839.5	839.7
142.5°	859.7	860.8	861.8	862.9	863.9	864.4	864.3	864.3	864.2	864.1	863.9
145°	894.0	895.0	896.2	897.2	898.2	898.7	898.5	898.3	898.2	898.0	898.0
147.5°	922.3	923.5	924.8	926.0	927.4	927.9	927.7	927.5	927.3	927.1	926.9
150°	940.6	942.0	943.4	944.8	946.2	946.7	946.4	946.0	945.7	945.3	945.0
152.5°	957.7	959.0	960.2	961.5	962.7	963.2	962.8	962.5	962.1	961.8	961.4
155°	980.1	981.5	982.9	984.3	985.7	986.1	985.6	985.1	984.5	984.0	983.7
157.5°	998.9	1000.3	1001.7	1003.1	1004.5	1004.9	1004.4	1003.8	1003.2	1002.7	1002.6
160°	1010.9	1012.3	1013.7	1015.1	1016.5	1016.8	1016.1	1015.4	1014.7	1014.0	1013.9
162.5°	1021.7	1023.2	1024.7	1026.2	1027.8	1028.0	1027.1	1026.1	1025.1	1024.2	1024.0
165°	1036.1	1037.5	1038.9	1040.4	1041.8	1042.0	1040.9	1039.9	1038.8	1037.7	1037.5
167.5°	1046.3	1047.8	1049.5	1051.0	1052.6	1052.8	1051.5	1050.3	1048.9	1047.7	1047.5
170°	1052.0	1053.5	1055.1	1056.7	1058.2	1058.3	1056.9	1055.5	1054.2	1052.8	1052.6
172.5°	1055.7	1057.3	1058.9	1060.5	1062.1	1062.3	1061.0	1059.7	1058.4	1057.1	1056.8
175°	1060.7	1062.3	1063.8	1065.4	1066.9	1067.0	1065.6	1064.2	1062.9	1061.5	1061.3
177.5°	1063.5	1064.6	1065.7	1066.8	1068.0	1068.0	1067.0	1066.1	1065.1	1064.1	1064.0
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4
2.5°	1706.2	1702.3	1695.3	1688.7	1680.5	1673.4	1668.6	1662.5	1655.0	1645.7	1638.0
5°	1781.7	1766.7	1747.0	1729.9	1708.1	1691.0	1673.3	1656.3	1639.2	1617.4	1598.3
7.5°	1865.4	1834.4	1804.3	1766.5	1732.1	1701.4	1671.9	1642.1	1613.0	1582.0	1552.2
10°	1916.6	1879.2	1837.6	1789.9	1746.3	1704.7	1666.5	1629.0	1589.5	1554.7	1517.2
12.5°	1964.7	1916.2	1868.7	1808.5	1756.1	1705.3	1656.7	1609.9	1567.7	1522.6	1482.4
15°	2008.0	1960.2	1907.1	1833.5	1760.6	1699.2	1641.9	1581.3	1528.8	1478.3	1433.4
17.5°	2024.8	1974.7	1913.0	1842.2	1762.5	1685.4	1611.5	1545.1	1483.3	1424.5	1373.9
20°	2018.2	1969.8	1906.4	1839.0	1753.7	1673.3	1593.6	1519.9	1451.2	1389.1	1335.2
22.5°	2002.4	1952.4	1891.2	1819.9	1739.0	1653.7	1568.5	1490.0	1417.9	1353.6	1294.9
25°	1978.7	1910.6	1847.9	1778.3	1701.3	1616.8	1528.8	1442.3	1365.2	1299.8	1235.8
27.5°	1954.0	1869.0	1789.2	1720.1	1638.7	1563.3	1478.5	1389.8	1308.8	1242.1	1176.4
30°	1931.7	1836.2	1748.3	1669.9	1592.9	1521.4	1440.9	1354.3	1271.2	1202.3	1135.6
32.5°	1903.8	1802.4	1705.8	1615.4	1541.1	1470.1	1397.2	1314.5	1233.6	1162.6	1094.7
35°	1869.0	1739.5	1634.5	1538.3	1455.9	1387.0	1321.6	1254.9	1173.8	1100.1	1034.0
37.5°	1823.1	1676.2	1554.7	1450.1	1363.0	1293.9	1242.2	1181.2	1107.2	1036.7	975.3
40°	1795.3	1630.4	1497.4	1393.9	1302.5	1229.6	1181.2	1129.4	1062.0	995.8	934.4
42.5°	1758.3	1588.4	1439.7	1331.7	1239.8	1169.6	1120.6	1075.4	1018.9	956.5	890.8
45°	1685.6	1507.0	1350.9	1235.1	1142.4	1073.5	1027.8	987.6	944.7	887.5	830.2
47.5°	1590.9	1422.1	1258.8	1132.3	1041.5	977.5	933.2	901.5	870.8	822.1	766.5
50°	1515.2	1352.3	1192.8	1070.2	973.3	912.6	871.1	845.9	817.9	773.7	727.3
52.5°	1425.7	1280.3	1124.1	998.7	907.4	850.5	810.5	785.4	762.3	726.2	682.0
55°	1284.9	1157.4	1014.2	900.4	816.6	759.3	721.1	697.3	683.7	653.0	618.2
57.5°	1122.2	1030.9	904.6	794.9	720.7	664.2	636.2	615.9	600.5	578.9	554.3
60°	1008.8	944.7	831.5	727.3	659.1	605.2	580.1	563.0	548.7	530.3	511.2
62.5°	893.7	847.1	748.7	659.1	596.4	551.3	527.7	512.3	495.8	483.4	464.8
65°	739.5	697.9	629.8	559.6	501.7	465.5	448.5	434.8	424.6	411.0	398.1
67.5°	575.3	558.4	511.3	462.9	421.3	389.2	374.5	365.0	352.6	344.5	335.6
70°	474.4	466.3	432.8	400.8	361.9	340.1	326.5	322.3	307.4	299.2	293.1
72.5°	385.0	381.1	361.9	339.7	312.4	293.3	280.6	276.1	266.5	259.9	256.0
75°	263.8	265.2	261.8	247.4	237.2	224.9	214.0	211.3	204.5	199.0	195.6
77.5°	166.8	173.8	174.1	173.4	169.4	161.8	157.3	155.3	148.6	146.5	145.7
80°	114.5	122.0	128.9	128.2	126.7	124.7	121.3	119.3	115.8	113.8	112.5
82.5°	76.3	83.3	89.0	92.7	92.4	90.4	88.1	87.2	86.4	84.9	84.6
85°	36.2	37.5	39.5	44.3	47.7	48.4	47.7	47.1	44.9	45.6	46.4
87.5°	14.5	14.3	14.6	14.3	13.5	16.0	17.4	17.6	16.8	16.0	15.1
90°	10.2	9.0	7.7	6.4	5.0	3.6	2.2	0.8	2.2	3.6	5.0
92.5°	10.5	9.4	8.3	8.3	9.2	10.2	11.2	12.1	11.2	10.2	9.2
95°	26.0	32.6	39.3	42.9	43.4	43.9	44.5	45.0	44.5	43.9	43.4
97.5°	65.2	78.5	91.7	97.8	96.8	95.8	94.9	94.0	94.9	95.8	96.8
100°	136.0	135.3	134.6	134.0	133.5	132.9	132.4	131.9	132.4	132.9	133.5
102.5°	174.5	174.1	173.6	173.1	172.4	171.8	171.1	170.5	171.1	171.8	172.4
105°	235.3	235.3	235.3	235.0	234.3	233.6	232.9	232.2	232.9	233.6	234.3
107.5°	297.2	296.8	296.5	296.3	296.3	296.3	296.3	296.3	296.3	296.3	296.3
110°	338.9	338.5	338.2	338.0	338.0	338.0	338.0	338.0	338.0	338.0	338.0



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	379.6	379.4	379.2	378.9	378.5	378.0	377.6	377.2	377.6	378.0	378.5
115°	440.3	440.2	440.0	439.5	438.6	437.7	436.9	436.0	436.9	437.7	438.6
117.5°	498.3	497.6	497.0	496.7	496.7	496.7	496.8	496.8	496.8	496.7	496.7
120°	535.2	534.6	534.1	533.9	534.1	534.3	534.5	534.6	534.5	534.3	534.1
122.5°	571.8	571.5	571.3	570.8	570.2	569.5	568.9	568.2	568.9	569.5	570.2
125°	625.5	625.5	625.5	624.9	623.7	622.4	621.2	620.0	621.2	622.4	623.7
127.5°	673.1	673.2	673.3	672.9	672.1	671.2	670.2	669.4	670.2	671.2	672.1
130°	704.1	704.0	703.8	703.3	702.4	701.5	700.6	699.7	700.6	701.5	702.4
132.5°	733.7	734.1	734.5	734.2	733.1	732.1	731.0	730.0	731.0	732.1	733.1
135°	777.0	777.4	777.7	777.4	776.4	775.3	774.3	773.2	774.3	775.3	776.4
137.5°	816.2	816.5	816.8	816.5	815.6	814.7	813.7	812.8	813.7	814.7	815.6
140°	839.9	840.0	840.2	840.1	839.8	839.4	839.1	838.7	839.1	839.4	839.8
142.5°	863.6	863.4	863.1	862.9	862.7	862.5	862.3	862.1	862.3	862.5	862.7
145°	898.0	898.0	898.0	897.8	897.5	897.1	896.8	896.4	896.8	897.1	897.5
147.5°	926.6	926.3	926.1	926.1	926.1	926.2	926.3	926.3	926.3	926.2	926.1
150°	944.6	944.3	943.9	943.9	944.3	944.6	945.0	945.3	945.0	944.6	944.3
152.5°	961.1	960.7	960.4	960.6	961.4	962.1	962.9	963.7	962.9	962.1	961.4
155°	983.3	983.0	982.6	983.0	984.0	985.1	986.1	987.2	986.1	985.1	984.0
157.5°	1002.6	1002.6	1002.5	1002.8	1003.5	1004.1	1004.7	1005.3	1004.7	1004.1	1003.5
160°	1013.7	1013.5	1013.4	1013.8	1014.8	1015.9	1016.9	1018.0	1016.9	1015.9	1014.8
162.5°	1023.8	1023.6	1023.5	1023.9	1024.9	1026.0	1027.0	1028.1	1027.0	1026.0	1024.9
165°	1037.4	1037.2	1037.0	1037.4	1038.5	1039.6	1040.7	1041.7	1040.7	1039.6	1038.5
167.5°	1047.3	1047.1	1047.0	1047.4	1048.5	1049.7	1050.8	1051.8	1050.8	1049.7	1048.5
170°	1052.4	1052.2	1052.1	1052.6	1053.8	1055.0	1056.2	1057.5	1056.2	1055.0	1053.8
172.5°	1056.5	1056.2	1055.9	1056.3	1057.6	1058.8	1060.1	1061.3	1060.1	1058.8	1057.6
175°	1061.1	1060.9	1060.8	1061.2	1062.3	1063.3	1064.3	1065.4	1064.3	1063.3	1062.3
177.5°	1063.8	1063.7	1063.6	1063.9	1064.8	1065.6	1066.4	1067.3	1066.4	1065.6	1064.8
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4
2.5°	1632.5	1625.0	1619.5	1608.6	1600.9	1597.7	1591.6	1590.0	1596.0	1591.6	1591.1
5°	1584.1	1564.3	1548.6	1532.9	1515.9	1505.0	1488.6	1485.9	1481.8	1475.6	1474.3
7.5°	1525.8	1500.1	1479.9	1454.0	1431.5	1413.4	1392.9	1383.2	1378.0	1370.0	1359.4
10°	1486.5	1455.9	1428.7	1402.7	1374.8	1352.3	1331.8	1316.2	1306.0	1296.4	1292.3
12.5°	1447.8	1416.6	1381.7	1350.4	1319.2	1293.9	1271.3	1261.1	1249.8	1238.6	1229.1
15°	1387.8	1346.2	1308.0	1271.8	1245.3	1218.0	1196.2	1181.2	1164.2	1159.4	1141.0
17.5°	1323.9	1283.1	1238.5	1200.4	1169.6	1139.6	1115.6	1098.6	1085.8	1068.2	1059.8
20°	1284.1	1235.8	1192.1	1157.4	1123.3	1087.8	1063.3	1048.9	1036.7	1022.4	1015.6
22.5°	1241.6	1194.3	1149.6	1108.8	1074.2	1039.4	1021.9	1007.0	993.1	979.9	970.9
25°	1179.1	1131.5	1084.4	1042.2	1006.0	980.8	960.4	943.3	935.8	922.9	913.3
27.5°	1117.4	1066.7	1017.9	975.7	947.5	922.5	905.7	892.2	878.7	867.4	859.1
30°	1077.6	1025.8	972.6	939.3	909.3	885.3	867.0	854.0	843.8	833.6	827.5
32.5°	1037.8	984.4	937.2	901.1	872.7	852.1	833.1	820.8	810.0	798.7	791.4
35°	974.0	919.5	881.3	845.9	817.9	798.8	785.9	768.2	759.3	751.1	743.7
37.5°	914.7	864.0	822.7	791.6	767.3	748.4	731.6	722.1	711.1	703.8	697.5
40°	871.1	824.8	787.3	754.6	736.8	715.7	700.0	687.7	679.5	670.0	663.2
42.5°	831.8	788.7	752.3	722.9	700.8	683.0	667.8	655.6	645.2	638.4	632.7
45°	776.4	733.4	697.9	670.7	650.3	633.2	617.5	611.4	597.7	589.6	586.8
47.5°	718.9	680.5	646.3	621.2	600.3	584.1	569.4	556.8	549.4	541.3	536.9
50°	680.2	643.4	611.4	586.8	566.4	548.7	535.0	526.8	516.6	509.2	503.7
52.5°	641.6	607.4	575.4	552.0	534.2	516.5	501.3	493.1	483.4	478.6	474.8
55°	586.2	550.1	522.8	499.6	481.2	464.8	450.5	442.3	436.3	431.4	430.1
57.5°	523.5	494.8	469.5	448.6	429.5	414.1	401.6	393.8	388.4	387.7	383.6
60°	482.6	456.7	433.5	411.0	394.7	380.3	369.4	360.5	355.1	354.5	353.0
62.5°	441.7	416.9	395.4	375.6	360.8	347.1	336.7	326.8	323.5	320.1	317.1
65°	381.0	358.5	340.8	325.1	309.4	297.8	287.6	281.6	274.0	269.9	262.5
67.5°	321.4	304.0	287.0	273.8	261.5	250.4	242.0	232.9	227.8	224.5	219.0
70°	282.2	268.5	251.6	237.2	227.6	218.8	212.0	201.8	198.3	195.6	192.9
72.5°	245.1	233.1	218.8	207.2	197.6	189.3	181.5	176.6	173.3	170.6	169.0
75°	192.9	181.3	169.1	160.9	154.0	147.2	143.1	139.8	138.4	137.6	134.9
77.5°	141.7	135.5	125.7	119.2	114.6	111.9	108.3	106.4	106.3	103.3	102.4
80°	108.4	104.9	96.7	94.0	90.7	88.0	85.8	82.5	79.1	77.7	75.6
82.5°	80.6	77.2	73.9	69.5	66.7	65.0	63.0	61.7	62.2	60.3	59.3
85°	42.9	39.5	38.2	37.5	36.2	37.5	36.8	36.2	35.4	34.7	35.4
87.5°	14.9	15.1	14.8	16.3	14.8	15.7	15.8	15.5	15.6	15.8	15.3
90°	6.4	7.7	9.0	10.2	11.4	12.6	13.5	14.4	15.2	16.2	16.9
92.5°	8.3	8.3	9.4	10.5	11.5	12.6	13.5	14.4	15.2	16.2	16.7
95°	42.9	39.3	32.6	26.0	19.3	12.6	13.5	14.4	15.2	16.2	16.6
97.5°	97.8	91.7	78.5	65.2	52.0	38.9	33.9	29.0	24.0	19.1	16.6
100°	134.0	134.6	135.3	136.0	136.7	137.4	111.3	85.1	59.0	32.8	19.4
102.5°	173.1	173.6	174.1	174.5	174.9	175.3	170.4	165.4	160.5	155.5	147.1
105°	235.0	235.3	235.3	235.3	235.3	235.3	235.3	235.3	235.3	235.3	235.3
107.5°	296.3	296.5	296.8	297.2	297.5	297.9	297.9	298.0	298.0	298.0	297.8
110°	338.0	338.2	338.5	338.9	339.2	339.6	339.1	338.5	338.0	337.5	337.3



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	378.9	379.2	379.4	379.6	379.8	380.0	379.4	378.7	378.0	377.4	376.9
115°	439.5	440.0	440.2	440.3	440.5	440.7	440.0	439.3	438.6	437.9	437.0
117.5°	496.7	497.0	497.6	498.3	499.0	499.6	498.7	497.8	496.9	495.9	495.2
120°	533.9	534.1	534.6	535.2	535.7	536.2	535.9	535.5	535.2	534.8	534.2
122.5°	570.8	571.3	571.5	571.8	572.0	572.3	571.9	571.6	571.2	570.9	570.2
125°	624.9	625.5	625.5	625.5	625.5	625.5	624.8	624.1	623.4	622.7	622.1
127.5°	672.9	673.3	673.2	673.1	673.0	672.9	672.5	672.1	671.8	671.4	670.4
130°	703.3	703.8	704.0	704.1	704.3	704.5	704.0	703.4	702.9	702.4	701.7
132.5°	734.2	734.5	734.1	733.7	733.3	732.9	732.8	732.7	732.6	732.5	732.0
135°	777.4	777.7	777.4	777.0	776.7	776.4	776.0	775.7	775.3	775.0	774.3
137.5°	816.5	816.8	816.5	816.2	815.9	815.5	815.6	815.7	815.7	815.8	815.4
140°	840.1	840.2	840.0	839.9	839.7	839.5	839.9	840.2	840.6	840.9	840.6
142.5°	862.9	863.1	863.4	863.6	863.9	864.1	864.2	864.3	864.3	864.4	863.9
145°	897.8	898.0	898.0	898.0	898.0	898.0	898.2	898.3	898.5	898.7	898.2
147.5°	926.1	926.1	926.3	926.6	926.9	927.1	927.3	927.5	927.7	927.9	927.4
150°	943.9	943.9	944.3	944.6	945.0	945.3	945.7	946.0	946.4	946.7	946.2
152.5°	960.6	960.4	960.7	961.1	961.4	961.8	962.1	962.5	962.8	963.2	962.7
155°	983.0	982.6	983.0	983.3	983.7	984.0	984.5	985.1	985.6	986.1	985.7
157.5°	1002.8	1002.5	1002.6	1002.6	1002.6	1002.7	1003.2	1003.8	1004.4	1004.9	1004.5
160°	1013.8	1013.4	1013.5	1013.7	1013.9	1014.0	1014.7	1015.4	1016.1	1016.8	1016.5
162.5°	1023.9	1023.5	1023.6	1023.8	1024.0	1024.2	1025.1	1026.1	1027.1	1028.0	1027.8
165°	1037.4	1037.0	1037.2	1037.4	1037.5	1037.7	1038.8	1039.9	1040.9	1042.0	1041.8
167.5°	1047.4	1047.0	1047.1	1047.3	1047.5	1047.7	1048.9	1050.3	1051.5	1052.8	1052.6
170°	1052.6	1052.1	1052.2	1052.4	1052.6	1052.8	1054.2	1055.5	1056.9	1058.3	1058.2
172.5°	1056.3	1055.9	1056.2	1056.5	1056.8	1057.1	1058.4	1059.7	1061.0	1062.3	1062.1
175°	1061.2	1060.8	1060.9	1061.1	1061.3	1061.5	1062.9	1064.2	1065.6	1067.0	1066.9
177.5°	1063.9	1063.6	1063.7	1063.8	1064.0	1064.1	1065.1	1066.1	1067.0	1068.0	1068.0
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4
2.5°	1590.5	1584.6	1583.0	1585.1	1583.0	1584.6	1590.5	1591.1	1591.6	1596.0	1590.0
5°	1467.5	1460.7	1464.1	1462.7	1464.1	1460.7	1467.5	1474.3	1475.6	1481.8	1485.9
7.5°	1359.3	1350.8	1341.8	1344.6	1341.8	1350.8	1359.3	1359.4	1370.0	1378.0	1383.2
10°	1283.4	1276.7	1272.5	1276.0	1272.5	1276.7	1283.4	1292.3	1296.4	1306.0	1316.2
12.5°	1219.6	1215.6	1212.0	1210.5	1212.0	1215.6	1219.6	1229.1	1238.6	1249.8	1261.1
15°	1132.9	1124.7	1121.3	1112.4	1121.3	1124.7	1132.9	1141.0	1159.4	1164.2	1181.2
17.5°	1052.8	1050.1	1041.2	1037.4	1041.2	1050.1	1052.8	1059.8	1068.2	1085.8	1098.6
20°	1005.3	1002.6	993.8	999.3	993.8	1002.6	1005.3	1015.6	1022.4	1036.7	1048.9
22.5°	966.1	960.1	957.3	955.6	957.3	960.1	966.1	970.9	979.9	993.1	1007.0
25°	910.6	901.7	898.4	894.2	898.4	901.7	910.6	913.3	922.9	935.8	943.3
27.5°	855.3	850.5	846.0	845.0	846.0	850.5	855.3	859.1	867.4	878.7	892.2
30°	819.3	814.6	811.1	811.1	811.1	814.6	819.3	827.5	833.6	843.8	854.0
32.5°	787.1	783.5	780.0	779.5	780.0	783.5	787.1	791.4	798.7	810.0	820.8
35°	740.2	734.8	733.4	729.3	733.4	734.8	740.2	743.7	751.1	759.3	768.2
37.5°	691.6	687.0	686.9	686.5	686.9	687.0	691.6	697.5	703.8	711.1	722.1
40°	660.5	657.0	656.4	651.6	656.4	657.0	660.5	663.2	670.0	679.5	687.7
42.5°	627.2	625.4	623.1	621.1	623.1	625.4	627.2	632.7	638.4	645.2	655.6
45°	582.1	577.3	577.3	573.9	577.3	577.3	582.1	586.8	589.6	597.7	611.4
47.5°	535.4	531.8	532.2	528.7	532.2	531.8	535.4	536.9	541.3	549.4	556.8
50°	504.4	502.3	501.7	500.3	501.7	502.3	504.4	503.7	509.2	516.6	526.8
52.5°	473.3	472.3	474.9	471.9	474.9	472.3	473.3	474.8	478.6	483.4	493.1
55°	431.4	429.4	433.5	429.4	433.5	429.4	431.4	430.1	431.4	436.3	442.3
57.5°	383.3	381.4	385.1	383.0	385.1	381.4	383.3	383.6	387.7	388.4	393.8
60°	351.7	347.6	349.6	350.3	349.6	347.6	351.7	353.0	354.5	355.1	360.5
62.5°	314.1	311.6	313.2	310.0	313.2	311.6	314.1	317.1	320.1	323.5	326.8
65°	261.1	259.0	256.3	254.9	256.3	259.0	261.1	262.5	269.9	274.0	281.6
67.5°	219.3	214.4	214.3	215.4	214.3	214.4	219.3	219.0	224.5	227.8	232.9
70°	188.8	188.8	188.1	188.1	188.1	188.8	188.8	192.9	195.6	198.3	201.8
72.5°	167.5	167.0	165.7	165.2	165.7	167.0	167.5	169.0	170.6	173.3	176.6
75°	134.9	135.6	134.3	133.6	134.3	135.6	134.9	134.9	137.6	138.4	139.8
77.5°	99.7	96.7	98.3	96.7	98.3	96.7	99.7	102.4	103.3	106.3	106.4
80°	75.6	74.9	77.1	74.9	77.1	74.9	75.6	75.6	77.7	79.1	82.5
82.5°	59.9	59.2	60.1	58.6	60.1	59.2	59.9	59.3	60.3	62.2	61.7
85°	36.2	35.4	34.7	35.4	34.7	35.4	36.2	35.4	34.7	35.4	36.2
87.5°	16.1	15.6	15.7	15.8	15.7	15.6	16.1	15.3	15.8	15.6	15.5
90°	17.4	17.9	18.4	19.0	18.4	17.9	17.4	16.9	16.2	15.2	14.4
92.5°	17.0	17.2	17.5	17.7	17.5	17.2	17.0	16.7	16.2	15.2	14.4
95°	16.6	16.6	16.6	16.6	16.6	16.6	16.6	16.6	16.2	15.2	14.4
97.5°	16.6	16.6	16.6	16.6	16.6	16.6	16.6	16.6	19.1	24.0	29.0
100°	18.7	18.0	17.3	16.6	17.3	18.0	18.7	19.4	32.8	59.0	85.1
102.5°	135.1	123.2	111.3	99.4	111.3	123.2	135.1	147.1	155.5	160.5	165.4
105°	235.1	234.9	234.7	234.6	234.7	234.9	235.1	235.3	235.3	235.3	235.3
107.5°	297.3	296.7	296.2	295.7	296.2	296.7	297.3	297.8	298.0	298.0	298.0
110°	337.5	337.7	337.8	338.0	337.8	337.7	337.5	337.3	337.5	338.0	338.5



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	376.7	376.4	376.2	376.0	376.2	376.4	376.7	376.9	377.4	378.0	378.7
115°	436.0	434.8	433.8	432.8	433.8	434.8	436.0	437.0	437.9	438.6	439.3
117.5°	494.8	494.3	493.9	493.4	493.9	494.3	494.8	495.2	495.9	496.9	497.8
120°	533.3	532.5	531.6	530.7	531.6	532.5	533.3	534.2	534.8	535.2	535.5
122.5°	569.2	568.2	567.1	566.1	567.1	568.2	569.2	570.2	570.9	571.2	571.6
125°	621.6	621.0	620.5	620.0	620.5	621.0	621.6	622.1	622.7	623.4	624.1
127.5°	669.2	667.9	666.6	665.3	666.6	667.9	669.2	670.4	671.4	671.8	672.1
130°	700.7	699.9	699.0	698.1	699.0	699.9	700.7	701.7	702.4	702.9	703.4
132.5°	731.1	730.2	729.3	728.5	729.3	730.2	731.1	732.0	732.5	732.6	732.7
135°	773.2	772.1	771.0	770.0	771.0	772.1	773.2	774.3	775.0	775.3	775.7
137.5°	814.5	813.5	812.6	811.7	812.6	813.5	814.5	815.4	815.8	815.7	815.7
140°	839.5	838.5	837.4	836.4	837.4	838.5	839.5	840.6	840.9	840.6	840.2
142.5°	862.9	861.8	860.8	859.7	860.8	861.8	862.9	863.9	864.4	864.3	864.3
145°	897.2	896.2	895.0	894.0	895.0	896.2	897.2	898.2	898.7	898.5	898.3
147.5°	926.0	924.8	923.5	922.3	923.5	924.8	926.0	927.4	927.9	927.7	927.5
150°	944.8	943.4	942.0	940.6	942.0	943.4	944.8	946.2	946.7	946.4	946.0
152.5°	961.5	960.2	959.0	957.7	959.0	960.2	961.5	962.7	963.2	962.8	962.5
155°	984.3	982.9	981.5	980.1	981.5	982.9	984.3	985.7	986.1	985.6	985.1
157.5°	1003.1	1001.7	1000.3	998.9	1000.3	1001.7	1003.1	1004.5	1004.9	1004.4	1003.8
160°	1015.1	1013.7	1012.3	1010.9	1012.3	1013.7	1015.1	1016.5	1016.8	1016.1	1015.4
162.5°	1026.2	1024.7	1023.2	1021.7	1023.2	1024.7	1026.2	1027.8	1028.0	1027.1	1026.1
165°	1040.4	1038.9	1037.5	1036.1	1037.5	1038.9	1040.4	1041.8	1042.0	1040.9	1039.9
167.5°	1051.0	1049.5	1047.8	1046.3	1047.8	1049.5	1051.0	1052.6	1052.8	1051.5	1050.3
170°	1056.7	1055.1	1053.5	1052.0	1053.5	1055.1	1056.7	1058.2	1058.3	1056.9	1055.5
172.5°	1060.5	1058.9	1057.3	1055.7	1057.3	1058.9	1060.5	1062.1	1062.3	1061.0	1059.7
175°	1065.4	1063.8	1062.3	1060.7	1062.3	1063.8	1065.4	1066.9	1067.0	1065.6	1064.2
177.5°	1066.8	1065.7	1064.6	1063.5	1064.6	1065.7	1066.8	1068.0	1068.0	1067.0	1066.1
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4
2.5°	1591.6	1597.7	1600.9	1608.6	1619.5	1625.0	1632.5	1638.0	1645.7	1655.0	1662.5
5°	1488.6	1505.0	1515.9	1532.9	1548.6	1564.3	1584.1	1598.3	1617.4	1639.2	1656.3
7.5°	1392.9	1413.4	1431.5	1454.0	1479.9	1500.1	1525.8	1552.2	1582.0	1613.0	1642.1
10°	1331.8	1352.3	1374.8	1402.7	1428.7	1455.9	1486.5	1517.2	1554.7	1589.5	1629.0
12.5°	1271.3	1293.9	1319.2	1350.4	1381.7	1416.6	1447.8	1482.4	1522.6	1567.7	1609.9
15°	1196.2	1218.0	1245.3	1271.8	1308.0	1346.2	1387.8	1433.4	1478.3	1528.8	1581.3
17.5°	1115.6	1139.6	1169.6	1200.4	1238.5	1283.1	1323.9	1373.9	1424.5	1483.3	1545.1
20°	1063.3	1087.8	1123.3	1157.4	1192.1	1235.8	1284.1	1335.2	1389.1	1451.2	1519.9
22.5°	1021.9	1039.4	1074.2	1108.8	1149.6	1194.3	1241.6	1294.9	1353.6	1417.9	1490.0
25°	960.4	980.8	1006.0	1042.2	1084.4	1131.5	1179.1	1235.8	1299.8	1365.2	1442.3
27.5°	905.7	922.5	947.5	975.7	1017.9	1066.7	1117.4	1176.4	1242.1	1308.8	1389.8
30°	867.0	885.3	909.3	939.3	972.6	1025.8	1077.6	1135.6	1202.3	1271.2	1354.3
32.5°	833.1	852.1	872.7	901.1	937.2	984.4	1037.8	1094.7	1162.6	1233.6	1314.5
35°	785.9	798.8	817.9	845.9	881.3	919.5	974.0	1034.0	1100.1	1173.8	1254.9
37.5°	731.6	748.4	767.3	791.6	822.7	864.0	914.7	975.3	1036.7	1107.2	1181.2
40°	700.0	715.7	736.8	754.6	787.3	824.8	871.1	934.4	995.8	1062.0	1129.4
42.5°	667.8	683.0	700.8	722.9	752.3	788.7	831.8	890.8	956.5	1018.9	1075.4
45°	617.5	633.2	650.3	670.7	697.9	733.4	776.4	830.2	887.5	944.7	987.6
47.5°	569.4	584.1	600.3	621.2	646.3	680.5	718.9	766.5	822.1	870.8	901.5
50°	535.0	548.7	566.4	586.8	611.4	643.4	680.2	727.3	773.7	817.9	845.9
52.5°	501.3	516.5	534.2	552.0	575.4	607.4	641.6	682.0	726.2	762.3	785.4
55°	450.5	464.8	481.2	499.6	522.8	550.1	586.2	618.2	653.0	683.7	697.3
57.5°	401.6	414.1	429.5	448.6	469.5	494.8	523.5	554.3	578.9	600.5	615.9
60°	369.4	380.3	394.7	411.0	433.5	456.7	482.6	511.2	530.3	548.7	563.0
62.5°	336.7	347.1	360.8	375.6	395.4	416.9	441.7	464.8	483.4	495.8	512.3
65°	287.6	297.8	309.4	325.1	340.8	358.5	381.0	398.1	411.0	424.6	434.8
67.5°	242.0	250.4	261.5	273.8	287.0	304.0	321.4	335.6	344.5	352.6	365.0
70°	212.0	218.8	227.6	237.2	251.6	268.5	282.2	293.1	299.2	307.4	322.3
72.5°	181.5	189.3	197.6	207.2	218.8	233.1	245.1	256.0	259.9	266.5	276.1
75°	143.1	147.2	154.0	160.9	169.1	181.3	192.9	195.6	199.0	204.5	211.3
77.5°	108.3	111.9	114.6	119.2	125.7	135.5	141.7	145.7	146.5	148.6	155.3
80°	85.8	88.0	90.7	94.0	96.7	104.9	108.4	112.5	113.8	115.8	119.3
82.5°	63.0	65.0	66.7	69.5	73.9	77.2	80.6	84.6	84.9	86.4	87.2
85°	36.8	37.5	36.2	37.5	38.2	39.5	42.9	46.4	45.6	44.9	47.1
87.5°	15.8	15.7	14.8	16.3	14.8	15.1	14.9	15.1	16.0	16.8	17.6
90°	13.5	12.6	11.4	10.2	9.0	7.7	6.4	5.0	3.6	2.2	0.8
92.5°	13.5	12.6	11.5	10.5	9.4	8.3	8.3	9.2	10.2	11.2	12.1
95°	13.5	12.6	19.3	26.0	32.6	39.3	42.9	43.4	43.9	44.5	45.0
97.5°	33.9	38.9	52.0	65.2	78.5	91.7	97.8	96.8	95.8	94.9	94.0
100°	111.3	137.4	136.7	136.0	135.3	134.6	134.0	133.5	132.9	132.4	131.9
102.5°	170.4	175.3	174.9	174.5	174.1	173.6	173.1	172.4	171.8	171.1	170.5
105°	235.3	235.3	235.3	235.3	235.3	235.3	235.0	234.3	233.6	232.9	232.2
107.5°	297.9	297.9	297.5	297.2	296.8	296.5	296.3	296.3	296.3	296.3	296.3
110°	339.1	339.6	339.2	338.9	338.5	338.2	338.0	338.0	338.0	338.0	338.0



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	379.4	380.0	379.8	379.6	379.4	379.2	378.9	378.5	378.0	377.6	377.2
115°	440.0	440.7	440.5	440.3	440.2	440.0	439.5	438.6	437.7	436.9	436.0
117.5°	498.7	499.6	499.0	498.3	497.6	497.0	496.7	496.7	496.7	496.8	496.8
120°	535.9	536.2	535.7	535.2	534.6	534.1	533.9	534.1	534.3	534.5	534.6
122.5°	571.9	572.3	572.0	571.8	571.5	571.3	570.8	570.2	569.5	568.9	568.2
125°	624.8	625.5	625.5	625.5	625.5	625.5	624.9	623.7	622.4	621.2	620.0
127.5°	672.5	672.9	673.0	673.1	673.2	673.3	672.9	672.1	671.2	670.2	669.4
130°	704.0	704.5	704.3	704.1	704.0	703.8	703.3	702.4	701.5	700.6	699.7
132.5°	732.8	732.9	733.3	733.7	734.1	734.5	734.2	733.1	732.1	731.0	730.0
135°	776.0	776.4	776.7	777.0	777.4	777.7	777.4	776.4	775.3	774.3	773.2
137.5°	815.6	815.5	815.9	816.2	816.5	816.8	816.5	815.6	814.7	813.7	812.8
140°	839.9	839.5	839.7	839.9	840.0	840.2	840.1	839.8	839.4	839.1	838.7
142.5°	864.2	864.1	863.9	863.6	863.4	863.1	862.9	862.7	862.5	862.3	862.1
145°	898.2	898.0	898.0	898.0	898.0	898.0	897.8	897.5	897.1	896.8	896.4
147.5°	927.3	927.1	926.9	926.6	926.3	926.1	926.1	926.1	926.2	926.3	926.3
150°	945.7	945.3	945.0	944.6	944.3	943.9	943.9	944.3	944.6	945.0	945.3
152.5°	962.1	961.8	961.4	961.1	960.7	960.4	960.6	961.4	962.1	962.9	963.7
155°	984.5	984.0	983.7	983.3	983.0	982.6	983.0	984.0	985.1	986.1	987.2
157.5°	1003.2	1002.7	1002.6	1002.6	1002.6	1002.5	1002.8	1003.5	1004.1	1004.7	1005.3
160°	1014.7	1014.0	1013.9	1013.7	1013.5	1013.4	1013.8	1014.8	1015.9	1016.9	1018.0
162.5°	1025.1	1024.2	1024.0	1023.8	1023.6	1023.5	1023.9	1024.9	1026.0	1027.0	1028.1
165°	1038.8	1037.7	1037.5	1037.4	1037.2	1037.0	1037.4	1038.5	1039.6	1040.7	1041.7
167.5°	1048.9	1047.7	1047.5	1047.3	1047.1	1047.0	1047.4	1048.5	1049.7	1050.8	1051.8
170°	1054.2	1052.8	1052.6	1052.4	1052.2	1052.1	1052.6	1053.8	1055.0	1056.2	1057.5
172.5°	1058.4	1057.1	1056.8	1056.5	1056.2	1055.9	1056.3	1057.6	1058.8	1060.1	1061.3
175°	1062.9	1061.5	1061.3	1061.1	1060.9	1060.8	1061.2	1062.3	1063.3	1064.3	1065.4
177.5°	1065.1	1064.1	1064.0	1063.8	1063.7	1063.6	1063.9	1064.8	1065.6	1066.4	1067.3
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4
2.5°	1668.6	1673.4	1680.5	1688.7	1695.3	1702.3	1706.2	1706.2	1709.5	1716.6	1725.9
5°	1673.3	1691.0	1708.1	1729.9	1747.0	1766.7	1781.7	1796.0	1809.0	1825.3	1842.4
7.5°	1671.9	1701.4	1732.1	1766.5	1804.3	1834.4	1865.4	1889.7	1913.7	1945.0	1969.6
10°	1666.5	1704.7	1746.3	1789.9	1837.6	1879.2	1916.6	1950.8	1983.5	2017.5	2048.2
12.5°	1656.7	1705.3	1756.1	1808.5	1868.7	1916.2	1964.7	2000.9	2039.1	2076.4	2114.2
15°	1641.9	1699.2	1760.6	1833.5	1907.1	1960.2	2008.0	2055.1	2090.4	2132.7	2168.9
17.5°	1611.5	1685.4	1762.5	1842.2	1913.0	1974.7	2024.8	2069.5	2107.3	2153.7	2202.8
20°	1593.6	1673.3	1753.7	1839.0	1906.4	1969.8	2018.2	2064.6	2111.6	2172.2	2232.2
22.5°	1568.5	1653.7	1739.0	1819.9	1891.2	1952.4	2002.4	2059.1	2120.8	2189.7	2262.2
25°	1528.8	1616.8	1701.3	1778.3	1847.9	1910.6	1978.7	2055.1	2130.0	2220.7	2324.9
27.5°	1478.5	1563.3	1638.7	1720.1	1789.2	1869.0	1954.0	2036.8	2144.9	2269.6	2399.7
30°	1440.9	1521.4	1592.9	1669.9	1748.3	1836.2	1931.7	2029.1	2158.0	2304.5	2459.2
32.5°	1397.2	1470.1	1541.1	1615.4	1705.8	1802.4	1903.8	2023.2	2177.1	2343.8	2504.0
35°	1321.6	1387.0	1455.9	1538.3	1634.5	1739.5	1869.0	2014.2	2200.2	2379.4	2523.2
37.5°	1242.2	1293.9	1363.0	1450.1	1554.7	1676.2	1823.1	1999.5	2190.7	2351.5	2412.8
40°	1181.2	1229.6	1302.5	1393.9	1497.4	1630.4	1795.3	1976.6	2168.9	2280.7	2275.8
42.5°	1120.6	1169.6	1239.8	1331.7	1439.7	1588.4	1758.3	1946.6	2108.9	2151.4	2062.6
45°	1027.8	1073.5	1142.4	1235.1	1350.9	1507.0	1685.6	1866.2	1969.8	1901.0	1725.2
47.5°	933.2	977.5	1041.5	1132.3	1258.8	1422.1	1590.9	1739.2	1753.7	1605.9	1394.9
50°	871.1	912.6	973.3	1070.2	1192.8	1352.3	1515.2	1631.7	1595.6	1415.0	1197.6
52.5°	810.5	850.5	907.4	998.7	1124.1	1280.3	1425.7	1517.2	1433.7	1241.6	1046.0
55°	721.1	759.3	816.6	900.4	1014.2	1157.4	1284.9	1318.2	1195.5	1002.0	843.8
57.5°	636.2	664.2	720.7	794.9	904.6	1030.9	1122.2	1116.2	980.8	806.5	693.1
60°	580.1	605.2	659.1	727.3	831.5	944.7	1008.8	981.5	844.6	700.6	591.6
62.5°	527.7	551.3	596.4	659.1	748.7	847.1	893.7	856.1	726.7	600.4	513.6
65°	448.5	465.5	501.7	559.6	629.8	697.9	739.5	684.3	569.9	474.4	409.0
67.5°	374.5	389.2	421.3	462.9	511.3	558.4	575.3	523.5	434.4	370.1	324.1
70°	326.5	340.1	361.9	400.8	432.8	466.3	474.4	428.1	353.8	304.7	276.1
72.5°	280.6	293.3	312.4	339.7	361.9	381.1	385.0	341.9	285.1	251.3	229.1
75°	214.0	224.9	237.2	247.4	261.8	265.2	263.8	230.4	199.8	177.2	164.9
77.5°	157.3	161.8	169.4	173.4	174.1	173.8	166.8	145.7	129.9	120.7	115.6
80°	121.3	124.7	126.7	128.2	128.9	122.0	114.5	101.6	96.1	90.7	84.5
82.5°	88.1	90.4	92.4	92.7	89.0	83.3	76.3	69.9	66.1	63.4	61.1
85°	47.7	48.4	47.7	44.3	39.5	37.5	36.2	34.7	34.0	33.4	33.4
87.5°	17.4	16.0	13.5	14.3	14.6	14.3	14.5	14.2	13.9	14.1	14.3
90°	2.2	3.6	5.0	6.4	7.7	9.0	10.2	11.4	12.6	13.5	14.4
92.5°	11.2	10.2	9.2	8.3	8.3	9.4	10.5	11.5	12.6	13.5	14.4
95°	44.5	43.9	43.4	42.9	39.3	32.6	26.0	19.3	12.6	13.5	14.4
97.5°	94.9	95.8	96.8	97.8	91.7	78.5	65.2	52.0	38.9	33.9	29.0
100°	132.4	132.9	133.5	134.0	134.6	135.3	136.0	136.7	137.4	111.3	85.1
102.5°	171.1	171.8	172.4	173.1	173.6	174.1	174.5	174.9	175.3	170.4	165.4
105°	232.9	233.6	234.3	235.0	235.3	235.3	235.3	235.3	235.3	235.3	235.3
107.5°	296.3	296.3	296.3	296.3	296.5	296.8	297.2	297.5	297.9	297.9	298.0
110°	338.0	338.0	338.0	338.0	338.2	338.5	338.9	339.2	339.6	339.1	338.5



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	377.6	378.0	378.5	378.9	379.2	379.4	379.6	379.8	380.0	379.4	378.7
115°	436.9	437.7	438.6	439.5	440.0	440.2	440.3	440.5	440.7	440.0	439.3
117.5°	496.8	496.7	496.7	496.7	497.0	497.6	498.3	499.0	499.6	498.7	497.8
120°	534.5	534.3	534.1	533.9	534.1	534.6	535.2	535.7	536.2	535.9	535.5
122.5°	568.9	569.5	570.2	570.8	571.3	571.5	571.8	572.0	572.3	571.9	571.6
125°	621.2	622.4	623.7	624.9	625.5	625.5	625.5	625.5	625.5	624.8	624.1
127.5°	670.2	671.2	672.1	672.9	673.3	673.2	673.1	673.0	672.9	672.5	672.1
130°	700.6	701.5	702.4	703.3	703.8	704.0	704.1	704.3	704.5	704.0	703.4
132.5°	731.0	732.1	733.1	734.2	734.5	734.1	733.7	733.3	732.9	732.8	732.7
135°	774.3	775.3	776.4	777.4	777.7	777.4	777.0	776.7	776.4	776.0	775.7
137.5°	813.7	814.7	815.6	816.5	816.8	816.5	816.2	815.9	815.5	815.6	815.7
140°	839.1	839.4	839.8	840.1	840.2	840.0	839.9	839.7	839.5	839.9	840.2
142.5°	862.3	862.5	862.7	862.9	863.1	863.4	863.6	863.9	864.1	864.2	864.3
145°	896.8	897.1	897.5	897.8	898.0	898.0	898.0	898.0	898.0	898.2	898.3
147.5°	926.3	926.2	926.1	926.1	926.1	926.3	926.6	926.9	927.1	927.3	927.5
150°	945.0	944.6	944.3	943.9	943.9	944.3	944.6	945.0	945.3	945.7	946.0
152.5°	962.9	962.1	961.4	960.6	960.4	960.7	961.1	961.4	961.8	962.1	962.5
155°	986.1	985.1	984.0	983.0	982.6	983.0	983.3	983.7	984.0	984.5	985.1
157.5°	1004.7	1004.1	1003.5	1002.8	1002.5	1002.6	1002.6	1002.6	1002.7	1003.2	1003.8
160°	1016.9	1015.9	1014.8	1013.8	1013.4	1013.5	1013.7	1013.9	1014.0	1014.7	1015.4
162.5°	1027.0	1026.0	1024.9	1023.9	1023.5	1023.6	1023.8	1024.0	1024.2	1025.1	1026.1
165°	1040.7	1039.6	1038.5	1037.4	1037.0	1037.2	1037.4	1037.5	1037.7	1038.8	1039.9
167.5°	1050.8	1049.7	1048.5	1047.4	1047.0	1047.1	1047.3	1047.5	1047.7	1048.9	1050.3
170°	1056.2	1055.0	1053.8	1052.6	1052.1	1052.2	1052.4	1052.6	1052.8	1054.2	1055.5
172.5°	1060.1	1058.8	1057.6	1056.3	1055.9	1056.2	1056.5	1056.8	1057.1	1058.4	1059.7
175°	1064.3	1063.3	1062.3	1061.2	1060.8	1060.9	1061.1	1061.3	1061.5	1062.9	1064.2
177.5°	1066.4	1065.6	1064.8	1063.9	1063.6	1063.7	1063.8	1064.0	1064.1	1065.1	1066.1
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4	1660.4
2.5°	1732.9	1732.9	1742.2	1741.6	1747.7	1745.5	1746.6
5°	1862.8	1874.4	1884.6	1891.5	1901.7	1904.4	1903.0
7.5°	1997.5	2023.3	2035.8	2053.0	2056.1	2065.1	2064.2
10°	2080.9	2106.2	2125.3	2140.2	2147.7	2157.3	2158.0
12.5°	2146.4	2167.8	2184.6	2198.6	2207.7	2210.7	2212.5
15°	2197.5	2221.3	2241.1	2260.9	2272.5	2281.3	2286.1
17.5°	2249.0	2285.8	2320.7	2347.5	2363.7	2377.3	2377.1
20°	2288.9	2331.1	2374.7	2405.4	2436.7	2450.3	2452.4
22.5°	2331.4	2396.0	2452.2	2499.7	2540.8	2555.1	2560.4
25°	2419.6	2504.2	2590.8	2657.6	2705.2	2733.2	2737.3
27.5°	2526.4	2640.8	2731.9	2793.5	2833.2	2853.9	2858.3
30°	2601.7	2707.3	2789.1	2835.5	2853.9	2856.6	2846.4
32.5°	2635.4	2714.4	2747.1	2744.4	2708.3	2684.3	2675.1
35°	2594.1	2577.8	2498.1	2402.7	2329.8	2283.4	2271.1
37.5°	2360.8	2219.7	2073.1	1928.8	1852.1	1813.0	1746.0
40°	2130.7	1929.7	1777.0	1655.6	1569.0	1499.5	1483.2
42.5°	1871.2	1663.6	1510.9	1406.9	1337.9	1290.1	1269.4
45°	1503.6	1325.0	1198.9	1119.2	1066.0	1031.3	1015.6
47.5°	1202.6	1064.4	972.5	913.5	873.0	842.7	834.2
50°	1037.4	927.0	849.3	799.5	768.8	745.7	736.1
52.5°	901.1	811.9	752.2	711.1	682.2	667.7	659.7
55°	743.7	666.6	623.7	591.0	574.6	563.0	557.5
57.5°	608.1	552.5	521.2	498.6	483.4	476.1	473.3
60°	532.3	488.7	460.1	442.3	432.1	422.6	419.9
62.5°	465.2	430.9	408.8	393.2	383.0	379.0	377.3
65°	374.9	352.3	336.0	326.5	318.3	316.9	316.3
67.5°	298.0	284.8	276.2	266.2	263.4	258.6	257.6
70°	254.9	246.1	235.8	232.5	229.0	224.3	224.9
72.5°	216.2	207.3	200.4	195.9	194.7	192.6	194.4
75°	158.1	155.4	152.7	149.3	147.9	147.9	147.2
77.5°	112.9	110.6	107.6	105.5	105.1	102.2	103.3
80°	81.8	78.4	77.1	77.7	75.6	74.9	74.9
82.5°	60.5	59.3	58.0	58.1	57.7	57.0	57.6
85°	33.4	32.7	32.7	32.0	32.0	31.3	31.3
87.5°	15.0	15.8	14.8	14.3	14.4	15.1	15.8
90°	15.2	16.2	16.9	17.4	17.9	18.4	19.0
92.5°	15.2	16.2	16.7	17.0	17.2	17.5	17.7
95°	15.2	16.2	16.6	16.6	16.6	16.6	16.6
97.5°	24.0	19.1	16.6	16.6	16.6	16.6	16.6
100°	59.0	32.8	19.4	18.7	18.0	17.3	16.6
102.5°	160.5	155.5	147.1	135.1	123.2	111.3	99.4
105°	235.3	235.3	235.3	235.1	234.9	234.7	234.6
107.5°	298.0	298.0	297.8	297.3	296.7	296.2	295.7
110°	338.0	337.5	337.3	337.5	337.7	337.8	338.0



TEST NUMBER: P333592-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	378.0	377.4	376.9	376.7	376.4	376.2	376.0
115°	438.6	437.9	437.0	436.0	434.8	433.8	432.8
117.5°	496.9	495.9	495.2	494.8	494.3	493.9	493.4
120°	535.2	534.8	534.2	533.3	532.5	531.6	530.7
122.5°	571.2	570.9	570.2	569.2	568.2	567.1	566.1
125°	623.4	622.7	622.1	621.6	621.0	620.5	620.0
127.5°	671.8	671.4	670.4	669.2	667.9	666.6	665.3
130°	702.9	702.4	701.7	700.7	699.9	699.0	698.1
132.5°	732.6	732.5	732.0	731.1	730.2	729.3	728.5
135°	775.3	775.0	774.3	773.2	772.1	771.0	770.0
137.5°	815.7	815.8	815.4	814.5	813.5	812.6	811.7
140°	840.6	840.9	840.6	839.5	838.5	837.4	836.4
142.5°	864.3	864.4	863.9	862.9	861.8	860.8	859.7
145°	898.5	898.7	898.2	897.2	896.2	895.0	894.0
147.5°	927.7	927.9	927.4	926.0	924.8	923.5	922.3
150°	946.4	946.7	946.2	944.8	943.4	942.0	940.6
152.5°	962.8	963.2	962.7	961.5	960.2	959.0	957.7
155°	985.6	986.1	985.7	984.3	982.9	981.5	980.1
157.5°	1004.4	1004.9	1004.5	1003.1	1001.7	1000.3	998.9
160°	1016.1	1016.8	1016.5	1015.1	1013.7	1012.3	1010.9
162.5°	1027.1	1028.0	1027.8	1026.2	1024.7	1023.2	1021.7
165°	1040.9	1042.0	1041.8	1040.4	1038.9	1037.5	1036.1
167.5°	1051.5	1052.8	1052.6	1051.0	1049.5	1047.8	1046.3
170°	1056.9	1058.3	1058.2	1056.7	1055.1	1053.5	1052.0
172.5°	1061.0	1062.3	1062.1	1060.5	1058.9	1057.3	1055.7
175°	1065.6	1067.0	1066.9	1065.4	1063.8	1062.3	1060.7
177.5°	1067.0	1068.0	1068.0	1066.8	1065.7	1064.6	1063.5
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4

(END OF REPORT)