

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333595-840

Luminaire Tested: **S125RDIP-S1090D810U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333595-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1090D810U840-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7538.0 lumens
Efficiency: N/A
Efficacy: 138.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333595-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

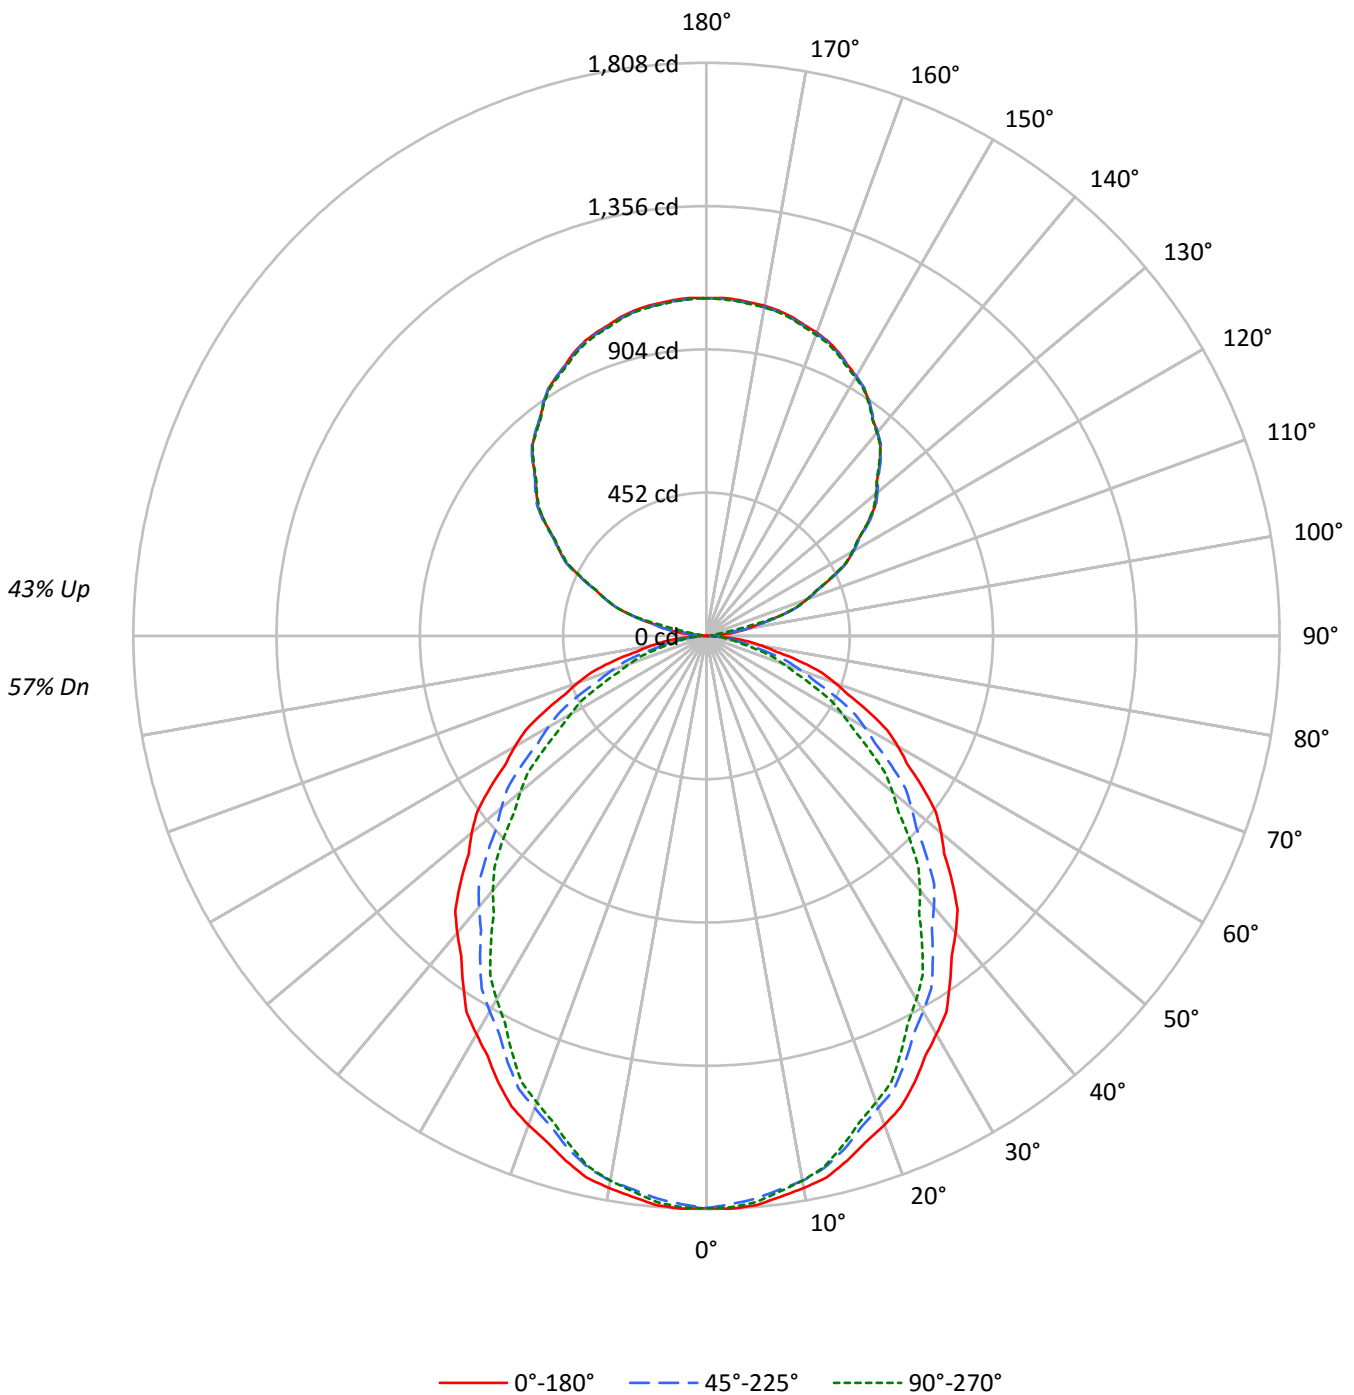



TEST NUMBER: P333595-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	57
1	100	95	91	88	92	89	85	82	77	74	72	66	64	62	55	54	53	48
2	91	83	77	72	84	78	73	68	68	63	60	58	55	52	49	47	45	41
3	83	74	66	60	77	69	62	57	60	55	51	51	48	45	44	41	39	35
4	76	65	57	51	71	61	54	49	53	48	43	46	42	38	39	36	33	30
5	70	58	50	44	65	55	47	42	48	42	38	41	37	33	35	32	29	26
6	64	52	44	38	60	49	42	37	43	37	33	37	33	29	32	29	26	23
7	60	47	39	34	55	45	37	32	39	33	29	34	30	26	29	26	23	21
8	55	43	35	30	52	41	34	29	36	30	26	31	27	23	27	23	21	18
9	52	39	32	27	48	37	30	26	33	27	23	29	24	21	25	21	19	17
10	48	36	29	24	45	34	28	23	30	25	21	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11657	11657	11657
5°	11684	11551	11622
10°	11596	11444	11444
15°	11457	11212	11120
20°	11281	10888	10757
25°	11075	10570	10337
30°	10818	10197	9871
35°	10555	9813	9351
40°	10309	9413	8838
45°	10011	8965	8280
50°	9711	8478	7698
55°	9364	8014	7076
60°	9016	7448	6409
65°	8604	6791	5645
70°	8135	5973	4864
75°	7483	5036	4047
80°	6590	3954	3396
85°	5550	3231	3031



TEST NUMBER: P333595-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.7	2.3
10°-20°	474.3	6.3
20°-30°	687.8	9.1
30°-40°	783.9	10.4
40°-50°	764.1	10.1
50°-60°	643.2	8.5
60°-70°	450.9	6.0
70°-80°	231.8	3.1
80°-90°	60.7	0.8
90°-100°	38.7	0.5
100°-110°	238.6	3.2
110°-120°	432.8	5.7
120°-130°	555.4	7.4
130°-140°	597.4	7.9
140°-150°	560.7	7.4
150°-160°	453.6	6.0
160°-170°	293.3	3.9
170°-180°	101.2	1.3
0°-30°	1331.9	17.7
0°-40°	2115.8	28.1
0°-60°	3523.1	46.7
0°-90°	4266.4	56.6
90°-120°	710.1	9.4
90°-150°	2423.5	32.2
90°-180°	3272.0	43.4
0°-180°	7538.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1805	1805	1805	1805	1805	
5°	1802	1796	1782	1794	1793	171
15°	1714	1704	1677	1675	1663	483
25°	1554	1532	1483	1466	1451	715
35°	1339	1304	1245	1206	1186	838
45°	1096	1055	982	929	907	845
55°	832	786	712	652	628	744
65°	563	515	444	392	369	558
75°	300	258	202	173	162	317
85°	75	51	44	42	41	84
90°	1	7	13	17	19	5
95°	45	41	13	16	17	57
105°	232	235	235	235	235	246
115°	436	440	441	437	433	432
125°	620	625	626	622	620	554
135°	773	778	776	775	770	596
145°	896	898	898	898	894	560
155°	987	983	984	986	980	455
165°	1042	1037	1038	1042	1036	294
175°	1065	1061	1062	1067	1061	101
180°	1065	1065	1065	1065	1065	



TEST NUMBER: P333595-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0
2.5°	1808.3	1807.6	1806.9	1806.0	1805.3	1803.8	1801.4	1799.0	1796.5	1794.1	1796.5
5°	1802.3	1801.1	1799.9	1798.7	1797.5	1795.1	1791.8	1788.5	1785.1	1781.8	1784.8
7.5°	1784.5	1783.4	1782.2	1781.1	1779.9	1777.4	1773.3	1769.4	1765.3	1761.4	1763.5
10°	1768.2	1767.3	1766.4	1765.4	1764.5	1762.0	1757.8	1753.5	1749.3	1745.0	1746.0
12.5°	1749.6	1748.5	1747.4	1746.2	1745.0	1741.6	1736.0	1730.2	1724.5	1718.8	1719.5
15°	1713.6	1711.8	1710.0	1708.2	1706.4	1702.3	1696.0	1689.6	1683.2	1676.9	1676.6
17.5°	1673.0	1670.2	1667.5	1664.7	1661.8	1656.5	1648.5	1640.5	1632.4	1624.5	1623.0
20°	1641.4	1638.4	1635.4	1632.3	1629.3	1623.0	1613.3	1603.6	1593.9	1584.2	1582.7
22.5°	1606.5	1603.5	1600.4	1597.4	1594.4	1587.8	1577.6	1567.4	1557.2	1547.0	1544.1
25°	1554.2	1549.6	1545.1	1540.5	1536.0	1528.1	1516.9	1505.7	1494.5	1483.3	1479.4
27.5°	1494.2	1488.6	1483.1	1477.6	1472.1	1463.4	1451.4	1439.4	1427.3	1415.3	1409.9
30°	1450.6	1444.8	1439.1	1433.3	1427.5	1418.3	1405.5	1392.8	1380.1	1367.4	1360.4
32.5°	1408.0	1401.3	1394.5	1387.9	1381.1	1371.3	1358.3	1345.3	1332.3	1319.4	1311.7
35°	1338.8	1331.5	1324.2	1317.0	1309.7	1299.2	1285.6	1271.9	1258.3	1244.7	1235.9
37.5°	1270.8	1262.0	1253.1	1244.4	1235.5	1224.1	1209.9	1195.9	1181.8	1167.8	1157.2
40°	1222.8	1213.8	1204.7	1195.6	1186.5	1174.7	1160.1	1145.6	1131.0	1116.5	1105.0
42.5°	1172.7	1163.4	1154.1	1144.7	1135.4	1123.2	1108.1	1093.2	1078.1	1063.1	1052.1
45°	1096.1	1087.3	1078.5	1069.8	1061.0	1048.2	1031.6	1014.9	998.3	981.6	969.5
47.5°	1016.7	1007.4	998.2	989.0	979.7	966.6	949.9	933.0	916.3	899.5	887.0
50°	966.5	956.5	946.5	936.5	926.6	912.9	895.6	878.4	861.1	843.8	831.1
52.5°	912.0	901.8	891.5	881.3	871.1	857.8	841.5	825.2	808.9	792.6	778.9
55°	831.6	821.9	812.2	802.5	792.8	779.5	762.5	745.6	728.6	711.7	698.0
57.5°	750.3	740.0	729.6	719.2	708.9	695.6	679.2	662.9	646.5	630.2	616.8
60°	698.0	687.4	676.8	666.2	655.6	642.1	625.7	609.4	593.0	576.6	563.3
62.5°	642.4	632.3	622.2	612.0	601.9	588.5	572.0	555.3	538.8	522.1	509.8
65°	563.0	552.7	542.4	532.1	521.8	508.7	492.6	476.6	460.5	444.4	432.3
67.5°	484.2	473.9	463.6	453.3	443.0	430.2	414.8	399.4	384.1	368.6	357.6
70°	430.8	420.5	410.2	399.9	389.6	376.9	361.7	346.6	331.4	316.3	306.9
72.5°	378.5	368.4	358.3	348.3	338.2	326.1	311.9	297.7	283.6	269.4	260.7
75°	299.9	290.8	281.8	272.7	263.6	252.7	239.9	227.2	214.5	201.8	195.1
77.5°	222.0	214.7	207.4	200.2	192.9	184.1	174.0	163.8	153.6	143.4	138.8
80°	177.2	170.0	162.7	155.4	148.1	140.3	131.8	123.3	114.8	106.3	103.6
82.5°	133.6	127.0	120.5	114.0	107.4	101.3	95.4	89.6	83.8	78.0	76.7
85°	74.9	69.5	64.0	58.6	53.1	49.7	48.2	46.7	45.1	43.6	43.3
87.5°	25.2	23.8	22.4	21.0	19.6	18.9	18.9	18.9	18.9	18.9	19.1
90°	0.8	2.2	3.6	5.0	6.4	7.7	9.0	10.2	11.4	12.6	13.5
92.5°	12.1	11.2	10.2	9.2	8.3	8.3	9.4	10.5	11.5	12.6	13.5
95°	45.0	44.5	43.9	43.4	42.9	39.3	32.6	26.0	19.3	12.6	13.5
97.5°	94.0	94.9	95.8	96.8	97.8	91.7	78.5	65.2	52.0	38.9	33.9
100°	131.9	132.4	132.9	133.5	134.0	134.6	135.3	136.0	136.7	137.4	111.3
102.5°	170.5	171.1	171.8	172.4	173.1	173.6	174.1	174.5	174.9	175.3	170.4
105°	232.2	232.9	233.6	234.3	235.0	235.3	235.3	235.3	235.3	235.3	235.3
107.5°	296.3	296.3	296.3	296.3	296.3	296.5	296.8	297.2	297.5	297.9	297.9
110°	338.0	338.0	338.0	338.0	338.0	338.2	338.5	338.9	339.2	339.6	339.1



TEST NUMBER: P333595-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	377.2	377.6	378.0	378.5	378.9	379.2	379.4	379.6	379.8	380.0	379.4
115°	436.0	436.9	437.7	438.6	439.5	440.0	440.2	440.3	440.5	440.7	440.0
117.5°	496.8	496.8	496.7	496.7	496.7	497.0	497.6	498.3	499.0	499.6	498.7
120°	534.6	534.5	534.3	534.1	533.9	534.1	534.6	535.2	535.7	536.2	535.9
122.5°	568.2	568.9	569.5	570.2	570.8	571.3	571.5	571.8	572.0	572.3	571.9
125°	620.0	621.2	622.4	623.7	624.9	625.5	625.5	625.5	625.5	625.5	624.8
127.5°	669.4	670.2	671.2	672.1	672.9	673.3	673.2	673.1	673.0	672.9	672.5
130°	699.7	700.6	701.5	702.4	703.3	703.8	704.0	704.1	704.3	704.5	704.0
132.5°	730.0	731.0	732.1	733.1	734.2	734.5	734.1	733.7	733.3	732.9	732.8
135°	773.2	774.3	775.3	776.4	777.4	777.7	777.4	777.0	776.7	776.4	776.0
137.5°	812.8	813.7	814.7	815.6	816.5	816.8	816.5	816.2	815.9	815.5	815.6
140°	838.7	839.1	839.4	839.8	840.1	840.2	840.0	839.9	839.7	839.5	839.9
142.5°	862.1	862.3	862.5	862.7	862.9	863.1	863.4	863.6	863.9	864.1	864.2
145°	896.4	896.8	897.1	897.5	897.8	898.0	898.0	898.0	898.0	898.0	898.2
147.5°	926.3	926.3	926.2	926.1	926.1	926.1	926.3	926.6	926.9	927.1	927.3
150°	945.3	945.0	944.6	944.3	943.9	943.9	944.3	944.6	945.0	945.3	945.7
152.5°	963.7	962.9	962.1	961.4	960.6	960.4	960.7	961.1	961.4	961.8	962.1
155°	987.2	986.1	985.1	984.0	983.0	982.6	983.0	983.3	983.7	984.0	984.5
157.5°	1005.3	1004.7	1004.1	1003.5	1002.8	1002.5	1002.6	1002.6	1002.6	1002.7	1003.2
160°	1018.0	1016.9	1015.9	1014.8	1013.8	1013.4	1013.5	1013.7	1013.9	1014.0	1014.7
162.5°	1028.1	1027.0	1026.0	1024.9	1023.9	1023.5	1023.6	1023.8	1024.0	1024.2	1025.1
165°	1041.7	1040.7	1039.6	1038.5	1037.4	1037.0	1037.2	1037.4	1037.5	1037.7	1038.8
167.5°	1051.8	1050.8	1049.7	1048.5	1047.4	1047.0	1047.1	1047.3	1047.5	1047.7	1048.9
170°	1057.5	1056.2	1055.0	1053.8	1052.6	1052.1	1052.2	1052.4	1052.6	1052.8	1054.2
172.5°	1061.3	1060.1	1058.8	1057.6	1056.3	1055.9	1056.2	1056.5	1056.8	1057.1	1058.4
175°	1065.4	1064.3	1063.3	1062.3	1061.2	1060.8	1060.9	1061.1	1061.3	1061.5	1062.9
177.5°	1067.3	1066.4	1065.6	1064.8	1063.9	1063.6	1063.7	1063.8	1064.0	1064.1	1065.1
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4



TEST NUMBER: P333595-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0	1805.0
2.5°	1799.0	1801.4	1803.8	1804.8	1804.6	1804.4	1804.1	1803.9
5°	1787.9	1790.9	1793.9	1795.1	1794.5	1793.9	1793.3	1792.7
7.5°	1765.6	1767.8	1769.9	1770.6	1769.9	1769.3	1768.6	1767.9
10°	1746.9	1747.8	1748.7	1748.7	1747.8	1746.9	1746.0	1745.0
12.5°	1720.2	1720.8	1721.5	1721.1	1719.7	1718.4	1717.0	1715.6
15°	1676.3	1676.0	1675.7	1674.2	1671.4	1668.7	1666.0	1663.2
17.5°	1621.4	1619.9	1618.4	1616.6	1614.3	1612.0	1609.8	1607.6
20°	1581.1	1579.6	1578.1	1576.0	1573.3	1570.5	1567.8	1565.1
22.5°	1541.2	1538.1	1535.2	1532.6	1530.3	1528.1	1525.8	1523.6
25°	1475.4	1471.5	1467.5	1463.9	1460.6	1457.2	1453.9	1450.6
27.5°	1404.3	1398.9	1393.3	1389.0	1385.7	1382.5	1379.3	1376.1
30°	1353.4	1346.5	1339.5	1334.6	1331.9	1329.2	1326.5	1323.7
32.5°	1304.0	1296.3	1288.6	1283.0	1279.6	1276.2	1272.6	1269.2
35°	1227.1	1218.3	1209.5	1203.1	1198.8	1194.6	1190.3	1186.1
37.5°	1146.7	1136.2	1125.6	1118.3	1114.2	1110.0	1105.9	1101.8
40°	1093.5	1082.0	1070.5	1062.9	1059.2	1055.6	1052.0	1048.3
42.5°	1041.1	1030.0	1019.0	1010.8	1005.4	1000.2	994.8	989.5
45°	957.4	945.2	933.1	924.7	920.2	915.6	911.1	906.6
47.5°	874.5	862.0	849.6	840.8	835.8	830.7	825.8	820.7
50°	818.4	805.7	792.9	784.4	779.8	775.3	770.7	766.2
52.5°	765.3	751.5	737.8	728.7	724.2	719.6	715.1	710.5
55°	684.4	670.8	657.1	647.8	643.0	638.1	633.3	628.4
57.5°	603.5	590.2	576.8	567.9	563.7	559.4	555.0	550.8
60°	550.0	536.6	523.3	514.4	509.9	505.3	500.8	496.2
62.5°	497.5	485.0	472.7	464.2	459.7	455.1	450.6	446.1
65°	420.2	408.1	396.0	387.6	383.0	378.5	374.0	369.4
67.5°	346.5	335.4	324.3	316.9	313.3	309.6	306.0	302.4
70°	297.5	288.1	278.7	272.2	268.5	264.9	261.3	257.6
72.5°	252.1	243.4	234.7	229.1	226.7	224.3	221.9	219.4
75°	188.4	181.8	175.1	170.7	168.5	166.4	164.3	162.2
77.5°	134.1	129.5	124.7	121.6	120.1	118.5	116.9	115.3
80°	100.9	98.2	95.4	93.7	93.1	92.5	91.9	91.3
82.5°	75.4	74.1	72.9	72.1	71.7	71.3	71.0	70.6
85°	43.0	42.7	42.4	42.1	41.8	41.5	41.2	40.9
87.5°	19.2	19.4	19.6	19.6	19.5	19.3	19.2	19.1
90°	14.4	15.2	16.2	16.9	17.4	17.9	18.4	19.0
92.5°	14.4	15.2	16.2	16.7	17.0	17.2	17.5	17.7
95°	14.4	15.2	16.2	16.6	16.6	16.6	16.6	16.6
97.5°	29.0	24.0	19.1	16.6	16.6	16.6	16.6	16.6
100°	85.1	59.0	32.8	19.4	18.7	18.0	17.3	16.6
102.5°	165.4	160.5	155.5	147.1	135.1	123.2	111.3	99.4
105°	235.3	235.3	235.3	235.3	235.1	234.9	234.7	234.6
107.5°	298.0	298.0	298.0	297.8	297.3	296.7	296.2	295.7
110°	338.5	338.0	337.5	337.3	337.5	337.7	337.8	338.0



TEST NUMBER: P333595-840

CATALOG NUMBER: S125RDIP-S1090D810U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	378.7	378.0	377.4	376.9	376.7	376.4	376.2	376.0
115°	439.3	438.6	437.9	437.0	436.0	434.8	433.8	432.8
117.5°	497.8	496.9	495.9	495.2	494.8	494.3	493.9	493.4
120°	535.5	535.2	534.8	534.2	533.3	532.5	531.6	530.7
122.5°	571.6	571.2	570.9	570.2	569.2	568.2	567.1	566.1
125°	624.1	623.4	622.7	622.1	621.6	621.0	620.5	620.0
127.5°	672.1	671.8	671.4	670.4	669.2	667.9	666.6	665.3
130°	703.4	702.9	702.4	701.7	700.7	699.9	699.0	698.1
132.5°	732.7	732.6	732.5	732.0	731.1	730.2	729.3	728.5
135°	775.7	775.3	775.0	774.3	773.2	772.1	771.0	770.0
137.5°	815.7	815.7	815.8	815.4	814.5	813.5	812.6	811.7
140°	840.2	840.6	840.9	840.6	839.5	838.5	837.4	836.4
142.5°	864.3	864.3	864.4	863.9	862.9	861.8	860.8	859.7
145°	898.3	898.5	898.7	898.2	897.2	896.2	895.0	894.0
147.5°	927.5	927.7	927.9	927.4	926.0	924.8	923.5	922.3
150°	946.0	946.4	946.7	946.2	944.8	943.4	942.0	940.6
152.5°	962.5	962.8	963.2	962.7	961.5	960.2	959.0	957.7
155°	985.1	985.6	986.1	985.7	984.3	982.9	981.5	980.1
157.5°	1003.8	1004.4	1004.9	1004.5	1003.1	1001.7	1000.3	998.9
160°	1015.4	1016.1	1016.8	1016.5	1015.1	1013.7	1012.3	1010.9
162.5°	1026.1	1027.1	1028.0	1027.8	1026.2	1024.7	1023.2	1021.7
165°	1039.9	1040.9	1042.0	1041.8	1040.4	1038.9	1037.5	1036.1
167.5°	1050.3	1051.5	1052.8	1052.6	1051.0	1049.5	1047.8	1046.3
170°	1055.5	1056.9	1058.3	1058.2	1056.7	1055.1	1053.5	1052.0
172.5°	1059.7	1061.0	1062.3	1062.1	1060.5	1058.9	1057.3	1055.7
175°	1064.2	1065.6	1067.0	1066.9	1065.4	1063.8	1062.3	1060.7
177.5°	1066.1	1067.0	1068.0	1068.0	1066.8	1065.7	1064.6	1063.5
180°	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4	1065.4

(END OF REPORT)