

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333639-840

Luminaire Tested: **S125RDIP-S1270D1205U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333639-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S1270D1205U840-4F0-1E-UDD-F4  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9292.7 lumens  
Efficiency: N/A  
Efficacy: 129.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 71.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333639-840

CATALOG NUMBER: S125RDIP-S1270D1205U840-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

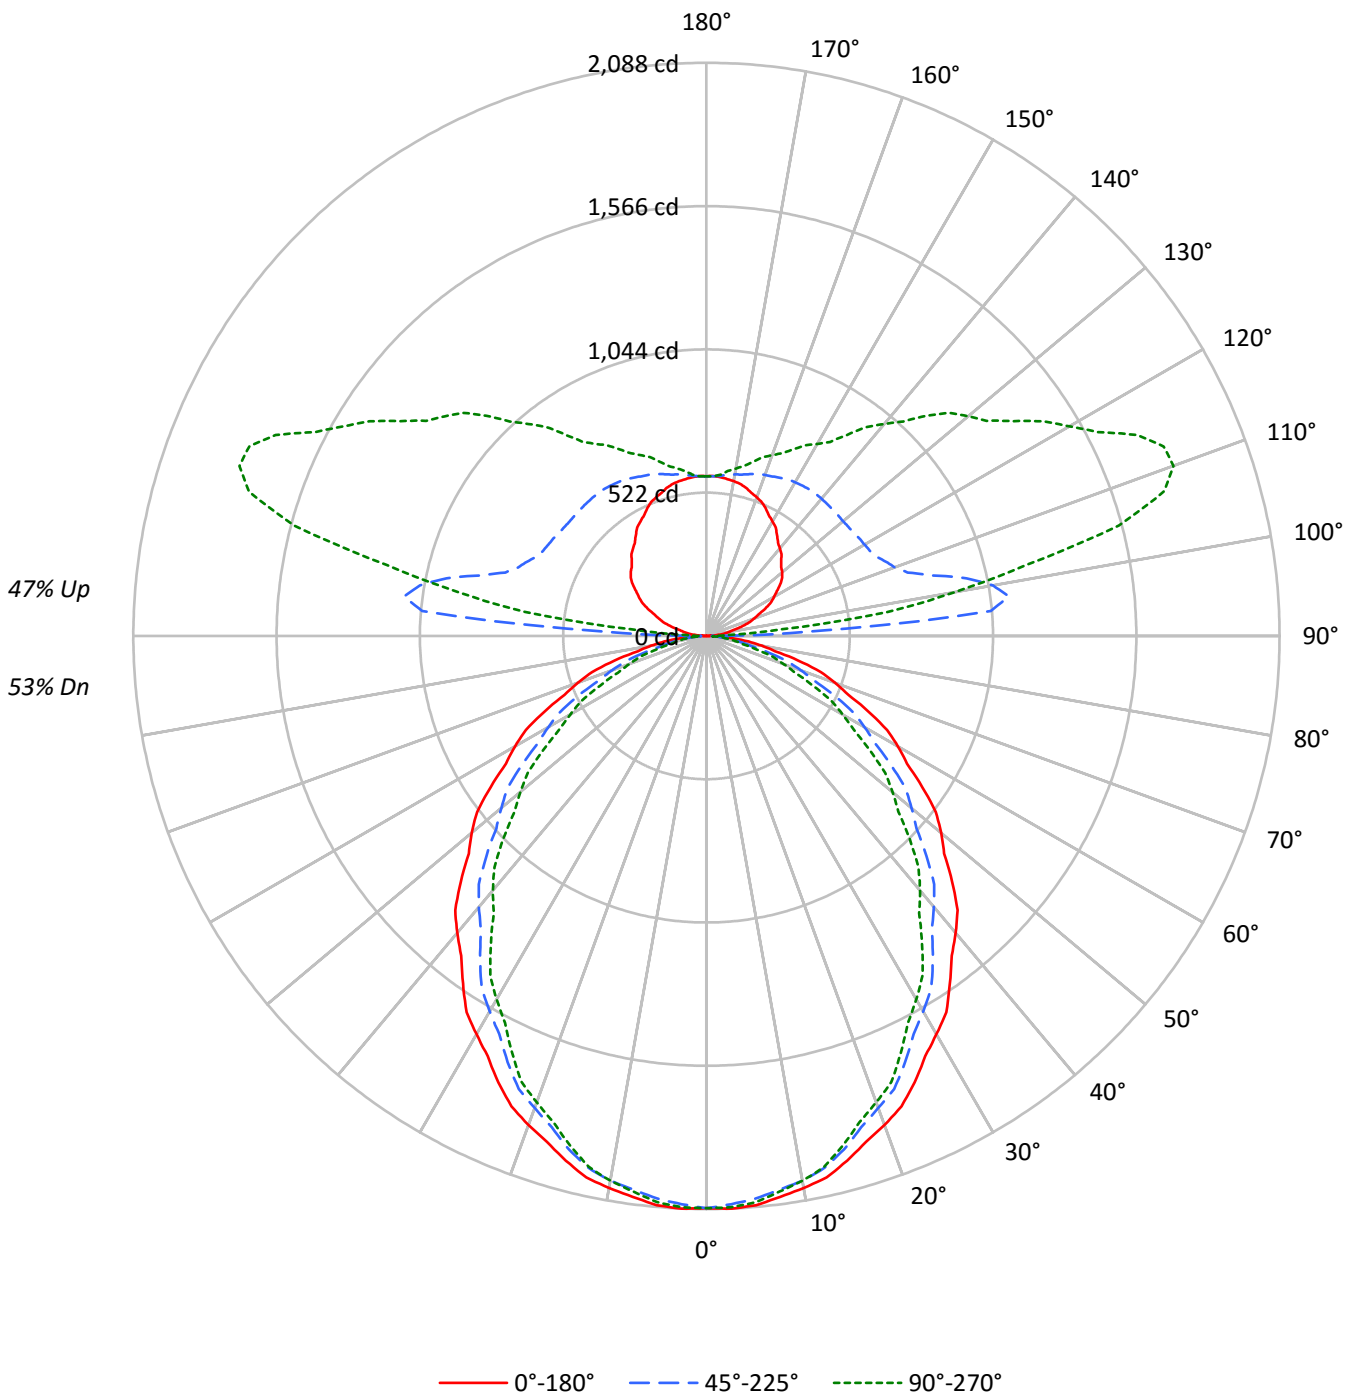



TEST NUMBER: P333639-840

CATALOG NUMBER: S125RDIP-S1270D1205U840-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	99	94	91	87	91	88	84	81	75	73	70	63	62	60	52	51	50	45
2	90	83	77	72	83	77	72	67	66	62	59	56	53	50	46	44	43	38
3	82	73	66	60	76	68	61	56	58	53	50	49	46	43	41	39	37	33
4	75	65	57	51	70	60	53	48	52	47	42	44	40	37	37	34	32	28
5	69	58	50	44	64	54	47	41	47	41	37	40	35	32	33	30	28	25
6	64	52	44	38	59	48	41	36	42	36	32	36	32	28	30	27	24	22
7	59	47	39	33	55	44	37	32	38	33	28	33	28	25	28	24	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	32	26	47	37	30	25	32	27	23	28	23	20	24	20	18	16
10	48	36	29	24	44	34	27	23	30	24	20	26	21	18	22	19	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13464	13464	13464
5°	13494	13341	13422
10°	13392	13217	13217
15°	13233	12948	12843
20°	13029	12575	12423
25°	12790	12207	11938
30°	12493	11777	11401
35°	12191	11334	10800
40°	11907	10871	10208
45°	11562	10355	9563
50°	11216	9792	8890
55°	10815	9254	8173
60°	10413	8603	7403
65°	9938	7844	6521
70°	9396	6898	5620
75°	8644	5814	4674
80°	7613	4567	3924
85°	6417	3735	3505



TEST NUMBER: P333639-840

CATALOG NUMBER: S125RDIP-S1270D1205U840-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	196.0	2.1
10°-20°	547.8	5.9
20°-30°	794.4	8.5
30°-40°	905.3	9.7
40°-50°	882.5	9.5
50°-60°	742.8	8.0
60°-70°	520.7	5.6
70°-80°	267.7	2.9
80°-90°	70.8	0.8
90°-100°	421.9	4.5
100°-110°	906.9	9.8
110°-120°	851.1	9.2
120°-130°	689.8	7.4
130°-140°	553.5	6.0
140°-150°	417.7	4.5
150°-160°	294.0	3.2
160°-170°	173.3	1.9
170°-180°	56.4	0.6
0°-30°	1538.2	16.6
0°-40°	2443.5	26.3
0°-60°	4068.9	43.8
0°-90°	4928.1	53.0
90°-120°	2179.9	23.5
90°-150°	3840.9	41.3
90°-180°	4365.0	47.0
0°-180°	9292.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2085	2085	2085	2085	2085	
5°	2082	2075	2058	2073	2070	197
15°	1979	1968	1937	1934	1921	558
25°	1795	1769	1713	1693	1675	826
35°	1546	1507	1438	1393	1370	968
45°	1266	1218	1134	1073	1047	976
55°	960	908	822	754	726	859
65°	650	595	513	452	427	644
75°	346	298	233	200	187	367
85°	87	59	50	49	47	97
90°	1	11	19	25	27	6
95°	39	114	1040	472	276	41
105°	133	185	851	1675	1555	140
115°	237	286	683	1472	1732	233
125°	328	385	655	1171	1365	291
135°	385	463	650	982	1134	299
145°	448	513	652	813	894	281
155°	512	550	636	719	750	236
165°	559	574	610	647	657	157
175°	581	581	586	593	590	55
180°	582	582	582	582	582	



TEST NUMBER: P333639-840

CATALOG NUMBER: S125RDIP-S1270D1205U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7
2.5°	2088.4	2087.6	2086.7	2085.9	2085.1	2083.3	2080.4	2077.6	2074.9	2072.0	2074.9
5°	2081.5	2080.1	2078.7	2077.3	2075.9	2073.3	2069.4	2065.6	2061.7	2057.9	2061.3
7.5°	2061.0	2059.7	2058.4	2057.0	2055.7	2052.8	2048.1	2043.5	2038.9	2034.3	2036.7
10°	2042.1	2041.0	2040.0	2039.0	2037.9	2035.0	2030.0	2025.2	2020.2	2015.4	2016.4
12.5°	2020.7	2019.4	2018.0	2016.7	2015.4	2011.4	2004.9	1998.3	1991.7	1985.1	1985.9
15°	1979.1	1977.0	1975.0	1972.9	1970.8	1966.0	1958.6	1951.4	1944.0	1936.6	1936.3
17.5°	1932.2	1929.0	1925.8	1922.6	1919.3	1913.1	1903.9	1894.6	1885.4	1876.1	1874.4
20°	1895.7	1892.2	1888.6	1885.2	1881.7	1874.3	1863.2	1852.0	1840.8	1829.6	1827.9
22.5°	1855.4	1851.9	1848.4	1844.9	1841.4	1833.8	1822.0	1810.3	1798.5	1786.8	1783.3
25°	1794.9	1789.7	1784.4	1779.2	1773.9	1764.8	1751.9	1739.0	1726.0	1713.0	1708.5
27.5°	1725.7	1719.3	1712.9	1706.6	1700.2	1690.1	1676.2	1662.3	1648.5	1634.7	1628.3
30°	1675.3	1668.6	1661.9	1655.4	1648.7	1638.0	1623.3	1608.6	1593.9	1579.2	1571.1
32.5°	1626.2	1618.4	1610.6	1602.9	1595.1	1583.7	1568.7	1553.8	1538.7	1523.8	1514.9
35°	1546.2	1537.7	1529.3	1521.0	1512.6	1500.5	1484.7	1469.1	1453.3	1437.5	1427.3
37.5°	1467.7	1457.5	1447.3	1437.1	1426.8	1413.6	1397.5	1381.2	1364.9	1348.7	1336.6
40°	1412.3	1401.8	1391.3	1380.8	1370.4	1356.7	1339.9	1323.1	1306.3	1289.5	1276.3
42.5°	1354.4	1343.6	1332.8	1322.0	1311.3	1297.2	1279.9	1262.5	1245.2	1227.8	1215.1
45°	1265.9	1255.8	1245.6	1235.5	1225.3	1210.6	1191.3	1172.2	1152.9	1133.7	1119.6
47.5°	1174.3	1163.6	1152.9	1142.2	1131.5	1116.4	1097.0	1077.6	1058.2	1038.8	1024.4
50°	1116.3	1104.8	1093.2	1081.7	1070.2	1054.4	1034.4	1014.5	994.5	974.6	959.9
52.5°	1053.3	1041.5	1029.7	1017.8	1006.0	990.7	971.9	953.1	934.2	915.4	899.6
55°	960.5	949.3	938.1	926.9	915.6	900.3	880.7	861.1	841.5	821.9	806.2
57.5°	866.6	854.6	842.6	830.7	818.7	803.3	784.5	765.5	746.6	727.7	712.4
60°	806.2	793.9	781.6	769.4	757.2	741.5	722.7	703.8	684.9	666.0	650.7
62.5°	741.9	730.2	718.5	706.8	695.2	679.7	660.6	641.4	622.2	603.0	588.8
65°	650.3	638.3	626.5	614.6	602.7	587.4	569.0	550.4	531.8	513.3	499.3
67.5°	559.3	547.3	535.4	523.6	511.7	496.9	479.1	461.3	443.5	425.8	412.9
70°	497.6	485.6	473.7	461.8	450.0	435.3	417.8	400.3	382.7	365.3	354.5
72.5°	437.1	425.5	413.8	402.2	390.6	376.6	360.2	343.9	327.5	311.1	301.1
75°	346.4	335.9	325.4	314.9	304.4	291.9	277.1	262.5	247.7	233.0	225.3
77.5°	256.3	247.9	239.5	231.2	222.8	212.7	200.9	189.1	177.4	165.6	160.3
80°	204.7	196.3	187.9	179.5	171.1	162.0	152.2	142.4	132.6	122.8	119.7
82.5°	154.3	146.7	139.2	131.6	124.1	116.9	110.2	103.5	96.7	90.1	88.6
85°	86.6	80.3	74.0	67.7	61.4	57.4	55.6	53.9	52.1	50.4	50.0
87.5°	29.2	27.5	26.0	24.5	23.0	22.3	22.3	22.5	22.4	22.6	22.9
90°	1.2	2.3	4.6	7.1	9.4	11.7	12.9	15.2	16.5	18.8	20.0
92.5°	14.3	17.4	27.3	41.8	62.0	96.2	160.3	267.8	384.5	378.3	306.3
95°	38.7	39.9	49.3	62.2	88.0	140.8	266.4	524.5	848.4	1039.7	1017.3
97.5°	64.3	65.7	72.3	85.2	108.5	146.4	229.5	418.7	757.6	1110.2	1287.3
100°	82.1	84.5	89.2	102.1	124.4	159.6	227.6	380.2	675.9	1059.6	1352.9
102.5°	101.9	103.3	107.0	120.9	141.3	175.5	236.1	364.3	613.9	970.4	1313.5
105°	132.6	132.6	138.5	150.2	169.0	201.9	253.5	357.9	553.8	850.7	1187.5
107.5°	162.6	165.0	170.6	180.3	199.8	229.2	279.2	368.7	528.5	768.3	1058.9
110°	184.2	186.6	191.3	201.9	219.4	249.9	298.0	379.0	521.0	729.8	985.6



TEST NUMBER: P333639-840

CATALOG NUMBER: S125RDIP-S1270D1205U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	205.8	208.1	211.9	222.5	240.0	269.6	315.9	392.1	521.0	707.3	931.2
115°	237.0	239.3	242.9	253.5	271.0	300.4	343.9	411.8	524.5	683.0	871.8
117.5°	265.2	268.7	272.5	283.1	303.0	331.3	372.4	434.4	532.3	671.0	836.4
120°	284.0	287.5	292.2	302.8	322.7	352.0	393.1	449.4	539.8	665.3	816.7
122.5°	303.7	306.3	310.0	320.5	342.4	371.7	412.8	466.4	546.3	660.7	799.8
125°	328.5	330.9	336.8	347.3	369.6	400.1	438.9	489.3	557.3	654.8	776.8
127.5°	348.0	351.5	359.1	372.4	396.2	426.7	463.9	510.5	569.8	652.0	755.7
130°	360.2	363.8	373.1	388.4	413.0	443.5	479.9	524.5	577.3	650.1	741.6
132.5°	369.6	374.1	385.4	402.5	428.1	458.6	494.9	536.7	585.7	650.1	730.3
135°	384.9	389.6	403.6	422.4	447.1	478.8	515.1	553.8	597.2	650.1	717.0
137.5°	404.1	407.7	420.8	439.6	463.7	496.3	529.5	566.5	607.8	651.5	705.0
140°	415.4	418.9	433.0	451.8	474.0	505.7	539.8	575.0	612.5	652.4	699.3
142.5°	428.5	431.1	444.2	463.0	484.4	514.2	546.3	579.7	615.3	653.4	694.7
145°	448.3	450.6	462.3	478.8	499.9	526.8	557.3	586.7	618.4	652.4	687.6
147.5°	468.9	470.3	480.4	495.6	513.9	537.7	564.4	591.0	619.6	649.3	680.3
150°	481.1	483.4	491.7	507.0	523.3	543.3	569.1	593.8	619.6	646.5	674.7
152.5°	494.2	495.6	502.9	516.3	531.8	549.9	573.8	595.6	618.6	642.8	668.1
155°	511.6	511.6	518.7	530.4	542.1	558.6	578.5	597.2	616.0	636.0	657.1
157.5°	527.1	526.8	532.5	542.6	552.9	565.3	582.5	598.4	613.0	628.9	646.8
160°	537.5	536.2	541.0	549.2	558.6	569.1	584.4	598.4	610.2	624.3	638.3
162.5°	545.8	544.7	549.4	556.6	564.2	572.9	586.2	597.5	607.3	618.6	630.9
165°	558.6	556.2	559.8	565.6	570.3	577.3	586.7	596.1	603.1	610.2	619.6
167.5°	567.0	565.8	567.9	571.2	574.5	579.0	586.7	593.3	596.5	602.0	608.5
170°	572.6	571.5	572.6	575.0	577.3	580.9	586.7	591.4	593.8	597.2	602.0
172.5°	576.4	574.3	575.4	577.7	579.2	580.9	585.7	589.6	590.0	591.7	595.4
175°	580.9	578.5	579.7	580.9	580.9	580.9	584.4	586.7	585.5	585.5	586.7
177.5°	583.0	581.1	581.1	582.0	581.1	581.1	583.0	583.9	582.0	582.0	583.0
180°	582.0	582.0	582.0	582.0	582.0	582.0	582.0	582.0	582.0	582.0	582.0



TEST NUMBER: P333639-840

CATALOG NUMBER: S125RDIP-S1270D1205U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7
2.5°	2077.6	2080.4	2083.3	2084.5	2084.3	2084.0	2083.7	2083.4
5°	2064.9	2068.4	2071.8	2073.3	2072.5	2071.8	2071.1	2070.4
7.5°	2039.1	2041.6	2044.1	2044.9	2044.1	2043.4	2042.6	2041.8
10°	2017.4	2018.5	2019.5	2019.5	2018.5	2017.4	2016.4	2015.4
12.5°	1986.7	1987.4	1988.2	1987.8	1986.2	1984.6	1983.0	1981.4
15°	1935.9	1935.6	1935.2	1933.5	1930.4	1927.2	1924.0	1920.9
17.5°	1872.7	1870.9	1869.2	1867.0	1864.4	1861.8	1859.3	1856.6
20°	1826.0	1824.3	1822.6	1820.1	1816.9	1813.8	1810.7	1807.6
22.5°	1779.9	1776.5	1773.0	1770.0	1767.5	1764.8	1762.2	1759.7
25°	1703.9	1699.4	1694.9	1690.6	1686.8	1682.9	1679.1	1675.3
27.5°	1621.9	1615.6	1609.2	1604.2	1600.4	1596.7	1593.0	1589.3
30°	1563.2	1555.1	1547.0	1541.5	1538.3	1535.1	1532.0	1528.8
32.5°	1506.0	1497.1	1488.2	1481.8	1477.8	1473.8	1469.9	1465.8
35°	1417.2	1407.0	1396.9	1389.4	1384.5	1379.6	1374.7	1369.8
37.5°	1324.3	1312.2	1300.0	1291.5	1286.8	1282.0	1277.3	1272.5
40°	1262.9	1249.6	1236.4	1227.6	1223.4	1219.2	1215.0	1210.8
42.5°	1202.3	1189.6	1176.9	1167.4	1161.2	1155.1	1148.9	1142.8
45°	1105.6	1091.7	1077.6	1068.0	1062.8	1057.5	1052.3	1047.0
47.5°	1010.1	995.6	981.2	971.1	965.2	959.5	953.6	947.9
50°	945.2	930.5	915.8	905.8	900.6	895.3	890.1	884.8
52.5°	883.7	868.0	852.1	841.6	836.4	831.1	825.9	820.6
55°	790.4	774.7	758.9	748.2	742.7	737.0	731.4	725.9
57.5°	696.9	681.6	666.1	656.0	651.0	646.0	641.1	636.1
60°	635.2	619.9	604.4	594.1	588.9	583.6	578.3	573.1
62.5°	574.5	560.2	545.9	536.1	530.9	525.6	520.4	515.1
65°	485.3	471.3	457.3	447.7	442.4	437.2	431.9	426.7
67.5°	400.1	387.3	374.6	366.0	361.8	357.6	353.5	349.2
70°	343.6	332.8	321.9	314.4	310.1	306.0	301.7	297.6
72.5°	291.1	281.1	271.0	264.7	261.9	259.1	256.3	253.5
75°	217.6	210.0	202.3	197.1	194.7	192.3	189.9	187.3
77.5°	154.8	149.5	144.1	140.5	138.7	136.8	135.0	133.2
80°	116.5	113.4	110.2	108.3	107.6	106.8	106.2	105.5
82.5°	87.2	85.6	84.2	83.2	82.8	82.4	82.0	81.6
85°	49.7	49.4	49.0	48.7	48.3	48.0	47.6	47.3
87.5°	23.1	23.3	23.6	23.9	23.6	23.3	23.3	23.0
90°	21.1	22.3	23.4	25.9	25.9	25.9	27.0	27.0
92.5°	207.9	150.9	113.6	96.2	81.2	78.4	76.7	74.8
95°	843.6	665.3	521.0	422.4	339.1	303.9	294.6	275.8
97.5°	1256.5	1131.5	990.9	853.7	781.2	715.6	681.6	666.5
100°	1443.3	1385.8	1265.0	1142.9	1062.0	977.4	934.0	915.2
102.5°	1506.2	1541.7	1483.7	1401.1	1314.4	1254.4	1207.2	1193.2
105°	1469.2	1629.9	1681.5	1668.6	1631.0	1592.4	1568.8	1554.8
107.5°	1336.8	1551.3	1683.8	1745.1	1764.1	1763.9	1756.2	1746.8
110°	1239.1	1462.1	1627.5	1727.3	1780.1	1802.4	1810.6	1810.6





TEST NUMBER: P333639-840

CATALOG NUMBER: S125RDIP-S1270D1205U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1162.2	1373.8	1541.2	1658.7	1736.0	1774.2	1794.6	1803.1
115°	1065.5	1247.4	1408.1	1536.0	1627.5	1683.8	1716.7	1731.9
117.5°	1003.0	1159.8	1298.3	1415.6	1507.1	1565.4	1598.0	1607.3
120°	969.3	1110.0	1239.1	1342.4	1429.3	1485.5	1517.2	1526.6
122.5°	943.9	1074.4	1189.4	1286.1	1363.5	1415.1	1446.8	1455.3
125°	907.1	1026.7	1128.8	1213.4	1279.0	1327.2	1352.9	1364.7
127.5°	869.5	981.2	1076.5	1155.6	1215.2	1257.7	1282.1	1287.3
130°	846.1	949.3	1040.9	1117.1	1175.8	1214.5	1238.0	1245.0
132.5°	822.5	919.3	1002.3	1075.8	1134.5	1173.2	1194.8	1202.7
135°	792.0	873.0	948.2	1015.0	1066.6	1105.4	1126.5	1133.6
137.5°	766.3	831.7	894.1	951.0	997.1	1032.4	1051.9	1059.6
140°	752.1	807.3	861.3	910.6	954.0	984.5	1002.1	1007.9
142.5°	739.9	786.7	833.1	875.9	912.7	938.5	955.1	960.1
145°	724.0	760.3	796.8	828.4	856.6	876.6	889.5	894.1
147.5°	709.0	738.5	766.5	790.4	812.7	828.7	836.2	838.3
150°	700.5	726.4	748.6	769.7	787.4	801.4	806.2	807.3
152.5°	691.2	714.2	734.6	751.0	765.8	777.0	781.7	782.9
155°	677.0	695.8	712.3	725.2	736.9	745.1	748.6	749.8
157.5°	663.0	678.4	691.2	701.3	710.3	717.2	720.4	720.2
160°	653.6	665.3	677.0	685.3	693.5	699.3	701.8	700.5
162.5°	643.3	654.1	663.9	671.2	677.5	682.5	683.0	682.7
165°	628.9	637.1	644.2	650.1	654.8	657.1	657.1	657.1
167.5°	615.3	620.8	626.1	630.4	632.7	634.8	633.9	633.7
170°	607.8	611.4	614.9	617.2	619.6	620.8	620.8	619.6
172.5°	599.4	602.9	605.5	606.9	607.3	609.5	607.6	606.4
175°	590.3	590.3	592.6	592.6	592.6	593.8	591.4	590.3
177.5°	583.9	584.8	584.8	584.8	583.9	584.8	582.0	582.0
180°	582.0	582.0	582.0	582.0	582.0	582.0	582.0	582.0

(END OF REPORT)