

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333619-840

Luminaire Tested: **S125RDIP-S1270D590U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333619-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S1270D590U840-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 590 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7313.3 lumens  
Efficiency: N/A  
Efficacy: 132.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 55.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333619-840

CATALOG NUMBER: S125RDIP-S1270D590U840-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

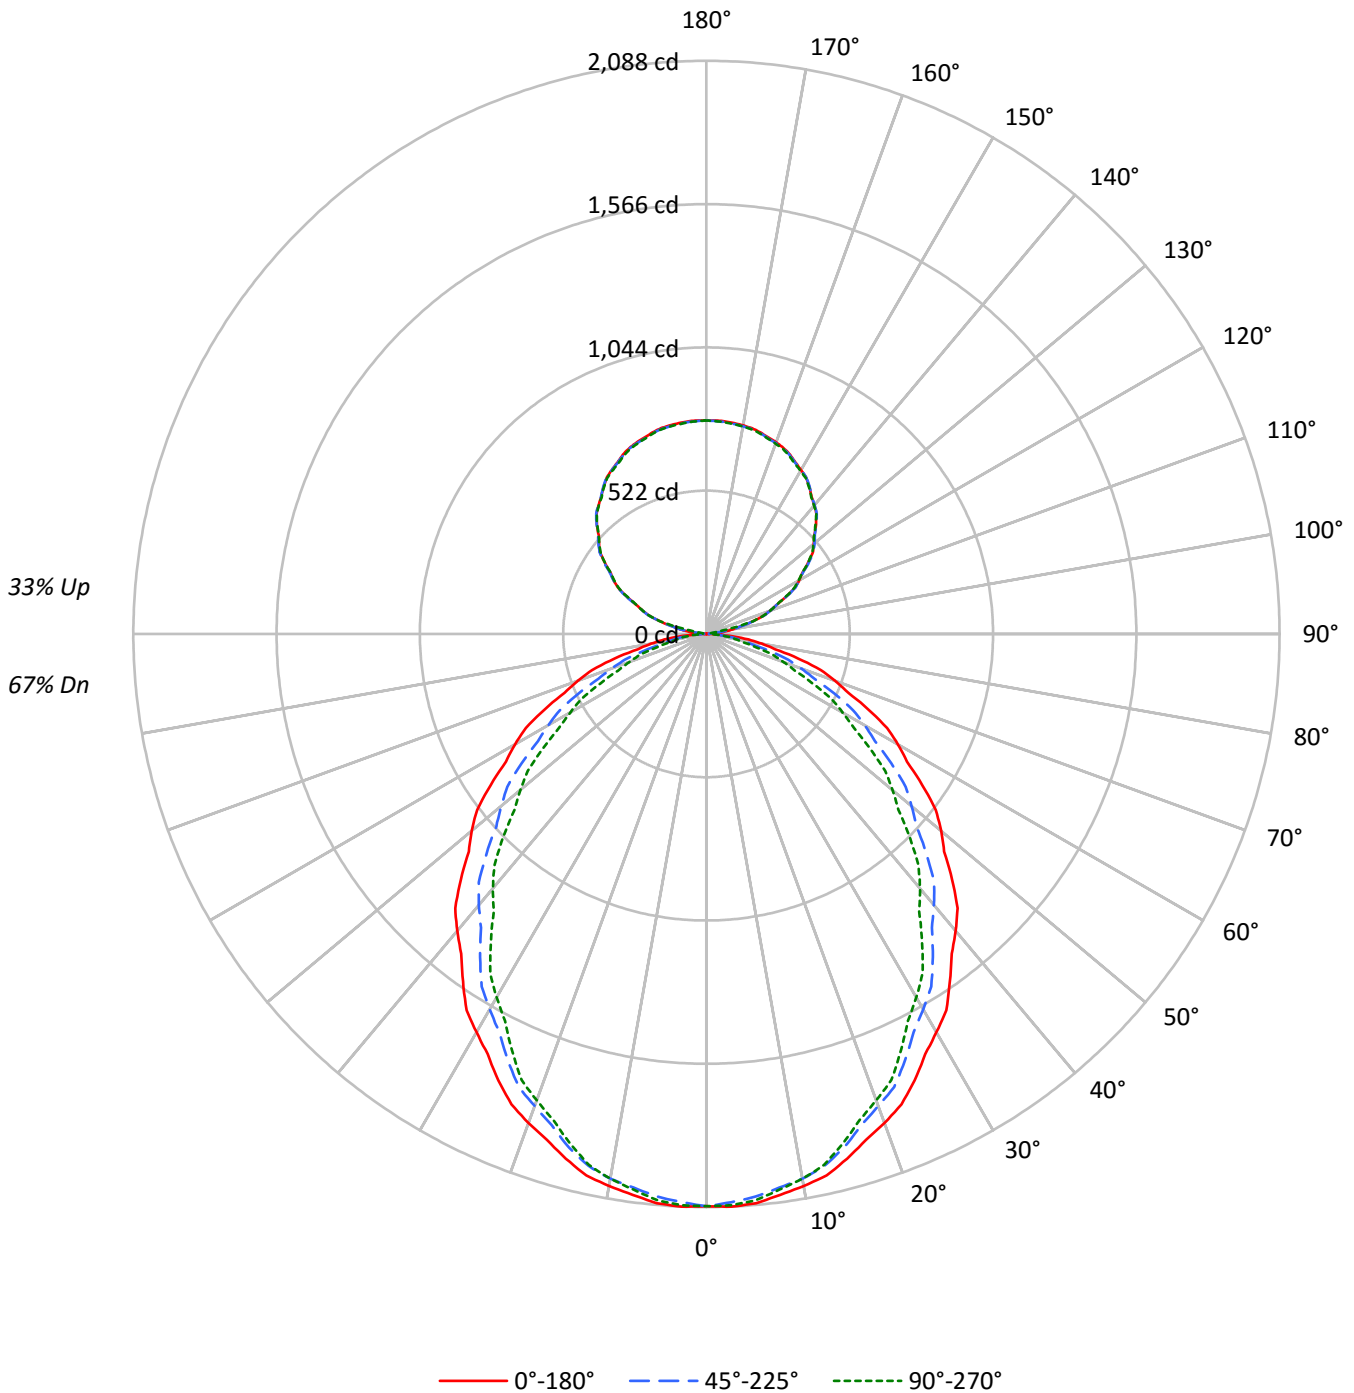



TEST NUMBER: P333619-840

CATALOG NUMBER: S125RDIP-S1270D590U840-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67
1	102	98	94	90	96	92	89	86	82	80	77	73	71	69	64	63	62	57
2	93	86	79	74	88	81	76	71	72	68	64	64	61	58	57	54	52	49
3	85	76	68	62	80	72	65	60	64	59	54	57	53	50	51	47	45	41
4	78	67	59	53	73	64	56	51	57	51	47	51	46	43	45	42	39	36
5	72	60	52	46	68	57	50	44	51	45	41	46	41	37	41	37	34	31
6	66	54	46	40	62	51	44	38	46	40	36	42	37	33	37	33	30	27
7	61	49	41	35	58	47	39	34	42	36	32	38	33	29	34	30	27	24
8	57	45	37	31	54	43	35	30	39	33	28	35	30	26	31	27	24	22
9	53	41	33	28	50	39	32	27	36	30	25	32	27	24	29	25	22	20
10	50	38	30	25	47	36	29	25	33	27	23	30	25	21	27	23	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13464	13464	13464
5°	13494	13341	13422
10°	13392	13217	13217
15°	13233	12948	12843
20°	13029	12575	12423
25°	12790	12207	11938
30°	12493	11777	11401
35°	12191	11334	10800
40°	11907	10871	10208
45°	11562	10355	9563
50°	11216	9792	8890
55°	10815	9254	8173
60°	10413	8603	7403
65°	9938	7844	6521
70°	9396	6898	5620
75°	8644	5814	4674
80°	7613	4567	3924
85°	6417	3735	3505



TEST NUMBER: P333619-840

CATALOG NUMBER: S125RDIP-S1270D590U840-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	196.0	2.7
10°-20°	547.8	7.5
20°-30°	794.4	10.9
30°-40°	905.3	12.4
40°-50°	882.5	12.1
50°-60°	742.8	10.2
60°-70°	520.7	7.1
70°-80°	267.7	3.7
80°-90°	69.2	0.9
90°-100°	28.3	0.4
100°-110°	174.1	2.4
110°-120°	315.7	4.3
120°-130°	405.2	5.5
130°-140°	435.8	6.0
140°-150°	409.1	5.6
150°-160°	330.9	4.5
160°-170°	214.0	2.9
170°-180°	73.8	1.0
0°-30°	1538.2	21.0
0°-40°	2443.5	33.4
0°-60°	4068.9	55.6
0°-90°	4926.5	67.4
90°-120°	518.0	7.1
90°-150°	1768.1	24.2
90°-180°	2387.0	32.6
0°-180°	7313.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2085	2085	2085	2085	2085	
5°	2082	2075	2058	2073	2070	197
15°	1979	1968	1937	1934	1921	558
25°	1795	1769	1713	1693	1675	826
35°	1546	1507	1438	1393	1370	968
45°	1266	1218	1134	1073	1047	976
55°	960	908	822	754	726	859
65°	650	595	513	452	427	644
75°	346	298	233	200	187	367
85°	87	59	50	49	47	97
90°	1	5	9	12	14	5
95°	33	30	9	12	12	42
105°	169	172	172	172	171	180
115°	318	321	322	319	316	315
125°	452	456	456	454	452	404
135°	564	567	566	565	562	435
145°	654	655	655	655	652	409
155°	720	717	718	719	715	332
165°	760	757	757	760	756	215
175°	777	774	774	778	774	74
180°	777	777	777	777	777	



TEST NUMBER: P333619-840

CATALOG NUMBER: S125RDIP-S1270D590U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7
2.5°	2088.4	2087.6	2086.7	2085.9	2085.1	2083.3	2080.4	2077.6	2074.9	2072.0	2074.9
5°	2081.5	2080.1	2078.7	2077.3	2075.9	2073.3	2069.4	2065.6	2061.7	2057.9	2061.3
7.5°	2061.0	2059.7	2058.4	2057.0	2055.7	2052.8	2048.1	2043.5	2038.9	2034.3	2036.7
10°	2042.1	2041.0	2040.0	2039.0	2037.9	2035.0	2030.0	2025.2	2020.2	2015.4	2016.4
12.5°	2020.7	2019.4	2018.0	2016.7	2015.4	2011.4	2004.9	1998.3	1991.7	1985.1	1985.9
15°	1979.1	1977.0	1975.0	1972.9	1970.8	1966.0	1958.6	1951.4	1944.0	1936.6	1936.3
17.5°	1932.2	1929.0	1925.8	1922.6	1919.3	1913.1	1903.9	1894.6	1885.4	1876.1	1874.4
20°	1895.7	1892.2	1888.6	1885.2	1881.7	1874.3	1863.2	1852.0	1840.8	1829.6	1827.9
22.5°	1855.4	1851.9	1848.4	1844.9	1841.4	1833.8	1822.0	1810.3	1798.5	1786.8	1783.3
25°	1794.9	1789.7	1784.4	1779.2	1773.9	1764.8	1751.9	1739.0	1726.0	1713.0	1708.5
27.5°	1725.7	1719.3	1712.9	1706.6	1700.2	1690.1	1676.2	1662.3	1648.5	1634.7	1628.3
30°	1675.3	1668.6	1661.9	1655.4	1648.7	1638.0	1623.3	1608.6	1593.9	1579.2	1571.1
32.5°	1626.2	1618.4	1610.6	1602.9	1595.1	1583.7	1568.7	1553.8	1538.7	1523.8	1514.9
35°	1546.2	1537.7	1529.3	1521.0	1512.6	1500.5	1484.7	1469.1	1453.3	1437.5	1427.3
37.5°	1467.7	1457.5	1447.3	1437.1	1426.8	1413.6	1397.5	1381.2	1364.9	1348.7	1336.6
40°	1412.3	1401.8	1391.3	1380.8	1370.4	1356.7	1339.9	1323.1	1306.3	1289.5	1276.3
42.5°	1354.4	1343.6	1332.8	1322.0	1311.3	1297.2	1279.9	1262.5	1245.2	1227.8	1215.1
45°	1265.9	1255.8	1245.6	1235.5	1225.3	1210.6	1191.3	1172.2	1152.9	1133.7	1119.6
47.5°	1174.3	1163.6	1152.9	1142.2	1131.5	1116.4	1097.0	1077.6	1058.2	1038.8	1024.4
50°	1116.3	1104.8	1093.2	1081.7	1070.2	1054.4	1034.4	1014.5	994.5	974.6	959.9
52.5°	1053.3	1041.5	1029.7	1017.8	1006.0	990.7	971.9	953.1	934.2	915.4	899.6
55°	960.5	949.3	938.1	926.9	915.6	900.3	880.7	861.1	841.5	821.9	806.2
57.5°	866.6	854.6	842.6	830.7	818.7	803.3	784.5	765.5	746.6	727.7	712.4
60°	806.2	793.9	781.6	769.4	757.2	741.5	722.7	703.8	684.9	666.0	650.7
62.5°	741.9	730.2	718.5	706.8	695.2	679.7	660.6	641.4	622.2	603.0	588.8
65°	650.3	638.3	626.5	614.6	602.7	587.4	569.0	550.4	531.8	513.3	499.3
67.5°	559.3	547.3	535.4	523.6	511.7	496.9	479.1	461.3	443.5	425.8	412.9
70°	497.6	485.6	473.7	461.8	450.0	435.3	417.8	400.3	382.7	365.3	354.5
72.5°	437.1	425.5	413.8	402.2	390.6	376.6	360.2	343.9	327.5	311.1	301.1
75°	346.4	335.9	325.4	314.9	304.4	291.9	277.1	262.5	247.7	233.0	225.3
77.5°	256.3	247.9	239.5	231.2	222.8	212.7	200.9	189.1	177.4	165.6	160.3
80°	204.7	196.3	187.9	179.5	171.1	162.0	152.2	142.4	132.6	122.8	119.7
82.5°	154.3	146.7	139.2	131.6	124.1	116.9	110.2	103.5	96.7	90.1	88.6
85°	86.6	80.3	74.0	67.7	61.4	57.4	55.6	53.9	52.1	50.4	50.0
87.5°	29.1	27.4	25.5	23.8	22.1	21.1	21.0	20.9	20.8	20.7	20.9
90°	0.6	1.6	2.6	3.6	4.6	5.7	6.6	7.5	8.3	9.2	9.9
92.5°	8.9	8.2	7.5	6.8	6.0	6.1	6.9	7.7	8.4	9.2	9.9
95°	32.8	32.4	32.1	31.7	31.3	28.7	23.8	19.0	14.0	9.2	9.9
97.5°	68.6	69.3	70.0	70.6	71.3	66.9	57.3	47.6	38.0	28.4	24.7
100°	96.2	96.6	96.9	97.4	97.8	98.2	98.8	99.3	99.8	100.3	81.2
102.5°	124.3	124.8	125.3	125.8	126.2	126.6	126.9	127.3	127.6	127.9	124.3
105°	169.4	169.9	170.5	171.0	171.5	171.7	171.7	171.7	171.7	171.7	171.7
107.5°	216.2	216.2	216.2	216.2	216.2	216.3	216.5	216.8	217.1	217.3	217.3
110°	246.6	246.6	246.6	246.6	246.6	246.7	247.0	247.2	247.5	247.7	247.4



TEST NUMBER: P333619-840

CATALOG NUMBER: S125RDIP-S1270D590U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	275.2	275.5	275.8	276.1	276.4	276.6	276.8	276.9	277.1	277.2	276.8
115°	318.0	318.7	319.3	319.9	320.6	321.0	321.1	321.2	321.3	321.5	321.0
117.5°	362.4	362.3	362.3	362.3	362.3	362.5	363.0	363.6	364.0	364.5	363.9
120°	390.1	389.9	389.8	389.7	389.5	389.7	390.1	390.4	390.8	391.2	390.9
122.5°	414.4	415.0	415.5	416.0	416.5	416.8	417.0	417.2	417.3	417.5	417.3
125°	452.3	453.2	454.0	454.9	455.9	456.4	456.4	456.4	456.4	456.4	455.9
127.5°	488.4	489.0	489.7	490.3	490.9	491.2	491.1	491.1	491.0	490.9	490.6
130°	510.5	511.1	511.8	512.4	513.0	513.4	513.5	513.7	513.8	513.9	513.5
132.5°	532.6	533.3	534.1	534.8	535.5	535.8	535.5	535.2	534.9	534.7	534.6
135°	564.1	564.8	565.6	566.3	567.1	567.4	567.1	566.8	566.6	566.3	566.1
137.5°	593.0	593.7	594.3	595.0	595.6	595.9	595.6	595.4	595.2	594.9	595.0
140°	611.9	612.2	612.4	612.7	612.9	613.0	612.9	612.7	612.6	612.5	612.7
142.5°	628.9	629.1	629.2	629.4	629.5	629.8	630.0	630.1	630.3	630.5	630.5
145°	654.0	654.2	654.5	654.7	655.0	655.1	655.1	655.1	655.1	655.1	655.2
147.5°	675.8	675.8	675.7	675.7	675.6	675.7	675.8	676.0	676.1	676.3	676.5
150°	689.6	689.4	689.1	688.9	688.6	688.6	688.9	689.1	689.4	689.6	689.9
152.5°	703.1	702.5	702.0	701.4	700.7	700.6	700.8	701.1	701.4	701.7	702.0
155°	720.2	719.4	718.7	717.9	717.1	716.9	717.1	717.4	717.6	717.9	718.3
157.5°	733.5	733.0	732.6	732.1	731.6	731.4	731.4	731.4	731.4	731.5	732.0
160°	742.7	741.9	741.1	740.3	739.6	739.3	739.4	739.5	739.6	739.8	740.3
162.5°	750.0	749.3	748.5	747.7	747.0	746.7	746.8	746.9	747.0	747.2	747.9
165°	759.9	759.2	758.4	757.7	756.9	756.6	756.7	756.8	757.0	757.1	757.8
167.5°	767.3	766.6	765.8	765.0	764.2	763.9	764.0	764.1	764.2	764.4	765.3
170°	771.5	770.6	769.7	768.8	767.9	767.5	767.6	767.8	767.9	768.0	769.0
172.5°	774.3	773.4	772.4	771.5	770.6	770.3	770.5	770.8	771.0	771.2	772.1
175°	777.3	776.5	775.7	775.0	774.2	773.9	774.0	774.2	774.3	774.4	775.4
177.5°	778.6	778.0	777.4	776.8	776.2	775.9	776.0	776.1	776.2	776.3	777.1
180°	777.3	777.3	777.3	777.3	777.3	777.3	777.3	777.3	777.3	777.3	777.3



TEST NUMBER: P333619-840

CATALOG NUMBER: S125RDIP-S1270D590U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7
2.5°	2077.6	2080.4	2083.3	2084.5	2084.3	2084.0	2083.7	2083.4
5°	2064.9	2068.4	2071.8	2073.3	2072.5	2071.8	2071.1	2070.4
7.5°	2039.1	2041.6	2044.1	2044.9	2044.1	2043.4	2042.6	2041.8
10°	2017.4	2018.5	2019.5	2019.5	2018.5	2017.4	2016.4	2015.4
12.5°	1986.7	1987.4	1988.2	1987.8	1986.2	1984.6	1983.0	1981.4
15°	1935.9	1935.6	1935.2	1933.5	1930.4	1927.2	1924.0	1920.9
17.5°	1872.7	1870.9	1869.2	1867.0	1864.4	1861.8	1859.3	1856.6
20°	1826.0	1824.3	1822.6	1820.1	1816.9	1813.8	1810.7	1807.6
22.5°	1779.9	1776.5	1773.0	1770.0	1767.5	1764.8	1762.2	1759.7
25°	1703.9	1699.4	1694.9	1690.6	1686.8	1682.9	1679.1	1675.3
27.5°	1621.9	1615.6	1609.2	1604.2	1600.4	1596.7	1593.0	1589.3
30°	1563.2	1555.1	1547.0	1541.5	1538.3	1535.1	1532.0	1528.8
32.5°	1506.0	1497.1	1488.2	1481.8	1477.8	1473.8	1469.9	1465.8
35°	1417.2	1407.0	1396.9	1389.4	1384.5	1379.6	1374.7	1369.8
37.5°	1324.3	1312.2	1300.0	1291.5	1286.8	1282.0	1277.3	1272.5
40°	1262.9	1249.6	1236.4	1227.6	1223.4	1219.2	1215.0	1210.8
42.5°	1202.3	1189.6	1176.9	1167.4	1161.2	1155.1	1148.9	1142.8
45°	1105.6	1091.7	1077.6	1068.0	1062.8	1057.5	1052.3	1047.0
47.5°	1010.1	995.6	981.2	971.1	965.2	959.5	953.6	947.9
50°	945.2	930.5	915.8	905.8	900.6	895.3	890.1	884.8
52.5°	883.7	868.0	852.1	841.6	836.4	831.1	825.9	820.6
55°	790.4	774.7	758.9	748.2	742.7	737.0	731.4	725.9
57.5°	696.9	681.6	666.1	656.0	651.0	646.0	641.1	636.1
60°	635.2	619.9	604.4	594.1	588.9	583.6	578.3	573.1
62.5°	574.5	560.2	545.9	536.1	530.9	525.6	520.4	515.1
65°	485.3	471.3	457.3	447.7	442.4	437.2	431.9	426.7
67.5°	400.1	387.3	374.6	366.0	361.8	357.6	353.5	349.2
70°	343.6	332.8	321.9	314.4	310.1	306.0	301.7	297.6
72.5°	291.1	281.1	271.0	264.7	261.9	259.1	256.3	253.5
75°	217.6	210.0	202.3	197.1	194.7	192.3	189.9	187.3
77.5°	154.8	149.5	144.1	140.5	138.7	136.8	135.0	133.2
80°	116.5	113.4	110.2	108.3	107.6	106.8	106.2	105.5
82.5°	87.2	85.6	84.2	83.2	82.8	82.4	82.0	81.6
85°	49.7	49.4	49.0	48.7	48.3	48.0	47.6	47.3
87.5°	21.0	21.1	21.2	21.2	21.0	20.8	20.6	20.4
90°	10.5	11.1	11.8	12.3	12.7	13.0	13.4	13.8
92.5°	10.5	11.1	11.8	12.2	12.3	12.5	12.7	12.9
95°	10.5	11.1	11.8	12.1	12.1	12.1	12.1	12.1
97.5°	21.1	17.5	13.9	12.1	12.1	12.1	12.1	12.1
100°	62.1	43.0	23.9	14.1	13.6	13.1	12.6	12.1
102.5°	120.7	117.0	113.5	107.3	98.6	89.9	81.2	72.5
105°	171.7	171.7	171.7	171.7	171.5	171.4	171.3	171.1
107.5°	217.4	217.4	217.4	217.2	216.9	216.5	216.1	215.7
110°	247.0	246.6	246.2	246.1	246.2	246.3	246.5	246.6





TEST NUMBER: P333619-840

CATALOG NUMBER: S125RDIP-S1270D590U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	276.3	275.8	275.3	275.0	274.8	274.6	274.5	274.3
115°	320.4	319.9	319.4	318.8	318.0	317.3	316.5	315.8
117.5°	363.1	362.4	361.8	361.3	361.0	360.6	360.3	360.0
120°	390.7	390.4	390.2	389.7	389.1	388.5	387.8	387.2
122.5°	417.0	416.8	416.5	416.0	415.3	414.4	413.7	413.0
125°	455.3	454.7	454.2	453.8	453.4	453.0	452.7	452.3
127.5°	490.3	490.1	489.8	489.2	488.2	487.3	486.4	485.3
130°	513.2	512.8	512.4	511.9	511.3	510.6	510.0	509.4
132.5°	534.5	534.4	534.4	534.0	533.4	532.7	532.1	531.5
135°	565.8	565.6	565.3	564.8	564.1	563.3	562.5	561.8
137.5°	595.0	595.1	595.1	594.8	594.2	593.5	592.9	592.2
140°	613.0	613.2	613.5	613.2	612.5	611.7	611.0	610.2
142.5°	630.6	630.6	630.7	630.3	629.5	628.7	627.9	627.2
145°	655.4	655.5	655.6	655.3	654.5	653.8	653.0	652.2
147.5°	676.6	676.8	676.9	676.5	675.6	674.7	673.8	672.9
150°	690.1	690.4	690.6	690.3	689.3	688.2	687.2	686.2
152.5°	702.2	702.5	702.7	702.4	701.5	700.5	699.5	698.6
155°	718.7	719.0	719.4	719.1	718.1	717.1	716.1	715.0
157.5°	732.4	732.8	733.2	732.9	731.8	730.7	729.7	728.7
160°	740.8	741.3	741.8	741.5	740.5	739.5	738.5	737.5
162.5°	748.6	749.3	750.0	749.8	748.7	747.6	746.5	745.3
165°	758.6	759.4	760.1	760.0	759.0	758.0	757.0	755.9
167.5°	766.2	767.1	768.0	767.9	766.8	765.6	764.5	763.3
170°	770.1	771.1	772.1	772.0	770.9	769.7	768.6	767.5
172.5°	773.1	774.1	775.0	774.9	773.7	772.5	771.3	770.2
175°	776.4	777.4	778.5	778.4	777.3	776.1	775.0	773.8
177.5°	777.8	778.5	779.2	779.1	778.3	777.5	776.7	775.9
180°	777.3	777.3	777.3	777.3	777.3	777.3	777.3	777.3

(END OF REPORT)