

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333494-840

Luminaire Tested: **S125RDIP-S375D365U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333494-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S375D365U840-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2740.7 lumens  
Efficiency: N/A  
Efficacy: 135.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 20.3  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333494-840

CATALOG NUMBER: S125RDIP-S375D365U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

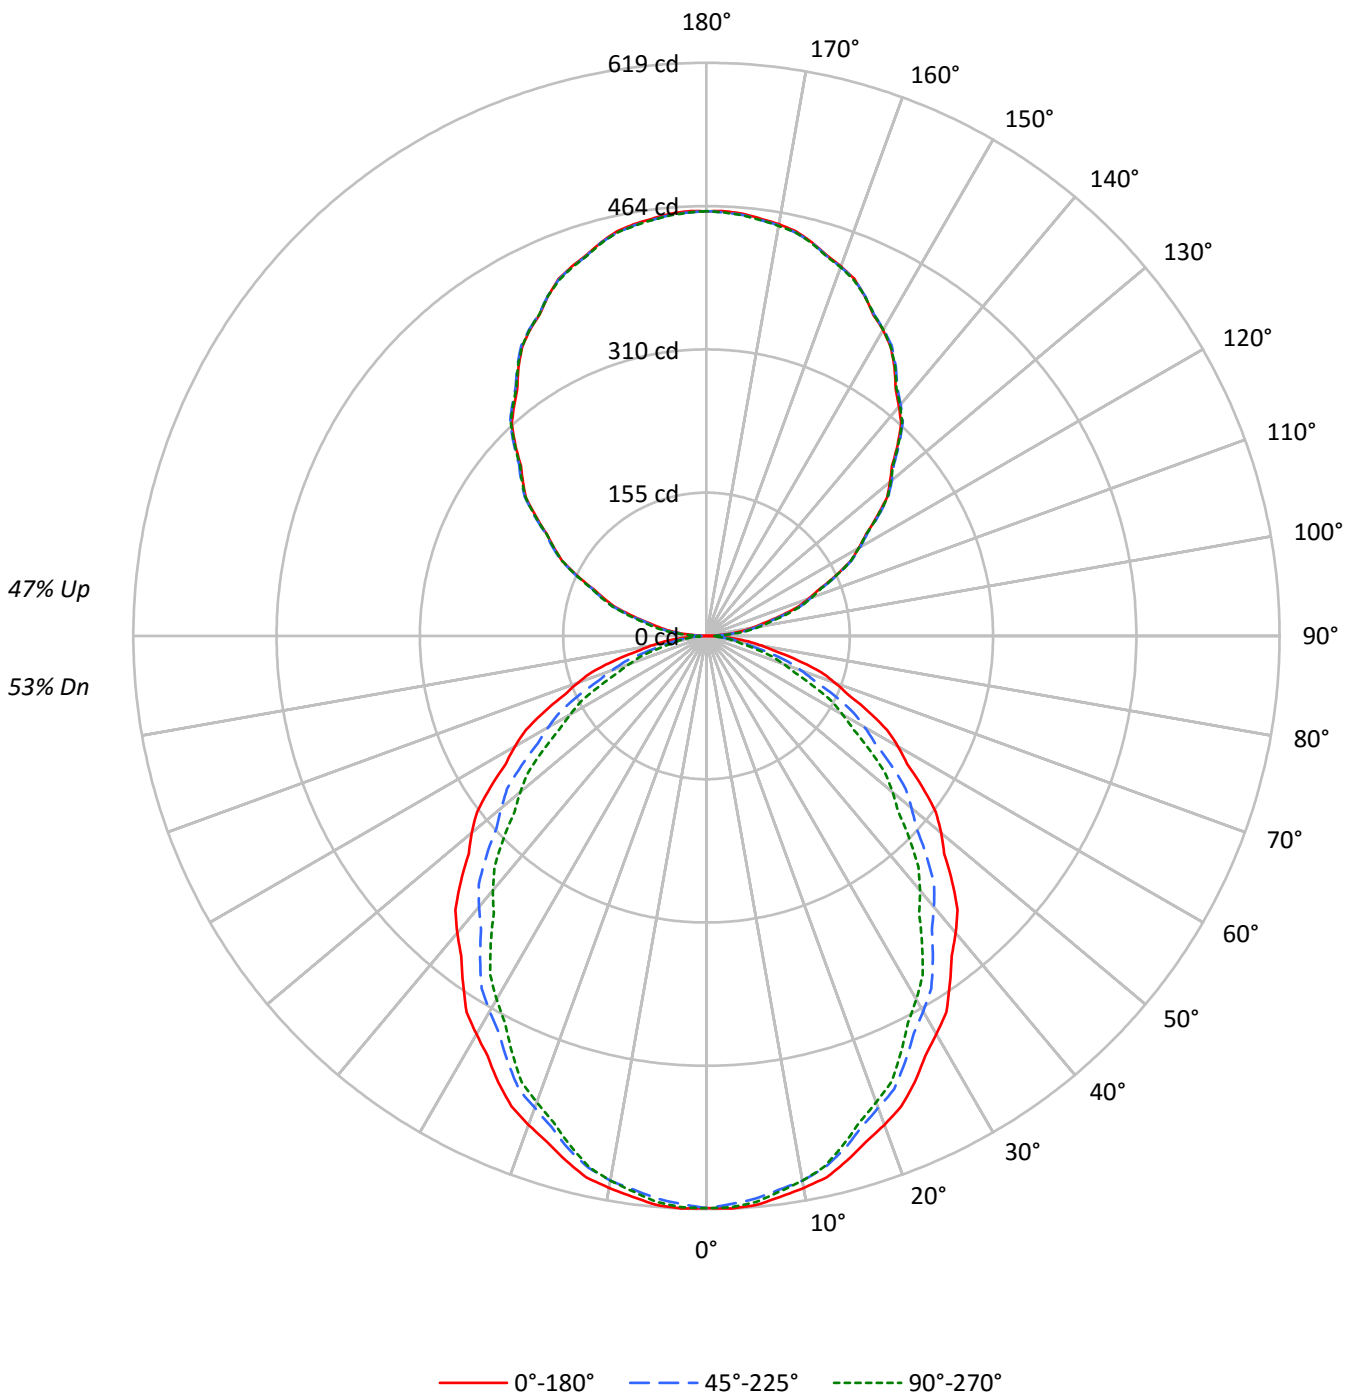



TEST NUMBER: P333494-840

CATALOG NUMBER: S125RDIP-S375D365U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	53
1	99	95	91	87	91	88	84	81	75	73	70	63	62	60	53	52	50	45
2	90	83	77	72	83	77	72	67	66	62	59	56	53	51	47	45	43	38
3	82	73	66	60	76	68	62	56	58	54	50	50	46	43	41	39	37	33
4	75	65	57	51	70	60	53	48	52	47	42	44	40	37	37	34	32	28
5	69	58	50	44	64	54	47	41	47	41	37	40	36	32	34	30	28	25
6	64	52	44	38	59	49	41	36	42	36	32	36	32	28	31	27	25	22
7	59	47	39	33	55	44	37	32	38	33	28	33	28	25	28	25	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	32	26	47	37	30	25	32	27	23	28	23	20	24	20	18	16
10	48	36	29	24	44	34	27	23	30	24	21	26	21	18	22	19	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3991	3991	3991
5°	4000	3955	3979
10°	3970	3918	3918
15°	3922	3839	3807
20°	3862	3727	3682
25°	3792	3619	3539
30°	3703	3491	3380
35°	3613	3360	3202
40°	3530	3222	3026
45°	3428	3070	2834
50°	3325	2903	2635
55°	3206	2743	2423
60°	3086	2550	2195
65°	2946	2326	1932
70°	2783	2045	1665
75°	2563	1724	1385
80°	2258	1354	1164
85°	1904	1104	1037



TEST NUMBER: P333494-840

CATALOG NUMBER: S125RDIP-S375D365U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	58.1	2.1
10°-20°	162.4	5.9
20°-30°	235.5	8.6
30°-40°	268.4	9.8
40°-50°	261.6	9.5
50°-60°	220.2	8.0
60°-70°	154.3	5.6
70°-80°	79.3	2.9
80°-90°	21.0	0.8
90°-100°	30.7	1.1
100°-110°	90.7	3.3
110°-120°	153.6	5.6
120°-130°	202.2	7.4
130°-140°	226.6	8.3
140°-150°	222.1	8.1
150°-160°	186.5	6.8
160°-170°	124.0	4.5
170°-180°	43.4	1.6
0°-30°	456.0	16.6
0°-40°	724.3	26.4
0°-60°	1206.1	44.0
0°-90°	1460.8	53.3
90°-120°	275.1	10.0
90°-150°	925.9	33.8
90°-180°	1280.0	46.7
0°-180°	2740.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	618	618	618	618	618	
5°	617	615	610	614	614	58
15°	587	584	574	573	569	165
25°	532	524	508	502	497	245
35°	458	447	426	413	406	287
45°	375	361	336	318	310	289
55°	285	269	244	223	215	255
65°	193	176	152	134	126	191
75°	103	88	69	59	56	109
85°	26	18	15	14	14	29
90°	0	3	6	7	9	2
95°	23	24	28	30	31	25
105°	81	83	85	87	89	87
115°	154	155	156	156	155	152
125°	224	227	227	226	226	201
135°	292	294	294	294	293	225
145°	354	355	356	356	355	221
155°	405	405	405	406	405	186
165°	440	439	440	441	439	124
175°	458	456	456	458	456	43
180°	459	459	459	459	459	



TEST NUMBER: P333494-840

CATALOG NUMBER: S125RDIP-S375D365U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	617.9	617.9	617.9	617.9	617.9	617.9	617.9	617.9	617.9	617.9	617.9
2.5°	619.0	618.8	618.5	618.3	618.0	617.5	616.7	615.8	615.0	614.2	615.0
5°	617.0	616.6	616.2	615.7	615.3	614.6	613.4	612.3	611.2	610.0	611.1
7.5°	611.0	610.6	610.2	609.8	609.4	608.4	607.1	605.7	604.4	603.0	603.7
10°	605.3	605.0	604.7	604.4	604.1	603.2	601.8	600.3	598.8	597.4	597.7
12.5°	599.0	598.5	598.2	597.8	597.4	596.2	594.3	592.4	590.4	588.4	588.7
15°	586.6	586.0	585.4	584.8	584.2	582.8	580.6	578.5	576.2	574.1	574.0
17.5°	572.8	571.8	570.9	569.9	569.0	567.1	564.3	561.6	558.9	556.1	555.6
20°	561.9	560.9	559.9	558.9	557.7	555.6	552.3	549.0	545.6	542.3	541.8
22.5°	550.0	549.0	548.0	546.8	545.8	543.6	540.1	536.6	533.1	529.7	528.7
25°	532.1	530.5	529.0	527.4	525.8	523.1	519.3	515.4	511.6	507.8	506.4
27.5°	511.5	509.7	507.8	505.8	503.9	501.0	496.9	492.7	488.7	484.5	482.6
30°	496.6	494.6	492.6	490.7	488.7	485.5	481.2	476.9	472.5	468.1	465.7
32.5°	482.0	479.7	477.5	475.1	472.8	469.5	465.0	460.6	456.2	451.7	449.1
35°	458.3	455.9	453.3	450.8	448.4	444.7	440.1	435.5	430.8	426.2	423.1
37.5°	435.0	432.0	429.0	426.0	422.9	419.0	414.2	409.4	404.7	399.8	396.2
40°	418.7	415.6	412.4	409.3	406.2	402.1	397.2	392.2	387.2	382.2	378.3
42.5°	401.4	398.3	395.1	391.9	388.7	384.6	379.4	374.3	369.1	364.0	360.2
45°	375.3	372.2	369.2	366.2	363.2	358.8	353.1	347.5	341.7	336.1	331.8
47.5°	348.1	344.9	341.7	338.5	335.4	330.9	325.2	319.4	313.7	307.9	303.7
50°	330.9	327.5	324.1	320.6	317.2	312.6	306.6	300.7	294.8	288.9	284.6
52.5°	312.3	308.7	305.2	301.7	298.2	293.7	288.1	282.5	276.9	271.4	266.7
55°	284.7	281.3	278.0	274.8	271.5	266.9	261.1	255.2	249.4	243.6	238.9
57.5°	256.9	253.4	249.7	246.2	242.7	238.1	232.5	226.9	221.4	215.7	211.2
60°	238.9	235.3	231.7	228.0	224.4	219.8	214.2	208.6	203.0	197.4	192.9
62.5°	219.9	216.4	213.0	209.5	206.0	201.5	195.8	190.2	184.4	178.7	174.5
65°	192.8	189.2	185.7	182.2	178.6	174.1	168.6	163.2	157.6	152.2	148.0
67.5°	165.8	162.3	158.8	155.2	151.7	147.2	142.0	136.7	131.5	126.2	122.4
70°	147.4	144.0	140.5	136.9	133.4	129.1	123.8	118.7	113.5	108.3	105.0
72.5°	129.6	126.1	122.7	119.3	115.8	111.6	106.7	101.9	97.0	92.2	89.3
75°	102.7	99.6	96.4	93.3	90.3	86.5	82.1	77.8	73.4	69.1	66.8
77.5°	75.9	73.5	71.0	68.5	66.0	63.0	59.6	56.0	52.6	49.1	47.5
80°	60.7	58.2	55.7	53.2	50.7	48.1	45.1	42.2	39.3	36.4	35.4
82.5°	45.7	43.5	41.3	39.0	36.8	34.6	32.7	30.7	28.7	26.7	26.3
85°	25.7	23.8	21.9	20.1	18.2	17.0	16.5	16.0	15.5	14.9	14.8
87.5°	8.7	8.2	7.8	7.3	6.9	6.7	6.7	6.7	6.7	6.8	6.9
90°	0.4	1.0	1.6	2.2	2.9	3.5	4.0	4.6	5.2	5.8	6.1
92.5°	8.7	9.1	9.5	10.0	10.4	11.0	11.6	12.3	13.0	13.7	14.2
95°	23.2	23.3	23.5	23.6	23.8	24.3	25.1	25.9	26.7	27.5	28.1
97.5°	38.6	38.6	38.7	38.8	38.8	39.4	40.5	41.6	42.6	43.7	44.3
100°	50.0	50.0	50.0	50.0	50.0	50.5	51.5	52.5	53.6	54.6	55.3
102.5°	62.2	62.6	62.9	63.2	63.5	63.9	64.4	64.9	65.5	66.0	66.9
105°	81.4	81.8	82.2	82.6	83.0	83.4	83.9	84.3	84.8	85.3	85.7
107.5°	102.5	102.9	103.3	103.7	104.1	104.5	104.8	105.2	105.5	105.9	106.1
110°	117.0	117.4	117.9	118.3	118.7	119.0	119.2	119.5	119.7	120.0	120.2



TEST NUMBER: P333494-840

CATALOG NUMBER: S125RDIP-S375D365U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	131.9	132.1	132.3	132.5	132.7	133.0	133.3	133.6	133.9	134.2	134.3
115°	153.8	154.1	154.5	154.8	155.1	155.3	155.5	155.6	155.8	156.0	155.9
117.5°	175.8	175.9	176.1	176.2	176.4	176.5	176.7	176.8	176.9	177.1	177.1
120°	189.6	190.0	190.4	190.8	191.1	191.4	191.5	191.5	191.6	191.7	191.7
122.5°	204.4	204.5	204.7	204.8	204.9	205.1	205.3	205.5	205.7	205.9	205.9
125°	224.5	225.0	225.5	225.9	226.4	226.7	226.8	226.8	226.9	227.0	226.8
127.5°	245.9	246.2	246.5	246.7	247.0	247.2	247.3	247.4	247.5	247.5	247.5
130°	258.7	259.1	259.5	259.9	260.3	260.6	260.7	260.9	261.2	261.3	261.2
132.5°	271.7	272.3	273.0	273.6	274.2	274.6	274.5	274.5	274.5	274.4	274.3
135°	292.0	292.5	293.0	293.4	293.9	294.2	294.3	294.3	294.4	294.5	294.5
137.5°	311.1	311.5	312.0	312.5	313.0	313.3	313.5	313.6	313.8	314.0	314.1
140°	323.4	323.8	324.2	324.6	325.0	325.3	325.5	325.8	326.0	326.2	326.4
142.5°	335.7	336.0	336.3	336.7	337.0	337.3	337.6	337.9	338.2	338.5	338.6
145°	353.8	354.1	354.4	354.7	355.0	355.3	355.5	355.8	356.0	356.2	356.2
147.5°	370.4	370.6	370.7	370.9	371.1	371.3	371.5	371.7	371.8	372.0	372.2
150°	381.5	381.5	381.4	381.3	381.2	381.3	381.6	382.0	382.3	382.6	382.6
152.5°	390.7	390.8	390.9	391.0	391.1	391.2	391.4	391.5	391.6	391.7	391.9
155°	404.8	404.8	404.8	404.8	404.8	404.8	404.9	405.0	405.1	405.2	405.5
157.5°	417.3	417.2	417.0	416.8	416.7	416.6	416.7	416.8	416.8	416.9	417.2
160°	424.7	424.5	424.2	424.0	423.8	423.7	423.8	423.8	423.9	424.0	424.3
162.5°	431.3	431.1	431.0	430.8	430.6	430.5	430.5	430.6	430.6	430.6	431.0
165°	440.1	439.9	439.8	439.6	439.5	439.4	439.5	439.6	439.7	439.7	440.1
167.5°	447.5	447.2	446.9	446.6	446.3	446.1	446.1	446.1	446.1	446.1	446.6
170°	451.5	451.2	450.9	450.6	450.2	450.1	450.1	450.1	450.1	450.1	450.6
172.5°	454.3	454.0	453.7	453.4	453.1	452.9	452.9	452.9	452.9	452.9	453.4
175°	457.6	457.3	457.0	456.7	456.4	456.2	456.2	456.2	456.2	456.2	456.7
177.5°	459.2	459.0	458.7	458.5	458.2	458.1	458.0	458.0	457.9	457.8	458.2
180°	458.7	458.7	458.7	458.7	458.7	458.7	458.7	458.7	458.7	458.7	458.7



TEST NUMBER: P333494-840

CATALOG NUMBER: S125RDIP-S375D365U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	617.9	617.9	617.9	617.9	617.9	617.9	617.9	617.9
2.5°	615.8	616.7	617.5	617.9	617.8	617.7	617.6	617.5
5°	612.1	613.1	614.1	614.6	614.4	614.1	613.9	613.7
7.5°	604.4	605.2	605.9	606.1	605.9	605.7	605.5	605.2
10°	598.0	598.3	598.6	598.6	598.3	598.0	597.7	597.4
12.5°	588.9	589.2	589.4	589.3	588.8	588.2	587.8	587.3
15°	573.8	573.7	573.6	573.1	572.2	571.3	570.4	569.4
17.5°	555.1	554.6	554.1	553.4	552.7	551.9	551.1	550.4
20°	541.3	540.8	540.3	539.6	538.6	537.7	536.7	535.8
22.5°	527.6	526.5	525.5	524.6	523.9	523.1	522.4	521.6
25°	505.1	503.7	502.4	501.2	500.0	498.9	497.8	496.6
27.5°	480.8	478.9	477.0	475.5	474.4	473.3	472.2	471.1
30°	463.3	461.0	458.6	457.0	456.0	455.0	454.1	453.2
32.5°	446.5	443.8	441.1	439.3	438.1	436.9	435.7	434.5
35°	420.1	417.1	414.0	411.8	410.4	409.0	407.5	406.1
37.5°	392.5	389.0	385.4	382.8	381.4	380.0	378.6	377.2
40°	374.4	370.4	366.5	363.9	362.6	361.4	360.1	358.9
42.5°	356.4	352.6	348.8	346.1	344.3	342.3	340.5	338.7
45°	327.7	323.6	319.4	316.6	315.1	313.5	311.9	310.3
47.5°	299.4	295.1	290.8	287.8	286.1	284.4	282.7	280.9
50°	280.1	275.8	271.5	268.5	267.0	265.4	263.9	262.3
52.5°	262.0	257.3	252.6	249.4	247.9	246.4	244.8	243.3
55°	234.3	229.6	225.0	221.8	220.2	218.4	216.8	215.2
57.5°	206.6	202.1	197.4	194.4	193.0	191.5	190.1	188.5
60°	188.3	183.7	179.2	176.1	174.5	173.0	171.5	169.9
62.5°	170.3	166.0	161.8	159.0	157.3	155.8	154.3	152.7
65°	143.8	139.7	135.5	132.7	131.2	129.6	128.1	126.4
67.5°	118.6	114.8	111.0	108.5	107.2	106.0	104.7	103.5
70°	101.9	98.7	95.4	93.2	91.9	90.7	89.5	88.2
72.5°	86.2	83.3	80.4	78.5	77.7	76.9	75.9	75.1
75°	64.5	62.2	60.0	58.5	57.8	57.0	56.2	55.5
77.5°	45.9	44.3	42.7	41.6	41.1	40.6	40.0	39.5
80°	34.5	33.6	32.7	32.1	31.9	31.7	31.5	31.3
82.5°	25.9	25.3	24.9	24.6	24.5	24.4	24.3	24.1
85°	14.7	14.6	14.5	14.4	14.3	14.2	14.1	14.0
87.5°	6.9	7.0	7.1	7.1	7.1	7.0	7.0	7.0
90°	6.5	6.9	7.3	7.6	7.9	8.1	8.3	8.6
92.5°	14.7	15.2	15.8	16.2	16.4	16.5	16.7	16.9
95°	28.6	29.2	29.7	30.1	30.2	30.4	30.5	30.7
97.5°	44.8	45.3	45.8	46.2	46.3	46.4	46.5	46.6
100°	56.0	56.8	57.5	57.9	58.1	58.3	58.4	58.6
102.5°	67.6	68.4	69.2	69.7	69.9	70.1	70.3	70.5
105°	86.2	86.7	87.3	87.6	87.8	88.1	88.3	88.6
107.5°	106.4	106.6	106.8	107.0	106.9	106.9	106.9	106.9
110°	120.4	120.7	120.9	121.0	120.9	120.8	120.7	120.7





TEST NUMBER: P333494-840

CATALOG NUMBER: S125RDIP-S375D365U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	134.4	134.5	134.6	134.6	134.5	134.3	134.2	134.1
115°	155.8	155.7	155.6	155.6	155.5	155.4	155.3	155.2
117.5°	177.2	177.3	177.3	177.2	176.9	176.6	176.3	175.9
120°	191.7	191.7	191.7	191.5	191.2	190.9	190.6	190.3
122.5°	205.8	205.7	205.7	205.5	205.3	205.0	204.8	204.5
125°	226.7	226.5	226.4	226.2	226.2	226.1	226.0	225.9
127.5°	247.4	247.3	247.2	247.1	247.0	246.8	246.6	246.5
130°	261.2	261.1	260.9	260.8	260.6	260.5	260.3	260.2
132.5°	274.3	274.2	274.1	274.0	273.7	273.5	273.3	273.1
135°	294.5	294.5	294.5	294.3	294.0	293.7	293.4	293.1
137.5°	314.2	314.3	314.4	314.2	313.8	313.4	313.0	312.6
140°	326.6	326.7	326.9	326.8	326.4	326.0	325.6	325.2
142.5°	338.7	338.8	338.9	338.7	338.3	337.9	337.6	337.2
145°	356.2	356.2	356.2	356.1	355.9	355.6	355.4	355.2
147.5°	372.4	372.6	372.8	372.6	372.1	371.5	371.0	370.5
150°	382.6	382.6	382.6	382.5	382.4	382.2	382.0	381.9
152.5°	392.1	392.3	392.5	392.4	392.2	391.9	391.6	391.3
155°	405.8	406.1	406.4	406.4	406.0	405.6	405.2	404.8
157.5°	417.5	417.9	418.2	418.1	417.6	417.0	416.5	416.0
160°	424.6	425.0	425.3	425.3	424.9	424.4	424.0	423.6
162.5°	431.3	431.7	432.1	432.1	431.6	431.1	430.7	430.2
165°	440.4	440.7	441.0	440.9	440.4	440.0	439.5	439.0
167.5°	447.1	447.5	448.0	448.0	447.5	447.0	446.5	446.1
170°	451.0	451.5	452.0	451.9	451.4	450.8	450.3	449.7
172.5°	453.9	454.3	454.8	454.8	454.3	453.8	453.3	452.8
175°	457.1	457.6	458.1	458.0	457.5	456.9	456.4	455.8
177.5°	458.6	459.0	459.3	459.3	458.9	458.4	458.0	457.5
180°	458.7	458.7	458.7	458.7	458.7	458.7	458.7	458.7

(END OF REPORT)