

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333523-840

Luminaire Tested: **S125RDIP-S610D365U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333523-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S610D365U840-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 365 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3879.7 lumens  
Efficiency: N/A  
Efficacy: 141.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 27.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333523-840

CATALOG NUMBER: S125RDIP-S610D365U840-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

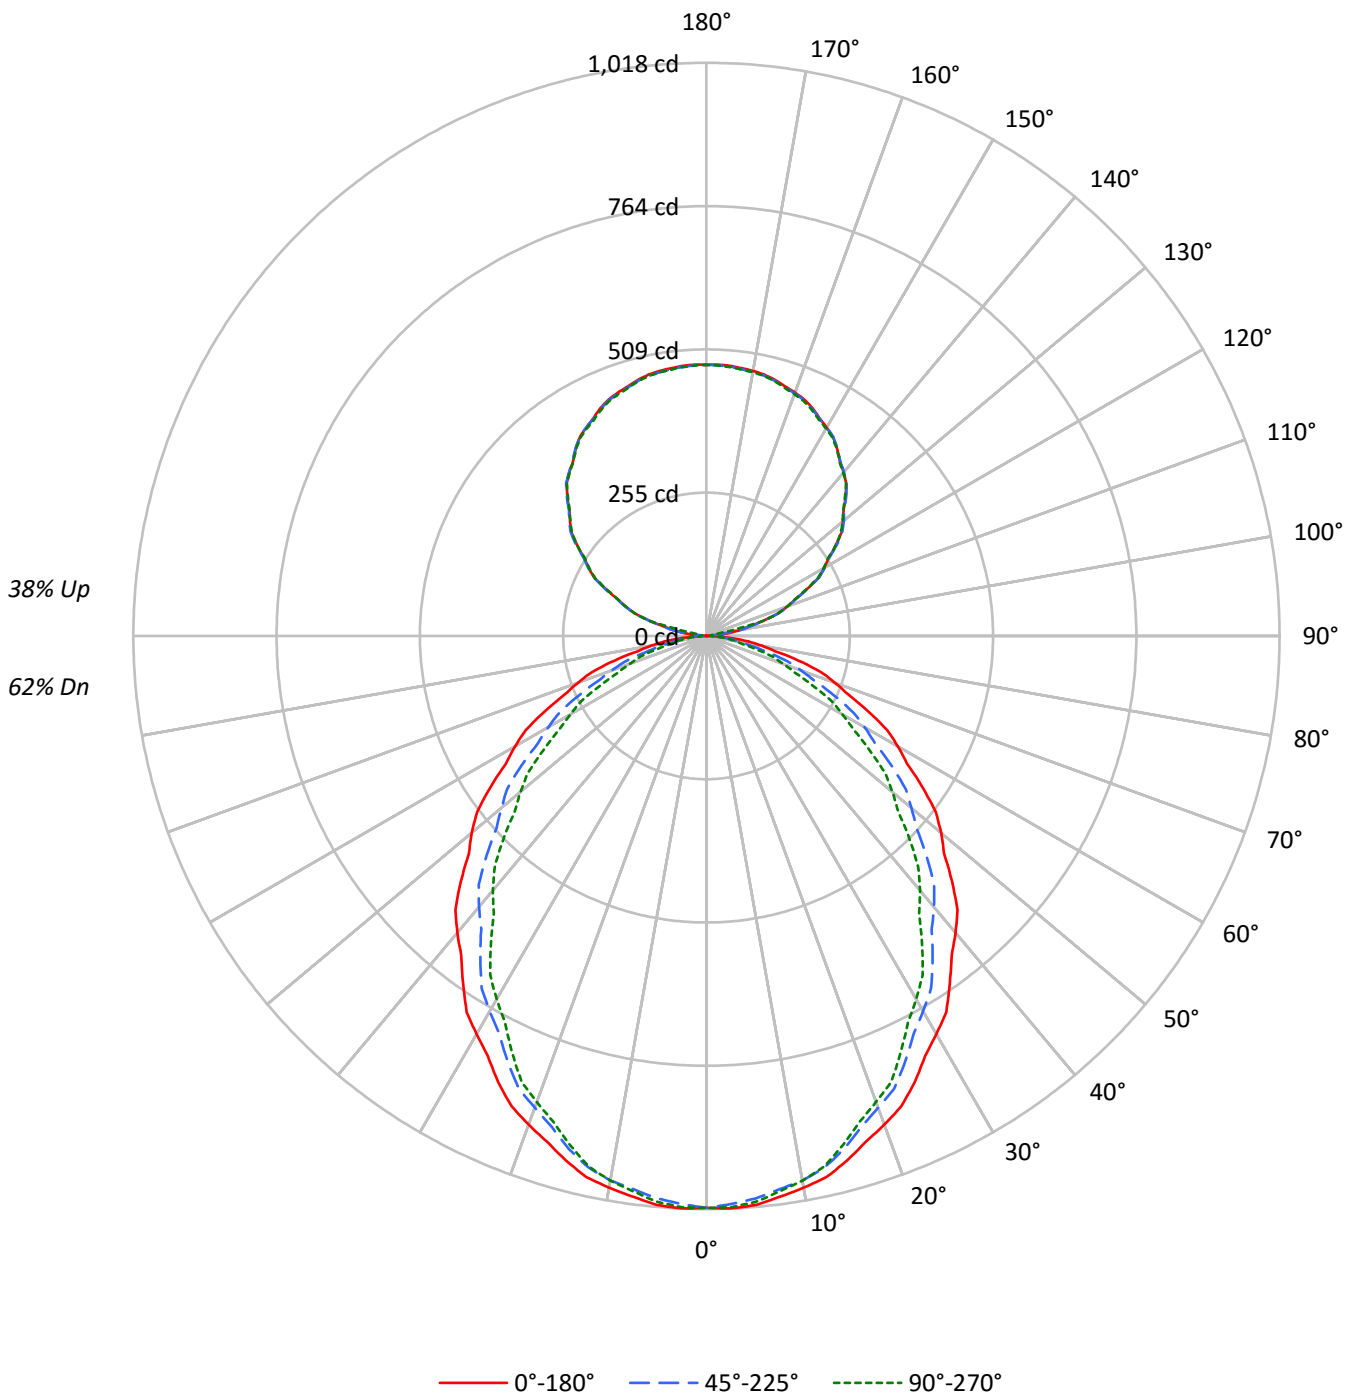



TEST NUMBER: P333523-840

CATALOG NUMBER: S125RDIP-S610D365U840-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	62
1	101	96	93	89	94	90	87	84	79	77	75	69	67	66	60	58	57	53
2	92	85	78	73	86	79	74	69	70	66	62	61	58	55	53	51	49	45
3	84	75	67	61	78	70	64	58	62	57	53	54	50	47	47	44	42	38
4	77	66	58	52	72	62	55	50	55	50	45	48	44	40	42	39	36	33
5	71	59	51	45	66	56	48	43	50	44	39	44	39	35	38	35	32	29
6	65	53	45	39	61	50	43	38	45	39	34	40	35	31	35	31	28	25
7	61	48	40	35	57	46	38	33	41	35	30	36	31	28	32	28	25	22
8	56	44	36	31	53	42	34	29	37	31	27	33	28	25	29	25	22	20
9	53	40	33	27	49	38	31	26	34	28	24	30	26	22	27	23	20	18
10	49	37	30	25	46	35	28	24	32	26	22	28	24	20	25	21	18	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6561	6561	6561
5°	6576	6501	6541
10°	6526	6441	6441
15°	6449	6310	6258
20°	6349	6128	6054
25°	6233	5949	5818
30°	6088	5739	5557
35°	5941	5523	5263
40°	5802	5298	4975
45°	5634	5045	4661
50°	5466	4772	4332
55°	5271	4510	3984
60°	5074	4193	3608
65°	4843	3822	3177
70°	4579	3361	2738
75°	4212	2832	2278
80°	3712	2228	1912
85°	3127	1815	1704



TEST NUMBER: P333523-840

CATALOG NUMBER: S125RDIP-S610D365U840-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	95.5	2.5
10°-20°	267.0	6.9
20°-30°	387.1	10.0
30°-40°	441.2	11.4
40°-50°	430.0	11.1
50°-60°	362.0	9.3
60°-70°	253.8	6.5
70°-80°	130.4	3.4
80°-90°	33.9	0.9
90°-100°	17.5	0.5
100°-110°	107.8	2.8
110°-120°	195.6	5.0
120°-130°	251.0	6.5
130°-140°	270.0	7.0
140°-150°	253.4	6.5
150°-160°	205.0	5.3
160°-170°	132.6	3.4
170°-180°	45.7	1.2
0°-30°	749.6	19.3
0°-40°	1190.8	30.7
0°-60°	1982.8	51.1
0°-90°	2401.0	61.9
90°-120°	321.0	8.3
90°-150°	1095.4	28.2
90°-180°	1479.0	38.1
0°-180°	3879.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1016	1016	1016	1016	1016	
5°	1014	1011	1003	1010	1009	96
15°	964	959	944	943	936	272
25°	875	862	835	825	816	402
35°	754	734	700	679	668	472
45°	617	594	552	523	510	476
55°	468	442	400	367	354	418
65°	317	290	250	220	208	314
75°	169	145	114	97	91	179
85°	42	29	24	24	23	47
90°	0	3	6	7	9	3
95°	20	19	6	7	8	26
105°	105	106	106	106	106	111
115°	197	199	199	198	196	195
125°	280	283	283	281	280	250
135°	350	351	351	350	348	269
145°	405	406	406	406	404	253
155°	446	444	445	446	443	206
165°	471	469	469	471	468	133
175°	482	480	480	482	479	46
180°	482	482	482	482	482	



TEST NUMBER: P333523-840

CATALOG NUMBER: S125RDIP-S610D365U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1015.9	1015.9	1015.9	1015.9	1015.9	1015.9	1015.9	1015.9	1015.9	1015.9	1015.9
2.5°	1017.7	1017.3	1016.9	1016.5	1016.1	1015.2	1013.8	1012.5	1011.1	1009.8	1011.1
5°	1014.3	1013.7	1013.0	1012.3	1011.6	1010.4	1008.5	1006.6	1004.7	1002.8	1004.5
7.5°	1004.4	1003.7	1003.1	1002.4	1001.8	1000.4	998.0	995.8	993.6	991.3	992.5
10°	995.1	994.6	994.1	993.6	993.1	991.7	989.3	986.9	984.5	982.1	982.6
12.5°	984.7	984.1	983.4	982.8	982.1	980.2	977.0	973.8	970.6	967.3	967.8
15°	964.5	963.4	962.4	961.4	960.4	958.1	954.5	950.9	947.4	943.7	943.6
17.5°	941.6	940.1	938.5	937.0	935.3	932.3	927.8	923.3	918.8	914.3	913.4
20°	923.8	922.1	920.4	918.7	917.0	913.4	908.0	902.5	897.1	891.6	890.7
22.5°	904.1	902.4	900.8	899.1	897.4	893.6	887.9	882.2	876.5	870.7	869.1
25°	874.7	872.1	869.6	867.1	864.4	860.0	853.7	847.4	841.1	834.8	832.6
27.5°	840.9	837.9	834.8	831.6	828.5	823.6	816.9	810.1	803.3	796.6	793.5
30°	816.4	813.1	809.9	806.7	803.4	798.2	791.0	784.0	776.8	769.6	765.7
32.5°	792.4	788.7	784.9	781.1	777.3	771.7	764.5	757.2	749.8	742.6	738.2
35°	753.5	749.4	745.3	741.2	737.1	731.2	723.6	715.9	708.2	700.5	695.6
37.5°	715.3	710.2	705.3	700.3	695.4	688.9	681.0	673.1	665.2	657.2	651.4
40°	688.2	683.2	678.0	672.9	667.8	661.2	653.0	644.8	636.6	628.4	622.0
42.5°	660.0	654.8	649.5	644.3	639.0	632.2	623.7	615.2	606.8	598.3	592.1
45°	616.9	612.0	607.0	602.1	597.1	590.0	580.6	571.2	561.8	552.4	545.6
47.5°	572.3	567.0	561.8	556.6	551.4	544.0	534.6	525.1	515.7	506.2	499.3
50°	544.0	538.4	532.7	527.1	521.5	513.8	504.1	494.4	484.6	474.9	467.8
52.5°	513.3	507.6	501.8	496.0	490.3	482.8	473.6	464.4	455.2	446.1	438.4
55°	468.1	462.6	457.2	451.7	446.3	438.7	429.2	419.6	410.1	400.5	392.8
57.5°	422.3	416.5	410.6	404.9	399.0	391.4	382.2	373.0	363.9	354.7	347.1
60°	392.8	386.9	380.9	375.0	369.0	361.4	352.1	343.0	333.8	324.6	317.1
62.5°	361.5	355.9	350.1	344.5	338.8	331.2	321.9	312.6	303.3	293.9	286.9
65°	316.9	311.1	305.3	299.5	293.7	286.3	277.2	268.2	259.1	250.1	243.3
67.5°	272.6	266.7	260.9	255.2	249.3	242.2	233.5	224.8	216.1	207.4	201.3
70°	242.5	236.7	230.9	225.1	219.2	212.1	203.6	195.1	186.5	178.0	172.7
72.5°	213.0	207.3	201.7	196.0	190.4	183.5	175.5	167.5	159.6	151.6	146.7
75°	168.8	163.7	158.5	153.5	148.3	142.2	135.0	127.8	120.7	113.5	109.8
77.5°	124.9	120.8	116.7	112.6	108.6	103.6	97.9	92.2	86.4	80.7	78.1
80°	99.8	95.6	91.6	87.5	83.4	79.0	74.1	69.4	64.6	59.9	58.3
82.5°	75.2	71.5	67.9	64.1	60.5	57.0	53.7	50.4	47.2	43.9	43.2
85°	42.2	39.1	36.1	33.0	29.9	28.0	27.1	26.3	25.4	24.5	24.3
87.5°	14.2	13.3	12.5	11.7	10.9	10.4	10.4	10.4	10.4	10.3	10.4
90°	0.4	1.0	1.6	2.2	2.9	3.5	4.0	4.6	5.2	5.8	6.1
92.5°	5.5	5.0	4.6	4.1	3.7	3.7	4.2	4.7	5.3	5.8	6.1
95°	20.3	20.1	19.9	19.6	19.4	17.8	14.7	11.7	8.7	5.8	6.1
97.5°	42.5	42.9	43.3	43.7	44.2	41.4	35.4	29.5	23.5	17.6	15.3
100°	59.6	59.9	60.1	60.3	60.6	60.8	61.2	61.5	61.8	62.1	50.3
102.5°	77.1	77.4	77.7	78.0	78.3	78.5	78.7	78.9	79.1	79.3	77.1
105°	104.9	105.2	105.6	105.9	106.2	106.3	106.3	106.3	106.3	106.3	106.3
107.5°	133.9	133.9	133.9	133.9	133.9	134.0	134.2	134.3	134.5	134.6	134.6
110°	152.8	152.8	152.8	152.8	152.8	152.9	153.0	153.2	153.3	153.5	153.3



TEST NUMBER: P333523-840

CATALOG NUMBER: S125RDIP-S610D365U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	170.5	170.7	170.9	171.1	171.3	171.4	171.5	171.6	171.7	171.8	171.5
115°	197.0	197.4	197.8	198.2	198.6	198.8	198.9	199.0	199.1	199.1	198.8
117.5°	224.5	224.5	224.5	224.5	224.5	224.6	224.9	225.2	225.5	225.8	225.4
120°	241.7	241.6	241.6	241.5	241.4	241.5	241.7	241.9	242.2	242.4	242.3
122.5°	256.8	257.1	257.4	257.7	258.0	258.2	258.3	258.4	258.5	258.6	258.5
125°	280.2	280.7	281.3	281.9	282.5	282.8	282.8	282.8	282.8	282.8	282.4
127.5°	302.6	303.0	303.4	303.8	304.2	304.4	304.3	304.3	304.2	304.2	304.0
130°	316.3	316.7	317.1	317.5	317.9	318.1	318.2	318.2	318.3	318.4	318.2
132.5°	330.0	330.4	330.9	331.3	331.8	331.9	331.8	331.6	331.4	331.2	331.2
135°	349.5	349.9	350.4	350.9	351.3	351.5	351.3	351.2	351.0	350.9	350.7
137.5°	367.4	367.8	368.2	368.6	369.0	369.2	369.0	368.9	368.7	368.6	368.6
140°	379.1	379.3	379.4	379.6	379.7	379.8	379.7	379.6	379.5	379.5	379.6
142.5°	389.7	389.8	389.9	389.9	390.0	390.1	390.3	390.4	390.5	390.6	390.6
145°	405.2	405.4	405.5	405.7	405.8	405.9	405.9	405.9	405.9	405.9	406.0
147.5°	418.7	418.7	418.7	418.6	418.6	418.6	418.7	418.8	418.9	419.0	419.1
150°	427.3	427.2	427.0	426.8	426.7	426.7	426.8	427.0	427.2	427.3	427.5
152.5°	435.6	435.3	434.8	434.5	434.1	434.0	434.2	434.4	434.5	434.7	434.8
155°	446.3	445.8	445.2	444.7	444.3	444.1	444.3	444.4	444.6	444.7	445.0
157.5°	454.4	454.1	453.8	453.5	453.3	453.1	453.1	453.2	453.2	453.2	453.4
160°	460.1	459.7	459.2	458.7	458.3	458.1	458.1	458.2	458.3	458.4	458.7
162.5°	464.7	464.2	463.7	463.2	462.8	462.6	462.7	462.7	462.8	462.9	463.3
165°	470.8	470.4	469.9	469.4	469.0	468.8	468.8	468.9	469.0	469.1	469.5
167.5°	475.4	474.9	474.4	473.9	473.4	473.2	473.3	473.4	473.5	473.5	474.1
170°	478.0	477.5	476.9	476.4	475.7	475.5	475.6	475.6	475.7	475.8	476.5
172.5°	479.7	479.2	478.6	478.1	477.5	477.3	477.4	477.6	477.7	477.9	478.4
175°	481.5	481.1	480.6	480.1	479.7	479.5	479.5	479.6	479.7	479.8	480.4
177.5°	482.4	482.0	481.6	481.3	480.9	480.7	480.8	480.9	480.9	481.0	481.4
180°	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5



TEST NUMBER: P333523-840

CATALOG NUMBER: S125RDIP-S610D365U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1015.9	1015.9	1015.9	1015.9	1015.9	1015.9	1015.9	1015.9
2.5°	1012.5	1013.8	1015.2	1015.8	1015.7	1015.5	1015.4	1015.3
5°	1006.2	1007.9	1009.7	1010.4	1010.0	1009.7	1009.4	1009.0
7.5°	993.7	994.9	996.1	996.5	996.1	995.7	995.4	995.0
10°	983.1	983.6	984.2	984.2	983.6	983.1	982.6	982.1
12.5°	968.2	968.6	968.9	968.7	967.9	967.1	966.3	965.5
15°	943.4	943.2	943.1	942.2	940.7	939.2	937.7	936.0
17.5°	912.6	911.7	910.9	909.8	908.6	907.3	906.1	904.7
20°	889.9	889.0	888.2	887.0	885.4	883.9	882.4	880.8
22.5°	867.4	865.7	864.0	862.5	861.3	860.0	858.8	857.5
25°	830.4	828.2	826.0	823.8	822.0	820.1	818.3	816.4
27.5°	790.4	787.3	784.2	781.7	779.9	778.1	776.3	774.5
30°	761.7	757.8	753.9	751.1	749.6	748.1	746.6	745.1
32.5°	733.9	729.6	725.3	722.2	720.1	718.2	716.3	714.4
35°	690.6	685.7	680.8	677.1	674.7	672.3	669.9	667.5
37.5°	645.4	639.4	633.5	629.3	627.0	624.8	622.5	620.2
40°	615.4	608.9	602.5	598.2	596.2	594.1	592.1	590.1
42.5°	585.9	579.7	573.5	568.9	565.9	562.9	559.9	556.9
45°	538.8	532.0	525.1	520.5	518.0	515.3	512.8	510.3
47.5°	492.2	485.1	478.2	473.2	470.4	467.6	464.7	461.9
50°	460.6	453.4	446.3	441.4	438.9	436.4	433.7	431.2
52.5°	430.7	422.9	415.3	410.1	407.6	405.1	402.4	399.9
55°	385.2	377.5	369.8	364.7	361.9	359.2	356.5	353.8
57.5°	339.6	332.1	324.7	319.6	317.2	314.8	312.5	310.0
60°	309.5	302.1	294.6	289.5	287.0	284.4	281.9	279.3
62.5°	279.9	273.0	266.0	261.3	258.7	256.2	253.6	251.1
65°	236.5	229.6	222.9	218.1	215.6	213.1	210.5	207.9
67.5°	195.0	188.7	182.5	178.3	176.3	174.3	172.2	170.2
70°	167.4	162.2	156.8	153.2	151.2	149.2	147.0	145.0
72.5°	141.9	136.9	132.1	129.0	127.6	126.2	124.9	123.5
75°	106.0	102.3	98.6	96.0	94.9	93.7	92.5	91.3
77.5°	75.4	72.8	70.2	68.5	67.6	66.7	65.8	64.9
80°	56.8	55.2	53.7	52.8	52.4	52.1	51.7	51.4
82.5°	42.4	41.7	41.0	40.6	40.4	40.2	40.0	39.8
85°	24.2	24.0	23.8	23.7	23.5	23.3	23.2	23.0
87.5°	10.5	10.6	10.7	10.7	10.6	10.5	10.4	10.3
90°	6.5	6.9	7.3	7.6	7.9	8.1	8.3	8.6
92.5°	6.5	6.9	7.3	7.6	7.7	7.8	7.9	8.0
95°	6.5	6.9	7.3	7.5	7.5	7.5	7.5	7.5
97.5°	13.1	10.8	8.6	7.5	7.5	7.5	7.5	7.5
100°	38.5	26.7	14.8	8.8	8.5	8.2	7.8	7.5
102.5°	74.7	72.5	70.3	66.4	61.1	55.7	50.3	44.9
105°	106.3	106.3	106.3	106.3	106.2	106.1	106.1	106.0
107.5°	134.7	134.7	134.7	134.6	134.4	134.1	133.9	133.6
110°	153.0	152.8	152.6	152.5	152.6	152.6	152.7	152.8





TEST NUMBER: P333523-840

CATALOG NUMBER: S125RDIP-S610D365U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	171.2	170.9	170.6	170.4	170.3	170.2	170.1	170.0
115°	198.5	198.2	197.9	197.5	197.0	196.6	196.1	195.6
117.5°	225.0	224.6	224.2	223.9	223.7	223.5	223.3	223.1
120°	242.1	241.9	241.8	241.5	241.1	240.7	240.2	239.8
122.5°	258.3	258.2	258.0	257.7	257.2	256.8	256.3	255.9
125°	282.1	281.8	281.4	281.1	280.9	280.7	280.4	280.2
127.5°	303.8	303.6	303.5	303.1	302.5	301.8	301.3	300.7
130°	317.9	317.7	317.5	317.1	316.8	316.4	316.0	315.6
132.5°	331.1	331.1	331.0	330.8	330.4	330.0	329.6	329.3
135°	350.6	350.4	350.2	349.9	349.5	349.0	348.5	348.0
137.5°	368.7	368.7	368.7	368.5	368.1	367.7	367.3	366.9
140°	379.8	379.9	380.1	379.9	379.5	379.0	378.5	378.0
142.5°	390.6	390.7	390.7	390.5	390.0	389.5	389.1	388.6
145°	406.1	406.1	406.2	406.0	405.6	405.1	404.6	404.0
147.5°	419.2	419.3	419.4	419.2	418.6	418.0	417.5	416.9
150°	427.6	427.8	427.9	427.7	427.1	426.5	425.8	425.2
152.5°	435.0	435.2	435.4	435.2	434.5	434.0	433.4	432.8
155°	445.2	445.5	445.8	445.6	444.9	444.2	443.6	443.0
157.5°	453.7	453.9	454.2	454.0	453.4	452.7	452.1	451.5
160°	459.0	459.3	459.6	459.5	458.8	458.2	457.6	457.0
162.5°	463.8	464.2	464.7	464.5	463.8	463.1	462.5	461.8
165°	470.0	470.5	471.0	470.9	470.3	469.6	469.0	468.4
167.5°	474.7	475.2	475.8	475.7	475.0	474.3	473.6	472.9
170°	477.1	477.8	478.4	478.4	477.7	477.0	476.2	475.4
172.5°	479.0	479.6	480.1	480.1	479.4	478.6	477.9	477.2
175°	481.0	481.7	482.3	482.3	481.5	480.8	480.1	479.4
177.5°	481.9	482.3	482.7	482.7	482.2	481.7	481.2	480.7
180°	481.5	481.5	481.5	481.5	481.5	481.5	481.5	481.5

(END OF REPORT)