

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333283-940

Luminaire Tested: **S125DIP-S1090D1035U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333283-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S1090D1035U940-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1035 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7650.2 lumens  
Efficiency: N/A  
Efficacy: 126.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 60.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333283-940

CATALOG NUMBER: S125DIP-S1090D1035U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

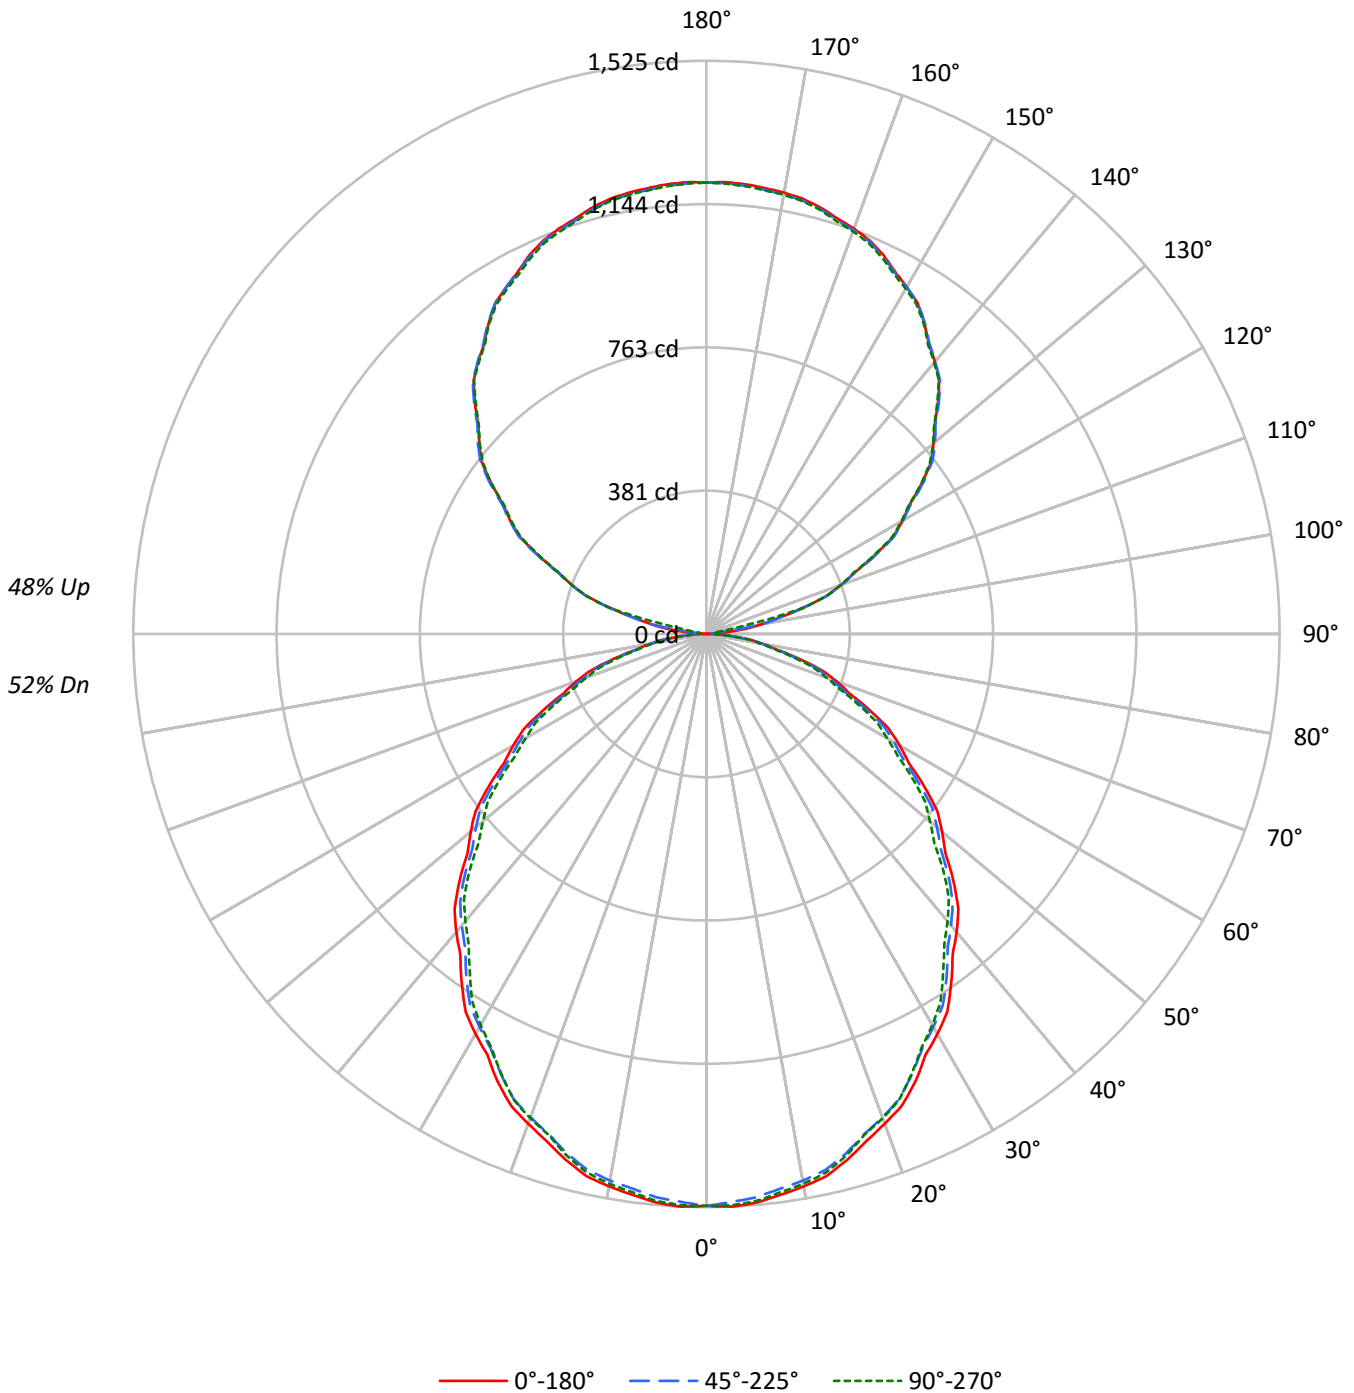



TEST NUMBER: P333283-940

CATALOG NUMBER: S125DIP-S1090D1035U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52
1	98	94	90	86	91	87	83	80	74	71	69	62	60	59	51	50	49	43
2	89	82	76	70	82	76	70	66	65	61	57	54	51	49	45	43	41	36
3	81	72	65	59	75	67	60	55	57	52	48	48	44	41	40	37	35	31
4	75	64	56	50	69	59	52	47	51	45	41	43	39	35	35	32	30	26
5	68	57	49	42	63	53	45	40	45	40	35	38	34	31	32	29	26	23
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	26	23	20
7	58	46	38	32	54	43	36	31	37	31	27	32	27	24	26	23	20	18
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16
9	50	38	31	25	47	36	29	24	31	25	22	27	22	19	22	19	17	14
10	47	35	28	23	44	33	26	22	29	23	19	25	20	17	21	17	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9827	9827	9827
5°	9849	9756	9818
10°	9789	9686	9742
15°	9682	9570	9610
20°	9531	9407	9423
25°	9368	9213	9204
30°	9165	9004	8959
35°	8949	8779	8656
40°	8728	8535	8413
45°	8488	8312	8147
50°	8225	8043	7801
55°	7970	7739	7523
60°	7665	7432	7167
65°	7303	7065	6825
70°	6956	6637	6411
75°	6338	6128	5916
80°	5642	5553	5415
85°	4905	4994	4728



TEST NUMBER: P333283-940

CATALOG NUMBER: S125DIP-S1090D1035U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	143.5	1.9
10°-20°	405.3	5.3
20°-30°	598.4	7.8
30°-40°	698.2	9.1
40°-50°	701.3	9.2
50°-60°	615.6	8.0
60°-70°	458.7	6.0
70°-80°	262.3	3.4
80°-90°	78.8	1.0
90°-100°	43.6	0.6
100°-110°	269.0	3.5
110°-120°	487.9	6.4
120°-130°	626.1	8.2
130°-140°	673.4	8.8
140°-150°	632.1	8.3
150°-160°	511.3	6.7
160°-170°	330.7	4.3
170°-180°	114.1	1.5
0°-30°	1147.1	15.0
0°-40°	1845.3	24.1
0°-60°	3162.2	41.3
0°-90°	3961.9	51.8
90°-120°	800.5	10.5
90°-150°	2732.2	35.7
90°-180°	3688.0	48.2
0°-180°	7650.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1522	1522	1522	1522	1522	
5°	1519	1516	1505	1515	1514	144
15°	1448	1444	1431	1437	1437	408
25°	1315	1308	1293	1295	1292	605
35°	1135	1130	1114	1107	1098	710
45°	929	924	910	896	892	716
55°	708	703	687	677	668	632
65°	478	475	462	452	447	474
75°	254	251	246	242	237	271
85°	66	67	67	66	64	74
90°	1	8	14	19	21	6
95°	51	46	14	18	19	65
105°	262	265	265	265	264	277
115°	492	496	497	493	488	487
125°	699	705	705	702	699	624
135°	872	877	875	873	868	672
145°	1011	1012	1012	1013	1008	632
155°	1113	1108	1109	1112	1105	513
165°	1174	1169	1170	1175	1168	332
175°	1201	1196	1197	1203	1196	114
180°	1201	1201	1201	1201	1201	



TEST NUMBER: P333283-940

CATALOG NUMBER: S125DIP-S1090D1035U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6
2.5°	1525.4	1524.8	1524.1	1523.5	1522.9	1521.4	1519.3	1517.2	1515.0	1512.9	1515.0
5°	1519.2	1518.7	1518.1	1517.6	1517.1	1515.5	1512.8	1510.1	1507.4	1504.8	1507.2
7.5°	1505.2	1504.7	1504.1	1503.6	1503.1	1501.3	1498.3	1495.4	1492.5	1489.5	1491.9
10°	1492.7	1492.2	1491.7	1491.1	1490.6	1488.8	1485.9	1482.9	1480.0	1477.0	1479.2
12.5°	1477.3	1476.3	1475.3	1474.4	1473.5	1471.6	1468.8	1466.2	1463.4	1460.6	1462.4
15°	1448.1	1447.3	1446.5	1445.7	1444.9	1443.1	1440.1	1437.2	1434.2	1431.3	1432.6
17.5°	1414.7	1413.5	1412.3	1411.1	1410.0	1407.8	1404.8	1401.8	1398.7	1395.6	1397.3
20°	1386.8	1386.3	1385.7	1385.2	1384.6	1382.6	1379.1	1375.6	1372.2	1368.7	1370.6
22.5°	1358.8	1357.9	1356.9	1355.9	1355.0	1352.8	1349.6	1346.3	1343.1	1339.8	1341.0
25°	1314.6	1313.2	1311.9	1310.5	1309.2	1306.8	1303.3	1299.8	1296.4	1292.9	1293.4
27.5°	1262.8	1261.9	1261.1	1260.3	1259.5	1257.4	1253.7	1250.2	1246.6	1243.0	1243.1
30°	1229.0	1228.2	1227.4	1226.6	1225.8	1223.4	1219.4	1215.4	1211.4	1207.4	1206.8
32.5°	1192.5	1191.2	1190.0	1188.7	1187.6	1185.2	1181.5	1177.9	1174.4	1170.8	1169.8
35°	1135.1	1134.1	1133.0	1131.9	1130.9	1128.5	1124.7	1121.0	1117.2	1113.5	1112.1
37.5°	1075.7	1074.3	1073.0	1071.7	1070.3	1067.9	1064.3	1060.9	1057.3	1053.8	1051.8
40°	1035.3	1033.9	1032.6	1031.3	1029.9	1027.3	1023.6	1019.8	1016.1	1012.4	1010.0
42.5°	991.9	990.8	989.7	988.6	987.4	985.0	981.2	977.5	973.7	970.0	967.8
45°	929.3	928.3	927.2	926.1	925.1	922.9	919.7	916.5	913.3	910.1	906.9
47.5°	861.9	861.9	862.0	862.1	862.1	860.2	856.4	852.5	848.6	844.8	841.5
50°	818.6	817.8	817.0	816.2	815.4	813.3	810.1	806.9	803.7	800.5	797.0
52.5°	774.3	773.6	773.1	772.5	772.0	769.9	766.5	763.0	759.6	756.2	753.1
55°	707.8	707.0	706.2	705.4	704.6	702.3	698.6	694.8	691.1	687.3	684.9
57.5°	637.8	637.3	636.9	636.5	636.1	634.3	631.1	627.9	624.8	621.6	618.5
60°	593.4	592.4	591.3	590.2	589.2	587.2	584.2	581.3	578.4	575.4	572.7
62.5°	547.2	546.4	545.5	544.7	543.9	542.2	539.6	537.1	534.6	532.1	529.1
65°	477.9	477.3	476.8	476.3	475.7	474.0	471.1	468.1	465.2	462.3	459.9
67.5°	410.7	409.6	408.5	407.3	406.3	404.6	402.3	400.2	398.0	395.8	393.8
70°	368.4	367.0	365.7	364.4	363.0	361.1	358.7	356.3	353.9	351.5	349.9
72.5°	322.2	321.2	320.3	319.4	318.5	317.3	315.8	314.1	312.6	311.0	309.2
75°	254.0	253.4	252.9	252.4	251.8	250.9	249.6	248.3	246.9	245.6	244.8
77.5°	191.2	190.9	190.7	190.6	190.3	189.8	189.0	188.3	187.6	186.8	186.4
80°	151.7	151.7	151.7	151.7	151.7	151.4	150.9	150.3	149.8	149.3	149.0
82.5°	117.0	116.5	116.2	115.7	115.3	115.0	114.9	114.9	114.7	114.6	114.1
85°	66.2	66.4	66.7	67.0	67.2	67.4	67.4	67.4	67.4	67.4	67.1
87.5°	26.2	26.5	26.8	27.1	27.5	27.6	27.7	27.7	27.8	27.9	28.1
90°	0.9	2.5	4.0	5.6	7.2	8.7	10.1	11.5	12.8	14.3	15.2
92.5°	13.7	12.6	11.5	10.3	9.3	9.4	10.5	11.8	13.0	14.3	15.2
95°	50.7	50.1	49.6	49.0	48.4	44.3	36.8	29.2	21.8	14.3	15.2
97.5°	105.9	107.0	108.1	109.1	110.2	103.3	88.5	73.6	58.7	43.8	38.3
100°	148.6	149.3	149.9	150.4	151.1	151.8	152.6	153.4	154.1	154.9	125.5
102.5°	192.2	192.9	193.7	194.4	195.1	195.7	196.3	196.7	197.2	197.7	192.1
105°	261.7	262.5	263.3	264.1	264.9	265.3	265.3	265.3	265.3	265.3	265.3
107.5°	334.0	334.0	334.0	334.0	334.0	334.2	334.7	335.0	335.5	335.8	335.9
110°	381.0	381.0	381.0	381.0	381.0	381.3	381.7	382.1	382.5	382.8	382.3



TEST NUMBER: P333283-940

CATALOG NUMBER: S125DIP-S1090D1035U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	425.3	425.7	426.1	426.7	427.1	427.5	427.8	427.9	428.2	428.5	427.7
115°	491.5	492.5	493.5	494.5	495.4	496.1	496.2	496.4	496.6	496.8	496.1
117.5°	560.0	560.0	559.9	559.9	559.9	560.3	561.0	561.7	562.5	563.2	562.2
120°	602.8	602.5	602.4	602.2	602.0	602.2	602.8	603.3	604.0	604.6	604.1
122.5°	640.5	641.2	642.0	642.7	643.5	644.0	644.4	644.6	644.9	645.2	644.7
125°	698.9	700.3	701.7	703.1	704.5	705.2	705.2	705.2	705.2	705.2	704.4
127.5°	754.7	755.6	756.6	757.6	758.6	759.0	758.9	758.8	758.7	758.6	758.1
130°	788.8	789.9	790.9	791.8	792.8	793.4	793.6	793.8	794.0	794.2	793.6
132.5°	823.0	824.2	825.4	826.4	827.6	828.0	827.5	827.2	826.7	826.3	826.1
135°	871.6	872.8	874.1	875.2	876.4	876.8	876.4	876.0	875.6	875.2	874.8
137.5°	916.3	917.4	918.4	919.4	920.4	920.8	920.4	920.1	919.7	919.4	919.4
140°	945.6	945.9	946.4	946.7	947.1	947.3	947.0	946.8	946.6	946.5	946.8
142.5°	971.9	972.1	972.4	972.6	972.9	973.1	973.4	973.7	973.9	974.2	974.3
145°	1010.6	1010.9	1011.3	1011.7	1012.1	1012.4	1012.4	1012.4	1012.4	1012.4	1012.5
147.5°	1044.4	1044.3	1044.2	1044.1	1044.0	1044.1	1044.4	1044.6	1044.8	1045.1	1045.4
150°	1065.8	1065.3	1065.0	1064.5	1064.2	1064.2	1064.5	1065.0	1065.3	1065.8	1066.1
152.5°	1086.4	1085.6	1084.7	1083.8	1082.9	1082.7	1083.1	1083.4	1083.9	1084.2	1084.7
155°	1112.9	1111.8	1110.5	1109.4	1108.2	1107.8	1108.2	1108.6	1108.9	1109.4	1110.0
157.5°	1133.4	1132.7	1132.0	1131.3	1130.6	1130.2	1130.2	1130.3	1130.3	1130.4	1131.0
160°	1147.6	1146.5	1145.3	1144.1	1142.9	1142.4	1142.6	1142.8	1143.0	1143.2	1144.0
162.5°	1159.0	1157.9	1156.6	1155.5	1154.3	1153.8	1154.0	1154.2	1154.4	1154.6	1155.7
165°	1174.4	1173.1	1172.0	1170.8	1169.7	1169.1	1169.3	1169.5	1169.7	1169.9	1171.1
167.5°	1185.8	1184.5	1183.3	1182.1	1180.9	1180.4	1180.5	1180.7	1180.9	1181.2	1182.6
170°	1192.1	1190.8	1189.4	1188.0	1186.6	1186.1	1186.2	1186.4	1186.6	1186.9	1188.4
172.5°	1196.4	1195.1	1193.6	1192.3	1190.9	1190.4	1190.7	1191.1	1191.4	1191.8	1193.2
175°	1201.0	1199.9	1198.7	1197.5	1196.3	1195.9	1196.1	1196.2	1196.4	1196.6	1198.2
177.5°	1203.2	1202.3	1201.3	1200.3	1199.4	1199.0	1199.2	1199.4	1199.5	1199.6	1200.8
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333283-940

CATALOG NUMBER: S125DIP-S1090D1035U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6
2.5°	1517.2	1519.3	1521.4	1522.4	1522.2	1522.0	1521.8	1521.6
5°	1509.6	1512.0	1514.4	1515.5	1515.2	1514.9	1514.7	1514.4
7.5°	1494.2	1496.6	1499.0	1500.0	1499.8	1499.5	1499.2	1499.0
10°	1481.3	1483.5	1485.6	1486.6	1486.3	1486.0	1485.8	1485.5
12.5°	1464.1	1465.8	1467.5	1468.4	1468.3	1468.2	1468.2	1468.1
15°	1434.0	1435.3	1436.6	1437.3	1437.3	1437.3	1437.3	1437.3
17.5°	1399.0	1400.6	1402.3	1402.5	1401.1	1399.8	1398.5	1397.1
20°	1372.4	1374.3	1376.2	1376.4	1375.1	1373.8	1372.4	1371.1
22.5°	1342.3	1343.5	1344.7	1344.9	1344.0	1343.1	1342.2	1341.2
25°	1294.0	1294.5	1295.0	1294.9	1294.1	1293.2	1292.4	1291.6
27.5°	1243.2	1243.3	1243.5	1243.1	1242.3	1241.5	1240.7	1239.9
30°	1206.3	1205.8	1205.2	1204.6	1203.8	1203.0	1202.2	1201.4
32.5°	1168.9	1167.9	1167.0	1165.7	1164.3	1162.9	1161.4	1159.9
35°	1110.8	1109.5	1108.1	1106.4	1104.3	1102.2	1100.0	1097.9
37.5°	1049.8	1047.8	1045.9	1044.3	1043.0	1041.8	1040.5	1039.4
40°	1007.5	1005.1	1002.7	1001.1	1000.3	999.5	998.7	997.9
42.5°	965.6	963.4	961.3	959.5	958.3	957.1	955.8	954.6
45°	903.7	900.4	897.2	895.2	894.4	893.6	892.8	892.0
47.5°	838.3	835.0	831.8	829.2	827.3	825.5	823.6	821.7
50°	793.5	790.1	786.6	783.9	782.0	780.2	778.3	776.4
52.5°	750.1	747.1	744.0	741.5	739.3	737.3	735.2	733.1
55°	682.5	680.1	677.7	675.6	673.7	671.8	669.9	668.1
57.5°	615.5	612.3	609.2	607.2	606.2	605.1	604.1	603.1
60°	570.1	567.4	564.7	562.4	560.5	558.7	556.8	554.9
62.5°	526.3	523.4	520.5	518.4	516.9	515.5	514.0	512.6
65°	457.4	455.0	452.6	450.8	449.8	448.7	447.6	446.6
67.5°	391.7	389.7	387.6	386.3	385.7	385.0	384.4	383.8
70°	348.3	346.7	345.1	343.8	342.7	341.6	340.5	339.5
72.5°	307.5	305.6	303.8	302.4	301.3	300.2	299.2	298.1
75°	244.0	243.2	242.4	241.4	240.3	239.2	238.2	237.1
77.5°	185.8	185.4	184.9	184.3	183.5	182.8	182.0	181.3
80°	148.7	148.5	148.2	147.8	147.2	146.7	146.2	145.6
82.5°	113.6	113.2	112.7	112.4	112.3	112.2	112.1	111.9
85°	66.9	66.6	66.3	65.9	65.4	64.8	64.3	63.8
87.5°	28.3	28.4	28.7	28.6	28.4	28.0	27.7	27.4
90°	16.2	17.2	18.2	19.0	19.6	20.2	20.8	21.4
92.5°	16.2	17.2	18.2	18.8	19.1	19.4	19.7	20.0
95°	16.2	17.2	18.2	18.7	18.7	18.7	18.7	18.7
97.5°	32.6	27.1	21.5	18.7	18.7	18.7	18.7	18.7
100°	95.9	66.5	37.0	21.8	21.0	20.2	19.5	18.7
102.5°	186.5	180.9	175.3	165.9	152.4	138.9	125.5	112.0
105°	265.3	265.3	265.3	265.2	265.0	264.8	264.7	264.4
107.5°	335.9	336.0	336.0	335.7	335.1	334.6	333.9	333.3
110°	381.7	381.0	380.5	380.3	380.5	380.7	380.8	381.0





TEST NUMBER: P333283-940

CATALOG NUMBER: S125DIP-S1090D1035U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	427.0	426.1	425.4	424.9	424.6	424.4	424.1	423.8
115°	495.3	494.5	493.7	492.7	491.5	490.3	489.1	487.9
117.5°	561.2	560.2	559.1	558.3	557.9	557.3	556.8	556.2
120°	603.8	603.3	603.0	602.3	601.3	600.3	599.3	598.3
122.5°	644.4	644.0	643.5	642.7	641.7	640.5	639.4	638.2
125°	703.6	702.8	702.0	701.3	700.7	700.1	699.5	698.9
127.5°	757.7	757.2	756.8	755.9	754.4	753.0	751.5	750.0
130°	793.0	792.4	791.8	791.0	790.1	789.1	788.1	787.0
132.5°	826.0	825.9	825.7	825.2	824.2	823.2	822.2	821.3
135°	874.4	874.1	873.6	872.8	871.6	870.5	869.2	868.1
137.5°	919.5	919.6	919.7	919.2	918.2	917.1	916.1	915.1
140°	947.3	947.6	948.0	947.6	946.5	945.2	944.1	942.9
142.5°	974.4	974.5	974.6	974.0	972.8	971.6	970.4	969.2
145°	1012.7	1012.9	1013.1	1012.6	1011.5	1010.2	1009.1	1007.9
147.5°	1045.5	1045.8	1046.1	1045.4	1044.0	1042.6	1041.2	1039.7
150°	1066.6	1066.9	1067.3	1066.8	1065.1	1063.5	1061.9	1060.4
152.5°	1085.0	1085.5	1085.8	1085.3	1083.9	1082.4	1081.0	1079.6
155°	1110.5	1111.2	1111.8	1111.3	1109.6	1108.0	1106.5	1104.9
157.5°	1131.7	1132.3	1132.9	1132.5	1130.9	1129.3	1127.7	1126.1
160°	1144.8	1145.6	1146.4	1145.9	1144.4	1142.8	1141.2	1139.6
162.5°	1156.8	1157.9	1159.0	1158.7	1157.0	1155.2	1153.5	1151.7
165°	1172.2	1173.5	1174.7	1174.5	1172.9	1171.3	1169.7	1168.1
167.5°	1184.0	1185.4	1186.9	1186.7	1184.9	1183.1	1181.3	1179.6
170°	1190.0	1191.6	1193.2	1193.0	1191.2	1189.5	1187.8	1186.0
172.5°	1194.6	1196.1	1197.5	1197.3	1195.5	1193.7	1191.9	1190.3
175°	1199.8	1201.4	1202.9	1202.8	1201.0	1199.3	1197.5	1195.7
177.5°	1201.8	1203.0	1204.1	1204.0	1202.7	1201.5	1200.2	1198.9
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0

(END OF REPORT)