

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333275-940

Luminaire Tested: **S125DIP-S1090D810U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333275-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1090D810U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6461.6 lumens
Efficiency: N/A
Efficacy: 118.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333275-940

CATALOG NUMBER: S125DIP-S1090D810U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

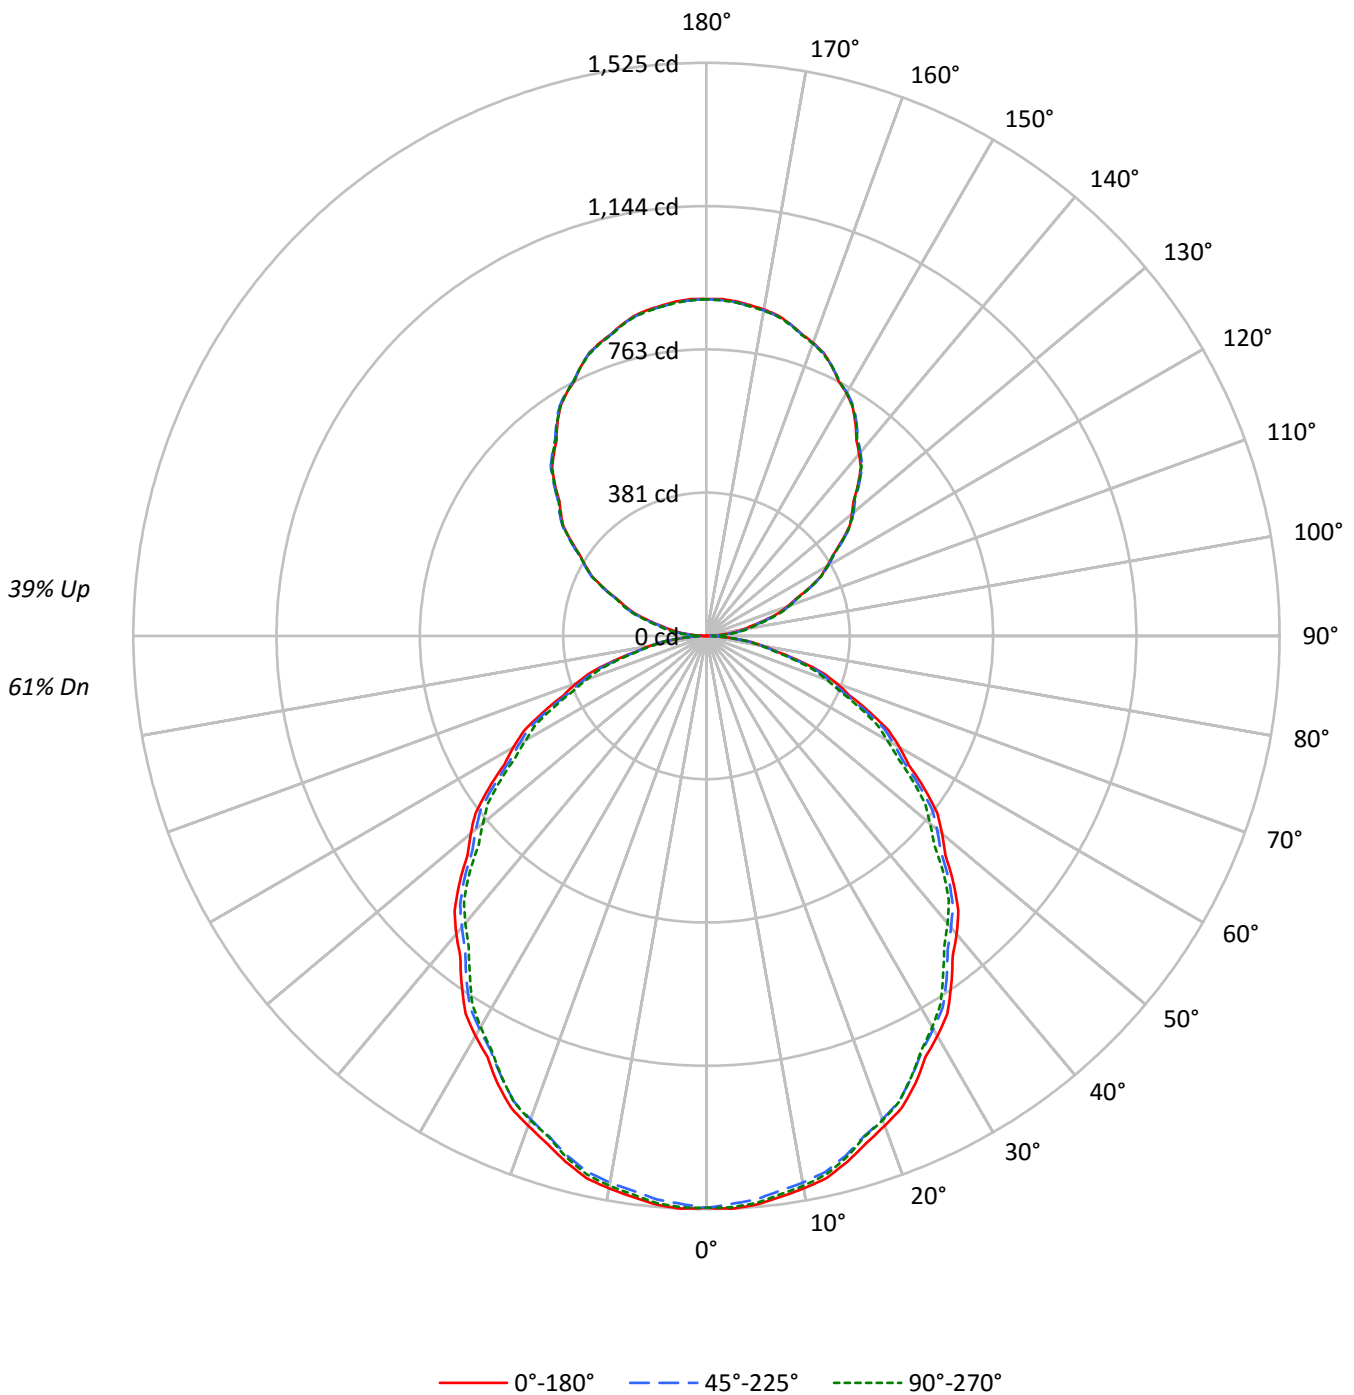



TEST NUMBER: P333275-940

CATALOG NUMBER: S125DIP-S1090D810U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	61
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56	51
2	91	84	77	72	85	78	73	68	69	65	61	60	57	54	52	49	47	43
3	83	74	66	60	78	69	62	57	61	55	51	53	49	46	46	43	40	36
4	76	65	57	51	71	61	54	48	54	48	44	47	43	39	41	37	35	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	65	52	44	38	60	49	42	36	44	37	33	38	33	30	33	30	27	24
7	60	47	39	33	56	45	37	32	40	33	29	35	30	26	30	27	24	21
8	55	43	35	30	52	41	33	28	36	30	26	32	27	23	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	22	19	24	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9827	9827	9827
5°	9849	9756	9818
10°	9789	9686	9742
15°	9682	9570	9610
20°	9531	9407	9423
25°	9368	9213	9204
30°	9165	9004	8959
35°	8949	8779	8656
40°	8728	8535	8413
45°	8488	8312	8147
50°	8225	8043	7801
55°	7970	7739	7523
60°	7665	7432	7167
65°	7303	7065	6825
70°	6956	6637	6411
75°	6338	6128	5916
80°	5642	5553	5415
85°	4905	4994	4728



TEST NUMBER: P333275-940

CATALOG NUMBER: S125DIP-S1090D810U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	143.5	2.2
10°-20°	405.3	6.3
20°-30°	598.4	9.3
30°-40°	698.2	10.8
40°-50°	701.3	10.9
50°-60°	615.6	9.5
60°-70°	458.7	7.1
70°-80°	262.3	4.1
80°-90°	78.3	1.2
90°-100°	60.0	0.9
100°-110°	177.2	2.7
110°-120°	300.2	4.6
120°-130°	395.0	6.1
130°-140°	442.6	6.9
140°-150°	433.8	6.7
150°-160°	364.4	5.6
160°-170°	242.2	3.7
170°-180°	84.8	1.3
0°-30°	1147.1	17.8
0°-40°	1845.3	28.6
0°-60°	3162.2	48.9
0°-90°	3961.3	61.3
90°-120°	537.4	8.3
90°-150°	1808.9	28.0
90°-180°	2500.0	38.7
0°-180°	6461.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1522	1522	1522	1522	1522	
5°	1519	1516	1505	1515	1514	144
15°	1448	1444	1431	1437	1437	408
25°	1315	1308	1293	1295	1292	605
35°	1135	1130	1114	1107	1098	710
45°	929	924	910	896	892	716
55°	708	703	687	677	668	632
65°	478	475	462	452	447	474
75°	254	251	246	242	237	271
85°	66	67	67	66	64	74
90°	1	6	11	15	17	6
95°	45	47	54	58	60	48
105°	159	162	167	171	173	170
115°	300	303	305	304	303	297
125°	438	443	443	442	441	393
135°	570	574	575	575	572	439
145°	691	694	696	696	694	432
155°	791	791	791	794	791	364
165°	860	858	859	861	858	242
175°	894	891	891	895	890	85
180°	896	896	896	896	896	



TEST NUMBER: P333275-940

CATALOG NUMBER: S125DIP-S1090D810U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6
2.5°	1525.4	1524.8	1524.1	1523.5	1522.9	1521.4	1519.3	1517.2	1515.0	1512.9	1515.0
5°	1519.2	1518.7	1518.1	1517.6	1517.1	1515.5	1512.8	1510.1	1507.4	1504.8	1507.2
7.5°	1505.2	1504.7	1504.1	1503.6	1503.1	1501.3	1498.3	1495.4	1492.5	1489.5	1491.9
10°	1492.7	1492.2	1491.7	1491.1	1490.6	1488.8	1485.9	1482.9	1480.0	1477.0	1479.2
12.5°	1477.3	1476.3	1475.3	1474.4	1473.5	1471.6	1468.8	1466.2	1463.4	1460.6	1462.4
15°	1448.1	1447.3	1446.5	1445.7	1444.9	1443.1	1440.1	1437.2	1434.2	1431.3	1432.6
17.5°	1414.7	1413.5	1412.3	1411.1	1410.0	1407.8	1404.8	1401.8	1398.7	1395.6	1397.3
20°	1386.8	1386.3	1385.7	1385.2	1384.6	1382.6	1379.1	1375.6	1372.2	1368.7	1370.6
22.5°	1358.8	1357.9	1356.9	1355.9	1355.0	1352.8	1349.6	1346.3	1343.1	1339.8	1341.0
25°	1314.6	1313.2	1311.9	1310.5	1309.2	1306.8	1303.3	1299.8	1296.4	1292.9	1293.4
27.5°	1262.8	1261.9	1261.1	1260.3	1259.5	1257.4	1253.7	1250.2	1246.6	1243.0	1243.1
30°	1229.0	1228.2	1227.4	1226.6	1225.8	1223.4	1219.4	1215.4	1211.4	1207.4	1206.8
32.5°	1192.5	1191.2	1190.0	1188.7	1187.6	1185.2	1181.5	1177.9	1174.4	1170.8	1169.8
35°	1135.1	1134.1	1133.0	1131.9	1130.9	1128.5	1124.7	1121.0	1117.2	1113.5	1112.1
37.5°	1075.7	1074.3	1073.0	1071.7	1070.3	1067.9	1064.3	1060.9	1057.3	1053.8	1051.8
40°	1035.3	1033.9	1032.6	1031.3	1029.9	1027.3	1023.6	1019.8	1016.1	1012.4	1010.0
42.5°	991.9	990.8	989.7	988.6	987.4	985.0	981.2	977.5	973.7	970.0	967.8
45°	929.3	928.3	927.2	926.1	925.1	922.9	919.7	916.5	913.3	910.1	906.9
47.5°	861.9	861.9	862.0	862.1	862.1	860.2	856.4	852.5	848.6	844.8	841.5
50°	818.6	817.8	817.0	816.2	815.4	813.3	810.1	806.9	803.7	800.5	797.0
52.5°	774.3	773.6	773.1	772.5	772.0	769.9	766.5	763.0	759.6	756.2	753.1
55°	707.8	707.0	706.2	705.4	704.6	702.3	698.6	694.8	691.1	687.3	684.9
57.5°	637.8	637.3	636.9	636.5	636.1	634.3	631.1	627.9	624.8	621.6	618.5
60°	593.4	592.4	591.3	590.2	589.2	587.2	584.2	581.3	578.4	575.4	572.7
62.5°	547.2	546.4	545.5	544.7	543.9	542.2	539.6	537.1	534.6	532.1	529.1
65°	477.9	477.3	476.8	476.3	475.7	474.0	471.1	468.1	465.2	462.3	459.9
67.5°	410.7	409.6	408.5	407.3	406.3	404.6	402.3	400.2	398.0	395.8	393.8
70°	368.4	367.0	365.7	364.4	363.0	361.1	358.7	356.3	353.9	351.5	349.9
72.5°	322.2	321.2	320.3	319.4	318.5	317.3	315.8	314.1	312.6	311.0	309.2
75°	254.0	253.4	252.9	252.4	251.8	250.9	249.6	248.3	246.9	245.6	244.8
77.5°	191.2	190.9	190.7	190.6	190.3	189.8	189.0	188.3	187.6	186.8	186.4
80°	151.7	151.7	151.7	151.7	151.7	151.4	150.9	150.3	149.8	149.3	149.0
82.5°	117.0	116.5	116.2	115.7	115.3	115.0	114.9	114.9	114.7	114.6	114.1
85°	66.2	66.4	66.7	67.0	67.2	67.4	67.4	67.4	67.4	67.4	67.1
87.5°	26.1	26.4	26.7	26.8	27.1	27.3	27.3	27.3	27.3	27.3	27.5
90°	0.7	2.0	3.2	4.5	5.6	6.8	7.9	9.0	10.1	11.1	11.9
92.5°	16.9	17.7	18.6	19.4	20.3	21.4	22.7	24.1	25.4	26.8	27.8
95°	45.3	45.7	45.9	46.3	46.5	47.5	49.0	50.6	52.2	53.7	54.8
97.5°	75.3	75.4	75.5	75.7	75.8	77.0	79.1	81.2	83.4	85.5	86.5
100°	97.6	97.6	97.6	97.6	97.6	98.6	100.7	102.6	104.7	106.6	108.1
102.5°	121.6	122.3	122.9	123.5	124.1	124.9	125.9	127.0	128.0	129.0	130.5
105°	159.0	159.8	160.5	161.3	162.1	162.9	163.9	164.8	165.7	166.7	167.6
107.5°	200.3	201.0	201.8	202.6	203.4	204.1	204.8	205.5	206.3	207.0	207.4
110°	228.7	229.5	230.2	231.0	231.8	232.5	232.9	233.4	233.8	234.3	234.8



TEST NUMBER: P333275-940

CATALOG NUMBER: S125DIP-S1090D810U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	257.7	258.2	258.5	259.0	259.3	259.8	260.4	261.0	261.6	262.2	262.4
115°	300.5	301.1	301.8	302.4	303.0	303.4	303.8	304.1	304.4	304.7	304.5
117.5°	343.5	343.8	344.0	344.3	344.6	344.9	345.2	345.4	345.7	346.0	346.1
120°	370.2	371.0	371.8	372.6	373.4	373.8	374.0	374.2	374.3	374.4	374.4
122.5°	399.2	399.6	399.8	400.1	400.4	400.7	401.1	401.5	401.9	402.3	402.2
125°	438.5	439.5	440.4	441.4	442.3	442.8	443.0	443.2	443.3	443.4	443.2
127.5°	480.5	481.0	481.4	482.0	482.5	482.9	483.0	483.2	483.5	483.7	483.5
130°	505.5	506.3	507.1	507.8	508.6	509.2	509.4	509.8	510.1	510.4	510.2
132.5°	530.7	531.9	533.2	534.4	535.7	536.3	536.3	536.2	536.1	536.1	535.9
135°	570.3	571.3	572.2	573.2	574.1	574.6	574.8	575.0	575.1	575.2	575.2
137.5°	607.8	608.7	609.6	610.5	611.4	612.0	612.3	612.6	613.0	613.3	613.5
140°	631.8	632.5	633.3	634.1	634.8	635.4	635.9	636.4	636.9	637.3	637.7
142.5°	655.8	656.4	657.0	657.6	658.4	659.0	659.5	660.1	660.7	661.3	661.5
145°	691.0	691.6	692.2	692.9	693.5	694.0	694.5	694.9	695.4	695.9	695.9
147.5°	723.6	724.0	724.3	724.7	725.0	725.3	725.8	726.1	726.5	726.8	727.2
150°	745.4	745.2	745.1	744.9	744.8	745.0	745.6	746.3	746.9	747.5	747.5
152.5°	763.2	763.5	763.7	763.9	764.1	764.4	764.6	764.8	765.1	765.4	765.7
155°	790.7	790.7	790.7	790.7	790.7	790.8	790.9	791.1	791.2	791.4	792.0
157.5°	815.3	814.9	814.6	814.2	813.9	813.8	814.0	814.1	814.2	814.4	815.0
160°	829.7	829.3	828.8	828.4	827.9	827.8	827.9	828.0	828.2	828.4	829.0
162.5°	842.6	842.2	841.9	841.6	841.2	841.1	841.1	841.2	841.2	841.2	842.0
165°	859.8	859.4	859.2	858.8	858.5	858.4	858.5	858.7	858.9	859.1	859.7
167.5°	874.2	873.6	873.0	872.4	871.7	871.5	871.5	871.5	871.5	871.5	872.4
170°	882.1	881.5	880.8	880.2	879.6	879.2	879.2	879.2	879.2	879.2	880.2
172.5°	887.6	887.0	886.4	885.7	885.1	884.8	884.8	884.8	884.8	884.8	885.7
175°	893.9	893.3	892.7	892.1	891.4	891.1	891.1	891.1	891.1	891.1	892.1
177.5°	897.2	896.6	896.2	895.6	895.1	894.8	894.7	894.6	894.5	894.3	895.1
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0



TEST NUMBER: P333275-940

CATALOG NUMBER: S125DIP-S1090D810U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6
2.5°	1517.2	1519.3	1521.4	1522.4	1522.2	1522.0	1521.8	1521.6
5°	1509.6	1512.0	1514.4	1515.5	1515.2	1514.9	1514.7	1514.4
7.5°	1494.2	1496.6	1499.0	1500.0	1499.8	1499.5	1499.2	1499.0
10°	1481.3	1483.5	1485.6	1486.6	1486.3	1486.0	1485.8	1485.5
12.5°	1464.1	1465.8	1467.5	1468.4	1468.3	1468.2	1468.2	1468.1
15°	1434.0	1435.3	1436.6	1437.3	1437.3	1437.3	1437.3	1437.3
17.5°	1399.0	1400.6	1402.3	1402.5	1401.1	1399.8	1398.5	1397.1
20°	1372.4	1374.3	1376.2	1376.4	1375.1	1373.8	1372.4	1371.1
22.5°	1342.3	1343.5	1344.7	1344.9	1344.0	1343.1	1342.2	1341.2
25°	1294.0	1294.5	1295.0	1294.9	1294.1	1293.2	1292.4	1291.6
27.5°	1243.2	1243.3	1243.5	1243.1	1242.3	1241.5	1240.7	1239.9
30°	1206.3	1205.8	1205.2	1204.6	1203.8	1203.0	1202.2	1201.4
32.5°	1168.9	1167.9	1167.0	1165.7	1164.3	1162.9	1161.4	1159.9
35°	1110.8	1109.5	1108.1	1106.4	1104.3	1102.2	1100.0	1097.9
37.5°	1049.8	1047.8	1045.9	1044.3	1043.0	1041.8	1040.5	1039.4
40°	1007.5	1005.1	1002.7	1001.1	1000.3	999.5	998.7	997.9
42.5°	965.6	963.4	961.3	959.5	958.3	957.1	955.8	954.6
45°	903.7	900.4	897.2	895.2	894.4	893.6	892.8	892.0
47.5°	838.3	835.0	831.8	829.2	827.3	825.5	823.6	821.7
50°	793.5	790.1	786.6	783.9	782.0	780.2	778.3	776.4
52.5°	750.1	747.1	744.0	741.5	739.3	737.3	735.2	733.1
55°	682.5	680.1	677.7	675.6	673.7	671.8	669.9	668.1
57.5°	615.5	612.3	609.2	607.2	606.2	605.1	604.1	603.1
60°	570.1	567.4	564.7	562.4	560.5	558.7	556.8	554.9
62.5°	526.3	523.4	520.5	518.4	516.9	515.5	514.0	512.6
65°	457.4	455.0	452.6	450.8	449.8	448.7	447.6	446.6
67.5°	391.7	389.7	387.6	386.3	385.7	385.0	384.4	383.8
70°	348.3	346.7	345.1	343.8	342.7	341.6	340.5	339.5
72.5°	307.5	305.6	303.8	302.4	301.3	300.2	299.2	298.1
75°	244.0	243.2	242.4	241.4	240.3	239.2	238.2	237.1
77.5°	185.8	185.4	184.9	184.3	183.5	182.8	182.0	181.3
80°	148.7	148.5	148.2	147.8	147.2	146.7	146.2	145.6
82.5°	113.6	113.2	112.7	112.4	112.3	112.2	112.1	111.9
85°	66.9	66.6	66.3	65.9	65.4	64.8	64.3	63.8
87.5°	27.6	27.7	27.9	27.8	27.5	27.1	26.8	26.5
90°	12.7	13.5	14.3	14.9	15.3	15.8	16.2	16.8
92.5°	28.8	29.9	30.9	31.6	31.9	32.2	32.5	32.9
95°	55.8	57.0	58.1	58.8	59.0	59.4	59.7	59.9
97.5°	87.6	88.5	89.6	90.2	90.3	90.5	90.8	91.0
100°	109.5	110.8	112.3	113.2	113.4	113.7	114.0	114.3
102.5°	132.1	133.6	135.1	136.1	136.5	136.9	137.3	137.8
105°	168.5	169.4	170.4	171.0	171.6	172.0	172.5	172.9
107.5°	207.9	208.3	208.8	209.0	209.0	208.9	208.9	208.9
110°	235.2	235.7	236.1	236.3	236.1	235.9	235.9	235.7



TEST NUMBER: P333275-940

CATALOG NUMBER: S125DIP-S1090D810U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	262.6	262.8	263.1	263.1	262.7	262.4	262.2	261.9
115°	304.4	304.3	304.1	303.9	303.8	303.6	303.4	303.4
117.5°	346.3	346.3	346.5	346.3	345.6	345.0	344.4	343.8
120°	374.4	374.4	374.4	374.2	373.5	372.9	372.3	371.7
122.5°	402.1	402.0	401.8	401.5	401.0	400.6	400.0	399.6
125°	442.8	442.6	442.2	442.0	441.8	441.7	441.6	441.4
127.5°	483.3	483.1	483.0	482.8	482.5	482.1	481.9	481.5
130°	510.1	510.0	509.8	509.5	509.3	508.9	508.6	508.3
132.5°	535.7	535.6	535.5	535.1	534.8	534.3	533.9	533.4
135°	575.2	575.2	575.2	575.0	574.4	573.7	573.1	572.5
137.5°	613.7	613.9	614.0	613.8	613.0	612.2	611.4	610.6
140°	637.9	638.2	638.6	638.3	637.6	636.8	636.0	635.3
142.5°	661.6	661.8	662.0	661.7	660.9	660.2	659.4	658.6
145°	695.9	695.9	695.9	695.6	695.2	694.7	694.3	693.8
147.5°	727.5	728.0	728.3	728.0	726.9	725.9	724.9	723.8
150°	747.5	747.5	747.5	747.3	747.0	746.7	746.4	746.1
152.5°	766.1	766.4	766.8	766.7	766.2	765.6	765.1	764.5
155°	792.6	793.3	793.9	793.8	793.0	792.3	791.5	790.7
157.5°	815.6	816.3	816.9	816.7	815.6	814.7	813.6	812.6
160°	829.6	830.2	830.8	830.8	830.0	829.2	828.4	827.7
162.5°	842.7	843.5	844.2	844.1	843.2	842.3	841.4	840.5
165°	860.3	860.9	861.5	861.4	860.4	859.5	858.5	857.6
167.5°	873.3	874.2	875.2	875.1	874.2	873.3	872.3	871.3
170°	881.1	882.1	883.0	882.9	881.8	880.7	879.7	878.6
172.5°	886.7	887.6	888.6	888.6	887.6	886.6	885.6	884.7
175°	893.0	893.9	894.8	894.7	893.7	892.6	891.5	890.5
177.5°	895.8	896.5	897.3	897.2	896.3	895.5	894.7	893.8
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0

(END OF REPORT)