

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333339-940

Luminaire Tested: **S125DIP-S1270D1205U940-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333339-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1270D1205U940-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8429.7 lumens
Efficiency: N/A
Efficacy: 117.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333339-940

CATALOG NUMBER: S125DIP-S1270D1205U940-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

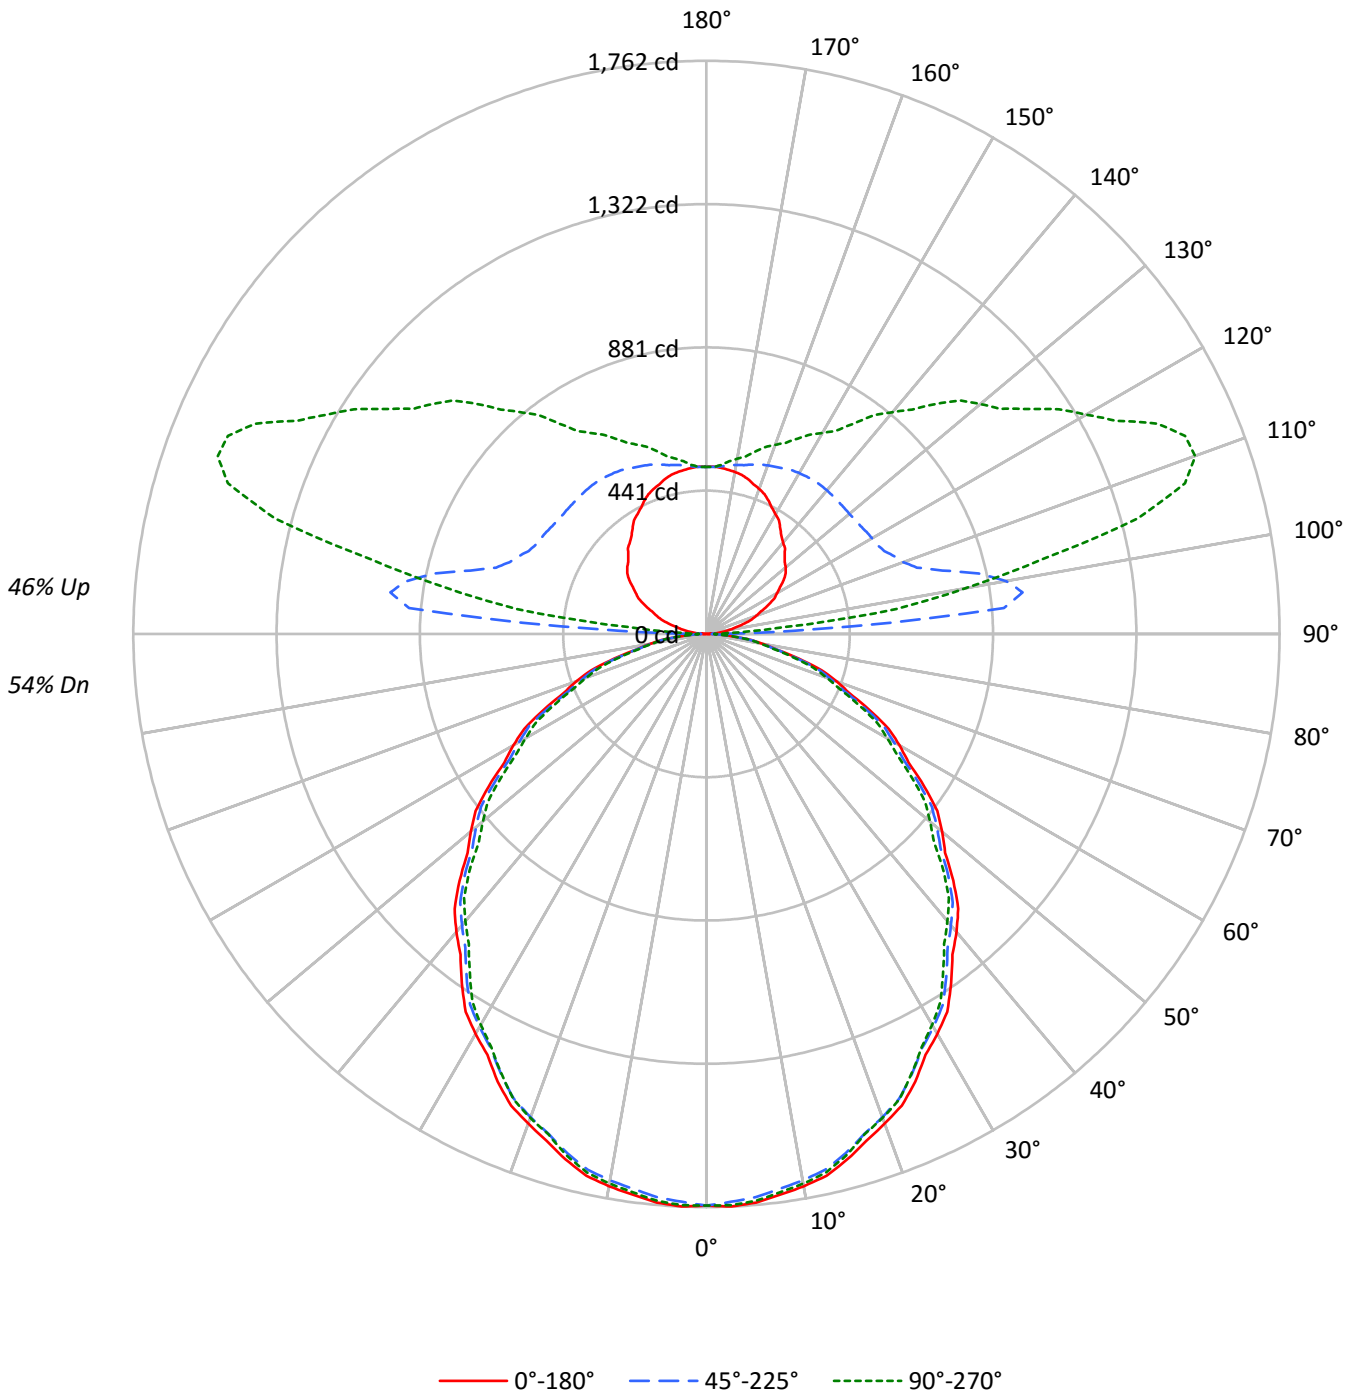



TEST NUMBER: P333339-940

CATALOG NUMBER: S125DIP-S1270D1205U940-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54
1	99	94	90	87	91	88	84	81	75	73	70	64	62	60	53	52	51	46
2	90	82	76	71	83	77	71	67	66	62	58	56	53	50	47	44	43	38
3	82	72	65	59	76	67	61	56	58	53	49	49	46	42	41	39	36	32
4	75	64	56	50	69	60	53	47	52	46	42	44	40	36	37	34	31	28
5	69	57	49	43	64	53	46	40	46	40	36	39	35	31	33	30	27	24
6	63	51	43	37	59	48	41	35	42	36	31	36	31	28	30	27	24	21
7	59	46	38	33	54	43	36	31	38	32	28	32	28	24	28	24	21	19
8	54	42	34	29	50	39	32	27	34	29	25	30	25	22	25	22	19	17
9	51	38	31	26	47	36	29	24	32	26	22	27	23	20	23	20	17	15
10	47	35	28	23	44	33	26	22	29	24	20	25	21	18	22	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11349	11349	11349
5°	11374	11267	11339
10°	11305	11187	11252
15°	11183	11053	11099
20°	11008	10864	10883
25°	10819	10641	10630
30°	10586	10399	10347
35°	10336	10139	9996
40°	10080	9857	9716
45°	9803	9600	9409
50°	9499	9289	9010
55°	9205	8939	8688
60°	8853	8584	8280
65°	8436	8159	7882
70°	8033	7666	7404
75°	7321	7079	6832
80°	6512	6412	6259
85°	5669	5765	5461



TEST NUMBER: P333339-940

CATALOG NUMBER: S125DIP-S1270D1205U940-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	165.7	2.0
10°-20°	468.1	5.6
20°-30°	691.1	8.2
30°-40°	806.4	9.6
40°-50°	809.9	9.6
50°-60°	710.9	8.4
60°-70°	529.7	6.3
70°-80°	302.9	3.6
80°-90°	91.0	1.1
90°-100°	372.5	4.4
100°-110°	800.8	9.5
110°-120°	751.5	8.9
120°-130°	609.1	7.2
130°-140°	488.8	5.8
140°-150°	368.8	4.4
150°-160°	259.6	3.1
160°-170°	153.0	1.8
170°-180°	49.8	0.6
0°-30°	1324.8	15.7
0°-40°	2131.2	25.3
0°-60°	3652.1	43.3
0°-90°	4575.7	54.3
90°-120°	1924.8	22.8
90°-150°	3391.5	40.2
90°-180°	3854.0	45.7
0°-180°	8429.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1757	1757	1757	1757	1757	
5°	1754	1751	1738	1750	1749	166
15°	1672	1668	1653	1660	1660	471
25°	1518	1511	1493	1496	1492	698
35°	1311	1305	1286	1279	1268	820
45°	1073	1067	1051	1035	1030	827
55°	818	812	794	781	772	730
65°	552	548	534	522	516	548
75°	293	290	284	279	274	313
85°	76	78	78	76	74	85
90°	1	9	17	22	24	6
95°	34	101	918	416	244	36
105°	117	164	751	1479	1373	123
115°	209	252	603	1300	1529	206
125°	290	340	578	1034	1205	257
135°	340	409	574	867	1001	264
145°	396	453	576	718	790	248
155°	452	486	562	635	662	208
165°	493	507	539	571	580	139
175°	513	513	517	523	521	49
180°	514	514	514	514	514	



TEST NUMBER: P333339-940

CATALOG NUMBER: S125DIP-S1270D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3
2.5°	1761.8	1761.0	1760.3	1759.5	1758.8	1757.2	1754.7	1752.2	1749.8	1747.3	1749.8
5°	1754.5	1753.9	1753.3	1752.7	1752.0	1750.2	1747.1	1744.0	1741.0	1737.9	1740.6
7.5°	1738.4	1737.8	1737.1	1736.5	1735.9	1733.9	1730.5	1727.2	1723.8	1720.4	1723.1
10°	1723.9	1723.3	1722.7	1722.1	1721.4	1719.5	1716.1	1712.7	1709.2	1705.8	1708.3
12.5°	1706.1	1705.0	1704.0	1702.8	1701.7	1699.6	1696.4	1693.3	1690.1	1686.9	1689.0
15°	1672.5	1671.6	1670.6	1669.7	1668.8	1666.6	1663.2	1659.8	1656.4	1653.1	1654.6
17.5°	1633.9	1632.5	1631.1	1629.8	1628.4	1625.9	1622.5	1618.9	1615.4	1611.9	1613.8
20°	1601.6	1601.0	1600.4	1599.7	1599.1	1596.8	1592.8	1588.8	1584.7	1580.7	1582.9
22.5°	1569.3	1568.3	1567.1	1566.0	1564.9	1562.5	1558.7	1555.0	1551.1	1547.4	1548.8
25°	1518.2	1516.6	1515.1	1513.6	1512.0	1509.2	1505.2	1501.2	1497.2	1493.2	1493.8
27.5°	1458.4	1457.5	1456.5	1455.6	1454.7	1452.2	1448.0	1443.9	1439.8	1435.6	1435.7
30°	1419.5	1418.5	1417.6	1416.7	1415.8	1413.0	1408.4	1403.7	1399.1	1394.5	1393.8
32.5°	1377.2	1375.8	1374.4	1373.0	1371.5	1368.8	1364.6	1360.5	1356.3	1352.2	1351.1
35°	1311.0	1309.8	1308.6	1307.3	1306.1	1303.3	1299.0	1294.7	1290.3	1286.0	1284.5
37.5°	1242.3	1240.8	1239.3	1237.7	1236.2	1233.3	1229.3	1225.2	1221.1	1217.1	1214.8
40°	1195.6	1194.1	1192.6	1191.0	1189.5	1186.5	1182.2	1177.9	1173.6	1169.2	1166.4
42.5°	1145.6	1144.3	1143.0	1141.7	1140.4	1137.6	1133.3	1128.9	1124.6	1120.3	1117.8
45°	1073.3	1072.1	1070.9	1069.6	1068.4	1065.9	1062.2	1058.5	1054.8	1051.1	1047.3
47.5°	995.4	995.5	995.6	995.6	995.7	993.5	989.1	984.6	980.2	975.7	972.0
50°	945.4	944.5	943.5	942.6	941.6	939.3	935.7	931.9	928.3	924.5	920.5
52.5°	894.2	893.6	892.9	892.2	891.5	889.2	885.2	881.3	877.4	873.3	869.9
55°	817.5	816.5	815.6	814.7	813.8	811.2	806.8	802.5	798.2	793.9	791.0
57.5°	736.6	736.1	735.6	735.1	734.6	732.5	728.9	725.2	721.6	717.9	714.3
60°	685.4	684.2	683.0	681.7	680.5	678.1	674.8	671.4	668.0	664.6	661.5
62.5°	632.0	631.1	630.1	629.0	628.0	626.2	623.2	620.3	617.4	614.5	611.2
65°	552.0	551.3	550.7	550.1	549.5	547.4	544.0	540.6	537.3	533.9	531.1
67.5°	474.4	473.1	471.8	470.5	469.2	467.3	464.8	462.2	459.7	457.1	454.8
70°	425.4	423.9	422.3	420.8	419.3	417.1	414.3	411.5	408.8	406.0	404.1
72.5°	372.0	371.0	370.0	368.9	367.8	366.4	364.6	362.8	361.1	359.3	357.1
75°	293.4	292.7	292.1	291.5	290.9	289.8	288.3	286.7	285.2	283.7	282.7
77.5°	220.8	220.5	220.3	220.1	219.8	219.3	218.4	217.5	216.6	215.8	215.3
80°	175.1	175.1	175.1	175.1	175.1	174.9	174.2	173.6	173.0	172.4	172.1
82.5°	135.1	134.6	134.1	133.7	133.1	132.9	132.7	132.6	132.5	132.3	131.8
85°	76.5	76.8	77.0	77.4	77.7	77.8	77.8	77.8	77.8	77.8	77.6
87.5°	30.2	30.4	30.9	31.3	31.7	32.0	31.9	32.1	32.1	32.2	32.5
90°	1.1	2.1	4.1	6.2	8.3	10.3	11.4	13.5	14.5	16.6	17.7
92.5°	12.7	15.3	24.1	36.9	54.8	85.0	141.5	236.5	339.5	334.0	270.5
95°	34.2	35.2	43.5	54.9	77.7	124.3	235.2	463.2	749.1	918.0	898.3
97.5°	56.8	58.1	63.8	75.3	95.8	129.3	202.7	369.7	669.0	980.3	1136.7
100°	72.5	74.6	78.7	90.2	109.9	140.9	201.0	335.7	596.8	935.6	1194.6
102.5°	90.0	91.2	94.5	106.7	124.8	155.0	208.5	321.6	542.1	856.8	1159.8
105°	117.1	117.1	122.3	132.6	149.2	178.3	223.8	316.0	489.0	751.2	1048.6
107.5°	143.6	145.7	150.6	159.2	176.4	202.4	246.6	325.6	466.6	678.4	935.0
110°	162.6	164.8	168.9	178.3	193.8	220.7	263.1	334.7	460.0	644.4	870.3



TEST NUMBER: P333339-940

CATALOG NUMBER: S125DIP-S1270D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	181.7	183.8	187.1	196.4	212.0	238.1	278.9	346.3	460.0	624.6	822.2
115°	209.3	211.3	214.5	223.8	239.3	265.3	303.6	363.6	463.2	603.1	769.8
117.5°	234.2	237.3	240.6	249.9	267.5	292.6	328.9	383.6	470.0	592.5	738.5
120°	250.7	253.9	258.0	267.3	284.9	310.9	347.1	396.8	476.6	587.5	721.1
122.5°	268.1	270.5	273.8	283.0	302.4	328.2	364.5	411.8	482.4	583.4	706.2
125°	290.1	292.2	297.4	306.7	326.4	353.3	387.5	432.0	492.1	578.2	685.9
127.5°	307.3	310.4	317.1	328.9	349.8	376.7	409.7	450.8	503.1	575.7	667.3
130°	318.1	321.2	329.5	343.0	364.7	391.6	423.7	463.2	509.8	574.0	654.9
132.5°	326.4	330.3	340.3	355.4	378.0	404.9	437.0	473.9	517.2	574.0	644.9
135°	339.8	344.0	356.4	373.0	394.8	422.8	454.9	489.0	527.4	574.0	633.1
137.5°	356.9	360.0	371.6	388.2	409.5	438.3	467.5	500.2	536.7	575.2	622.5
140°	366.8	369.9	382.4	399.0	418.6	446.6	476.6	507.7	540.8	576.0	617.5
142.5°	378.4	380.7	392.3	408.8	427.8	454.1	482.4	511.8	543.3	576.9	613.4
145°	395.8	397.9	408.2	422.8	441.4	465.2	492.1	518.1	546.1	576.0	607.2
147.5°	414.0	415.3	424.2	437.7	453.8	474.7	498.4	521.8	547.1	573.4	600.7
150°	424.8	426.9	434.2	447.6	462.1	479.7	502.5	524.3	547.1	570.9	595.8
152.5°	436.4	437.7	444.1	455.9	469.6	485.5	506.7	525.9	546.3	567.6	590.0
155°	451.7	451.7	458.0	468.3	478.7	493.2	510.8	527.4	543.9	561.6	580.2
157.5°	465.5	465.2	470.2	479.1	488.2	499.2	514.3	528.4	541.3	555.4	571.1
160°	474.6	473.5	477.7	484.9	493.2	502.5	516.0	528.4	538.8	551.3	563.7
162.5°	482.0	481.0	485.1	491.5	498.2	505.9	517.6	527.6	536.3	546.3	557.1
165°	493.2	491.2	494.3	499.4	503.5	509.8	518.1	526.4	532.5	538.8	547.1
167.5°	500.7	499.6	501.5	504.4	507.3	511.2	518.1	523.9	526.7	531.5	537.3
170°	505.6	504.6	505.6	507.7	509.8	512.9	518.1	522.2	524.3	527.4	531.5
172.5°	509.0	507.1	508.1	510.1	511.4	512.9	517.2	520.6	520.9	522.5	525.8
175°	512.9	510.8	511.8	512.9	512.9	512.9	516.0	518.1	517.0	517.0	518.1
177.5°	514.8	513.1	513.1	513.9	513.1	513.1	514.8	515.6	513.9	513.9	514.8
180°	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9



TEST NUMBER: P333339-940

CATALOG NUMBER: S125DIP-S1270D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3
2.5°	1752.2	1754.7	1757.2	1758.3	1758.1	1757.8	1757.6	1757.3
5°	1743.4	1746.2	1749.0	1750.2	1749.9	1749.6	1749.3	1749.0
7.5°	1725.7	1728.5	1731.2	1732.4	1732.1	1731.8	1731.5	1731.2
10°	1710.8	1713.3	1715.7	1716.8	1716.5	1716.2	1715.9	1715.7
12.5°	1691.0	1692.9	1694.9	1695.9	1695.8	1695.7	1695.7	1695.6
15°	1656.2	1657.7	1659.2	1660.0	1660.0	1660.0	1660.0	1660.0
17.5°	1615.7	1617.7	1619.5	1619.7	1618.2	1616.7	1615.1	1613.6
20°	1585.1	1587.2	1589.4	1589.7	1588.1	1586.6	1585.1	1583.5
22.5°	1550.2	1551.7	1553.1	1553.3	1552.2	1551.1	1550.1	1549.1
25°	1494.4	1495.0	1495.7	1495.5	1494.6	1493.6	1492.7	1491.7
27.5°	1435.8	1436.0	1436.1	1435.7	1434.8	1433.9	1432.9	1432.0
30°	1393.2	1392.6	1392.0	1391.2	1390.3	1389.4	1388.4	1387.5
32.5°	1350.0	1348.9	1347.7	1346.3	1344.7	1343.0	1341.3	1339.7
35°	1282.9	1281.4	1279.9	1277.8	1275.3	1272.9	1270.4	1267.9
37.5°	1212.5	1210.2	1207.9	1206.0	1204.6	1203.2	1201.8	1200.3
40°	1163.7	1160.9	1158.1	1156.3	1155.3	1154.4	1153.4	1152.5
42.5°	1115.3	1112.7	1110.2	1108.2	1106.8	1105.4	1103.9	1102.5
45°	1043.7	1039.9	1036.3	1033.9	1033.0	1032.1	1031.1	1030.2
47.5°	968.1	964.4	960.6	957.7	955.5	953.3	951.2	949.0
50°	916.5	912.5	908.5	905.4	903.2	901.1	898.9	896.7
52.5°	866.3	862.8	859.3	856.3	853.9	851.5	849.1	846.7
55°	788.3	785.5	782.7	780.2	778.1	776.0	773.7	771.6
57.5°	710.8	707.2	703.6	701.2	700.1	698.9	697.7	696.5
60°	658.4	655.3	652.2	649.6	647.4	645.2	643.1	641.0
62.5°	607.8	604.5	601.2	598.7	597.0	595.3	593.6	592.0
65°	528.3	525.5	522.7	520.8	519.5	518.3	517.0	515.8
67.5°	452.5	450.0	447.7	446.2	445.4	444.7	444.0	443.2
70°	402.3	400.4	398.5	397.0	395.7	394.5	393.3	392.1
72.5°	355.1	352.9	350.9	349.2	347.9	346.7	345.4	344.2
75°	281.8	280.8	279.9	278.8	277.6	276.3	275.1	273.8
77.5°	214.6	214.1	213.6	212.9	212.0	211.1	210.3	209.4
80°	171.7	171.5	171.1	170.7	170.0	169.4	168.8	168.3
82.5°	131.3	130.7	130.1	129.8	129.7	129.6	129.4	129.3
85°	77.2	77.0	76.6	76.2	75.5	74.9	74.3	73.7
87.5°	32.6	32.8	33.1	33.3	32.7	32.3	31.9	31.5
90°	18.6	19.7	20.7	22.8	22.8	22.8	23.8	23.8
92.5°	183.6	133.2	100.3	85.0	71.7	69.2	67.8	66.1
95°	744.9	587.5	460.0	373.0	299.4	268.3	260.1	243.5
97.5°	1109.5	999.1	874.9	753.9	689.8	631.9	601.8	588.5
100°	1274.4	1223.7	1117.0	1009.1	937.7	863.1	824.7	808.2
102.5°	1330.0	1361.3	1310.1	1237.2	1160.7	1107.6	1066.0	1053.6
105°	1297.3	1439.2	1484.8	1473.4	1440.2	1406.0	1385.3	1372.9
107.5°	1180.4	1369.8	1486.8	1541.0	1557.7	1557.6	1550.7	1542.4
110°	1094.1	1291.0	1437.1	1525.2	1571.8	1591.5	1598.7	1598.7



TEST NUMBER: P333339-940

CATALOG NUMBER: S125DIP-S1270D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1026.2	1213.1	1360.8	1464.6	1532.9	1566.6	1584.7	1592.1
115°	940.8	1101.4	1243.3	1356.3	1437.1	1486.8	1515.8	1529.3
117.5°	885.6	1024.1	1146.4	1250.0	1330.8	1382.2	1411.0	1419.2
120°	855.9	980.2	1094.1	1185.4	1262.0	1311.7	1339.7	1348.0
122.5°	833.5	948.7	1050.3	1135.6	1204.0	1249.6	1277.6	1285.0
125°	800.9	906.6	996.8	1071.4	1129.4	1171.9	1194.6	1205.1
127.5°	767.8	866.4	950.6	1020.4	1073.0	1110.5	1132.1	1136.7
130°	747.1	838.2	919.1	986.4	1038.2	1072.4	1093.1	1099.3
132.5°	726.3	811.7	885.0	949.9	1001.7	1035.9	1055.0	1062.0
135°	699.4	770.9	837.2	896.3	941.8	976.1	994.7	1000.9
137.5°	676.6	734.4	789.5	839.7	880.5	911.6	928.8	935.6
140°	664.1	712.8	760.5	804.1	842.4	869.3	884.8	890.0
142.5°	653.4	694.6	735.7	773.4	805.9	828.7	843.4	847.7
145°	639.3	671.4	703.6	731.5	756.3	774.0	785.4	789.5
147.5°	626.1	652.1	676.8	697.9	717.6	731.7	738.3	740.2
150°	618.6	641.4	661.0	679.7	695.3	707.7	711.9	712.8
152.5°	610.3	630.6	648.6	663.2	676.2	686.1	690.3	691.3
155°	597.8	614.4	628.9	640.3	650.7	657.9	661.0	662.1
157.5°	585.4	599.1	610.3	619.2	627.2	633.3	636.1	636.0
160°	577.1	587.5	597.8	605.1	612.3	617.5	619.6	618.6
162.5°	568.0	577.6	586.2	592.6	598.2	602.6	603.1	602.8
165°	555.4	562.6	568.8	574.0	578.2	580.2	580.2	580.2
167.5°	543.3	548.1	552.9	556.6	558.7	560.5	559.7	559.5
170°	536.7	539.8	543.0	545.0	547.1	548.1	548.1	547.1
172.5°	529.2	532.4	534.7	535.9	536.3	538.1	536.5	535.5
175°	521.2	521.2	523.3	523.3	523.3	524.3	522.2	521.2
177.5°	515.6	516.4	516.4	516.4	515.6	516.4	513.9	513.9
180°	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9

(END OF REPORT)