

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333297-940

Luminaire Tested: **S125DIP-S1270D365U940-4F0-1E-UDD-A4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333297-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1270D365U940-4F0-1E-UDD-A4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5794.3 lumens
Efficiency: N/A
Efficacy: 116.4 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 49.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

Luminous Intensity Polar Plot

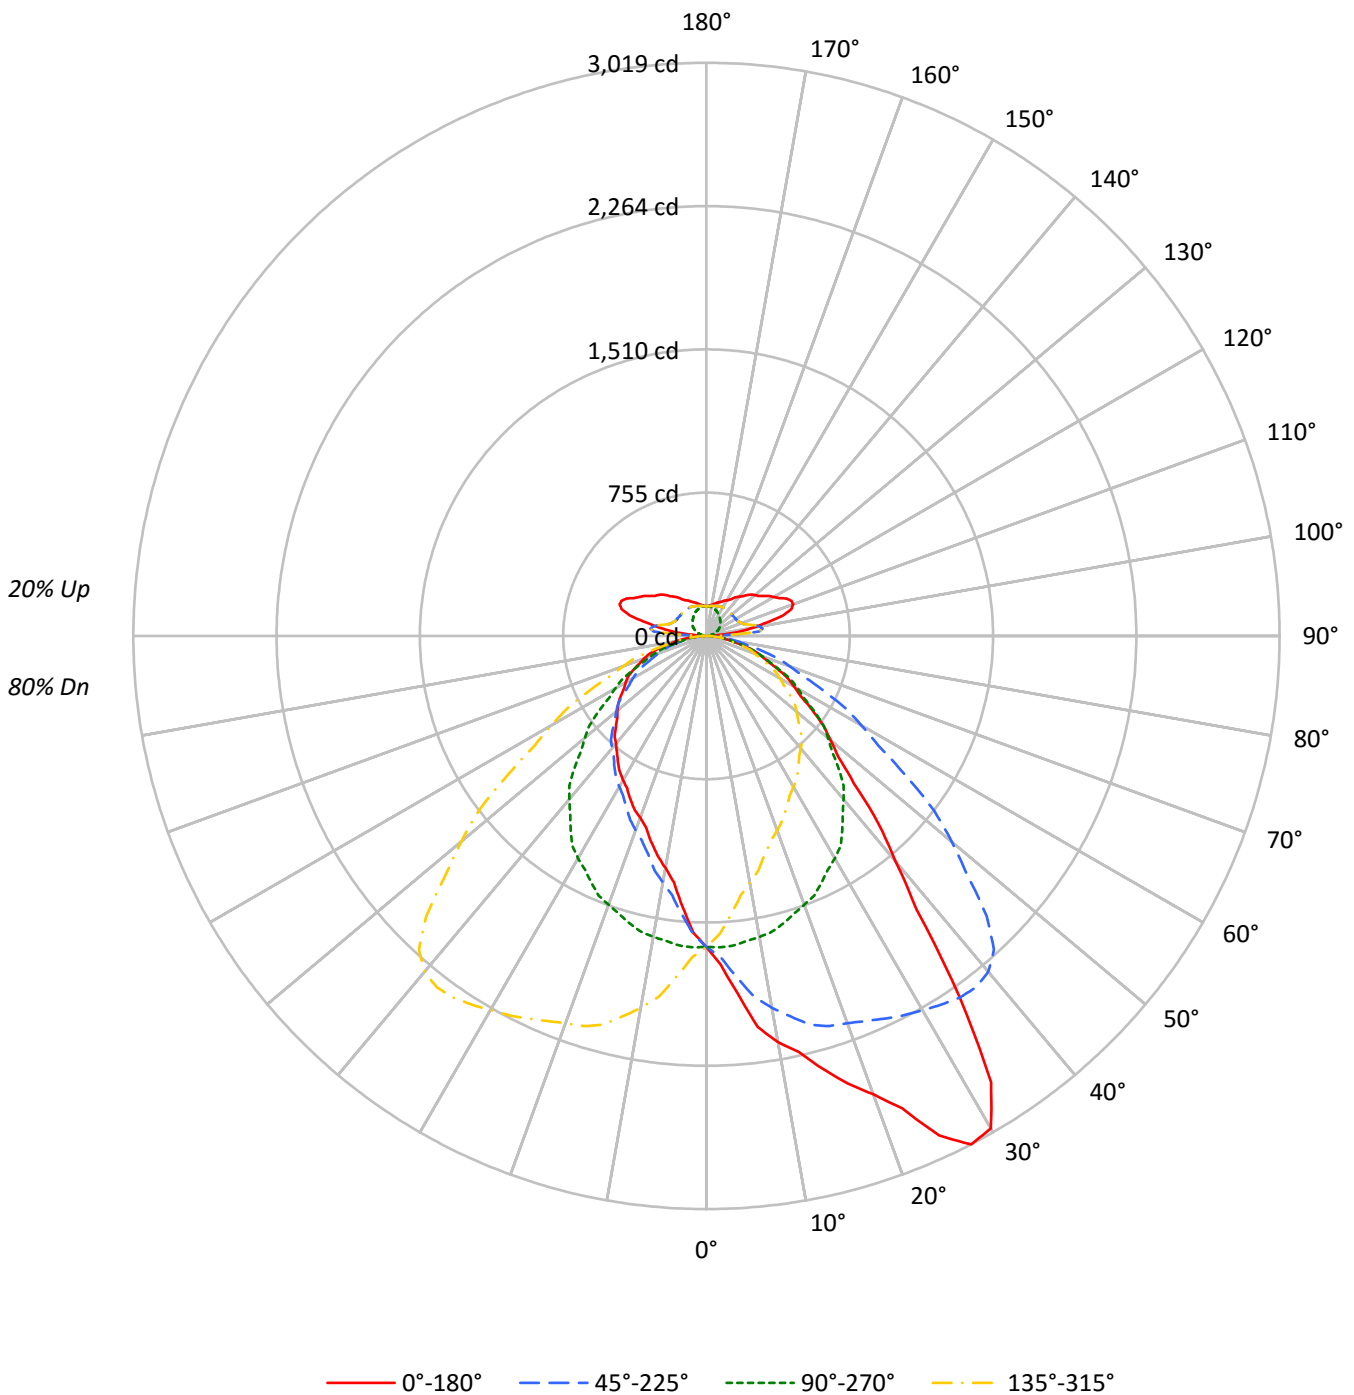



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	114	114	114	114	109	109	109	109	100	100	100	91	91	91	83	83	83	80
1	105	100	97	93	100	96	93	90	88	86	83	81	79	77	74	73	71	68
2	96	88	82	77	91	85	79	74	78	73	69	72	68	65	66	63	61	57
3	88	78	70	64	83	75	68	62	69	63	59	64	59	55	59	55	52	49
4	80	69	61	55	77	67	59	53	62	55	50	57	52	48	53	48	45	42
5	74	62	53	47	71	60	52	46	55	49	44	51	46	42	47	43	39	37
6	68	56	47	41	65	54	46	40	50	43	38	46	41	37	43	38	35	32
7	63	51	42	36	60	49	41	36	45	39	34	42	37	32	39	35	31	29
8	59	46	38	32	56	45	37	32	42	35	30	39	33	29	36	31	28	26
9	55	42	34	29	53	41	34	29	38	32	27	36	30	26	33	29	25	23
10	51	39	31	26	49	38	31	26	35	29	25	33	28	24	31	26	23	21

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10577	10577	10577	10577
5°	12248	10613	9292	10613
10°	14250	10558	8141	10558
15°	15774	10480	7511	10480
20°	17657	10357	7003	10357
25°	20685	10219	6757	10219
30°	22342	10082	6542	10082
35°	18370	9826	6401	9826
40°	13057	9470	6247	9470
45°	10030	8990	6158	8990
50°	8562	8395	6146	8395
55°	7624	7812	6199	7812
60°	6877	7174	6356	7174
65°	6353	6533	6522	6533
70°	5776	5867	6617	5867
75°	5100	5168	6558	5168
80°	4292	4214	5995	4214
85°	3394	3038	4846	3038



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.7	2.7
10°-20°	469.4	8.1
20°-30°	762.2	13.2
30°-40°	929.8	16.0
40°-50°	845.8	14.6
50°-60°	673.7	11.6
60°-70°	469.3	8.1
70°-80°	250.2	4.3
80°-90°	64.0	1.1
90°-100°	113.3	2.0
100°-110°	243.6	4.2
110°-120°	228.6	3.9
120°-130°	185.2	3.2
130°-140°	148.7	2.6
140°-150°	112.2	1.9
150°-160°	79.0	1.4
160°-170°	46.5	0.8
170°-180°	15.1	0.3
0°-30°	1389.3	24.0
0°-40°	2319.0	40.0
0°-60°	3838.6	66.2
0°-90°	4622.1	79.8
90°-120°	585.4	10.1
90°-150°	1031.5	17.8
90°-180°	1172.0	20.2
0°-180°	5794.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1638	1638	1638	1638	1638	
5°	1889	1637	1433	1637	1889	190
15°	2359	1567	1123	1567	2359	675
25°	2903	1434	948	1434	2903	1326
35°	2330	1246	812	1246	2330	1426
45°	1098	984	674	984	1098	879
55°	677	694	550	694	677	610
65°	416	428	427	428	416	413
75°	204	207	263	207	204	220
85°	46	41	65	41	46	53
90°	7	0	7	0	7	7
95°	74	10	74	10	74	105
105°	418	36	418	36	418	415
115°	465	64	465	64	465	454
125°	366	88	366	88	366	332
135°	304	103	304	103	304	236
145°	240	120	240	120	240	153
155°	201	137	201	137	201	94
165°	176	150	176	150	176	50
175°	158	156	158	156	158	15
180°	156	156	156	156	156	



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1732.2	1730.0	1727.8	1723.3	1726.6	1717.2	1712.7	1705.0	1695.5	1692.2	1688.3
5°	1889.3	1892.7	1896.2	1881.7	1883.0	1873.3	1851.1	1833.0	1818.4	1799.7	1786.5
7.5°	2078.4	2070.2	2069.5	2060.0	2043.8	2030.7	2007.3	1977.5	1948.8	1916.0	1888.9
10°	2172.9	2173.6	2167.4	2156.2	2138.9	2126.4	2095.8	2066.5	2031.1	1989.4	1959.5
12.5°	2244.1	2247.0	2239.1	2224.1	2215.5	2187.5	2163.6	2128.9	2086.7	2053.3	2007.9
15°	2359.2	2351.5	2346.0	2327.2	2312.7	2283.4	2245.2	2209.0	2163.2	2120.8	2078.4
17.5°	2470.1	2476.3	2465.8	2448.7	2403.4	2369.4	2318.1	2268.5	2211.4	2154.6	2104.0
20°	2569.1	2574.7	2558.7	2528.8	2474.6	2440.5	2373.1	2309.2	2243.1	2170.2	2114.5
22.5°	2692.6	2688.2	2666.6	2621.1	2574.1	2511.1	2438.2	2360.3	2277.6	2195.1	2121.2
25°	2902.8	2873.5	2860.3	2804.1	2742.2	2649.7	2549.7	2435.6	2332.8	2223.7	2129.1
27.5°	3019.2	3010.1	2995.3	2956.2	2891.1	2792.2	2674.2	2535.3	2390.2	2252.5	2128.7
30°	2995.9	2997.3	2998.7	2986.2	2944.5	2870.1	2752.6	2603.2	2430.8	2275.8	2132.6
32.5°	2789.1	2814.3	2838.6	2867.2	2878.9	2864.5	2791.0	2656.0	2478.6	2302.5	2130.4
35°	2330.0	2337.6	2416.2	2494.0	2599.7	2681.7	2736.7	2676.8	2527.4	2325.1	2127.7
37.5°	1816.8	1854.3	1908.6	1996.6	2149.1	2285.6	2461.2	2542.0	2493.8	2332.5	2122.9
40°	1548.7	1583.5	1618.9	1708.6	1837.2	2002.6	2202.1	2372.4	2412.0	2309.2	2106.2
42.5°	1341.8	1369.4	1408.7	1476.1	1583.6	1730.1	1920.7	2143.3	2280.2	2241.3	2071.2
45°	1098.2	1115.6	1146.2	1199.8	1277.6	1392.3	1560.5	1803.8	2015.8	2086.0	1988.0
47.5°	940.0	940.0	963.7	1000.7	1056.9	1154.3	1278.7	1469.4	1695.8	1863.3	1855.6
50°	852.2	848.7	867.5	899.5	944.0	1008.6	1127.5	1279.7	1497.3	1687.0	1739.8
52.5°	776.6	776.9	788.5	812.2	849.4	904.6	993.5	1130.7	1316.5	1511.3	1610.9
55°	677.1	674.2	687.4	703.5	730.6	766.7	830.6	935.6	1086.5	1278.3	1407.6
57.5°	585.9	593.5	598.8	609.9	632.4	656.6	710.5	787.6	907.2	1071.8	1208.5
60°	532.4	540.1	544.3	555.4	573.5	594.3	636.1	698.6	799.4	941.2	1076.7
62.5°	484.6	490.6	492.0	502.0	516.7	537.1	569.9	622.4	702.0	826.1	958.9
65°	415.7	415.7	418.5	428.9	435.9	453.9	478.9	517.2	581.1	677.7	791.0
67.5°	349.2	352.6	351.9	356.4	362.8	376.9	394.8	426.4	473.8	544.3	634.9
70°	305.9	308.6	307.9	311.4	318.3	327.4	342.0	371.8	405.9	466.5	544.3
72.5°	266.9	268.0	266.3	270.8	275.0	282.9	299.2	315.1	347.0	398.1	462.0
75°	204.4	205.7	207.1	209.9	214.1	218.3	226.6	242.6	263.4	301.7	342.7
77.5°	153.2	150.5	153.9	153.5	155.9	159.1	166.4	174.9	192.0	216.2	247.9
80°	115.4	116.1	116.1	116.8	120.3	122.3	128.6	134.8	148.0	166.1	188.4
82.5°	84.3	86.1	85.0	86.2	89.1	90.6	94.1	99.2	106.9	121.1	137.2
85°	45.8	42.4	43.8	45.2	45.2	45.8	48.7	50.7	54.9	60.5	66.7
87.5°	14.8	15.9	16.4	16.4	16.9	16.9	19.0	18.9	20.5	22.1	24.3
90°	7.2	7.2	7.0	7.0	7.0	6.3	6.0	5.7	5.4	5.1	4.4
92.5°	20.1	20.6	21.0	21.8	25.9	30.5	40.5	55.8	82.2	101.6	103.3
95°	74.1	79.1	81.6	91.0	113.4	139.9	178.7	226.6	273.2	279.2	227.8
97.5°	179.0	183.1	192.2	209.8	229.3	266.1	303.9	337.4	345.7	298.2	203.5
100°	245.8	250.8	262.5	285.2	306.9	339.7	372.2	387.6	363.4	284.5	181.6
102.5°	320.5	324.2	336.9	353.0	376.3	398.5	414.0	404.5	352.8	260.6	164.9
105°	417.6	421.3	427.7	438.0	448.2	451.6	437.7	394.6	319.0	228.5	148.7
107.5°	469.1	471.6	473.8	473.8	468.7	452.2	416.6	359.0	284.4	206.3	142.0
110°	486.2	486.2	484.0	478.0	463.9	437.1	392.7	332.8	264.7	196.0	139.9



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	484.3	482.0	476.5	466.2	445.5	413.9	369.0	312.1	250.1	189.9	139.9
115°	465.1	461.0	452.2	437.1	412.5	378.2	335.0	286.1	234.2	183.4	140.9
117.5°	431.7	429.2	420.4	404.7	380.2	348.7	311.5	269.4	224.6	180.2	142.9
120°	410.0	407.5	399.0	383.9	360.5	332.8	298.1	260.3	219.4	178.7	145.0
122.5°	390.8	388.6	380.0	366.2	345.4	319.4	288.6	253.5	214.8	177.5	146.7
125°	366.5	363.4	356.4	343.5	325.8	303.2	275.7	243.6	208.7	175.8	149.7
127.5°	345.7	344.3	337.8	326.4	310.3	289.1	263.5	233.5	203.0	175.1	153.0
130°	334.4	332.5	326.2	315.8	300.1	279.6	254.9	227.2	199.2	174.6	155.1
132.5°	323.0	320.8	315.0	304.7	288.9	269.2	246.9	220.9	196.2	174.6	157.3
135°	304.4	302.6	296.9	286.5	272.6	254.7	234.4	212.8	192.5	174.6	160.4
137.5°	284.5	282.5	277.2	267.8	255.4	240.1	223.4	205.8	189.3	175.0	163.3
140°	270.7	269.1	264.4	256.2	244.5	231.3	216.8	202.0	187.8	175.2	164.5
142.5°	257.9	256.5	252.1	245.1	235.2	223.7	211.2	198.8	186.5	175.5	165.2
145°	240.1	238.9	235.4	230.1	222.5	214.0	204.2	194.5	184.7	175.2	166.0
147.5°	225.2	224.5	222.6	218.3	212.3	205.9	198.3	190.4	182.7	174.4	166.4
150°	216.8	216.5	215.3	211.4	206.7	201.1	195.1	188.2	181.2	173.6	166.4
152.5°	210.3	209.9	208.7	205.6	201.7	197.2	191.8	185.7	179.4	172.6	166.1
155°	201.3	201.1	200.1	197.9	194.7	191.3	186.9	181.8	176.5	170.9	165.4
157.5°	193.4	193.5	192.6	190.8	188.3	185.7	182.2	178.1	173.7	168.9	164.6
160°	188.2	188.4	187.8	186.3	184.0	181.8	178.7	175.6	171.5	167.6	163.9
162.5°	183.3	183.4	183.2	182.0	180.3	178.3	175.7	172.7	169.4	166.1	163.1
165°	176.5	176.5	176.5	175.8	174.6	173.0	171.1	168.9	166.4	163.9	162.0
167.5°	170.1	170.2	170.5	170.0	169.3	168.2	166.7	165.2	163.5	161.7	160.2
170°	166.4	166.7	166.7	166.4	165.8	165.1	164.2	163.3	161.7	160.4	159.4
172.5°	162.8	163.2	163.7	163.1	163.0	162.6	161.9	161.0	159.9	158.9	158.5
175°	158.5	158.8	159.4	159.2	159.2	159.2	158.5	158.5	157.6	157.3	157.3
177.5°	156.3	156.3	157.0	156.9	157.0	157.0	157.0	156.9	156.6	156.3	156.3
180°	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1685.0	1681.1	1676.6	1668.8	1659.4	1654.4	1646.5	1641.6	1631.6	1623.2	1614.4
5°	1770.4	1752.4	1735.7	1714.1	1690.5	1675.2	1657.2	1637.0	1616.1	1594.6	1570.9
7.5°	1859.0	1827.0	1792.2	1754.9	1718.3	1684.6	1652.5	1621.0	1591.5	1555.9	1525.8
10°	1918.5	1878.2	1835.1	1784.3	1735.0	1691.9	1648.1	1609.9	1570.9	1529.2	1492.4
12.5°	1978.0	1924.3	1863.4	1807.7	1748.4	1696.3	1644.8	1596.0	1547.0	1500.8	1457.9
15°	2020.0	1972.7	1916.4	1837.2	1770.4	1698.9	1630.8	1567.4	1508.4	1457.0	1402.8
17.5°	2047.6	1986.7	1926.3	1850.2	1762.8	1682.7	1605.5	1533.1	1466.5	1401.3	1349.1
20°	2052.6	1990.1	1926.8	1852.4	1762.8	1671.1	1593.8	1507.0	1435.4	1368.0	1304.0
22.5°	2051.0	1980.0	1911.3	1834.7	1747.2	1662.7	1569.4	1480.9	1403.1	1336.9	1270.1
25°	2035.2	1959.5	1873.3	1796.2	1709.9	1620.3	1525.8	1434.0	1354.8	1279.0	1213.0
27.5°	2022.2	1924.0	1826.3	1736.3	1653.1	1570.9	1480.4	1386.4	1298.6	1221.8	1159.6
30°	2006.1	1898.4	1788.5	1694.7	1609.2	1529.2	1443.8	1352.0	1260.3	1185.2	1118.5
32.5°	1991.6	1866.1	1750.2	1648.0	1557.5	1479.7	1400.9	1313.6	1223.5	1147.4	1080.6
35°	1963.7	1818.4	1685.6	1570.2	1473.6	1393.7	1327.7	1246.3	1163.6	1089.9	1026.0
37.5°	1928.2	1755.9	1613.4	1492.4	1386.4	1302.3	1240.7	1178.3	1098.9	1028.0	970.1
40°	1900.4	1711.4	1560.5	1436.8	1327.0	1239.4	1182.4	1123.3	1057.3	991.2	930.1
42.5°	1865.4	1671.3	1507.2	1373.9	1265.2	1179.9	1120.1	1069.9	1011.6	950.1	893.3
45°	1801.0	1598.7	1420.8	1277.6	1167.8	1083.7	1021.8	984.3	940.5	882.1	834.1
47.5°	1706.4	1511.5	1327.5	1179.7	1066.4	988.5	930.5	894.5	863.6	820.2	776.7
50°	1622.4	1446.5	1260.3	1113.6	1000.2	921.7	868.2	835.5	809.1	775.7	738.9
52.5°	1528.4	1364.8	1194.1	1049.1	936.8	859.4	807.0	778.3	756.3	732.4	696.1
55°	1379.1	1240.1	1081.6	944.0	840.3	764.6	718.7	693.8	675.6	657.5	635.3
57.5°	1214.6	1105.9	965.5	839.7	744.3	675.4	632.6	608.2	594.1	584.9	571.8
60°	1098.9	1005.8	884.8	770.2	677.1	615.9	574.2	555.4	543.6	535.9	526.2
62.5°	991.7	915.2	803.2	698.5	617.0	559.1	521.9	503.6	492.4	488.7	480.6
65°	833.4	774.4	681.9	595.0	525.5	476.2	444.9	427.5	420.5	416.3	417.1
67.5°	677.6	641.6	567.3	493.2	437.7	396.4	371.3	358.0	354.5	348.9	348.8
70°	582.5	555.4	492.8	428.2	378.8	346.9	324.6	310.7	307.2	304.4	303.8
72.5°	498.6	474.7	420.5	368.7	324.3	296.2	277.9	269.6	263.9	262.2	262.1
75°	374.7	361.5	318.3	277.3	246.7	227.3	214.8	207.1	203.0	202.2	203.0
77.5°	266.4	254.9	227.5	198.4	179.1	164.3	153.7	151.1	146.4	146.5	145.8
80°	200.2	192.5	175.1	152.2	136.3	123.8	118.2	113.3	111.9	109.9	111.9
82.5°	145.2	137.0	125.1	110.5	97.3	89.8	84.3	82.8	81.9	80.9	81.3
85°	71.6	72.3	65.4	54.2	48.7	44.5	41.0	41.0	40.3	39.6	40.3
87.5°	25.3	24.1	21.8	20.0	17.0	15.2	14.6	15.1	13.5	13.0	13.7
90°	4.1	3.5	3.1	2.5	1.9	1.2	0.6	0.4	0.6	1.2	1.9
92.5°	71.9	43.1	25.9	16.7	11.2	7.3	4.6	3.8	4.6	7.3	11.2
95°	140.9	71.5	37.8	23.6	16.7	13.2	10.7	10.4	10.7	13.2	16.7
97.5°	112.4	61.6	39.3	29.2	22.9	19.4	17.7	17.3	17.7	19.4	22.9
100°	102.1	61.2	42.9	33.4	27.4	24.0	22.6	22.0	22.6	24.0	27.4
102.5°	97.8	63.4	47.2	38.0	32.5	28.7	27.7	27.4	27.7	28.7	32.5
105°	96.1	68.0	54.2	45.4	40.3	37.2	35.6	35.6	35.6	37.2	40.3
107.5°	99.0	75.0	61.6	53.7	48.4	45.8	44.3	43.7	44.3	45.8	48.4
110°	101.8	80.1	67.1	58.9	54.2	51.4	50.1	49.5	50.1	51.4	54.2



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	105.3	84.8	72.4	64.5	59.7	56.9	55.9	55.3	55.9	56.9	59.7
115°	110.6	92.4	80.7	72.8	68.0	65.3	64.3	63.7	64.3	65.3	68.0
117.5°	116.6	100.0	89.0	81.4	76.0	73.2	72.1	71.2	72.1	73.2	76.0
120°	120.7	105.6	94.5	86.7	81.3	78.5	77.2	76.2	77.2	78.5	81.3
122.5°	125.2	110.8	99.9	91.9	86.1	83.3	82.2	81.6	82.2	83.3	86.1
125°	131.4	117.9	107.5	99.2	93.3	90.4	88.9	88.3	88.9	90.4	93.3
127.5°	137.1	124.6	114.6	106.4	100.0	96.4	94.4	93.5	94.4	96.4	100.0
130°	140.9	128.9	119.1	110.9	104.3	100.2	97.7	96.8	97.7	100.2	104.3
132.5°	144.2	133.0	123.1	114.9	108.1	103.5	100.5	99.2	100.5	103.5	108.1
135°	148.7	138.3	128.6	120.1	113.4	108.4	104.6	103.3	104.6	108.4	113.4
137.5°	152.1	142.2	133.3	124.6	118.1	113.0	109.5	108.5	109.5	113.0	118.1
140°	154.4	145.0	135.8	127.3	121.4	116.3	112.5	111.6	112.5	116.3	121.4
142.5°	155.7	146.7	138.1	130.1	124.4	119.3	115.7	115.1	115.7	119.3	124.4
145°	157.6	149.7	141.5	134.3	128.6	124.1	121.0	120.4	121.0	124.1	128.6
147.5°	158.7	151.6	144.4	138.0	133.1	129.0	126.3	125.9	126.3	129.0	133.1
150°	159.4	152.8	145.9	140.5	136.2	132.1	129.8	129.2	129.8	132.1	136.2
152.5°	160.0	154.1	147.7	142.9	138.7	135.1	133.1	132.8	133.1	135.1	138.7
155°	160.4	155.3	150.0	145.6	142.4	139.3	137.4	137.4	137.4	139.3	142.4
157.5°	160.7	156.4	151.9	148.5	145.7	143.0	141.5	141.6	141.5	143.0	145.7
160°	160.7	156.9	152.8	150.0	147.5	145.3	144.0	144.4	144.0	145.3	147.5
162.5°	160.5	157.5	153.8	151.5	149.5	147.6	146.3	146.6	146.3	147.6	149.5
165°	160.1	157.6	155.1	153.2	151.9	150.3	149.4	150.0	149.4	150.3	151.9
167.5°	159.3	157.6	155.5	154.3	153.4	152.6	151.9	152.3	151.9	152.6	153.4
170°	158.8	157.6	156.0	155.1	154.4	153.8	153.5	153.8	153.5	153.8	154.4
172.5°	158.4	157.3	156.0	155.5	155.2	154.5	154.3	154.8	154.3	154.5	155.2
175°	157.6	156.9	156.0	156.0	156.0	155.7	155.3	156.0	155.3	155.7	156.0
177.5°	156.9	156.6	156.0	156.0	156.3	156.0	156.0	156.6	156.0	156.0	156.3
180°	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1609.3	1603.2	1598.2	1587.1	1580.9	1572.6	1565.9	1573.2	1565.4	1568.7	1563.7
5°	1559.2	1539.6	1525.8	1505.6	1488.3	1472.2	1460.4	1458.3	1452.8	1450.0	1441.6
7.5°	1498.8	1474.4	1450.5	1424.2	1401.9	1379.2	1364.8	1352.8	1344.9	1334.4	1327.4
10°	1463.2	1430.6	1402.8	1370.7	1342.9	1318.7	1299.1	1289.4	1280.4	1267.2	1262.3
12.5°	1419.2	1385.5	1351.6	1317.4	1290.7	1263.6	1246.9	1232.2	1225.9	1211.0	1209.5
15°	1366.5	1315.8	1282.5	1247.7	1210.9	1188.7	1174.7	1158.8	1151.8	1141.4	1133.7
17.5°	1303.8	1258.4	1216.7	1180.7	1149.1	1130.4	1113.1	1102.2	1090.2	1083.4	1070.9
20°	1258.1	1215.0	1173.3	1135.1	1110.8	1089.2	1075.3	1064.9	1052.4	1048.9	1036.4
22.5°	1219.8	1172.2	1132.2	1100.1	1073.5	1049.2	1034.2	1027.1	1018.5	1007.8	1005.2
25°	1157.4	1108.0	1074.0	1042.0	1018.3	996.1	985.7	976.6	968.3	960.6	957.9
27.5°	1103.4	1059.4	1018.9	990.0	969.4	949.1	940.0	929.0	922.8	916.7	909.2
30°	1065.6	1020.4	985.0	957.2	935.0	916.9	907.1	899.5	893.9	888.3	884.2
32.5°	1026.7	984.8	950.5	923.3	901.0	887.3	878.8	873.3	867.2	860.5	855.2
35°	975.3	929.3	896.0	872.4	855.0	844.5	834.8	829.9	823.0	823.0	817.4
37.5°	917.3	877.6	848.2	826.6	811.0	801.7	791.2	787.8	783.4	780.4	778.6
40°	882.8	846.0	818.1	796.6	779.9	772.2	763.9	758.4	755.5	752.1	750.7
42.5°	847.2	812.0	785.3	765.4	751.0	744.5	736.6	732.8	727.2	722.6	721.8
45°	793.1	759.0	734.8	718.7	706.2	698.6	693.8	685.4	682.6	677.1	676.4
47.5°	741.8	709.2	685.3	672.2	661.2	655.0	647.3	638.9	635.8	632.9	632.7
50°	703.5	673.6	651.3	638.8	628.4	619.4	611.7	606.1	604.0	604.0	605.5
52.5°	664.5	639.1	620.2	604.8	595.0	585.4	578.4	575.0	571.8	575.2	577.7
55°	607.5	581.8	567.9	553.3	543.6	532.4	529.0	527.6	525.5	531.1	533.9
57.5°	547.2	529.1	512.8	498.4	489.6	483.2	478.5	477.7	481.6	484.2	493.2
60°	508.8	487.9	473.4	462.3	451.8	447.6	446.3	444.9	447.6	455.3	467.1
62.5°	466.5	449.6	433.9	425.5	417.9	411.0	410.6	411.5	417.1	425.8	437.7
65°	404.6	389.9	379.5	369.8	363.6	359.4	360.8	363.6	369.8	381.7	394.8
67.5°	341.6	331.5	322.3	314.3	308.4	308.4	309.8	313.9	321.3	334.9	347.0
70°	301.0	289.9	282.2	278.7	273.8	271.1	275.3	282.2	288.5	301.0	311.4
72.5°	260.4	250.9	245.0	242.6	240.5	238.3	239.7	247.2	255.7	268.1	280.3
75°	200.2	196.7	192.5	189.8	187.7	189.0	190.5	197.4	204.4	217.6	231.5
77.5°	146.2	142.5	140.0	139.3	138.2	138.8	142.8	147.9	154.7	164.3	174.9
80°	110.5	109.1	107.7	107.0	107.0	107.7	113.3	116.8	123.1	132.1	140.4
82.5°	80.5	79.6	79.4	79.3	79.8	79.9	83.3	87.8	93.0	99.8	107.0
85°	42.4	41.0	43.1	43.8	42.4	44.5	45.8	48.7	50.7	54.2	57.7
87.5°	14.4	15.6	15.2	15.9	15.9	17.1	16.7	18.9	20.1	21.3	20.9
90°	2.5	3.1	3.5	4.1	4.4	5.1	5.4	5.7	6.0	6.3	7.0
92.5°	16.7	25.9	43.1	71.9	103.3	101.6	82.2	55.8	40.5	30.5	25.9
95°	23.6	37.8	71.5	140.9	227.8	279.2	273.2	226.6	178.7	139.9	113.4
97.5°	29.2	39.3	61.6	112.4	203.5	298.2	345.7	337.4	303.9	266.1	229.3
100°	33.4	42.9	61.2	102.1	181.6	284.5	363.4	387.6	372.2	339.7	306.9
102.5°	38.0	47.2	63.4	97.8	164.9	260.6	352.8	404.5	414.0	398.5	376.3
105°	45.4	54.2	68.0	96.1	148.7	228.5	319.0	394.6	437.7	451.6	448.2
107.5°	53.7	61.6	75.0	99.0	142.0	206.3	284.4	359.0	416.6	452.2	468.7
110°	58.9	67.1	80.1	101.8	139.9	196.0	264.7	332.8	392.7	437.1	463.9



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	64.5	72.4	84.8	105.3	139.9	189.9	250.1	312.1	369.0	413.9	445.5
115°	72.8	80.7	92.4	110.6	140.9	183.4	234.2	286.1	335.0	378.2	412.5
117.5°	81.4	89.0	100.0	116.6	142.9	180.2	224.6	269.4	311.5	348.7	380.2
120°	86.7	94.5	105.6	120.7	145.0	178.7	219.4	260.3	298.1	332.8	360.5
122.5°	91.9	99.9	110.8	125.2	146.7	177.5	214.8	253.5	288.6	319.4	345.4
125°	99.2	107.5	117.9	131.4	149.7	175.8	208.7	243.6	275.7	303.2	325.8
127.5°	106.4	114.6	124.6	137.1	153.0	175.1	203.0	233.5	263.5	289.1	310.3
130°	110.9	119.1	128.9	140.9	155.1	174.6	199.2	227.2	254.9	279.6	300.1
132.5°	114.9	123.1	133.0	144.2	157.3	174.6	196.2	220.9	246.9	269.2	288.9
135°	120.1	128.6	138.3	148.7	160.4	174.6	192.5	212.8	234.4	254.7	272.6
137.5°	124.6	133.3	142.2	152.1	163.3	175.0	189.3	205.8	223.4	240.1	255.4
140°	127.3	135.8	145.0	154.4	164.5	175.2	187.8	202.0	216.8	231.3	244.5
142.5°	130.1	138.1	146.7	155.7	165.2	175.5	186.5	198.8	211.2	223.7	235.2
145°	134.3	141.5	149.7	157.6	166.0	175.2	184.7	194.5	204.2	214.0	222.5
147.5°	138.0	144.4	151.6	158.7	166.4	174.4	182.7	190.4	198.3	205.9	212.3
150°	140.5	145.9	152.8	159.4	166.4	173.6	181.2	188.2	195.1	201.1	206.7
152.5°	142.9	147.7	154.1	160.0	166.1	172.6	179.4	185.7	191.8	197.2	201.7
155°	145.6	150.0	155.3	160.4	165.4	170.9	176.5	181.8	186.9	191.3	194.7
157.5°	148.5	151.9	156.4	160.7	164.6	168.9	173.7	178.1	182.2	185.7	188.3
160°	150.0	152.8	156.9	160.7	163.9	167.6	171.5	175.6	178.7	181.8	184.0
162.5°	151.5	153.8	157.5	160.5	163.1	166.1	169.4	172.7	175.7	178.3	180.3
165°	153.2	155.1	157.6	160.1	162.0	163.9	166.4	168.9	171.1	173.0	174.6
167.5°	154.3	155.5	157.6	159.3	160.2	161.7	163.5	165.2	166.7	168.2	169.3
170°	155.1	156.0	157.6	158.8	159.4	160.4	161.7	163.3	164.2	165.1	165.8
172.5°	155.5	156.0	157.3	158.4	158.5	158.9	159.9	161.0	161.9	162.6	163.0
175°	156.0	156.0	156.9	157.6	157.3	157.3	157.6	158.5	158.5	159.2	159.2
177.5°	156.0	156.0	156.6	156.9	156.3	156.3	156.6	156.9	157.0	157.0	157.0
180°	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1560.4	1564.2	1560.9	1565.4	1560.9	1564.2	1560.4	1563.7	1568.7	1565.4	1573.2
5°	1438.2	1431.9	1436.1	1433.3	1436.1	1431.9	1438.2	1441.6	1450.0	1452.8	1458.3
7.5°	1325.3	1319.3	1312.5	1309.3	1312.5	1319.3	1325.3	1327.4	1334.4	1344.9	1352.8
10°	1254.6	1247.1	1246.3	1241.4	1246.3	1247.1	1254.6	1262.3	1267.2	1280.4	1289.4
12.5°	1202.9	1195.9	1187.9	1185.9	1187.9	1195.9	1202.9	1209.5	1211.0	1225.9	1232.2
15°	1129.5	1124.0	1119.1	1123.3	1119.1	1124.0	1129.5	1133.7	1141.4	1151.8	1158.8
17.5°	1068.5	1063.9	1063.1	1057.9	1063.1	1063.9	1068.5	1070.9	1083.4	1090.2	1102.2
20°	1030.2	1026.7	1028.1	1019.0	1028.1	1026.7	1030.2	1036.4	1048.9	1052.4	1064.9
22.5°	999.6	992.7	991.9	990.2	991.9	992.7	999.6	1005.2	1007.8	1018.5	1027.1
25°	951.6	948.2	944.7	948.2	944.7	948.2	951.6	957.9	960.6	968.3	976.6
27.5°	909.7	905.6	904.6	905.0	904.6	905.6	909.7	909.2	916.7	922.8	929.0
30°	884.2	877.3	877.9	877.3	877.9	877.3	884.2	884.2	888.3	893.9	899.5
32.5°	856.4	851.7	850.7	849.4	850.7	851.7	856.4	855.2	860.5	867.2	873.3
35°	815.4	815.4	811.9	811.9	811.9	815.4	815.4	817.4	823.0	823.0	829.9
37.5°	776.9	776.1	774.1	774.4	774.1	776.1	776.9	778.6	780.4	783.4	787.8
40°	748.0	747.3	745.1	741.0	745.1	747.3	748.0	750.7	752.1	755.5	758.4
42.5°	720.1	717.7	716.8	715.4	716.8	717.7	720.1	721.8	722.6	727.2	732.8
45°	676.4	676.4	674.9	674.2	674.9	676.4	676.4	676.4	677.1	682.6	685.4
47.5°	633.8	635.1	637.7	637.3	637.7	635.1	633.8	632.7	632.9	635.8	638.9
50°	608.2	608.9	611.0	611.7	611.0	608.9	608.2	605.5	604.0	604.0	606.1
52.5°	579.9	583.9	586.6	586.1	586.6	583.9	579.9	577.7	575.2	571.8	575.0
55°	540.1	544.9	549.8	550.5	549.8	544.9	540.1	533.9	531.1	525.5	527.6
57.5°	500.8	507.6	512.7	514.3	512.7	507.6	500.8	493.2	484.2	481.6	477.7
60°	474.0	483.1	489.4	492.1	489.4	483.1	474.0	467.1	455.3	447.6	444.9
62.5°	448.4	458.6	464.8	465.5	464.8	458.6	448.4	437.7	425.8	417.1	411.5
65°	406.6	417.1	422.6	426.8	422.6	417.1	406.6	394.8	381.7	369.8	363.6
67.5°	361.6	372.0	378.2	381.5	378.2	372.0	361.6	347.0	334.9	321.3	313.9
70°	328.8	339.2	347.6	350.4	347.6	339.2	328.8	311.4	301.0	288.5	282.2
72.5°	296.5	305.9	312.5	315.8	312.5	305.9	296.5	280.3	268.1	255.7	247.2
75°	240.5	253.0	259.3	262.8	259.3	253.0	240.5	231.5	217.6	204.4	197.4
77.5°	185.5	196.9	200.6	202.4	200.6	196.9	185.5	174.9	164.3	154.7	147.9
80°	148.7	155.7	160.6	161.2	160.6	155.7	148.7	140.4	132.1	123.1	116.8
82.5°	114.3	120.1	121.6	123.4	121.6	120.1	114.3	107.0	99.8	93.0	87.8
85°	62.6	65.4	66.1	65.4	66.1	65.4	62.6	57.7	54.2	50.7	48.7
87.5°	21.9	21.4	21.5	22.6	21.5	21.4	21.9	20.9	21.3	20.1	18.9
90°	7.0	7.0	7.2	7.2	7.2	7.0	7.0	7.0	6.3	6.0	5.7
92.5°	21.8	21.0	20.6	20.1	20.6	21.0	21.8	25.9	30.5	40.5	55.8
95°	91.0	81.6	79.1	74.1	79.1	81.6	91.0	113.4	139.9	178.7	226.6
97.5°	209.8	192.2	183.1	179.0	183.1	192.2	209.8	229.3	266.1	303.9	337.4
100°	285.2	262.5	250.8	245.8	250.8	262.5	285.2	306.9	339.7	372.2	387.6
102.5°	353.0	336.9	324.2	320.5	324.2	336.9	353.0	376.3	398.5	414.0	404.5
105°	438.0	427.7	421.3	417.6	421.3	427.7	438.0	448.2	451.6	437.7	394.6
107.5°	473.8	473.8	471.6	469.1	471.6	473.8	473.8	468.7	452.2	416.6	359.0
110°	478.0	484.0	486.2	486.2	486.2	484.0	478.0	463.9	437.1	392.7	332.8



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	466.2	476.5	482.0	484.3	482.0	476.5	466.2	445.5	413.9	369.0	312.1
115°	437.1	452.2	461.0	465.1	461.0	452.2	437.1	412.5	378.2	335.0	286.1
117.5°	404.7	420.4	429.2	431.7	429.2	420.4	404.7	380.2	348.7	311.5	269.4
120°	383.9	399.0	407.5	410.0	407.5	399.0	383.9	360.5	332.8	298.1	260.3
122.5°	366.2	380.0	388.6	390.8	388.6	380.0	366.2	345.4	319.4	288.6	253.5
125°	343.5	356.4	363.4	366.5	363.4	356.4	343.5	325.8	303.2	275.7	243.6
127.5°	326.4	337.8	344.3	345.7	344.3	337.8	326.4	310.3	289.1	263.5	233.5
130°	315.8	326.2	332.5	334.4	332.5	326.2	315.8	300.1	279.6	254.9	227.2
132.5°	304.7	315.0	320.8	323.0	320.8	315.0	304.7	288.9	269.2	246.9	220.9
135°	286.5	296.9	302.6	304.4	302.6	296.9	286.5	272.6	254.7	234.4	212.8
137.5°	267.8	277.2	282.5	284.5	282.5	277.2	267.8	255.4	240.1	223.4	205.8
140°	256.2	264.4	269.1	270.7	269.1	264.4	256.2	244.5	231.3	216.8	202.0
142.5°	245.1	252.1	256.5	257.9	256.5	252.1	245.1	235.2	223.7	211.2	198.8
145°	230.1	235.4	238.9	240.1	238.9	235.4	230.1	222.5	214.0	204.2	194.5
147.5°	218.3	222.6	224.5	225.2	224.5	222.6	218.3	212.3	205.9	198.3	190.4
150°	211.4	215.3	216.5	216.8	216.5	215.3	211.4	206.7	201.1	195.1	188.2
152.5°	205.6	208.7	209.9	210.3	209.9	208.7	205.6	201.7	197.2	191.8	185.7
155°	197.9	200.1	201.1	201.3	201.1	200.1	197.9	194.7	191.3	186.9	181.8
157.5°	190.8	192.6	193.5	193.4	193.5	192.6	190.8	188.3	185.7	182.2	178.1
160°	186.3	187.8	188.4	188.2	188.4	187.8	186.3	184.0	181.8	178.7	175.6
162.5°	182.0	183.2	183.4	183.3	183.4	183.2	182.0	180.3	178.3	175.7	172.7
165°	175.8	176.5	176.5	176.5	176.5	176.5	175.8	174.6	173.0	171.1	168.9
167.5°	170.0	170.5	170.2	170.1	170.2	170.5	170.0	169.3	168.2	166.7	165.2
170°	166.4	166.7	166.7	166.4	166.7	166.7	166.4	165.8	165.1	164.2	163.3
172.5°	163.1	163.7	163.2	162.8	163.2	163.7	163.1	163.0	162.6	161.9	161.0
175°	159.2	159.4	158.8	158.5	158.8	159.4	159.2	159.2	159.2	158.5	158.5
177.5°	156.9	157.0	156.3	156.3	156.3	157.0	156.9	157.0	157.0	157.0	156.9
180°	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1565.9	1572.6	1580.9	1587.1	1598.2	1603.2	1609.3	1614.4	1623.2	1631.6	1641.6
5°	1460.4	1472.2	1488.3	1505.6	1525.8	1539.6	1559.2	1570.9	1594.6	1616.1	1637.0
7.5°	1364.8	1379.2	1401.9	1424.2	1450.5	1474.4	1498.8	1525.8	1555.9	1591.5	1621.0
10°	1299.1	1318.7	1342.9	1370.7	1402.8	1430.6	1463.2	1492.4	1529.2	1570.9	1609.9
12.5°	1246.9	1263.6	1290.7	1317.4	1351.6	1385.5	1419.2	1457.9	1500.8	1547.0	1596.0
15°	1174.7	1188.7	1210.9	1247.7	1282.5	1315.8	1366.5	1402.8	1457.0	1508.4	1567.4
17.5°	1113.1	1130.4	1149.1	1180.7	1216.7	1258.4	1303.8	1349.1	1401.3	1466.5	1533.1
20°	1075.3	1089.2	1110.8	1135.1	1173.3	1215.0	1258.1	1304.0	1368.0	1435.4	1507.0
22.5°	1034.2	1049.2	1073.5	1100.1	1132.2	1172.2	1219.8	1270.1	1336.9	1403.1	1480.9
25°	985.7	996.1	1018.3	1042.0	1074.0	1108.0	1157.4	1213.0	1279.0	1354.8	1434.0
27.5°	940.0	949.1	969.4	990.0	1018.9	1059.4	1103.4	1159.6	1221.8	1298.6	1386.4
30°	907.1	916.9	935.0	957.2	985.0	1020.4	1065.6	1118.5	1185.2	1260.3	1352.0
32.5°	878.8	887.3	901.0	923.3	950.5	984.8	1026.7	1080.6	1147.4	1223.5	1313.6
35°	834.8	844.5	855.0	872.4	896.0	929.3	975.3	1026.0	1089.9	1163.6	1246.3
37.5°	791.2	801.7	811.0	826.6	848.2	877.6	917.3	970.1	1028.0	1098.9	1178.3
40°	763.9	772.2	779.9	796.6	818.1	846.0	882.8	930.1	991.2	1057.3	1123.3
42.5°	736.6	744.5	751.0	765.4	785.3	812.0	847.2	893.3	950.1	1011.6	1069.9
45°	693.8	698.6	706.2	718.7	734.8	759.0	793.1	834.1	882.1	940.5	984.3
47.5°	647.3	655.0	661.2	672.2	685.3	709.2	741.8	776.7	820.2	863.6	894.5
50°	611.7	619.4	628.4	638.8	651.3	673.6	703.5	738.9	775.7	809.1	835.5
52.5°	578.4	585.4	595.0	604.8	620.2	639.1	664.5	696.1	732.4	756.3	778.3
55°	529.0	532.4	543.6	553.3	567.9	581.8	607.5	635.3	657.5	675.6	693.8
57.5°	478.5	483.2	489.6	498.4	512.8	529.1	547.2	571.8	584.9	594.1	608.2
60°	446.3	447.6	451.8	462.3	473.4	487.9	508.8	526.2	535.9	543.6	555.4
62.5°	410.6	411.0	417.9	425.5	433.9	449.6	466.5	480.6	488.7	492.4	503.6
65°	360.8	359.4	363.6	369.8	379.5	389.9	404.6	417.1	416.3	420.5	427.5
67.5°	309.8	308.4	308.4	314.3	322.3	331.5	341.6	348.8	348.9	354.5	358.0
70°	275.3	271.1	273.8	278.7	282.2	289.9	301.0	303.8	304.4	307.2	310.7
72.5°	239.7	238.3	240.5	242.6	245.0	250.9	260.4	262.1	262.2	263.9	269.6
75°	190.5	189.0	187.7	189.8	192.5	196.7	200.2	203.0	202.2	203.0	207.1
77.5°	142.8	138.8	138.2	139.3	140.0	142.5	146.2	145.8	146.5	146.4	151.1
80°	113.3	107.7	107.0	107.0	107.7	109.1	110.5	111.9	109.9	111.9	113.3
82.5°	83.3	79.9	79.8	79.3	79.4	79.6	80.5	81.3	80.9	81.9	82.8
85°	45.8	44.5	42.4	43.8	43.1	41.0	42.4	40.3	39.6	40.3	41.0
87.5°	16.7	17.1	15.9	15.9	15.2	15.6	14.4	13.7	13.0	13.5	15.1
90°	5.4	5.1	4.4	4.1	3.5	3.1	2.5	1.9	1.2	0.6	0.4
92.5°	82.2	101.6	103.3	71.9	43.1	25.9	16.7	11.2	7.3	4.6	3.8
95°	273.2	279.2	227.8	140.9	71.5	37.8	23.6	16.7	13.2	10.7	10.4
97.5°	345.7	298.2	203.5	112.4	61.6	39.3	29.2	22.9	19.4	17.7	17.3
100°	363.4	284.5	181.6	102.1	61.2	42.9	33.4	27.4	24.0	22.6	22.0
102.5°	352.8	260.6	164.9	97.8	63.4	47.2	38.0	32.5	28.7	27.7	27.4
105°	319.0	228.5	148.7	96.1	68.0	54.2	45.4	40.3	37.2	35.6	35.6
107.5°	284.4	206.3	142.0	99.0	75.0	61.6	53.7	48.4	45.8	44.3	43.7
110°	264.7	196.0	139.9	101.8	80.1	67.1	58.9	54.2	51.4	50.1	49.5



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	250.1	189.9	139.9	105.3	84.8	72.4	64.5	59.7	56.9	55.9	55.3
115°	234.2	183.4	140.9	110.6	92.4	80.7	72.8	68.0	65.3	64.3	63.7
117.5°	224.6	180.2	142.9	116.6	100.0	89.0	81.4	76.0	73.2	72.1	71.2
120°	219.4	178.7	145.0	120.7	105.6	94.5	86.7	81.3	78.5	77.2	76.2
122.5°	214.8	177.5	146.7	125.2	110.8	99.9	91.9	86.1	83.3	82.2	81.6
125°	208.7	175.8	149.7	131.4	117.9	107.5	99.2	93.3	90.4	88.9	88.3
127.5°	203.0	175.1	153.0	137.1	124.6	114.6	106.4	100.0	96.4	94.4	93.5
130°	199.2	174.6	155.1	140.9	128.9	119.1	110.9	104.3	100.2	97.7	96.8
132.5°	196.2	174.6	157.3	144.2	133.0	123.1	114.9	108.1	103.5	100.5	99.2
135°	192.5	174.6	160.4	148.7	138.3	128.6	120.1	113.4	108.4	104.6	103.3
137.5°	189.3	175.0	163.3	152.1	142.2	133.3	124.6	118.1	113.0	109.5	108.5
140°	187.8	175.2	164.5	154.4	145.0	135.8	127.3	121.4	116.3	112.5	111.6
142.5°	186.5	175.5	165.2	155.7	146.7	138.1	130.1	124.4	119.3	115.7	115.1
145°	184.7	175.2	166.0	157.6	149.7	141.5	134.3	128.6	124.1	121.0	120.4
147.5°	182.7	174.4	166.4	158.7	151.6	144.4	138.0	133.1	129.0	126.3	125.9
150°	181.2	173.6	166.4	159.4	152.8	145.9	140.5	136.2	132.1	129.8	129.2
152.5°	179.4	172.6	166.1	160.0	154.1	147.7	142.9	138.7	135.1	133.1	132.8
155°	176.5	170.9	165.4	160.4	155.3	150.0	145.6	142.4	139.3	137.4	137.4
157.5°	173.7	168.9	164.6	160.7	156.4	151.9	148.5	145.7	143.0	141.5	141.6
160°	171.5	167.6	163.9	160.7	156.9	152.8	150.0	147.5	145.3	144.0	144.4
162.5°	169.4	166.1	163.1	160.5	157.5	153.8	151.5	149.5	147.6	146.3	146.6
165°	166.4	163.9	162.0	160.1	157.6	155.1	153.2	151.9	150.3	149.4	150.0
167.5°	163.5	161.7	160.2	159.3	157.6	155.5	154.3	153.4	152.6	151.9	152.3
170°	161.7	160.4	159.4	158.8	157.6	156.0	155.1	154.4	153.8	153.5	153.8
172.5°	159.9	158.9	158.5	158.4	157.3	156.0	155.5	155.2	154.5	154.3	154.8
175°	157.6	157.3	157.3	157.6	156.9	156.0	156.0	156.0	155.7	155.3	156.0
177.5°	156.6	156.3	156.3	156.9	156.6	156.0	156.0	156.3	156.0	156.0	156.6
180°	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1646.5	1654.4	1659.4	1668.8	1676.6	1681.1	1685.0	1688.3	1692.2	1695.5	1705.0
5°	1657.2	1675.2	1690.5	1714.1	1735.7	1752.4	1770.4	1786.5	1799.7	1818.4	1833.0
7.5°	1652.5	1684.6	1718.3	1754.9	1792.2	1827.0	1859.0	1888.9	1916.0	1948.8	1977.5
10°	1648.1	1691.9	1735.0	1784.3	1835.1	1878.2	1918.5	1959.5	1989.4	2031.1	2066.5
12.5°	1644.8	1696.3	1748.4	1807.7	1863.4	1924.3	1978.0	2007.9	2053.3	2086.7	2128.9
15°	1630.8	1698.9	1770.4	1837.2	1916.4	1972.7	2020.0	2078.4	2120.8	2163.2	2209.0
17.5°	1605.5	1682.7	1762.8	1850.2	1926.3	1986.7	2047.6	2104.0	2154.6	2211.4	2268.5
20°	1593.8	1671.1	1762.8	1852.4	1926.8	1990.1	2052.6	2114.5	2170.2	2243.1	2309.2
22.5°	1569.4	1662.7	1747.2	1834.7	1911.3	1980.0	2051.0	2121.2	2195.1	2277.6	2360.3
25°	1525.8	1620.3	1709.9	1796.2	1873.3	1959.5	2035.2	2129.1	2223.7	2332.8	2435.6
27.5°	1480.4	1570.9	1653.1	1736.3	1826.3	1924.0	2022.2	2128.7	2252.5	2390.2	2535.3
30°	1443.8	1529.2	1609.2	1694.7	1788.5	1898.4	2006.1	2132.6	2275.8	2430.8	2603.2
32.5°	1400.9	1479.7	1557.5	1648.0	1750.2	1866.1	1991.6	2130.4	2302.5	2478.6	2656.0
35°	1327.7	1393.7	1473.6	1570.2	1685.6	1818.4	1963.7	2127.7	2325.1	2527.4	2676.8
37.5°	1240.7	1302.3	1386.4	1492.4	1613.4	1755.9	1928.2	2122.9	2332.5	2493.8	2542.0
40°	1182.4	1239.4	1327.0	1436.8	1560.5	1711.4	1900.4	2106.2	2309.2	2412.0	2372.4
42.5°	1120.1	1179.9	1265.2	1373.9	1507.2	1671.3	1865.4	2071.2	2241.3	2280.2	2143.3
45°	1021.8	1083.7	1167.8	1277.6	1420.8	1598.7	1801.0	1988.0	2086.0	2015.8	1803.8
47.5°	930.5	988.5	1066.4	1179.7	1327.5	1511.5	1706.4	1855.6	1863.3	1695.8	1469.4
50°	868.2	921.7	1000.2	1113.6	1260.3	1446.5	1622.4	1739.8	1687.0	1497.3	1279.7
52.5°	807.0	859.4	936.8	1049.1	1194.1	1364.8	1528.4	1610.9	1511.3	1316.5	1130.7
55°	718.7	764.6	840.3	944.0	1081.6	1240.1	1379.1	1407.6	1278.3	1086.5	935.6
57.5°	632.6	675.4	744.3	839.7	965.5	1105.9	1214.6	1208.5	1071.8	907.2	787.6
60°	574.2	615.9	677.1	770.2	884.8	1005.8	1098.9	1076.7	941.2	799.4	698.6
62.5°	521.9	559.1	617.0	698.5	803.2	915.2	991.7	958.9	826.1	702.0	622.4
65°	444.9	476.2	525.5	595.0	681.9	774.4	833.4	791.0	677.7	581.1	517.2
67.5°	371.3	396.4	437.7	493.2	567.3	641.6	677.6	634.9	544.3	473.8	426.4
70°	324.6	346.9	378.8	428.2	492.8	555.4	582.5	544.3	466.5	405.9	371.8
72.5°	277.9	296.2	324.3	368.7	420.5	474.7	498.6	462.0	398.1	347.0	315.1
75°	214.8	227.3	246.7	277.3	318.3	361.5	374.7	342.7	301.7	263.4	242.6
77.5°	153.7	164.3	179.1	198.4	227.5	254.9	266.4	247.9	216.2	192.0	174.9
80°	118.2	123.8	136.3	152.2	175.1	192.5	200.2	188.4	166.1	148.0	134.8
82.5°	84.3	89.8	97.3	110.5	125.1	137.0	145.2	137.2	121.1	106.9	99.2
85°	41.0	44.5	48.7	54.2	65.4	72.3	71.6	66.7	60.5	54.9	50.7
87.5°	14.6	15.2	17.0	20.0	21.8	24.1	25.3	24.3	22.1	20.5	18.9
90°	0.6	1.2	1.9	2.5	3.1	3.5	4.1	4.4	5.1	5.4	5.7
92.5°	4.6	7.3	11.2	16.7	25.9	43.1	71.9	103.3	101.6	82.2	55.8
95°	10.7	13.2	16.7	23.6	37.8	71.5	140.9	227.8	279.2	273.2	226.6
97.5°	17.7	19.4	22.9	29.2	39.3	61.6	112.4	203.5	298.2	345.7	337.4
100°	22.6	24.0	27.4	33.4	42.9	61.2	102.1	181.6	284.5	363.4	387.6
102.5°	27.7	28.7	32.5	38.0	47.2	63.4	97.8	164.9	260.6	352.8	404.5
105°	35.6	37.2	40.3	45.4	54.2	68.0	96.1	148.7	228.5	319.0	394.6
107.5°	44.3	45.8	48.4	53.7	61.6	75.0	99.0	142.0	206.3	284.4	359.0
110°	50.1	51.4	54.2	58.9	67.1	80.1	101.8	139.9	196.0	264.7	332.8



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	55.9	56.9	59.7	64.5	72.4	84.8	105.3	139.9	189.9	250.1	312.1
115°	64.3	65.3	68.0	72.8	80.7	92.4	110.6	140.9	183.4	234.2	286.1
117.5°	72.1	73.2	76.0	81.4	89.0	100.0	116.6	142.9	180.2	224.6	269.4
120°	77.2	78.5	81.3	86.7	94.5	105.6	120.7	145.0	178.7	219.4	260.3
122.5°	82.2	83.3	86.1	91.9	99.9	110.8	125.2	146.7	177.5	214.8	253.5
125°	88.9	90.4	93.3	99.2	107.5	117.9	131.4	149.7	175.8	208.7	243.6
127.5°	94.4	96.4	100.0	106.4	114.6	124.6	137.1	153.0	175.1	203.0	233.5
130°	97.7	100.2	104.3	110.9	119.1	128.9	140.9	155.1	174.6	199.2	227.2
132.5°	100.5	103.5	108.1	114.9	123.1	133.0	144.2	157.3	174.6	196.2	220.9
135°	104.6	108.4	113.4	120.1	128.6	138.3	148.7	160.4	174.6	192.5	212.8
137.5°	109.5	113.0	118.1	124.6	133.3	142.2	152.1	163.3	175.0	189.3	205.8
140°	112.5	116.3	121.4	127.3	135.8	145.0	154.4	164.5	175.2	187.8	202.0
142.5°	115.7	119.3	124.4	130.1	138.1	146.7	155.7	165.2	175.5	186.5	198.8
145°	121.0	124.1	128.6	134.3	141.5	149.7	157.6	166.0	175.2	184.7	194.5
147.5°	126.3	129.0	133.1	138.0	144.4	151.6	158.7	166.4	174.4	182.7	190.4
150°	129.8	132.1	136.2	140.5	145.9	152.8	159.4	166.4	173.6	181.2	188.2
152.5°	133.1	135.1	138.7	142.9	147.7	154.1	160.0	166.1	172.6	179.4	185.7
155°	137.4	139.3	142.4	145.6	150.0	155.3	160.4	165.4	170.9	176.5	181.8
157.5°	141.5	143.0	145.7	148.5	151.9	156.4	160.7	164.6	168.9	173.7	178.1
160°	144.0	145.3	147.5	150.0	152.8	156.9	160.7	163.9	167.6	171.5	175.6
162.5°	146.3	147.6	149.5	151.5	153.8	157.5	160.5	163.1	166.1	169.4	172.7
165°	149.4	150.3	151.9	153.2	155.1	157.6	160.1	162.0	163.9	166.4	168.9
167.5°	151.9	152.6	153.4	154.3	155.5	157.6	159.3	160.2	161.7	163.5	165.2
170°	153.5	153.8	154.4	155.1	156.0	157.6	158.8	159.4	160.4	161.7	163.3
172.5°	154.3	154.5	155.2	155.5	156.0	157.3	158.4	158.5	158.9	159.9	161.0
175°	155.3	155.7	156.0	156.0	156.0	156.9	157.6	157.3	157.3	157.6	158.5
177.5°	156.0	156.0	156.3	156.0	156.0	156.6	156.9	156.3	156.3	156.6	156.9
180°	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3	156.3



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1712.7	1717.2	1726.6	1723.3	1727.8	1730.0	1732.2
5°	1851.1	1873.3	1883.0	1881.7	1896.2	1892.7	1889.3
7.5°	2007.3	2030.7	2043.8	2060.0	2069.5	2070.2	2078.4
10°	2095.8	2126.4	2138.9	2156.2	2167.4	2173.6	2172.9
12.5°	2163.6	2187.5	2215.5	2224.1	2239.1	2247.0	2244.1
15°	2245.2	2283.4	2312.7	2327.2	2346.0	2351.5	2359.2
17.5°	2318.1	2369.4	2403.4	2448.7	2465.8	2476.3	2470.1
20°	2373.1	2440.5	2474.6	2528.8	2558.7	2574.7	2569.1
22.5°	2438.2	2511.1	2574.1	2621.1	2666.6	2688.2	2692.6
25°	2549.7	2649.7	2742.2	2804.1	2860.3	2873.5	2902.8
27.5°	2674.2	2792.2	2891.1	2956.2	2995.3	3010.1	3019.2
30°	2752.6	2870.1	2944.5	2986.2	2998.7	2997.3	2995.9
32.5°	2791.0	2864.5	2878.9	2867.2	2838.6	2814.3	2789.1
35°	2736.7	2681.7	2599.7	2494.0	2416.2	2337.6	2330.0
37.5°	2461.2	2285.6	2149.1	1996.6	1908.6	1854.3	1816.8
40°	2202.1	2002.6	1837.2	1708.6	1618.9	1583.5	1548.7
42.5°	1920.7	1730.1	1583.6	1476.1	1408.7	1369.4	1341.8
45°	1560.5	1392.3	1277.6	1199.8	1146.2	1115.6	1098.2
47.5°	1278.7	1154.3	1056.9	1000.7	963.7	940.0	940.0
50°	1127.5	1008.6	944.0	899.5	867.5	848.7	852.2
52.5°	993.5	904.6	849.4	812.2	788.5	776.9	776.6
55°	830.6	766.7	730.6	703.5	687.4	674.2	677.1
57.5°	710.5	656.6	632.4	609.9	598.8	593.5	585.9
60°	636.1	594.3	573.5	555.4	544.3	540.1	532.4
62.5°	569.9	537.1	516.7	502.0	492.0	490.6	484.6
65°	478.9	453.9	435.9	428.9	418.5	415.7	415.7
67.5°	394.8	376.9	362.8	356.4	351.9	352.6	349.2
70°	342.0	327.4	318.3	311.4	307.9	308.6	305.9
72.5°	299.2	282.9	275.0	270.8	266.3	268.0	266.9
75°	226.6	218.3	214.1	209.9	207.1	205.7	204.4
77.5°	166.4	159.1	155.9	153.5	153.9	150.5	153.2
80°	128.6	122.3	120.3	116.8	116.1	116.1	115.4
82.5°	94.1	90.6	89.1	86.2	85.0	86.1	84.3
85°	48.7	45.8	45.2	45.2	43.8	42.4	45.8
87.5°	19.0	16.9	16.9	16.4	16.4	15.9	14.8
90°	6.0	6.3	7.0	7.0	7.0	7.2	7.2
92.5°	40.5	30.5	25.9	21.8	21.0	20.6	20.1
95°	178.7	139.9	113.4	91.0	81.6	79.1	74.1
97.5°	303.9	266.1	229.3	209.8	192.2	183.1	179.0
100°	372.2	339.7	306.9	285.2	262.5	250.8	245.8
102.5°	414.0	398.5	376.3	353.0	336.9	324.2	320.5
105°	437.7	451.6	448.2	438.0	427.7	421.3	417.6
107.5°	416.6	452.2	468.7	473.8	473.8	471.6	469.1
110°	392.7	437.1	463.9	478.0	484.0	486.2	486.2



TEST NUMBER: P333297-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	369.0	413.9	445.5	466.2	476.5	482.0	484.3
115°	335.0	378.2	412.5	437.1	452.2	461.0	465.1
117.5°	311.5	348.7	380.2	404.7	420.4	429.2	431.7
120°	298.1	332.8	360.5	383.9	399.0	407.5	410.0
122.5°	288.6	319.4	345.4	366.2	380.0	388.6	390.8
125°	275.7	303.2	325.8	343.5	356.4	363.4	366.5
127.5°	263.5	289.1	310.3	326.4	337.8	344.3	345.7
130°	254.9	279.6	300.1	315.8	326.2	332.5	334.4
132.5°	246.9	269.2	288.9	304.7	315.0	320.8	323.0
135°	234.4	254.7	272.6	286.5	296.9	302.6	304.4
137.5°	223.4	240.1	255.4	267.8	277.2	282.5	284.5
140°	216.8	231.3	244.5	256.2	264.4	269.1	270.7
142.5°	211.2	223.7	235.2	245.1	252.1	256.5	257.9
145°	204.2	214.0	222.5	230.1	235.4	238.9	240.1
147.5°	198.3	205.9	212.3	218.3	222.6	224.5	225.2
150°	195.1	201.1	206.7	211.4	215.3	216.5	216.8
152.5°	191.8	197.2	201.7	205.6	208.7	209.9	210.3
155°	186.9	191.3	194.7	197.9	200.1	201.1	201.3
157.5°	182.2	185.7	188.3	190.8	192.6	193.5	193.4
160°	178.7	181.8	184.0	186.3	187.8	188.4	188.2
162.5°	175.7	178.3	180.3	182.0	183.2	183.4	183.3
165°	171.1	173.0	174.6	175.8	176.5	176.5	176.5
167.5°	166.7	168.2	169.3	170.0	170.5	170.2	170.1
170°	164.2	165.1	165.8	166.4	166.7	166.7	166.4
172.5°	161.9	162.6	163.0	163.1	163.7	163.2	162.8
175°	158.5	159.2	159.2	159.2	159.4	158.8	158.5
177.5°	157.0	157.0	157.0	156.9	157.0	156.3	156.3
180°	156.3	156.3	156.3	156.3	156.3	156.3	156.3

(END OF REPORT)