

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333301-940

Luminaire Tested: **S125DIP-S1270D365U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333301-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1270D365U940-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5879.5 lumens
Efficiency: N/A
Efficacy: 118.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 49.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333301-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

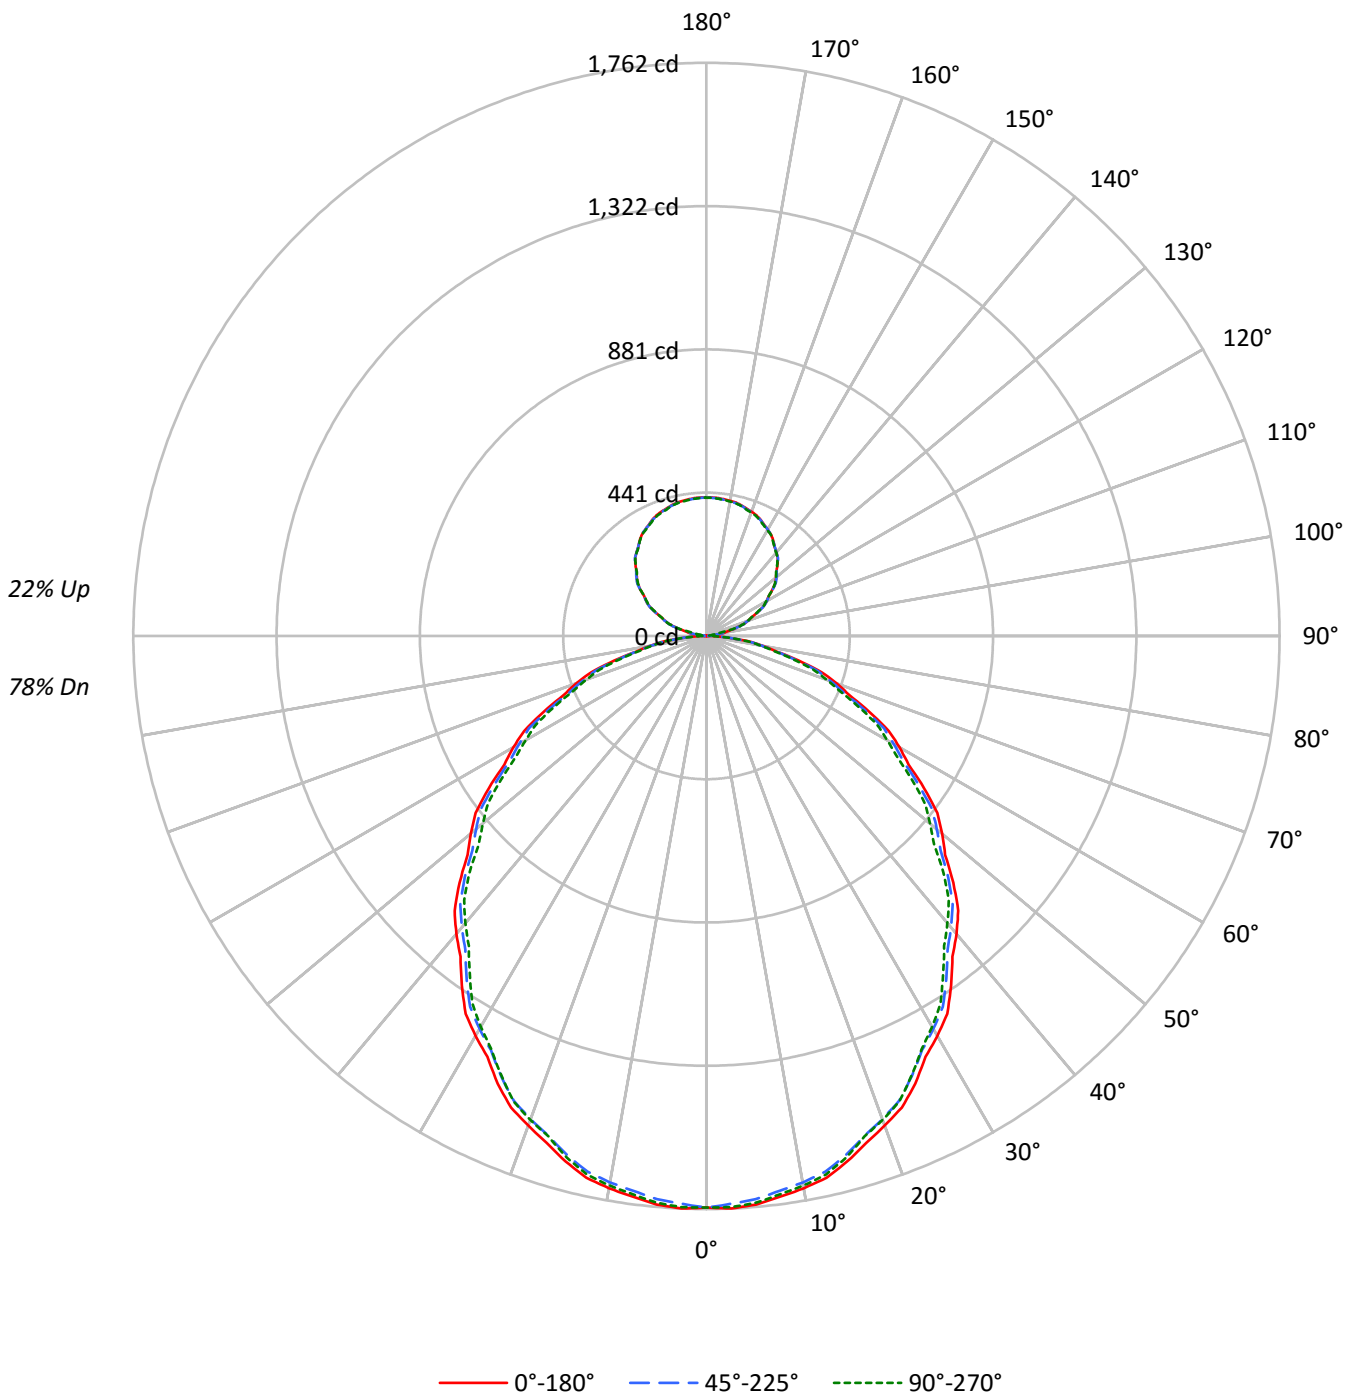



TEST NUMBER: P333301-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	114	114	114	114	109	109	109	109	99	99	99	90	90	90	82	82	82	78
1	104	99	95	92	99	95	91	88	87	84	81	79	77	75	72	70	69	65
2	95	87	80	75	90	83	77	72	76	71	67	69	66	62	63	60	58	55
3	86	76	69	62	82	73	66	60	67	61	57	61	57	53	56	52	49	46
4	79	68	59	53	75	65	57	51	60	53	48	55	50	45	50	46	42	40
5	73	60	52	46	69	58	50	44	53	47	42	49	44	39	45	41	37	34
6	67	54	46	40	64	52	44	39	48	42	37	45	39	35	41	36	33	30
7	62	49	41	35	59	47	40	34	44	37	32	41	35	31	38	33	29	27
8	58	45	37	31	55	43	36	30	40	34	29	37	32	27	35	30	26	24
9	54	41	33	28	51	40	32	27	37	31	26	34	29	25	32	27	24	22
10	51	38	30	25	48	37	30	25	34	28	24	32	26	23	30	25	21	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11349	11349	11349
5°	11374	11267	11339
10°	11305	11187	11252
15°	11183	11053	11099
20°	11008	10864	10883
25°	10819	10641	10630
30°	10586	10399	10347
35°	10336	10139	9996
40°	10080	9857	9716
45°	9803	9600	9409
50°	9499	9289	9010
55°	9205	8939	8688
60°	8853	8584	8280
65°	8436	8159	7882
70°	8033	7666	7404
75°	7321	7079	6832
80°	6512	6412	6259
85°	5669	5765	5461



TEST NUMBER: P333301-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	165.7	2.8
10°-20°	468.1	8.0
20°-30°	691.1	11.8
30°-40°	806.4	13.7
40°-50°	809.9	13.8
50°-60°	710.9	12.1
60°-70°	529.7	9.0
70°-80°	302.9	5.2
80°-90°	89.0	1.5
90°-100°	15.5	0.3
100°-110°	95.2	1.6
110°-120°	172.7	2.9
120°-130°	221.7	3.8
130°-140°	238.4	4.1
140°-150°	223.8	3.8
150°-160°	181.0	3.1
160°-170°	117.1	2.0
170°-180°	40.4	0.7
0°-30°	1324.8	22.5
0°-40°	2131.2	36.2
0°-60°	3652.1	62.1
0°-90°	4573.7	77.8
90°-120°	283.4	4.8
90°-150°	967.3	16.5
90°-180°	1306.0	22.2
0°-180°	5879.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1757	1757	1757	1757	1757	
5°	1754	1751	1738	1750	1749	166
15°	1672	1668	1653	1660	1660	471
25°	1518	1511	1493	1496	1492	698
35°	1311	1305	1286	1279	1268	820
45°	1073	1067	1051	1035	1030	827
55°	818	812	794	781	772	730
65°	552	548	534	522	516	548
75°	293	290	284	279	274	313
85°	76	78	78	76	74	85
90°	0	3	5	7	8	5
95°	18	16	5	6	7	23
105°	93	94	94	94	94	98
115°	174	176	176	175	173	172
125°	247	250	250	248	247	221
135°	309	310	310	309	307	238
145°	358	358	358	359	357	224
155°	394	392	393	394	391	181
165°	416	414	414	416	414	117
175°	425	424	424	426	423	40
180°	425	425	425	425	425	



TEST NUMBER: P333301-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3
2.5°	1761.8	1761.0	1760.3	1759.5	1758.8	1757.2	1754.7	1752.2	1749.8	1747.3	1749.8
5°	1754.5	1753.9	1753.3	1752.7	1752.0	1750.2	1747.1	1744.0	1741.0	1737.9	1740.6
7.5°	1738.4	1737.8	1737.1	1736.5	1735.9	1733.9	1730.5	1727.2	1723.8	1720.4	1723.1
10°	1723.9	1723.3	1722.7	1722.1	1721.4	1719.5	1716.1	1712.7	1709.2	1705.8	1708.3
12.5°	1706.1	1705.0	1704.0	1702.8	1701.7	1699.6	1696.4	1693.3	1690.1	1686.9	1689.0
15°	1672.5	1671.6	1670.6	1669.7	1668.8	1666.6	1663.2	1659.8	1656.4	1653.1	1654.6
17.5°	1633.9	1632.5	1631.1	1629.8	1628.4	1625.9	1622.5	1618.9	1615.4	1611.9	1613.8
20°	1601.6	1601.0	1600.4	1599.7	1599.1	1596.8	1592.8	1588.8	1584.7	1580.7	1582.9
22.5°	1569.3	1568.3	1567.1	1566.0	1564.9	1562.5	1558.7	1555.0	1551.1	1547.4	1548.8
25°	1518.2	1516.6	1515.1	1513.6	1512.0	1509.2	1505.2	1501.2	1497.2	1493.2	1493.8
27.5°	1458.4	1457.5	1456.5	1455.6	1454.7	1452.2	1448.0	1443.9	1439.8	1435.6	1435.7
30°	1419.5	1418.5	1417.6	1416.7	1415.8	1413.0	1408.4	1403.7	1399.1	1394.5	1393.8
32.5°	1377.2	1375.8	1374.4	1373.0	1371.5	1368.8	1364.6	1360.5	1356.3	1352.2	1351.1
35°	1311.0	1309.8	1308.6	1307.3	1306.1	1303.3	1299.0	1294.7	1290.3	1286.0	1284.5
37.5°	1242.3	1240.8	1239.3	1237.7	1236.2	1233.3	1229.3	1225.2	1221.1	1217.1	1214.8
40°	1195.6	1194.1	1192.6	1191.0	1189.5	1186.5	1182.2	1177.9	1173.6	1169.2	1166.4
42.5°	1145.6	1144.3	1143.0	1141.7	1140.4	1137.6	1133.3	1128.9	1124.6	1120.3	1117.8
45°	1073.3	1072.1	1070.9	1069.6	1068.4	1065.9	1062.2	1058.5	1054.8	1051.1	1047.3
47.5°	995.4	995.5	995.6	995.6	995.7	993.5	989.1	984.6	980.2	975.7	972.0
50°	945.4	944.5	943.5	942.6	941.6	939.3	935.7	931.9	928.3	924.5	920.5
52.5°	894.2	893.6	892.9	892.2	891.5	889.2	885.2	881.3	877.4	873.3	869.9
55°	817.5	816.5	815.6	814.7	813.8	811.2	806.8	802.5	798.2	793.9	791.0
57.5°	736.6	736.1	735.6	735.1	734.6	732.5	728.9	725.2	721.6	717.9	714.3
60°	685.4	684.2	683.0	681.7	680.5	678.1	674.8	671.4	668.0	664.6	661.5
62.5°	632.0	631.1	630.1	629.0	628.0	626.2	623.2	620.3	617.4	614.5	611.2
65°	552.0	551.3	550.7	550.1	549.5	547.4	544.0	540.6	537.3	533.9	531.1
67.5°	474.4	473.1	471.8	470.5	469.2	467.3	464.8	462.2	459.7	457.1	454.8
70°	425.4	423.9	422.3	420.8	419.3	417.1	414.3	411.5	408.8	406.0	404.1
72.5°	372.0	371.0	370.0	368.9	367.8	366.4	364.6	362.8	361.1	359.3	357.1
75°	293.4	292.7	292.1	291.5	290.9	289.8	288.3	286.7	285.2	283.7	282.7
77.5°	220.8	220.5	220.3	220.1	219.8	219.3	218.4	217.5	216.6	215.8	215.3
80°	175.1	175.1	175.1	175.1	175.1	174.9	174.2	173.6	173.0	172.4	172.1
82.5°	135.1	134.6	134.1	133.7	133.1	132.9	132.7	132.6	132.5	132.3	131.8
85°	76.5	76.8	77.0	77.4	77.7	77.8	77.8	77.8	77.8	77.8	77.6
87.5°	30.1	30.2	30.3	30.4	30.6	30.5	30.4	30.2	30.1	30.0	30.0
90°	0.4	0.9	1.4	2.0	2.6	3.1	3.6	4.1	4.5	5.1	5.4
92.5°	4.8	4.5	4.1	3.7	3.3	3.3	3.7	4.2	4.6	5.1	5.4
95°	17.9	17.7	17.6	17.3	17.1	15.7	13.0	10.3	7.7	5.1	5.4
97.5°	37.5	37.9	38.3	38.6	39.1	36.6	31.3	26.0	20.8	15.5	13.6
100°	52.6	52.9	53.1	53.2	53.5	53.7	54.0	54.3	54.6	54.8	44.4
102.5°	68.0	68.3	68.6	68.8	69.1	69.3	69.5	69.6	69.8	70.0	68.0
105°	92.6	92.9	93.3	93.5	93.8	93.9	93.9	93.9	93.9	93.9	93.9
107.5°	118.2	118.2	118.2	118.2	118.2	118.3	118.5	118.6	118.8	118.9	118.9
110°	134.9	134.9	134.9	134.9	134.9	135.0	135.1	135.3	135.4	135.5	135.4



TEST NUMBER: P333301-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	150.5	150.7	150.9	151.1	151.2	151.3	151.4	151.5	151.6	151.7	151.4
115°	174.0	174.3	174.7	175.0	175.4	175.6	175.7	175.8	175.8	175.8	175.6
117.5°	198.2	198.2	198.2	198.2	198.2	198.3	198.6	198.9	199.1	199.4	199.0
120°	213.4	213.3	213.3	213.2	213.1	213.2	213.4	213.6	213.8	214.0	213.9
122.5°	226.8	227.0	227.3	227.6	227.8	228.0	228.1	228.2	228.3	228.4	228.3
125°	247.4	247.9	248.4	248.9	249.4	249.7	249.7	249.7	249.7	249.7	249.3
127.5°	267.2	267.5	267.9	268.2	268.6	268.8	268.7	268.7	268.6	268.6	268.4
130°	279.3	279.6	280.0	280.4	280.7	280.9	281.0	281.0	281.1	281.2	281.0
132.5°	291.4	291.8	292.2	292.6	293.0	293.1	293.0	292.8	292.7	292.5	292.5
135°	308.6	309.0	309.4	309.9	310.2	310.4	310.2	310.1	310.0	309.9	309.7
137.5°	324.4	324.8	325.1	325.5	325.8	326.0	325.8	325.7	325.6	325.5	325.5
140°	334.7	334.9	335.0	335.2	335.3	335.4	335.3	335.2	335.1	335.1	335.2
142.5°	344.1	344.2	344.3	344.3	344.4	344.5	344.6	344.7	344.8	344.9	344.9
145°	357.8	357.9	358.0	358.2	358.3	358.4	358.4	358.4	358.4	358.4	358.5
147.5°	369.7	369.7	369.7	369.6	369.6	369.6	369.7	369.8	369.9	370.0	370.1
150°	377.3	377.2	377.0	376.8	376.7	376.7	376.8	377.0	377.2	377.3	377.5
152.5°	384.6	384.3	384.0	383.7	383.3	383.3	383.4	383.6	383.7	383.9	384.0
155°	394.0	393.6	393.2	392.7	392.4	392.2	392.4	392.4	392.6	392.7	393.0
157.5°	401.3	401.0	400.7	400.5	400.3	400.1	400.1	400.2	400.2	400.2	400.4
160°	406.3	405.9	405.5	405.0	404.7	404.5	404.5	404.6	404.7	404.7	405.0
162.5°	410.4	409.9	409.5	409.0	408.7	408.5	408.6	408.6	408.7	408.8	409.1
165°	415.7	415.4	414.9	414.5	414.1	413.9	413.9	414.0	414.1	414.2	414.6
167.5°	419.8	419.4	418.9	418.5	418.0	417.9	417.9	418.0	418.1	418.1	418.7
170°	422.0	421.6	421.1	420.6	420.1	419.9	420.0	420.0	420.1	420.2	420.7
172.5°	423.6	423.1	422.6	422.1	421.6	421.4	421.5	421.7	421.8	422.0	422.4
175°	425.2	424.8	424.4	423.9	423.6	423.4	423.4	423.5	423.6	423.7	424.2
177.5°	426.0	425.6	425.3	425.0	424.6	424.5	424.5	424.6	424.6	424.7	425.1
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2



TEST NUMBER: P333301-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3
2.5°	1752.2	1754.7	1757.2	1758.3	1758.1	1757.8	1757.6	1757.3
5°	1743.4	1746.2	1749.0	1750.2	1749.9	1749.6	1749.3	1749.0
7.5°	1725.7	1728.5	1731.2	1732.4	1732.1	1731.8	1731.5	1731.2
10°	1710.8	1713.3	1715.7	1716.8	1716.5	1716.2	1715.9	1715.7
12.5°	1691.0	1692.9	1694.9	1695.9	1695.8	1695.7	1695.7	1695.6
15°	1656.2	1657.7	1659.2	1660.0	1660.0	1660.0	1660.0	1660.0
17.5°	1615.7	1617.7	1619.5	1619.7	1618.2	1616.7	1615.1	1613.6
20°	1585.1	1587.2	1589.4	1589.7	1588.1	1586.6	1585.1	1583.5
22.5°	1550.2	1551.7	1553.1	1553.3	1552.2	1551.1	1550.1	1549.1
25°	1494.4	1495.0	1495.7	1495.5	1494.6	1493.6	1492.7	1491.7
27.5°	1435.8	1436.0	1436.1	1435.7	1434.8	1433.9	1432.9	1432.0
30°	1393.2	1392.6	1392.0	1391.2	1390.3	1389.4	1388.4	1387.5
32.5°	1350.0	1348.9	1347.7	1346.3	1344.7	1343.0	1341.3	1339.7
35°	1282.9	1281.4	1279.9	1277.8	1275.3	1272.9	1270.4	1267.9
37.5°	1212.5	1210.2	1207.9	1206.0	1204.6	1203.2	1201.8	1200.3
40°	1163.7	1160.9	1158.1	1156.3	1155.3	1154.4	1153.4	1152.5
42.5°	1115.3	1112.7	1110.2	1108.2	1106.8	1105.4	1103.9	1102.5
45°	1043.7	1039.9	1036.3	1033.9	1033.0	1032.1	1031.1	1030.2
47.5°	968.1	964.4	960.6	957.7	955.5	953.3	951.2	949.0
50°	916.5	912.5	908.5	905.4	903.2	901.1	898.9	896.7
52.5°	866.3	862.8	859.3	856.3	853.9	851.5	849.1	846.7
55°	788.3	785.5	782.7	780.2	778.1	776.0	773.7	771.6
57.5°	710.8	707.2	703.6	701.2	700.1	698.9	697.7	696.5
60°	658.4	655.3	652.2	649.6	647.4	645.2	643.1	641.0
62.5°	607.8	604.5	601.2	598.7	597.0	595.3	593.6	592.0
65°	528.3	525.5	522.7	520.8	519.5	518.3	517.0	515.8
67.5°	452.5	450.0	447.7	446.2	445.4	444.7	444.0	443.2
70°	402.3	400.4	398.5	397.0	395.7	394.5	393.3	392.1
72.5°	355.1	352.9	350.9	349.2	347.9	346.7	345.4	344.2
75°	281.8	280.8	279.9	278.8	277.6	276.3	275.1	273.8
77.5°	214.6	214.1	213.6	212.9	212.0	211.1	210.3	209.4
80°	171.7	171.5	171.1	170.7	170.0	169.4	168.8	168.3
82.5°	131.3	130.7	130.1	129.8	129.7	129.6	129.4	129.3
85°	77.2	77.0	76.6	76.2	75.5	74.9	74.3	73.7
87.5°	30.1	30.1	30.2	30.1	29.6	29.1	28.6	28.2
90°	5.7	6.1	6.4	6.7	7.0	7.1	7.3	7.6
92.5°	5.7	6.1	6.4	6.7	6.8	6.9	7.0	7.0
95°	5.7	6.1	6.4	6.6	6.6	6.6	6.6	6.6
97.5°	11.6	9.5	7.6	6.6	6.6	6.6	6.6	6.6
100°	34.0	23.5	13.1	7.8	7.5	7.2	6.9	6.6
102.5°	66.0	64.0	62.1	58.7	53.9	49.2	44.4	39.7
105°	93.9	93.9	93.9	93.9	93.8	93.7	93.7	93.6
107.5°	119.0	119.0	119.0	118.9	118.7	118.4	118.2	118.0
110°	135.1	134.9	134.7	134.6	134.7	134.7	134.8	134.9



TEST NUMBER: P333301-940

CATALOG NUMBER: S125DIP-S1270D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	151.1	150.9	150.6	150.4	150.3	150.3	150.2	150.1
115°	175.3	175.0	174.8	174.4	174.0	173.6	173.2	172.7
117.5°	198.7	198.3	198.0	197.7	197.5	197.3	197.2	197.0
120°	213.7	213.6	213.5	213.2	212.9	212.5	212.1	211.8
122.5°	228.1	228.0	227.8	227.6	227.1	226.8	226.3	226.0
125°	249.1	248.8	248.5	248.3	248.1	247.9	247.6	247.4
127.5°	268.2	268.0	268.0	267.6	267.1	266.5	266.1	265.6
130°	280.7	280.5	280.4	280.0	279.7	279.4	279.0	278.7
132.5°	292.4	292.4	292.3	292.1	291.8	291.4	291.1	290.8
135°	309.6	309.4	309.2	309.0	308.6	308.2	307.7	307.3
137.5°	325.6	325.6	325.6	325.4	325.0	324.7	324.3	324.0
140°	335.4	335.5	335.6	335.5	335.1	334.7	334.2	333.8
142.5°	344.9	345.0	345.0	344.8	344.4	343.9	343.6	343.1
145°	358.6	358.6	358.6	358.5	358.1	357.7	357.2	356.8
147.5°	370.1	370.2	370.3	370.1	369.6	369.1	368.6	368.1
150°	377.6	377.7	377.8	377.6	377.1	376.6	375.9	375.4
152.5°	384.1	384.2	384.4	384.2	383.7	383.3	382.7	382.2
155°	393.2	393.3	393.6	393.4	392.9	392.3	391.7	391.2
157.5°	400.6	400.8	401.1	400.9	400.4	399.8	399.2	398.7
160°	405.3	405.6	405.8	405.7	405.1	404.6	404.0	403.5
162.5°	409.6	409.9	410.4	410.2	409.6	408.9	408.4	407.8
165°	415.0	415.4	415.9	415.8	415.3	414.6	414.1	413.6
167.5°	419.2	419.6	420.2	420.1	419.5	418.8	418.2	417.6
170°	421.2	421.9	422.4	422.4	421.8	421.2	420.4	419.8
172.5°	422.9	423.5	423.9	423.9	423.3	422.6	422.0	421.3
175°	424.7	425.3	425.9	425.9	425.2	424.5	423.9	423.3
177.5°	425.5	425.9	426.2	426.2	425.8	425.3	424.9	424.5
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2

(END OF REPORT)