

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333314-940

Luminaire Tested: **S125DIP-S1270D810U940-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333314-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1270D810U940-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7123.4 lumens
Efficiency: N/A
Efficacy: 117.4 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

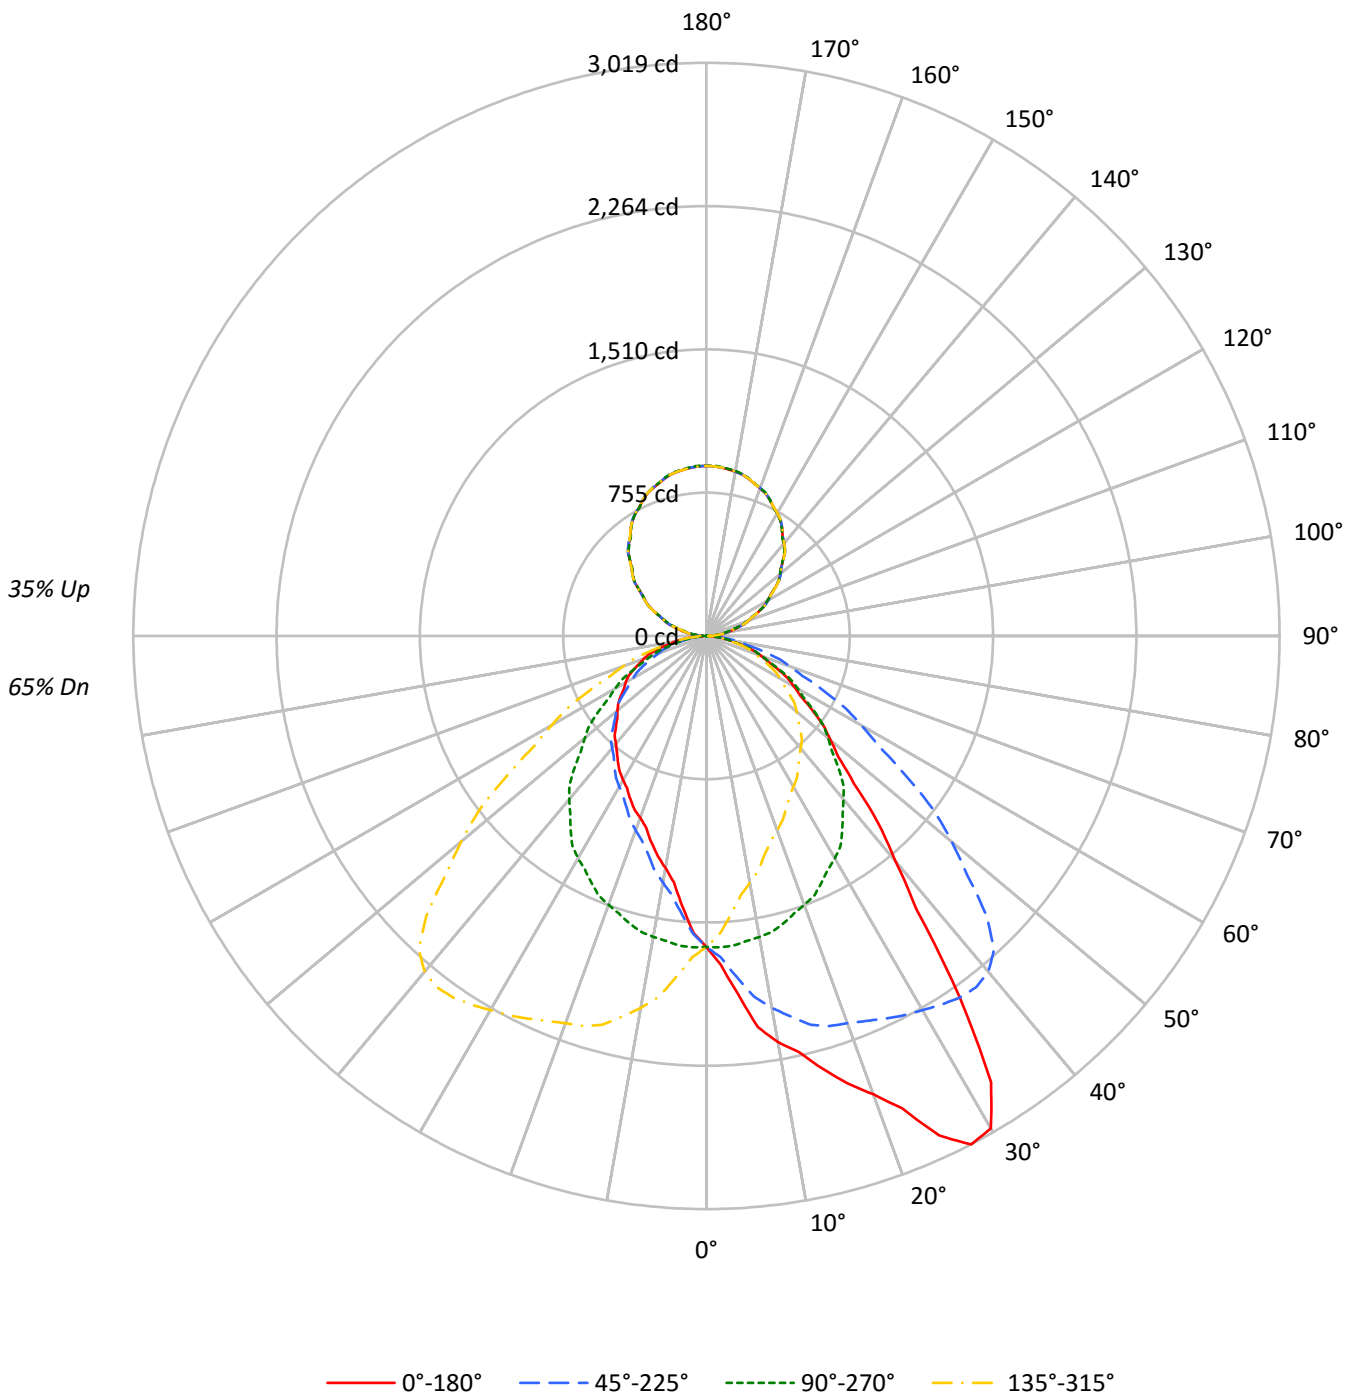



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	80	80	80	70	70	70	65
1	101	97	93	90	95	91	88	85	81	78	76	71	69	68	62	61	60	55
2	93	85	79	74	87	80	75	70	71	67	63	63	60	57	55	53	51	47
3	85	75	68	62	79	71	64	59	63	58	54	56	52	48	49	46	43	40
4	78	67	59	53	73	63	56	50	56	50	46	50	45	42	44	40	38	34
5	71	60	51	45	67	56	49	43	50	44	40	45	40	36	40	36	33	30
6	66	54	45	39	62	51	43	38	46	39	35	41	36	32	36	32	29	26
7	61	48	40	35	57	46	39	33	41	35	31	37	32	28	33	29	26	23
8	57	44	36	31	53	42	35	30	38	32	27	34	29	25	30	26	23	21
9	53	40	33	28	50	38	31	27	35	29	25	31	26	23	28	24	21	19
10	49	37	30	25	46	35	28	24	32	26	22	29	24	21	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10577	10577	10577	10577
5°	12248	10613	9292	10613
10°	14250	10558	8141	10558
15°	15774	10480	7511	10480
20°	17657	10357	7003	10357
25°	20685	10219	6757	10219
30°	22342	10082	6542	10082
35°	18370	9826	6401	9826
40°	13057	9470	6247	9470
45°	10030	8990	6158	8990
50°	8562	8395	6146	8395
55°	7624	7812	6199	7812
60°	6877	7174	6356	7174
65°	6353	6533	6522	6533
70°	5776	5867	6617	5867
75°	5100	5168	6558	5168
80°	4292	4214	5995	4214
85°	3394	3038	4846	3038



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.7	2.2
10°-20°	469.4	6.6
20°-30°	762.2	10.7
30°-40°	929.8	13.1
40°-50°	845.8	11.9
50°-60°	673.7	9.5
60°-70°	469.3	6.6
70°-80°	250.2	3.5
80°-90°	65.1	0.9
90°-100°	60.0	0.8
100°-110°	177.2	2.5
110°-120°	300.2	4.2
120°-130°	395.0	5.5
130°-140°	442.6	6.2
140°-150°	433.8	6.1
150°-160°	364.4	5.1
160°-170°	242.2	3.4
170°-180°	84.8	1.2
0°-30°	1389.3	19.5
0°-40°	2319.0	32.6
0°-60°	3838.6	53.9
0°-90°	4623.2	64.9
90°-120°	537.4	7.5
90°-150°	1808.9	25.4
90°-180°	2500.0	35.1
0°-180°	7123.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1638	1638	1638	1638	1638	
5°	1889	1637	1433	1637	1889	190
15°	2359	1567	1123	1567	2359	675
25°	2903	1434	948	1434	2903	1326
35°	2330	1246	812	1246	2330	1426
45°	1098	984	674	984	1098	879
55°	677	694	550	694	677	610
65°	416	428	427	428	416	413
75°	204	207	263	207	204	220
85°	46	41	65	41	46	53
90°	17	1	17	1	17	11
95°	60	45	60	45	60	61
105°	173	159	173	159	173	183
115°	303	300	303	300	303	300
125°	441	438	441	438	441	394
135°	572	570	572	570	572	442
145°	694	691	694	691	694	433
155°	791	791	791	791	791	364
165°	858	860	858	860	858	242
175°	890	894	890	894	890	85
180°	896	896	896	896	896	



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1732.2	1730.0	1727.8	1723.3	1726.6	1717.2	1712.7	1705.0	1695.5	1692.2	1688.3
5°	1889.3	1892.7	1896.2	1881.7	1883.0	1873.3	1851.1	1833.0	1818.4	1799.7	1786.5
7.5°	2078.4	2070.2	2069.5	2060.0	2043.8	2030.7	2007.3	1977.5	1948.8	1916.0	1888.9
10°	2172.9	2173.6	2167.4	2156.2	2138.9	2126.4	2095.8	2066.5	2031.1	1989.4	1959.5
12.5°	2244.1	2247.0	2239.1	2224.1	2215.5	2187.5	2163.6	2128.9	2086.7	2053.3	2007.9
15°	2359.2	2351.5	2346.0	2327.2	2312.7	2283.4	2245.2	2209.0	2163.2	2120.8	2078.4
17.5°	2470.1	2476.3	2465.8	2448.7	2403.4	2369.4	2318.1	2268.5	2211.4	2154.6	2104.0
20°	2569.1	2574.7	2558.7	2528.8	2474.6	2440.5	2373.1	2309.2	2243.1	2170.2	2114.5
22.5°	2692.6	2688.2	2666.6	2621.1	2574.1	2511.1	2438.2	2360.3	2277.6	2195.1	2121.2
25°	2902.8	2873.5	2860.3	2804.1	2742.2	2649.7	2549.7	2435.6	2332.8	2223.7	2129.1
27.5°	3019.2	3010.1	2995.3	2956.2	2891.1	2792.2	2674.2	2535.3	2390.2	2252.5	2128.7
30°	2995.9	2997.3	2998.7	2986.2	2944.5	2870.1	2752.6	2603.2	2430.8	2275.8	2132.6
32.5°	2789.1	2814.3	2838.6	2867.2	2878.9	2864.5	2791.0	2656.0	2478.6	2302.5	2130.4
35°	2330.0	2337.6	2416.2	2494.0	2599.7	2681.7	2736.7	2676.8	2527.4	2325.1	2127.7
37.5°	1816.8	1854.3	1908.6	1996.6	2149.1	2285.6	2461.2	2542.0	2493.8	2332.5	2122.9
40°	1548.7	1583.5	1618.9	1708.6	1837.2	2002.6	2202.1	2372.4	2412.0	2309.2	2106.2
42.5°	1341.8	1369.4	1408.7	1476.1	1583.6	1730.1	1920.7	2143.3	2280.2	2241.3	2071.2
45°	1098.2	1115.6	1146.2	1199.8	1277.6	1392.3	1560.5	1803.8	2015.8	2086.0	1988.0
47.5°	940.0	940.0	963.7	1000.7	1056.9	1154.3	1278.7	1469.4	1695.8	1863.3	1855.6
50°	852.2	848.7	867.5	899.5	944.0	1008.6	1127.5	1279.7	1497.3	1687.0	1739.8
52.5°	776.6	776.9	788.5	812.2	849.4	904.6	993.5	1130.7	1316.5	1511.3	1610.9
55°	677.1	674.2	687.4	703.5	730.6	766.7	830.6	935.6	1086.5	1278.3	1407.6
57.5°	585.9	593.5	598.8	609.9	632.4	656.6	710.5	787.6	907.2	1071.8	1208.5
60°	532.4	540.1	544.3	555.4	573.5	594.3	636.1	698.6	799.4	941.2	1076.7
62.5°	484.6	490.6	492.0	502.0	516.7	537.1	569.9	622.4	702.0	826.1	958.9
65°	415.7	415.7	418.5	428.9	435.9	453.9	478.9	517.2	581.1	677.7	791.0
67.5°	349.2	352.6	351.9	356.4	362.8	376.9	394.8	426.4	473.8	544.3	634.9
70°	305.9	308.6	307.9	311.4	318.3	327.4	342.0	371.8	405.9	466.5	544.3
72.5°	266.9	268.0	266.3	270.8	275.0	282.9	299.2	315.1	347.0	398.1	462.0
75°	204.4	205.7	207.1	209.9	214.1	218.3	226.6	242.6	263.4	301.7	342.7
77.5°	153.2	150.5	153.9	153.5	155.9	159.1	166.4	174.9	192.0	216.2	247.9
80°	115.4	116.1	116.1	116.8	120.3	122.3	128.6	134.8	148.0	166.1	188.4
82.5°	84.3	86.1	85.0	86.2	89.1	90.6	94.1	99.2	106.9	121.1	137.2
85°	45.8	42.4	43.8	45.2	45.2	45.8	48.7	50.7	54.9	60.5	66.7
87.5°	16.7	17.7	18.2	18.1	18.5	18.5	20.5	20.3	21.8	23.4	25.4
90°	16.8	16.2	15.8	15.3	14.9	14.3	13.5	12.7	11.9	11.1	10.1
92.5°	32.9	32.5	32.2	31.9	31.6	30.9	29.9	28.8	27.8	26.8	25.4
95°	59.9	59.7	59.4	59.0	58.8	58.1	57.0	55.8	54.8	53.7	52.2
97.5°	91.0	90.8	90.5	90.3	90.2	89.6	88.5	87.6	86.5	85.5	83.4
100°	114.3	114.0	113.7	113.4	113.2	112.3	110.8	109.5	108.1	106.6	104.7
102.5°	137.8	137.3	136.9	136.5	136.1	135.1	133.6	132.1	130.5	129.0	128.0
105°	172.9	172.5	172.0	171.6	171.0	170.4	169.4	168.5	167.6	166.7	165.7
107.5°	208.9	208.9	208.9	209.0	209.0	208.8	208.3	207.9	207.4	207.0	206.3
110°	235.7	235.9	235.9	236.1	236.3	236.1	235.7	235.2	234.8	234.3	233.8



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	261.9	262.2	262.4	262.7	263.1	263.1	262.8	262.6	262.4	262.2	261.6
115°	303.4	303.4	303.6	303.8	303.9	304.1	304.3	304.4	304.5	304.7	304.4
117.5°	343.8	344.4	345.0	345.6	346.3	346.5	346.3	346.3	346.1	346.0	345.7
120°	371.7	372.3	372.9	373.5	374.2	374.4	374.4	374.4	374.4	374.4	374.3
122.5°	399.6	400.0	400.6	401.0	401.5	401.8	402.0	402.1	402.2	402.3	401.9
125°	441.4	441.6	441.7	441.8	442.0	442.2	442.6	442.8	443.2	443.4	443.3
127.5°	481.5	481.9	482.1	482.5	482.8	483.0	483.1	483.3	483.5	483.7	483.5
130°	508.3	508.6	508.9	509.3	509.5	509.8	510.0	510.1	510.2	510.4	510.1
132.5°	533.4	533.9	534.3	534.8	535.1	535.5	535.6	535.7	535.9	536.1	536.1
135°	572.5	573.1	573.7	574.4	575.0	575.2	575.2	575.2	575.2	575.2	575.1
137.5°	610.6	611.4	612.2	613.0	613.8	614.0	613.9	613.7	613.5	613.3	613.0
140°	635.3	636.0	636.8	637.6	638.3	638.6	638.2	637.9	637.7	637.3	636.9
142.5°	658.6	659.4	660.2	660.9	661.7	662.0	661.8	661.6	661.5	661.3	660.7
145°	693.8	694.3	694.7	695.2	695.6	695.9	695.9	695.9	695.9	695.9	695.4
147.5°	723.8	724.9	725.9	726.9	728.0	728.3	728.0	727.5	727.2	726.8	726.5
150°	746.1	746.4	746.7	747.0	747.3	747.5	747.5	747.5	747.5	747.5	746.9
152.5°	764.5	765.1	765.6	766.2	766.7	766.8	766.4	766.1	765.7	765.4	765.1
155°	790.7	791.5	792.3	793.0	793.8	793.9	793.3	792.6	792.0	791.4	791.2
157.5°	812.6	813.6	814.7	815.6	816.7	816.9	816.3	815.6	815.0	814.4	814.2
160°	827.7	828.4	829.2	830.0	830.8	830.8	830.2	829.6	829.0	828.4	828.2
162.5°	840.5	841.4	842.3	843.2	844.1	844.2	843.5	842.7	842.0	841.2	841.2
165°	857.6	858.5	859.5	860.4	861.4	861.5	860.9	860.3	859.7	859.1	858.9
167.5°	871.3	872.3	873.3	874.2	875.1	875.2	874.2	873.3	872.4	871.5	871.5
170°	878.6	879.7	880.7	881.8	882.9	883.0	882.1	881.1	880.2	879.2	879.2
172.5°	884.7	885.6	886.6	887.6	888.6	888.6	887.6	886.7	885.7	884.8	884.8
175°	890.5	891.5	892.6	893.7	894.7	894.8	893.9	893.0	892.1	891.1	891.1
177.5°	893.8	894.7	895.5	896.3	897.2	897.3	896.5	895.8	895.1	894.3	894.5
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1685.0	1681.1	1676.6	1668.8	1659.4	1654.4	1646.5	1641.6	1631.6	1623.2	1614.4
5°	1770.4	1752.4	1735.7	1714.1	1690.5	1675.2	1657.2	1637.0	1616.1	1594.6	1570.9
7.5°	1859.0	1827.0	1792.2	1754.9	1718.3	1684.6	1652.5	1621.0	1591.5	1555.9	1525.8
10°	1918.5	1878.2	1835.1	1784.3	1735.0	1691.9	1648.1	1609.9	1570.9	1529.2	1492.4
12.5°	1978.0	1924.3	1863.4	1807.7	1748.4	1696.3	1644.8	1596.0	1547.0	1500.8	1457.9
15°	2020.0	1972.7	1916.4	1837.2	1770.4	1698.9	1630.8	1567.4	1508.4	1457.0	1402.8
17.5°	2047.6	1986.7	1926.3	1850.2	1762.8	1682.7	1605.5	1533.1	1466.5	1401.3	1349.1
20°	2052.6	1990.1	1926.8	1852.4	1762.8	1671.1	1593.8	1507.0	1435.4	1368.0	1304.0
22.5°	2051.0	1980.0	1911.3	1834.7	1747.2	1662.7	1569.4	1480.9	1403.1	1336.9	1270.1
25°	2035.2	1959.5	1873.3	1796.2	1709.9	1620.3	1525.8	1434.0	1354.8	1279.0	1213.0
27.5°	2022.2	1924.0	1826.3	1736.3	1653.1	1570.9	1480.4	1386.4	1298.6	1221.8	1159.6
30°	2006.1	1898.4	1788.5	1694.7	1609.2	1529.2	1443.8	1352.0	1260.3	1185.2	1118.5
32.5°	1991.6	1866.1	1750.2	1648.0	1557.5	1479.7	1400.9	1313.6	1223.5	1147.4	1080.6
35°	1963.7	1818.4	1685.6	1570.2	1473.6	1393.7	1327.7	1246.3	1163.6	1089.9	1026.0
37.5°	1928.2	1755.9	1613.4	1492.4	1386.4	1302.3	1240.7	1178.3	1098.9	1028.0	970.1
40°	1900.4	1711.4	1560.5	1436.8	1327.0	1239.4	1182.4	1123.3	1057.3	991.2	930.1
42.5°	1865.4	1671.3	1507.2	1373.9	1265.2	1179.9	1120.1	1069.9	1011.6	950.1	893.3
45°	1801.0	1598.7	1420.8	1277.6	1167.8	1083.7	1021.8	984.3	940.5	882.1	834.1
47.5°	1706.4	1511.5	1327.5	1179.7	1066.4	988.5	930.5	894.5	863.6	820.2	776.7
50°	1622.4	1446.5	1260.3	1113.6	1000.2	921.7	868.2	835.5	809.1	775.7	738.9
52.5°	1528.4	1364.8	1194.1	1049.1	936.8	859.4	807.0	778.3	756.3	732.4	696.1
55°	1379.1	1240.1	1081.6	944.0	840.3	764.6	718.7	693.8	675.6	657.5	635.3
57.5°	1214.6	1105.9	965.5	839.7	744.3	675.4	632.6	608.2	594.1	584.9	571.8
60°	1098.9	1005.8	884.8	770.2	677.1	615.9	574.2	555.4	543.6	535.9	526.2
62.5°	991.7	915.2	803.2	698.5	617.0	559.1	521.9	503.6	492.4	488.7	480.6
65°	833.4	774.4	681.9	595.0	525.5	476.2	444.9	427.5	420.5	416.3	417.1
67.5°	677.6	641.6	567.3	493.2	437.7	396.4	371.3	358.0	354.5	348.9	348.8
70°	582.5	555.4	492.8	428.2	378.8	346.9	324.6	310.7	307.2	304.4	303.8
72.5°	498.6	474.7	420.5	368.7	324.3	296.2	277.9	269.6	263.9	262.2	262.1
75°	374.7	361.5	318.3	277.3	246.7	227.3	214.8	207.1	203.0	202.2	203.0
77.5°	266.4	254.9	227.5	198.4	179.1	164.3	153.7	151.1	146.4	146.5	145.8
80°	200.2	192.5	175.1	152.2	136.3	123.8	118.2	113.3	111.9	109.9	111.9
82.5°	145.2	137.0	125.1	110.5	97.3	89.8	84.3	82.8	81.9	80.9	81.3
85°	71.6	72.3	65.4	54.2	48.7	44.5	41.0	41.0	40.3	39.6	40.3
87.5°	26.3	25.0	22.5	20.6	17.6	15.7	14.8	15.2	13.7	13.5	14.3
90°	9.0	7.9	6.8	5.6	4.5	3.2	2.0	0.7	2.0	3.2	4.5
92.5°	24.1	22.7	21.4	20.3	19.4	18.6	17.7	16.9	17.7	18.6	19.4
95°	50.6	49.0	47.5	46.5	46.3	45.9	45.7	45.3	45.7	45.9	46.3
97.5°	81.2	79.1	77.0	75.8	75.7	75.5	75.4	75.3	75.4	75.5	75.7
100°	102.6	100.7	98.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6	97.6
102.5°	127.0	125.9	124.9	124.1	123.5	122.9	122.3	121.6	122.3	122.9	123.5
105°	164.8	163.9	162.9	162.1	161.3	160.5	159.8	159.0	159.8	160.5	161.3
107.5°	205.5	204.8	204.1	203.4	202.6	201.8	201.0	200.3	201.0	201.8	202.6
110°	233.4	232.9	232.5	231.8	231.0	230.2	229.5	228.7	229.5	230.2	231.0



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	261.0	260.4	259.8	259.3	259.0	258.5	258.2	257.7	258.2	258.5	259.0
115°	304.1	303.8	303.4	303.0	302.4	301.8	301.1	300.5	301.1	301.8	302.4
117.5°	345.4	345.2	344.9	344.6	344.3	344.0	343.8	343.5	343.8	344.0	344.3
120°	374.2	374.0	373.8	373.4	372.6	371.8	371.0	370.2	371.0	371.8	372.6
122.5°	401.5	401.1	400.7	400.4	400.1	399.8	399.6	399.2	399.6	399.8	400.1
125°	443.2	443.0	442.8	442.3	441.4	440.4	439.5	438.5	439.5	440.4	441.4
127.5°	483.2	483.0	482.9	482.5	482.0	481.4	481.0	480.5	481.0	481.4	482.0
130°	509.8	509.4	509.2	508.6	507.8	507.1	506.3	505.5	506.3	507.1	507.8
132.5°	536.2	536.3	536.3	535.7	534.4	533.2	531.9	530.7	531.9	533.2	534.4
135°	575.0	574.8	574.6	574.1	573.2	572.2	571.3	570.3	571.3	572.2	573.2
137.5°	612.6	612.3	612.0	611.4	610.5	609.6	608.7	607.8	608.7	609.6	610.5
140°	636.4	635.9	635.4	634.8	634.1	633.3	632.5	631.8	632.5	633.3	634.1
142.5°	660.1	659.5	659.0	658.4	657.6	657.0	656.4	655.8	656.4	657.0	657.6
145°	694.9	694.5	694.0	693.5	692.9	692.2	691.6	691.0	691.6	692.2	692.9
147.5°	726.1	725.8	725.3	725.0	724.7	724.3	724.0	723.6	724.0	724.3	724.7
150°	746.3	745.6	745.0	744.8	744.9	745.1	745.2	745.4	745.2	745.1	744.9
152.5°	764.8	764.6	764.4	764.1	763.9	763.7	763.5	763.2	763.5	763.7	763.9
155°	791.1	790.9	790.8	790.7	790.7	790.7	790.7	790.7	790.7	790.7	790.7
157.5°	814.1	814.0	813.8	813.9	814.2	814.6	814.9	815.3	814.9	814.6	814.2
160°	828.0	827.9	827.8	827.9	828.4	828.8	829.3	829.7	829.3	828.8	828.4
162.5°	841.2	841.1	841.1	841.2	841.6	841.9	842.2	842.6	842.2	841.9	841.6
165°	858.7	858.5	858.4	858.5	858.8	859.2	859.4	859.8	859.4	859.2	858.8
167.5°	871.5	871.5	871.5	871.7	872.4	873.0	873.6	874.2	873.6	873.0	872.4
170°	879.2	879.2	879.2	879.6	880.2	880.8	881.5	882.1	881.5	880.8	880.2
172.5°	884.8	884.8	884.8	885.1	885.7	886.4	887.0	887.6	887.0	886.4	885.7
175°	891.1	891.1	891.1	891.4	892.1	892.7	893.3	893.9	893.3	892.7	892.1
177.5°	894.6	894.7	894.8	895.1	895.6	896.2	896.6	897.2	896.6	896.2	895.6
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1609.3	1603.2	1598.2	1587.1	1580.9	1572.6	1565.9	1573.2	1565.4	1568.7	1563.7
5°	1559.2	1539.6	1525.8	1505.6	1488.3	1472.2	1460.4	1458.3	1452.8	1450.0	1441.6
7.5°	1498.8	1474.4	1450.5	1424.2	1401.9	1379.2	1364.8	1352.8	1344.9	1334.4	1327.4
10°	1463.2	1430.6	1402.8	1370.7	1342.9	1318.7	1299.1	1289.4	1280.4	1267.2	1262.3
12.5°	1419.2	1385.5	1351.6	1317.4	1290.7	1263.6	1246.9	1232.2	1225.9	1211.0	1209.5
15°	1366.5	1315.8	1282.5	1247.7	1210.9	1188.7	1174.7	1158.8	1151.8	1141.4	1133.7
17.5°	1303.8	1258.4	1216.7	1180.7	1149.1	1130.4	1113.1	1102.2	1090.2	1083.4	1070.9
20°	1258.1	1215.0	1173.3	1135.1	1110.8	1089.2	1075.3	1064.9	1052.4	1048.9	1036.4
22.5°	1219.8	1172.2	1132.2	1100.1	1073.5	1049.2	1034.2	1027.1	1018.5	1007.8	1005.2
25°	1157.4	1108.0	1074.0	1042.0	1018.3	996.1	985.7	976.6	968.3	960.6	957.9
27.5°	1103.4	1059.4	1018.9	990.0	969.4	949.1	940.0	929.0	922.8	916.7	909.2
30°	1065.6	1020.4	985.0	957.2	935.0	916.9	907.1	899.5	893.9	888.3	884.2
32.5°	1026.7	984.8	950.5	923.3	901.0	887.3	878.8	873.3	867.2	860.5	855.2
35°	975.3	929.3	896.0	872.4	855.0	844.5	834.8	829.9	823.0	823.0	817.4
37.5°	917.3	877.6	848.2	826.6	811.0	801.7	791.2	787.8	783.4	780.4	778.6
40°	882.8	846.0	818.1	796.6	779.9	772.2	763.9	758.4	755.5	752.1	750.7
42.5°	847.2	812.0	785.3	765.4	751.0	744.5	736.6	732.8	727.2	722.6	721.8
45°	793.1	759.0	734.8	718.7	706.2	698.6	693.8	685.4	682.6	677.1	676.4
47.5°	741.8	709.2	685.3	672.2	661.2	655.0	647.3	638.9	635.8	632.9	632.7
50°	703.5	673.6	651.3	638.8	628.4	619.4	611.7	606.1	604.0	604.0	605.5
52.5°	664.5	639.1	620.2	604.8	595.0	585.4	578.4	575.0	571.8	575.2	577.7
55°	607.5	581.8	567.9	553.3	543.6	532.4	529.0	527.6	525.5	531.1	533.9
57.5°	547.2	529.1	512.8	498.4	489.6	483.2	478.5	477.7	481.6	484.2	493.2
60°	508.8	487.9	473.4	462.3	451.8	447.6	446.3	444.9	447.6	455.3	467.1
62.5°	466.5	449.6	433.9	425.5	417.9	411.0	410.6	411.5	417.1	425.8	437.7
65°	404.6	389.9	379.5	369.8	363.6	359.4	360.8	363.6	369.8	381.7	394.8
67.5°	341.6	331.5	322.3	314.3	308.4	308.4	309.8	313.9	321.3	334.9	347.0
70°	301.0	289.9	282.2	278.7	273.8	271.1	275.3	282.2	288.5	301.0	311.4
72.5°	260.4	250.9	245.0	242.6	240.5	238.3	239.7	247.2	255.7	268.1	280.3
75°	200.2	196.7	192.5	189.8	187.7	189.0	190.5	197.4	204.4	217.6	231.5
77.5°	146.2	142.5	140.0	139.3	138.2	138.8	142.8	147.9	154.7	164.3	174.9
80°	110.5	109.1	107.7	107.0	107.0	107.7	113.3	116.8	123.1	132.1	140.4
82.5°	80.5	79.6	79.4	79.3	79.8	79.9	83.3	87.8	93.0	99.8	107.0
85°	42.4	41.0	43.1	43.8	42.4	44.5	45.8	48.7	50.7	54.2	57.7
87.5°	15.1	16.4	16.1	16.9	17.0	18.4	17.9	20.3	21.6	22.8	22.5
90°	5.6	6.8	7.9	9.0	10.1	11.1	11.9	12.7	13.5	14.3	14.9
92.5°	20.3	21.4	22.7	24.1	25.4	26.8	27.8	28.8	29.9	30.9	31.6
95°	46.5	47.5	49.0	50.6	52.2	53.7	54.8	55.8	57.0	58.1	58.8
97.5°	75.8	77.0	79.1	81.2	83.4	85.5	86.5	87.6	88.5	89.6	90.2
100°	97.6	98.6	100.7	102.6	104.7	106.6	108.1	109.5	110.8	112.3	113.2
102.5°	124.1	124.9	125.9	127.0	128.0	129.0	130.5	132.1	133.6	135.1	136.1
105°	162.1	162.9	163.9	164.8	165.7	166.7	167.6	168.5	169.4	170.4	171.0
107.5°	203.4	204.1	204.8	205.5	206.3	207.0	207.4	207.9	208.3	208.8	209.0
110°	231.8	232.5	232.9	233.4	233.8	234.3	234.8	235.2	235.7	236.1	236.3



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	259.3	259.8	260.4	261.0	261.6	262.2	262.4	262.6	262.8	263.1	263.1
115°	303.0	303.4	303.8	304.1	304.4	304.7	304.5	304.4	304.3	304.1	303.9
117.5°	344.6	344.9	345.2	345.4	345.7	346.0	346.1	346.3	346.3	346.5	346.3
120°	373.4	373.8	374.0	374.2	374.3	374.4	374.4	374.4	374.4	374.4	374.2
122.5°	400.4	400.7	401.1	401.5	401.9	402.3	402.2	402.1	402.0	401.8	401.5
125°	442.3	442.8	443.0	443.2	443.3	443.4	443.2	442.8	442.6	442.2	442.0
127.5°	482.5	482.9	483.0	483.2	483.5	483.7	483.5	483.3	483.1	483.0	482.8
130°	508.6	509.2	509.4	509.8	510.1	510.4	510.2	510.1	510.0	509.8	509.5
132.5°	535.7	536.3	536.3	536.2	536.1	536.1	535.9	535.7	535.6	535.5	535.1
135°	574.1	574.6	574.8	575.0	575.1	575.2	575.2	575.2	575.2	575.2	575.0
137.5°	611.4	612.0	612.3	612.6	613.0	613.3	613.5	613.7	613.9	614.0	613.8
140°	634.8	635.4	635.9	636.4	636.9	637.3	637.7	637.9	638.2	638.6	638.3
142.5°	658.4	659.0	659.5	660.1	660.7	661.3	661.5	661.6	661.8	662.0	661.7
145°	693.5	694.0	694.5	694.9	695.4	695.9	695.9	695.9	695.9	695.9	695.6
147.5°	725.0	725.3	725.8	726.1	726.5	726.8	727.2	727.5	728.0	728.3	728.0
150°	744.8	745.0	745.6	746.3	746.9	747.5	747.5	747.5	747.5	747.5	747.3
152.5°	764.1	764.4	764.6	764.8	765.1	765.4	765.7	766.1	766.4	766.8	766.7
155°	790.7	790.8	790.9	791.1	791.2	791.4	792.0	792.6	793.3	793.9	793.8
157.5°	813.9	813.8	814.0	814.1	814.2	814.4	815.0	815.6	816.3	816.9	816.7
160°	827.9	827.8	827.9	828.0	828.2	828.4	829.0	829.6	830.2	830.8	830.8
162.5°	841.2	841.1	841.1	841.2	841.2	841.2	842.0	842.7	843.5	844.2	844.1
165°	858.5	858.4	858.5	858.7	858.9	859.1	859.7	860.3	860.9	861.5	861.4
167.5°	871.7	871.5	871.5	871.5	871.5	871.5	872.4	873.3	874.2	875.2	875.1
170°	879.6	879.2	879.2	879.2	879.2	879.2	880.2	881.1	882.1	883.0	882.9
172.5°	885.1	884.8	884.8	884.8	884.8	884.8	885.7	886.7	887.6	888.6	888.6
175°	891.4	891.1	891.1	891.1	891.1	891.1	892.1	893.0	893.9	894.8	894.7
177.5°	895.1	894.8	894.7	894.6	894.5	894.3	895.1	895.8	896.5	897.3	897.2
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1560.4	1564.2	1560.9	1565.4	1560.9	1564.2	1560.4	1563.7	1568.7	1565.4	1573.2
5°	1438.2	1431.9	1436.1	1433.3	1436.1	1431.9	1438.2	1441.6	1450.0	1452.8	1458.3
7.5°	1325.3	1319.3	1312.5	1309.3	1312.5	1319.3	1325.3	1327.4	1334.4	1344.9	1352.8
10°	1254.6	1247.1	1246.3	1241.4	1246.3	1247.1	1254.6	1262.3	1267.2	1280.4	1289.4
12.5°	1202.9	1195.9	1187.9	1185.9	1187.9	1195.9	1202.9	1209.5	1211.0	1225.9	1232.2
15°	1129.5	1124.0	1119.1	1123.3	1119.1	1124.0	1129.5	1133.7	1141.4	1151.8	1158.8
17.5°	1068.5	1063.9	1063.1	1057.9	1063.1	1063.9	1068.5	1070.9	1083.4	1090.2	1102.2
20°	1030.2	1026.7	1028.1	1019.0	1028.1	1026.7	1030.2	1036.4	1048.9	1052.4	1064.9
22.5°	999.6	992.7	991.9	990.2	991.9	992.7	999.6	1005.2	1007.8	1018.5	1027.1
25°	951.6	948.2	944.7	948.2	944.7	948.2	951.6	957.9	960.6	968.3	976.6
27.5°	909.7	905.6	904.6	905.0	904.6	905.6	909.7	909.2	916.7	922.8	929.0
30°	884.2	877.3	877.9	877.3	877.9	877.3	884.2	884.2	888.3	893.9	899.5
32.5°	856.4	851.7	850.7	849.4	850.7	851.7	856.4	855.2	860.5	867.2	873.3
35°	815.4	815.4	811.9	811.9	811.9	815.4	815.4	817.4	823.0	823.0	829.9
37.5°	776.9	776.1	774.1	774.4	774.1	776.1	776.9	778.6	780.4	783.4	787.8
40°	748.0	747.3	745.1	741.0	745.1	747.3	748.0	750.7	752.1	755.5	758.4
42.5°	720.1	717.7	716.8	715.4	716.8	717.7	720.1	721.8	722.6	727.2	732.8
45°	676.4	676.4	674.9	674.2	674.9	676.4	676.4	676.4	677.1	682.6	685.4
47.5°	633.8	635.1	637.7	637.3	637.7	635.1	633.8	632.7	632.9	635.8	638.9
50°	608.2	608.9	611.0	611.7	611.0	608.9	608.2	605.5	604.0	604.0	606.1
52.5°	579.9	583.9	586.6	586.1	586.6	583.9	579.9	577.7	575.2	571.8	575.0
55°	540.1	544.9	549.8	550.5	549.8	544.9	540.1	533.9	531.1	525.5	527.6
57.5°	500.8	507.6	512.7	514.3	512.7	507.6	500.8	493.2	484.2	481.6	477.7
60°	474.0	483.1	489.4	492.1	489.4	483.1	474.0	467.1	455.3	447.6	444.9
62.5°	448.4	458.6	464.8	465.5	464.8	458.6	448.4	437.7	425.8	417.1	411.5
65°	406.6	417.1	422.6	426.8	422.6	417.1	406.6	394.8	381.7	369.8	363.6
67.5°	361.6	372.0	378.2	381.5	378.2	372.0	361.6	347.0	334.9	321.3	313.9
70°	328.8	339.2	347.6	350.4	347.6	339.2	328.8	311.4	301.0	288.5	282.2
72.5°	296.5	305.9	312.5	315.8	312.5	305.9	296.5	280.3	268.1	255.7	247.2
75°	240.5	253.0	259.3	262.8	259.3	253.0	240.5	231.5	217.6	204.4	197.4
77.5°	185.5	196.9	200.6	202.4	200.6	196.9	185.5	174.9	164.3	154.7	147.9
80°	148.7	155.7	160.6	161.2	160.6	155.7	148.7	140.4	132.1	123.1	116.8
82.5°	114.3	120.1	121.6	123.4	121.6	120.1	114.3	107.0	99.8	93.0	87.8
85°	62.6	65.4	66.1	65.4	66.1	65.4	62.6	57.7	54.2	50.7	48.7
87.5°	23.6	23.2	23.3	24.5	23.3	23.2	23.6	22.5	22.8	21.6	20.3
90°	15.3	15.8	16.2	16.8	16.2	15.8	15.3	14.9	14.3	13.5	12.7
92.5°	31.9	32.2	32.5	32.9	32.5	32.2	31.9	31.6	30.9	29.9	28.8
95°	59.0	59.4	59.7	59.9	59.7	59.4	59.0	58.8	58.1	57.0	55.8
97.5°	90.3	90.5	90.8	91.0	90.8	90.5	90.3	90.2	89.6	88.5	87.6
100°	113.4	113.7	114.0	114.3	114.0	113.7	113.4	113.2	112.3	110.8	109.5
102.5°	136.5	136.9	137.3	137.8	137.3	136.9	136.5	136.1	135.1	133.6	132.1
105°	171.6	172.0	172.5	172.9	172.5	172.0	171.6	171.0	170.4	169.4	168.5
107.5°	209.0	208.9	208.9	208.9	208.9	208.9	209.0	209.0	208.8	208.3	207.9
110°	236.1	235.9	235.9	235.7	235.9	235.9	236.1	236.3	236.1	235.7	235.2



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	262.7	262.4	262.2	261.9	262.2	262.4	262.7	263.1	263.1	262.8	262.6
115°	303.8	303.6	303.4	303.4	303.4	303.6	303.8	303.9	304.1	304.3	304.4
117.5°	345.6	345.0	344.4	343.8	344.4	345.0	345.6	346.3	346.5	346.3	346.3
120°	373.5	372.9	372.3	371.7	372.3	372.9	373.5	374.2	374.4	374.4	374.4
122.5°	401.0	400.6	400.0	399.6	400.0	400.6	401.0	401.5	401.8	402.0	402.1
125°	441.8	441.7	441.6	441.4	441.6	441.7	441.8	442.0	442.2	442.6	442.8
127.5°	482.5	482.1	481.9	481.5	481.9	482.1	482.5	482.8	483.0	483.1	483.3
130°	509.3	508.9	508.6	508.3	508.6	508.9	509.3	509.5	509.8	510.0	510.1
132.5°	534.8	534.3	533.9	533.4	533.9	534.3	534.8	535.1	535.5	535.6	535.7
135°	574.4	573.7	573.1	572.5	573.1	573.7	574.4	575.0	575.2	575.2	575.2
137.5°	613.0	612.2	611.4	610.6	611.4	612.2	613.0	613.8	614.0	613.9	613.7
140°	637.6	636.8	636.0	635.3	636.0	636.8	637.6	638.3	638.6	638.2	637.9
142.5°	660.9	660.2	659.4	658.6	659.4	660.2	660.9	661.7	662.0	661.8	661.6
145°	695.2	694.7	694.3	693.8	694.3	694.7	695.2	695.6	695.9	695.9	695.9
147.5°	726.9	725.9	724.9	723.8	724.9	725.9	726.9	728.0	728.3	728.0	727.5
150°	747.0	746.7	746.4	746.1	746.4	746.7	747.0	747.3	747.5	747.5	747.5
152.5°	766.2	765.6	765.1	764.5	765.1	765.6	766.2	766.7	766.8	766.4	766.1
155°	793.0	792.3	791.5	790.7	791.5	792.3	793.0	793.8	793.9	793.3	792.6
157.5°	815.6	814.7	813.6	812.6	813.6	814.7	815.6	816.7	816.9	816.3	815.6
160°	830.0	829.2	828.4	827.7	828.4	829.2	830.0	830.8	830.8	830.2	829.6
162.5°	843.2	842.3	841.4	840.5	841.4	842.3	843.2	844.1	844.2	843.5	842.7
165°	860.4	859.5	858.5	857.6	858.5	859.5	860.4	861.4	861.5	860.9	860.3
167.5°	874.2	873.3	872.3	871.3	872.3	873.3	874.2	875.1	875.2	874.2	873.3
170°	881.8	880.7	879.7	878.6	879.7	880.7	881.8	882.9	883.0	882.1	881.1
172.5°	887.6	886.6	885.6	884.7	885.6	886.6	887.6	888.6	888.6	887.6	886.7
175°	893.7	892.6	891.5	890.5	891.5	892.6	893.7	894.7	894.8	893.9	893.0
177.5°	896.3	895.5	894.7	893.8	894.7	895.5	896.3	897.2	897.3	896.5	895.8
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1565.9	1572.6	1580.9	1587.1	1598.2	1603.2	1609.3	1614.4	1623.2	1631.6	1641.6
5°	1460.4	1472.2	1488.3	1505.6	1525.8	1539.6	1559.2	1570.9	1594.6	1616.1	1637.0
7.5°	1364.8	1379.2	1401.9	1424.2	1450.5	1474.4	1498.8	1525.8	1555.9	1591.5	1621.0
10°	1299.1	1318.7	1342.9	1370.7	1402.8	1430.6	1463.2	1492.4	1529.2	1570.9	1609.9
12.5°	1246.9	1263.6	1290.7	1317.4	1351.6	1385.5	1419.2	1457.9	1500.8	1547.0	1596.0
15°	1174.7	1188.7	1210.9	1247.7	1282.5	1315.8	1366.5	1402.8	1457.0	1508.4	1567.4
17.5°	1113.1	1130.4	1149.1	1180.7	1216.7	1258.4	1303.8	1349.1	1401.3	1466.5	1533.1
20°	1075.3	1089.2	1110.8	1135.1	1173.3	1215.0	1258.1	1304.0	1368.0	1435.4	1507.0
22.5°	1034.2	1049.2	1073.5	1100.1	1132.2	1172.2	1219.8	1270.1	1336.9	1403.1	1480.9
25°	985.7	996.1	1018.3	1042.0	1074.0	1108.0	1157.4	1213.0	1279.0	1354.8	1434.0
27.5°	940.0	949.1	969.4	990.0	1018.9	1059.4	1103.4	1159.6	1221.8	1298.6	1386.4
30°	907.1	916.9	935.0	957.2	985.0	1020.4	1065.6	1118.5	1185.2	1260.3	1352.0
32.5°	878.8	887.3	901.0	923.3	950.5	984.8	1026.7	1080.6	1147.4	1223.5	1313.6
35°	834.8	844.5	855.0	872.4	896.0	929.3	975.3	1026.0	1089.9	1163.6	1246.3
37.5°	791.2	801.7	811.0	826.6	848.2	877.6	917.3	970.1	1028.0	1098.9	1178.3
40°	763.9	772.2	779.9	796.6	818.1	846.0	882.8	930.1	991.2	1057.3	1123.3
42.5°	736.6	744.5	751.0	765.4	785.3	812.0	847.2	893.3	950.1	1011.6	1069.9
45°	693.8	698.6	706.2	718.7	734.8	759.0	793.1	834.1	882.1	940.5	984.3
47.5°	647.3	655.0	661.2	672.2	685.3	709.2	741.8	776.7	820.2	863.6	894.5
50°	611.7	619.4	628.4	638.8	651.3	673.6	703.5	738.9	775.7	809.1	835.5
52.5°	578.4	585.4	595.0	604.8	620.2	639.1	664.5	696.1	732.4	756.3	778.3
55°	529.0	532.4	543.6	553.3	567.9	581.8	607.5	635.3	657.5	675.6	693.8
57.5°	478.5	483.2	489.6	498.4	512.8	529.1	547.2	571.8	584.9	594.1	608.2
60°	446.3	447.6	451.8	462.3	473.4	487.9	508.8	526.2	535.9	543.6	555.4
62.5°	410.6	411.0	417.9	425.5	433.9	449.6	466.5	480.6	488.7	492.4	503.6
65°	360.8	359.4	363.6	369.8	379.5	389.9	404.6	417.1	416.3	420.5	427.5
67.5°	309.8	308.4	308.4	314.3	322.3	331.5	341.6	348.8	348.9	354.5	358.0
70°	275.3	271.1	273.8	278.7	282.2	289.9	301.0	303.8	304.4	307.2	310.7
72.5°	239.7	238.3	240.5	242.6	245.0	250.9	260.4	262.1	262.2	263.9	269.6
75°	190.5	189.0	187.7	189.8	192.5	196.7	200.2	203.0	202.2	203.0	207.1
77.5°	142.8	138.8	138.2	139.3	140.0	142.5	146.2	145.8	146.5	146.4	151.1
80°	113.3	107.7	107.0	107.0	107.7	109.1	110.5	111.9	109.9	111.9	113.3
82.5°	83.3	79.9	79.8	79.3	79.4	79.6	80.5	81.3	80.9	81.9	82.8
85°	45.8	44.5	42.4	43.8	43.1	41.0	42.4	40.3	39.6	40.3	41.0
87.5°	17.9	18.4	17.0	16.9	16.1	16.4	15.1	14.3	13.5	13.7	15.2
90°	11.9	11.1	10.1	9.0	7.9	6.8	5.6	4.5	3.2	2.0	0.7
92.5°	27.8	26.8	25.4	24.1	22.7	21.4	20.3	19.4	18.6	17.7	16.9
95°	54.8	53.7	52.2	50.6	49.0	47.5	46.5	46.3	45.9	45.7	45.3
97.5°	86.5	85.5	83.4	81.2	79.1	77.0	75.8	75.7	75.5	75.4	75.3
100°	108.1	106.6	104.7	102.6	100.7	98.6	97.6	97.6	97.6	97.6	97.6
102.5°	130.5	129.0	128.0	127.0	125.9	124.9	124.1	123.5	122.9	122.3	121.6
105°	167.6	166.7	165.7	164.8	163.9	162.9	162.1	161.3	160.5	159.8	159.0
107.5°	207.4	207.0	206.3	205.5	204.8	204.1	203.4	202.6	201.8	201.0	200.3
110°	234.8	234.3	233.8	233.4	232.9	232.5	231.8	231.0	230.2	229.5	228.7



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	262.4	262.2	261.6	261.0	260.4	259.8	259.3	259.0	258.5	258.2	257.7
115°	304.5	304.7	304.4	304.1	303.8	303.4	303.0	302.4	301.8	301.1	300.5
117.5°	346.1	346.0	345.7	345.4	345.2	344.9	344.6	344.3	344.0	343.8	343.5
120°	374.4	374.4	374.3	374.2	374.0	373.8	373.4	372.6	371.8	371.0	370.2
122.5°	402.2	402.3	401.9	401.5	401.1	400.7	400.4	400.1	399.8	399.6	399.2
125°	443.2	443.4	443.3	443.2	443.0	442.8	442.3	441.4	440.4	439.5	438.5
127.5°	483.5	483.7	483.5	483.2	483.0	482.9	482.5	482.0	481.4	481.0	480.5
130°	510.2	510.4	510.1	509.8	509.4	509.2	508.6	507.8	507.1	506.3	505.5
132.5°	535.9	536.1	536.1	536.2	536.3	536.3	535.7	534.4	533.2	531.9	530.7
135°	575.2	575.2	575.1	575.0	574.8	574.6	574.1	573.2	572.2	571.3	570.3
137.5°	613.5	613.3	613.0	612.6	612.3	612.0	611.4	610.5	609.6	608.7	607.8
140°	637.7	637.3	636.9	636.4	635.9	635.4	634.8	634.1	633.3	632.5	631.8
142.5°	661.5	661.3	660.7	660.1	659.5	659.0	658.4	657.6	657.0	656.4	655.8
145°	695.9	695.9	695.4	694.9	694.5	694.0	693.5	692.9	692.2	691.6	691.0
147.5°	727.2	726.8	726.5	726.1	725.8	725.3	725.0	724.7	724.3	724.0	723.6
150°	747.5	747.5	746.9	746.3	745.6	745.0	744.8	744.9	745.1	745.2	745.4
152.5°	765.7	765.4	765.1	764.8	764.6	764.4	764.1	763.9	763.7	763.5	763.2
155°	792.0	791.4	791.2	791.1	790.9	790.8	790.7	790.7	790.7	790.7	790.7
157.5°	815.0	814.4	814.2	814.1	814.0	813.8	813.9	814.2	814.6	814.9	815.3
160°	829.0	828.4	828.2	828.0	827.9	827.8	827.9	828.4	828.8	829.3	829.7
162.5°	842.0	841.2	841.2	841.2	841.1	841.1	841.2	841.6	841.9	842.2	842.6
165°	859.7	859.1	858.9	858.7	858.5	858.4	858.5	858.8	859.2	859.4	859.8
167.5°	872.4	871.5	871.5	871.5	871.5	871.5	871.7	872.4	873.0	873.6	874.2
170°	880.2	879.2	879.2	879.2	879.2	879.2	879.6	880.2	880.8	881.5	882.1
172.5°	885.7	884.8	884.8	884.8	884.8	884.8	885.1	885.7	886.4	887.0	887.6
175°	892.1	891.1	891.1	891.1	891.1	891.1	891.4	892.1	892.7	893.3	893.9
177.5°	895.1	894.3	894.5	894.6	894.7	894.8	895.1	895.6	896.2	896.6	897.2
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1646.5	1654.4	1659.4	1668.8	1676.6	1681.1	1685.0	1688.3	1692.2	1695.5	1705.0
5°	1657.2	1675.2	1690.5	1714.1	1735.7	1752.4	1770.4	1786.5	1799.7	1818.4	1833.0
7.5°	1652.5	1684.6	1718.3	1754.9	1792.2	1827.0	1859.0	1888.9	1916.0	1948.8	1977.5
10°	1648.1	1691.9	1735.0	1784.3	1835.1	1878.2	1918.5	1959.5	1989.4	2031.1	2066.5
12.5°	1644.8	1696.3	1748.4	1807.7	1863.4	1924.3	1978.0	2007.9	2053.3	2086.7	2128.9
15°	1630.8	1698.9	1770.4	1837.2	1916.4	1972.7	2020.0	2078.4	2120.8	2163.2	2209.0
17.5°	1605.5	1682.7	1762.8	1850.2	1926.3	1986.7	2047.6	2104.0	2154.6	2211.4	2268.5
20°	1593.8	1671.1	1762.8	1852.4	1926.8	1990.1	2052.6	2114.5	2170.2	2243.1	2309.2
22.5°	1569.4	1662.7	1747.2	1834.7	1911.3	1980.0	2051.0	2121.2	2195.1	2277.6	2360.3
25°	1525.8	1620.3	1709.9	1796.2	1873.3	1959.5	2035.2	2129.1	2223.7	2332.8	2435.6
27.5°	1480.4	1570.9	1653.1	1736.3	1826.3	1924.0	2022.2	2128.7	2252.5	2390.2	2535.3
30°	1443.8	1529.2	1609.2	1694.7	1788.5	1898.4	2006.1	2132.6	2275.8	2430.8	2603.2
32.5°	1400.9	1479.7	1557.5	1648.0	1750.2	1866.1	1991.6	2130.4	2302.5	2478.6	2656.0
35°	1327.7	1393.7	1473.6	1570.2	1685.6	1818.4	1963.7	2127.7	2325.1	2527.4	2676.8
37.5°	1240.7	1302.3	1386.4	1492.4	1613.4	1755.9	1928.2	2122.9	2332.5	2493.8	2542.0
40°	1182.4	1239.4	1327.0	1436.8	1560.5	1711.4	1900.4	2106.2	2309.2	2412.0	2372.4
42.5°	1120.1	1179.9	1265.2	1373.9	1507.2	1671.3	1865.4	2071.2	2241.3	2280.2	2143.3
45°	1021.8	1083.7	1167.8	1277.6	1420.8	1598.7	1801.0	1988.0	2086.0	2015.8	1803.8
47.5°	930.5	988.5	1066.4	1179.7	1327.5	1511.5	1706.4	1855.6	1863.3	1695.8	1469.4
50°	868.2	921.7	1000.2	1113.6	1260.3	1446.5	1622.4	1739.8	1687.0	1497.3	1279.7
52.5°	807.0	859.4	936.8	1049.1	1194.1	1364.8	1528.4	1610.9	1511.3	1316.5	1130.7
55°	718.7	764.6	840.3	944.0	1081.6	1240.1	1379.1	1407.6	1278.3	1086.5	935.6
57.5°	632.6	675.4	744.3	839.7	965.5	1105.9	1214.6	1208.5	1071.8	907.2	787.6
60°	574.2	615.9	677.1	770.2	884.8	1005.8	1098.9	1076.7	941.2	799.4	698.6
62.5°	521.9	559.1	617.0	698.5	803.2	915.2	991.7	958.9	826.1	702.0	622.4
65°	444.9	476.2	525.5	595.0	681.9	774.4	833.4	791.0	677.7	581.1	517.2
67.5°	371.3	396.4	437.7	493.2	567.3	641.6	677.6	634.9	544.3	473.8	426.4
70°	324.6	346.9	378.8	428.2	492.8	555.4	582.5	544.3	466.5	405.9	371.8
72.5°	277.9	296.2	324.3	368.7	420.5	474.7	498.6	462.0	398.1	347.0	315.1
75°	214.8	227.3	246.7	277.3	318.3	361.5	374.7	342.7	301.7	263.4	242.6
77.5°	153.7	164.3	179.1	198.4	227.5	254.9	266.4	247.9	216.2	192.0	174.9
80°	118.2	123.8	136.3	152.2	175.1	192.5	200.2	188.4	166.1	148.0	134.8
82.5°	84.3	89.8	97.3	110.5	125.1	137.0	145.2	137.2	121.1	106.9	99.2
85°	41.0	44.5	48.7	54.2	65.4	72.3	71.6	66.7	60.5	54.9	50.7
87.5°	14.8	15.7	17.6	20.6	22.5	25.0	26.3	25.4	23.4	21.8	20.3
90°	2.0	3.2	4.5	5.6	6.8	7.9	9.0	10.1	11.1	11.9	12.7
92.5°	17.7	18.6	19.4	20.3	21.4	22.7	24.1	25.4	26.8	27.8	28.8
95°	45.7	45.9	46.3	46.5	47.5	49.0	50.6	52.2	53.7	54.8	55.8
97.5°	75.4	75.5	75.7	75.8	77.0	79.1	81.2	83.4	85.5	86.5	87.6
100°	97.6	97.6	97.6	97.6	98.6	100.7	102.6	104.7	106.6	108.1	109.5
102.5°	122.3	122.9	123.5	124.1	124.9	125.9	127.0	128.0	129.0	130.5	132.1
105°	159.8	160.5	161.3	162.1	162.9	163.9	164.8	165.7	166.7	167.6	168.5
107.5°	201.0	201.8	202.6	203.4	204.1	204.8	205.5	206.3	207.0	207.4	207.9
110°	229.5	230.2	231.0	231.8	232.5	232.9	233.4	233.8	234.3	234.8	235.2



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	258.2	258.5	259.0	259.3	259.8	260.4	261.0	261.6	262.2	262.4	262.6
115°	301.1	301.8	302.4	303.0	303.4	303.8	304.1	304.4	304.7	304.5	304.4
117.5°	343.8	344.0	344.3	344.6	344.9	345.2	345.4	345.7	346.0	346.1	346.3
120°	371.0	371.8	372.6	373.4	373.8	374.0	374.2	374.3	374.4	374.4	374.4
122.5°	399.6	399.8	400.1	400.4	400.7	401.1	401.5	401.9	402.3	402.2	402.1
125°	439.5	440.4	441.4	442.3	442.8	443.0	443.2	443.3	443.4	443.2	442.8
127.5°	481.0	481.4	482.0	482.5	482.9	483.0	483.2	483.5	483.7	483.5	483.3
130°	506.3	507.1	507.8	508.6	509.2	509.4	509.8	510.1	510.4	510.2	510.1
132.5°	531.9	533.2	534.4	535.7	536.3	536.3	536.2	536.1	536.1	535.9	535.7
135°	571.3	572.2	573.2	574.1	574.6	574.8	575.0	575.1	575.2	575.2	575.2
137.5°	608.7	609.6	610.5	611.4	612.0	612.3	612.6	613.0	613.3	613.5	613.7
140°	632.5	633.3	634.1	634.8	635.4	635.9	636.4	636.9	637.3	637.7	637.9
142.5°	656.4	657.0	657.6	658.4	659.0	659.5	660.1	660.7	661.3	661.5	661.6
145°	691.6	692.2	692.9	693.5	694.0	694.5	694.9	695.4	695.9	695.9	695.9
147.5°	724.0	724.3	724.7	725.0	725.3	725.8	726.1	726.5	726.8	727.2	727.5
150°	745.2	745.1	744.9	744.8	745.0	745.6	746.3	746.9	747.5	747.5	747.5
152.5°	763.5	763.7	763.9	764.1	764.4	764.6	764.8	765.1	765.4	765.7	766.1
155°	790.7	790.7	790.7	790.7	790.8	790.9	791.1	791.2	791.4	792.0	792.6
157.5°	814.9	814.6	814.2	813.9	813.8	814.0	814.1	814.2	814.4	815.0	815.6
160°	829.3	828.8	828.4	827.9	827.8	827.9	828.0	828.2	828.4	829.0	829.6
162.5°	842.2	841.9	841.6	841.2	841.1	841.1	841.2	841.2	841.2	842.0	842.7
165°	859.4	859.2	858.8	858.5	858.4	858.5	858.7	858.9	859.1	859.7	860.3
167.5°	873.6	873.0	872.4	871.7	871.5	871.5	871.5	871.5	871.5	872.4	873.3
170°	881.5	880.8	880.2	879.6	879.2	879.2	879.2	879.2	879.2	880.2	881.1
172.5°	887.0	886.4	885.7	885.1	884.8	884.8	884.8	884.8	884.8	885.7	886.7
175°	893.3	892.7	892.1	891.4	891.1	891.1	891.1	891.1	891.1	892.1	893.0
177.5°	896.6	896.2	895.6	895.1	894.8	894.7	894.6	894.5	894.3	895.1	895.8
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1712.7	1717.2	1726.6	1723.3	1727.8	1730.0	1732.2
5°	1851.1	1873.3	1883.0	1881.7	1896.2	1892.7	1889.3
7.5°	2007.3	2030.7	2043.8	2060.0	2069.5	2070.2	2078.4
10°	2095.8	2126.4	2138.9	2156.2	2167.4	2173.6	2172.9
12.5°	2163.6	2187.5	2215.5	2224.1	2239.1	2247.0	2244.1
15°	2245.2	2283.4	2312.7	2327.2	2346.0	2351.5	2359.2
17.5°	2318.1	2369.4	2403.4	2448.7	2465.8	2476.3	2470.1
20°	2373.1	2440.5	2474.6	2528.8	2558.7	2574.7	2569.1
22.5°	2438.2	2511.1	2574.1	2621.1	2666.6	2688.2	2692.6
25°	2549.7	2649.7	2742.2	2804.1	2860.3	2873.5	2902.8
27.5°	2674.2	2792.2	2891.1	2956.2	2995.3	3010.1	3019.2
30°	2752.6	2870.1	2944.5	2986.2	2998.7	2997.3	2995.9
32.5°	2791.0	2864.5	2878.9	2867.2	2838.6	2814.3	2789.1
35°	2736.7	2681.7	2599.7	2494.0	2416.2	2337.6	2330.0
37.5°	2461.2	2285.6	2149.1	1996.6	1908.6	1854.3	1816.8
40°	2202.1	2002.6	1837.2	1708.6	1618.9	1583.5	1548.7
42.5°	1920.7	1730.1	1583.6	1476.1	1408.7	1369.4	1341.8
45°	1560.5	1392.3	1277.6	1199.8	1146.2	1115.6	1098.2
47.5°	1278.7	1154.3	1056.9	1000.7	963.7	940.0	940.0
50°	1127.5	1008.6	944.0	899.5	867.5	848.7	852.2
52.5°	993.5	904.6	849.4	812.2	788.5	776.9	776.6
55°	830.6	766.7	730.6	703.5	687.4	674.2	677.1
57.5°	710.5	656.6	632.4	609.9	598.8	593.5	585.9
60°	636.1	594.3	573.5	555.4	544.3	540.1	532.4
62.5°	569.9	537.1	516.7	502.0	492.0	490.6	484.6
65°	478.9	453.9	435.9	428.9	418.5	415.7	415.7
67.5°	394.8	376.9	362.8	356.4	351.9	352.6	349.2
70°	342.0	327.4	318.3	311.4	307.9	308.6	305.9
72.5°	299.2	282.9	275.0	270.8	266.3	268.0	266.9
75°	226.6	218.3	214.1	209.9	207.1	205.7	204.4
77.5°	166.4	159.1	155.9	153.5	153.9	150.5	153.2
80°	128.6	122.3	120.3	116.8	116.1	116.1	115.4
82.5°	94.1	90.6	89.1	86.2	85.0	86.1	84.3
85°	48.7	45.8	45.2	45.2	43.8	42.4	45.8
87.5°	20.5	18.5	18.5	18.1	18.2	17.7	16.7
90°	13.5	14.3	14.9	15.3	15.8	16.2	16.8
92.5°	29.9	30.9	31.6	31.9	32.2	32.5	32.9
95°	57.0	58.1	58.8	59.0	59.4	59.7	59.9
97.5°	88.5	89.6	90.2	90.3	90.5	90.8	91.0
100°	110.8	112.3	113.2	113.4	113.7	114.0	114.3
102.5°	133.6	135.1	136.1	136.5	136.9	137.3	137.8
105°	169.4	170.4	171.0	171.6	172.0	172.5	172.9
107.5°	208.3	208.8	209.0	209.0	208.9	208.9	208.9
110°	235.7	236.1	236.3	236.1	235.9	235.9	235.7



TEST NUMBER: P333314-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	262.8	263.1	263.1	262.7	262.4	262.2	261.9
115°	304.3	304.1	303.9	303.8	303.6	303.4	303.4
117.5°	346.3	346.5	346.3	345.6	345.0	344.4	343.8
120°	374.4	374.4	374.2	373.5	372.9	372.3	371.7
122.5°	402.0	401.8	401.5	401.0	400.6	400.0	399.6
125°	442.6	442.2	442.0	441.8	441.7	441.6	441.4
127.5°	483.1	483.0	482.8	482.5	482.1	481.9	481.5
130°	510.0	509.8	509.5	509.3	508.9	508.6	508.3
132.5°	535.6	535.5	535.1	534.8	534.3	533.9	533.4
135°	575.2	575.2	575.0	574.4	573.7	573.1	572.5
137.5°	613.9	614.0	613.8	613.0	612.2	611.4	610.6
140°	638.2	638.6	638.3	637.6	636.8	636.0	635.3
142.5°	661.8	662.0	661.7	660.9	660.2	659.4	658.6
145°	695.9	695.9	695.6	695.2	694.7	694.3	693.8
147.5°	728.0	728.3	728.0	726.9	725.9	724.9	723.8
150°	747.5	747.5	747.3	747.0	746.7	746.4	746.1
152.5°	766.4	766.8	766.7	766.2	765.6	765.1	764.5
155°	793.3	793.9	793.8	793.0	792.3	791.5	790.7
157.5°	816.3	816.9	816.7	815.6	814.7	813.6	812.6
160°	830.2	830.8	830.8	830.0	829.2	828.4	827.7
162.5°	843.5	844.2	844.1	843.2	842.3	841.4	840.5
165°	860.9	861.5	861.4	860.4	859.5	858.5	857.6
167.5°	874.2	875.2	875.1	874.2	873.3	872.3	871.3
170°	882.1	883.0	882.9	881.8	880.7	879.7	878.6
172.5°	887.6	888.6	888.6	887.6	886.6	885.6	884.7
175°	893.9	894.8	894.7	893.7	892.6	891.5	890.5
177.5°	896.5	897.3	897.2	896.3	895.5	894.7	893.8
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0

(END OF REPORT)