

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333319-940

Luminaire Tested: **S125DIP-S1270D810U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333319-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1270D810U940-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7463.6 lumens
Efficiency: N/A
Efficacy: 123.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333319-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

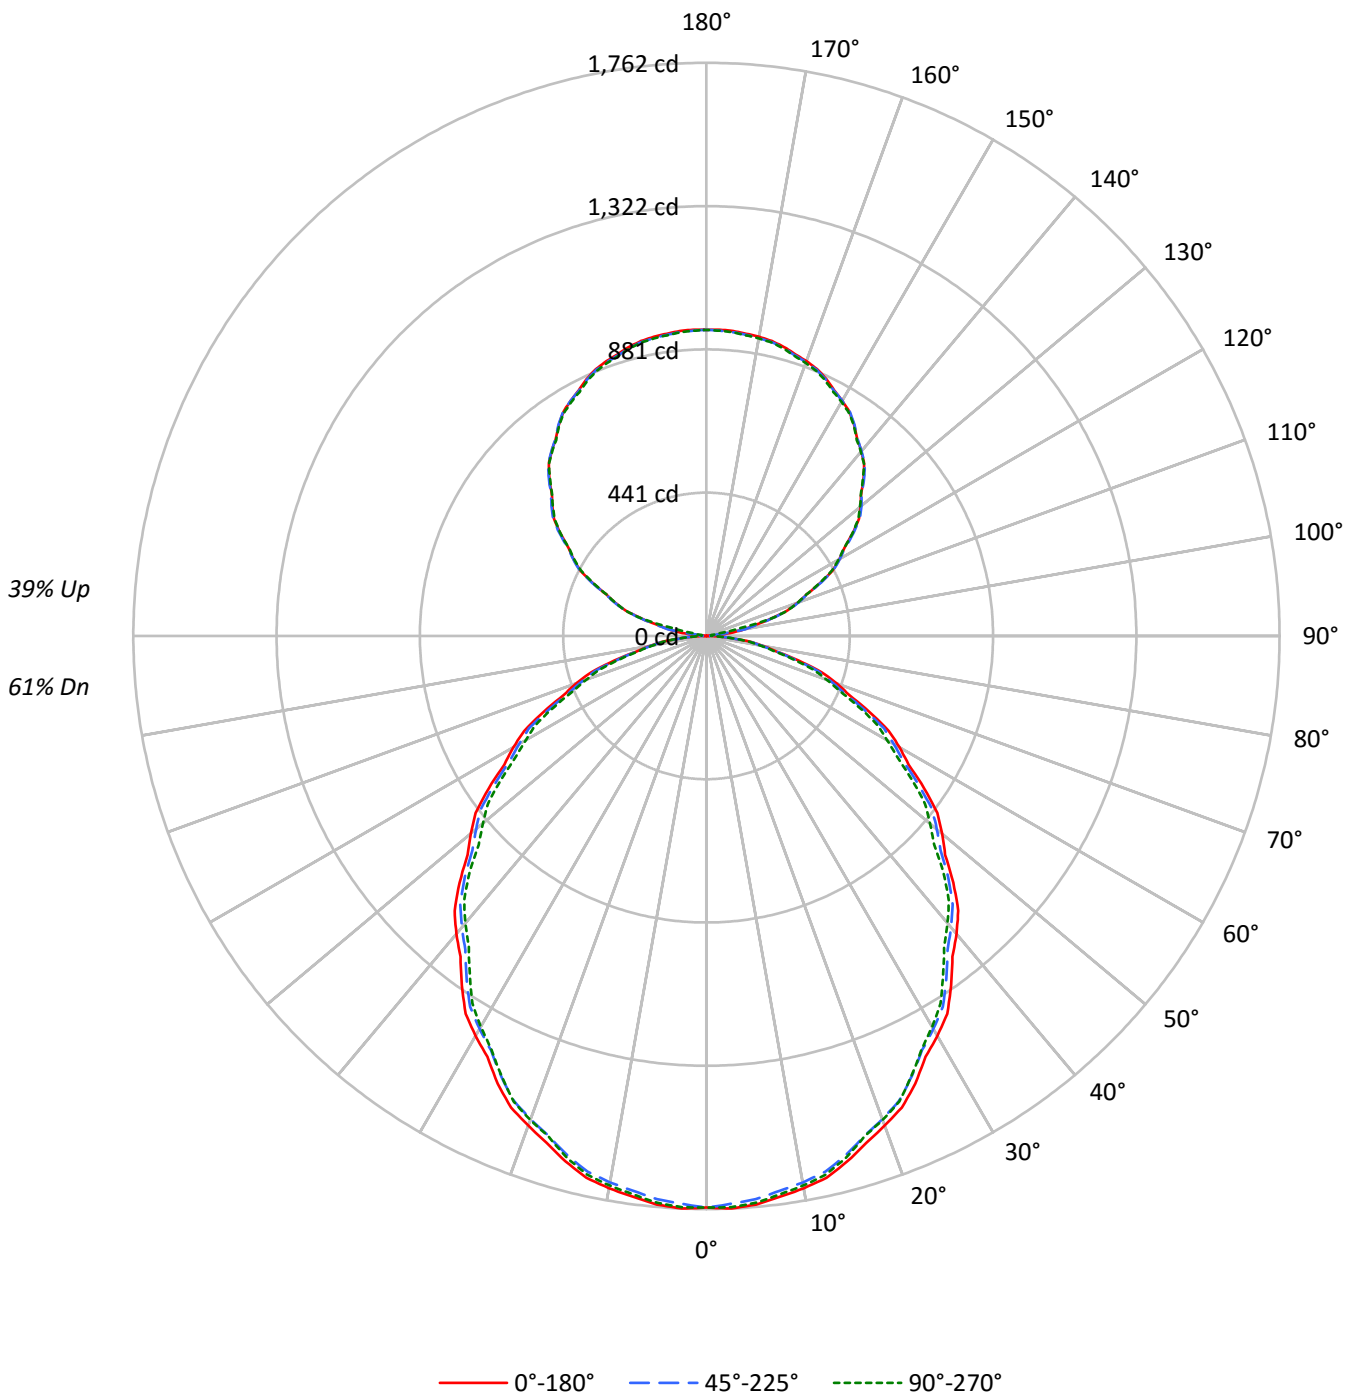



TEST NUMBER: P333319-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	66	66	66	61
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56	51
2	91	84	77	72	85	78	73	68	69	65	61	60	57	54	52	49	47	43
3	83	74	66	60	78	69	62	57	61	55	51	53	49	46	46	43	40	36
4	76	65	57	51	71	61	54	48	54	48	44	47	43	39	41	37	35	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	65	52	44	38	60	49	42	36	44	37	33	38	33	30	33	30	27	24
7	60	47	39	33	56	45	37	32	40	33	29	35	30	26	30	27	24	21
8	55	43	35	30	52	41	33	28	36	30	26	32	27	23	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	22	19	24	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11349	11349	11349
5°	11374	11267	11339
10°	11305	11187	11252
15°	11183	11053	11099
20°	11008	10864	10883
25°	10819	10641	10630
30°	10586	10399	10347
35°	10336	10139	9996
40°	10080	9857	9716
45°	9803	9600	9409
50°	9499	9289	9010
55°	9205	8939	8688
60°	8853	8584	8280
65°	8436	8159	7882
70°	8033	7666	7404
75°	7321	7079	6832
80°	6512	6412	6259
85°	5669	5765	5461



TEST NUMBER: P333319-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	165.7	2.2
10°-20°	468.1	6.3
20°-30°	691.1	9.3
30°-40°	806.4	10.8
40°-50°	809.9	10.9
50°-60°	710.9	9.5
60°-70°	529.7	7.1
70°-80°	302.9	4.1
80°-90°	90.1	1.2
90°-100°	34.2	0.5
100°-110°	210.7	2.8
110°-120°	382.1	5.1
120°-130°	490.4	6.6
130°-140°	527.5	7.1
140°-150°	495.1	6.6
150°-160°	400.5	5.4
160°-170°	259.0	3.5
170°-180°	89.3	1.2
0°-30°	1324.8	17.8
0°-40°	2131.2	28.6
0°-60°	3652.1	48.9
0°-90°	4574.8	61.3
90°-120°	627.0	8.4
90°-150°	2140.0	28.7
90°-180°	2889.0	38.7
0°-180°	7463.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1757	1757	1757	1757	1757	
5°	1754	1751	1738	1750	1749	166
15°	1672	1668	1653	1660	1660	471
25°	1518	1511	1493	1496	1492	698
35°	1311	1305	1286	1279	1268	820
45°	1073	1067	1051	1035	1030	827
55°	818	812	794	781	772	730
65°	552	548	534	522	516	548
75°	293	290	284	279	274	313
85°	76	78	78	76	74	85
90°	1	6	11	15	17	6
95°	40	36	11	14	15	51
105°	205	208	208	208	207	217
115°	385	388	389	386	382	381
125°	547	552	552	550	547	489
135°	683	687	686	684	680	526
145°	792	793	793	793	789	495
155°	872	868	869	871	865	401
165°	920	916	916	920	915	260
175°	941	937	937	942	937	90
180°	941	941	941	941	941	



TEST NUMBER: P333319-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3
2.5°	1761.8	1761.0	1760.3	1759.5	1758.8	1757.2	1754.7	1752.2	1749.8	1747.3	1749.8
5°	1754.5	1753.9	1753.3	1752.7	1752.0	1750.2	1747.1	1744.0	1741.0	1737.9	1740.6
7.5°	1738.4	1737.8	1737.1	1736.5	1735.9	1733.9	1730.5	1727.2	1723.8	1720.4	1723.1
10°	1723.9	1723.3	1722.7	1722.1	1721.4	1719.5	1716.1	1712.7	1709.2	1705.8	1708.3
12.5°	1706.1	1705.0	1704.0	1702.8	1701.7	1699.6	1696.4	1693.3	1690.1	1686.9	1689.0
15°	1672.5	1671.6	1670.6	1669.7	1668.8	1666.6	1663.2	1659.8	1656.4	1653.1	1654.6
17.5°	1633.9	1632.5	1631.1	1629.8	1628.4	1625.9	1622.5	1618.9	1615.4	1611.9	1613.8
20°	1601.6	1601.0	1600.4	1599.7	1599.1	1596.8	1592.8	1588.8	1584.7	1580.7	1582.9
22.5°	1569.3	1568.3	1567.1	1566.0	1564.9	1562.5	1558.7	1555.0	1551.1	1547.4	1548.8
25°	1518.2	1516.6	1515.1	1513.6	1512.0	1509.2	1505.2	1501.2	1497.2	1493.2	1493.8
27.5°	1458.4	1457.5	1456.5	1455.6	1454.7	1452.2	1448.0	1443.9	1439.8	1435.6	1435.7
30°	1419.5	1418.5	1417.6	1416.7	1415.8	1413.0	1408.4	1403.7	1399.1	1394.5	1393.8
32.5°	1377.2	1375.8	1374.4	1373.0	1371.5	1368.8	1364.6	1360.5	1356.3	1352.2	1351.1
35°	1311.0	1309.8	1308.6	1307.3	1306.1	1303.3	1299.0	1294.7	1290.3	1286.0	1284.5
37.5°	1242.3	1240.8	1239.3	1237.7	1236.2	1233.3	1229.3	1225.2	1221.1	1217.1	1214.8
40°	1195.6	1194.1	1192.6	1191.0	1189.5	1186.5	1182.2	1177.9	1173.6	1169.2	1166.4
42.5°	1145.6	1144.3	1143.0	1141.7	1140.4	1137.6	1133.3	1128.9	1124.6	1120.3	1117.8
45°	1073.3	1072.1	1070.9	1069.6	1068.4	1065.9	1062.2	1058.5	1054.8	1051.1	1047.3
47.5°	995.4	995.5	995.6	995.6	995.7	993.5	989.1	984.6	980.2	975.7	972.0
50°	945.4	944.5	943.5	942.6	941.6	939.3	935.7	931.9	928.3	924.5	920.5
52.5°	894.2	893.6	892.9	892.2	891.5	889.2	885.2	881.3	877.4	873.3	869.9
55°	817.5	816.5	815.6	814.7	813.8	811.2	806.8	802.5	798.2	793.9	791.0
57.5°	736.6	736.1	735.6	735.1	734.6	732.5	728.9	725.2	721.6	717.9	714.3
60°	685.4	684.2	683.0	681.7	680.5	678.1	674.8	671.4	668.0	664.6	661.5
62.5°	632.0	631.1	630.1	629.0	628.0	626.2	623.2	620.3	617.4	614.5	611.2
65°	552.0	551.3	550.7	550.1	549.5	547.4	544.0	540.6	537.3	533.9	531.1
67.5°	474.4	473.1	471.8	470.5	469.2	467.3	464.8	462.2	459.7	457.1	454.8
70°	425.4	423.9	422.3	420.8	419.3	417.1	414.3	411.5	408.8	406.0	404.1
72.5°	372.0	371.0	370.0	368.9	367.8	366.4	364.6	362.8	361.1	359.3	357.1
75°	293.4	292.7	292.1	291.5	290.9	289.8	288.3	286.7	285.2	283.7	282.7
77.5°	220.8	220.5	220.3	220.1	219.8	219.3	218.4	217.5	216.6	215.8	215.3
80°	175.1	175.1	175.1	175.1	175.1	174.9	174.2	173.6	173.0	172.4	172.1
82.5°	135.1	134.6	134.1	133.7	133.1	132.9	132.7	132.6	132.5	132.3	131.8
85°	76.5	76.8	77.0	77.4	77.7	77.8	77.8	77.8	77.8	77.8	77.6
87.5°	30.1	30.4	30.7	30.9	31.1	31.3	31.2	31.2	31.2	31.1	31.3
90°	0.7	2.0	3.2	4.5	5.6	6.8	7.9	9.0	10.1	11.1	11.9
92.5°	10.7	9.9	9.0	8.1	7.3	7.3	8.3	9.3	10.2	11.1	11.9
95°	39.8	39.3	38.8	38.3	37.9	34.7	28.8	22.9	17.0	11.1	11.9
97.5°	83.0	83.8	84.6	85.5	86.3	81.0	69.3	57.6	45.9	34.3	30.0
100°	116.5	116.9	117.3	117.9	118.3	118.9	119.5	120.1	120.7	121.4	98.3
102.5°	150.5	151.1	151.7	152.2	152.8	153.3	153.7	154.1	154.4	154.8	150.4
105°	205.0	205.6	206.3	206.9	207.5	207.8	207.8	207.8	207.8	207.8	207.8
107.5°	261.6	261.6	261.6	261.6	261.6	261.8	262.1	262.4	262.7	263.1	263.1
110°	298.5	298.5	298.5	298.5	298.5	298.6	298.9	299.3	299.5	299.9	299.4



TEST NUMBER: P333319-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	333.1	333.4	333.8	334.2	334.6	334.8	335.0	335.2	335.4	335.6	335.0
115°	385.0	385.8	386.5	387.3	388.1	388.5	388.7	388.8	389.0	389.1	388.5
117.5°	438.6	438.6	438.5	438.5	438.5	438.8	439.3	440.0	440.6	441.1	440.3
120°	472.1	472.0	471.8	471.6	471.4	471.6	472.1	472.6	473.1	473.5	473.2
122.5°	501.7	502.3	502.8	503.5	504.0	504.4	504.6	504.9	505.1	505.3	505.0
125°	547.4	548.5	549.6	550.7	551.8	552.3	552.3	552.3	552.3	552.3	551.7
127.5°	591.1	591.8	592.6	593.4	594.1	594.5	594.4	594.3	594.2	594.1	593.8
130°	617.9	618.7	619.4	620.2	621.0	621.4	621.6	621.7	621.9	622.1	621.6
132.5°	644.6	645.5	646.4	647.3	648.3	648.5	648.2	647.8	647.5	647.1	647.0
135°	682.7	683.7	684.6	685.5	686.4	686.7	686.4	686.1	685.8	685.5	685.2
137.5°	717.7	718.5	719.3	720.1	720.9	721.2	720.9	720.7	720.4	720.1	720.1
140°	740.6	740.9	741.2	741.5	741.8	741.9	741.7	741.6	741.5	741.3	741.6
142.5°	761.3	761.4	761.6	761.8	762.0	762.1	762.4	762.6	762.9	763.0	763.1
145°	791.5	791.8	792.1	792.5	792.7	792.9	792.9	792.9	792.9	792.9	793.1
147.5°	818.0	818.0	817.9	817.8	817.8	817.8	818.0	818.1	818.4	818.6	818.8
150°	834.7	834.5	834.1	833.8	833.5	833.5	833.8	834.1	834.5	834.7	835.1
152.5°	851.0	850.2	849.5	848.9	848.2	848.0	848.3	848.6	848.9	849.3	849.5
155°	871.7	870.8	869.9	868.9	868.0	867.6	868.0	868.3	868.6	868.9	869.3
157.5°	887.7	887.2	886.6	886.1	885.5	885.2	885.3	885.3	885.3	885.4	885.8
160°	898.9	898.0	897.1	896.1	895.2	894.8	894.9	895.1	895.3	895.4	896.0
162.5°	907.9	906.9	906.0	905.0	904.1	903.7	903.8	904.0	904.2	904.4	905.2
165°	919.8	918.9	917.9	917.0	916.1	915.7	915.9	916.1	916.1	916.3	917.3
167.5°	928.7	927.8	926.8	925.9	924.9	924.5	924.6	924.8	925.0	925.1	926.2
170°	933.8	932.6	931.6	930.5	929.4	929.0	929.1	929.3	929.4	929.6	930.9
172.5°	937.1	936.0	935.0	933.9	932.7	932.4	932.6	932.9	933.2	933.4	934.6
175°	940.8	939.8	938.9	938.0	937.0	936.7	936.7	936.9	937.1	937.3	938.5
177.5°	942.4	941.6	940.9	940.2	939.4	939.1	939.2	939.3	939.5	939.6	940.5
180°	940.8	940.8	940.8	940.8	940.8	940.8	940.8	940.8	940.8	940.8	940.8



TEST NUMBER: P333319-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3
2.5°	1752.2	1754.7	1757.2	1758.3	1758.1	1757.8	1757.6	1757.3
5°	1743.4	1746.2	1749.0	1750.2	1749.9	1749.6	1749.3	1749.0
7.5°	1725.7	1728.5	1731.2	1732.4	1732.1	1731.8	1731.5	1731.2
10°	1710.8	1713.3	1715.7	1716.8	1716.5	1716.2	1715.9	1715.7
12.5°	1691.0	1692.9	1694.9	1695.9	1695.8	1695.7	1695.7	1695.6
15°	1656.2	1657.7	1659.2	1660.0	1660.0	1660.0	1660.0	1660.0
17.5°	1615.7	1617.7	1619.5	1619.7	1618.2	1616.7	1615.1	1613.6
20°	1585.1	1587.2	1589.4	1589.7	1588.1	1586.6	1585.1	1583.5
22.5°	1550.2	1551.7	1553.1	1553.3	1552.2	1551.1	1550.1	1549.1
25°	1494.4	1495.0	1495.7	1495.5	1494.6	1493.6	1492.7	1491.7
27.5°	1435.8	1436.0	1436.1	1435.7	1434.8	1433.9	1432.9	1432.0
30°	1393.2	1392.6	1392.0	1391.2	1390.3	1389.4	1388.4	1387.5
32.5°	1350.0	1348.9	1347.7	1346.3	1344.7	1343.0	1341.3	1339.7
35°	1282.9	1281.4	1279.9	1277.8	1275.3	1272.9	1270.4	1267.9
37.5°	1212.5	1210.2	1207.9	1206.0	1204.6	1203.2	1201.8	1200.3
40°	1163.7	1160.9	1158.1	1156.3	1155.3	1154.4	1153.4	1152.5
42.5°	1115.3	1112.7	1110.2	1108.2	1106.8	1105.4	1103.9	1102.5
45°	1043.7	1039.9	1036.3	1033.9	1033.0	1032.1	1031.1	1030.2
47.5°	968.1	964.4	960.6	957.7	955.5	953.3	951.2	949.0
50°	916.5	912.5	908.5	905.4	903.2	901.1	898.9	896.7
52.5°	866.3	862.8	859.3	856.3	853.9	851.5	849.1	846.7
55°	788.3	785.5	782.7	780.2	778.1	776.0	773.7	771.6
57.5°	710.8	707.2	703.6	701.2	700.1	698.9	697.7	696.5
60°	658.4	655.3	652.2	649.6	647.4	645.2	643.1	641.0
62.5°	607.8	604.5	601.2	598.7	597.0	595.3	593.6	592.0
65°	528.3	525.5	522.7	520.8	519.5	518.3	517.0	515.8
67.5°	452.5	450.0	447.7	446.2	445.4	444.7	444.0	443.2
70°	402.3	400.4	398.5	397.0	395.7	394.5	393.3	392.1
72.5°	355.1	352.9	350.9	349.2	347.9	346.7	345.4	344.2
75°	281.8	280.8	279.9	278.8	277.6	276.3	275.1	273.8
77.5°	214.6	214.1	213.6	212.9	212.0	211.1	210.3	209.4
80°	171.7	171.5	171.1	170.7	170.0	169.4	168.8	168.3
82.5°	131.3	130.7	130.1	129.8	129.7	129.6	129.4	129.3
85°	77.2	77.0	76.6	76.2	75.5	74.9	74.3	73.7
87.5°	31.5	31.7	31.7	31.7	31.2	30.9	30.4	30.1
90°	12.8	13.5	14.3	14.9	15.3	15.8	16.2	16.8
92.5°	12.8	13.5	14.3	14.7	15.0	15.2	15.4	15.6
95°	12.8	13.5	14.3	14.6	14.6	14.6	14.6	14.6
97.5°	25.6	21.2	16.9	14.6	14.6	14.6	14.6	14.6
100°	75.2	52.1	29.0	17.1	16.5	15.9	15.2	14.6
102.5°	146.1	141.7	137.3	129.9	119.3	108.8	98.3	87.7
105°	207.8	207.8	207.8	207.8	207.6	207.4	207.2	207.1
107.5°	263.1	263.1	263.1	263.0	262.5	262.0	261.5	261.1
110°	298.9	298.5	298.0	297.8	298.0	298.2	298.3	298.5



TEST NUMBER: P333319-940

CATALOG NUMBER: S125DIP-S1270D810U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	334.4	333.8	333.2	332.8	332.6	332.3	332.2	332.0
115°	387.9	387.3	386.6	385.8	385.0	384.0	383.1	382.2
117.5°	439.5	438.7	437.9	437.3	436.9	436.5	436.1	435.7
120°	472.9	472.6	472.3	471.7	470.9	470.2	469.4	468.6
122.5°	504.7	504.4	504.1	503.5	502.6	501.7	500.8	499.9
125°	551.1	550.5	549.8	549.3	548.8	548.3	547.9	547.4
127.5°	593.4	593.2	592.8	592.0	590.9	589.8	588.6	587.5
130°	621.1	620.6	620.2	619.6	618.8	618.0	617.2	616.4
132.5°	646.9	646.8	646.8	646.3	645.6	644.8	644.0	643.3
135°	684.9	684.6	684.3	683.7	682.7	681.8	680.8	679.9
137.5°	720.2	720.2	720.3	720.0	719.2	718.4	717.6	716.8
140°	741.9	742.3	742.5	742.3	741.3	740.4	739.4	738.5
142.5°	763.2	763.2	763.3	762.9	762.0	761.0	760.1	759.1
145°	793.2	793.4	793.5	793.1	792.2	791.3	790.3	789.4
147.5°	818.9	819.1	819.3	818.9	817.7	816.6	815.5	814.4
150°	835.4	835.7	836.0	835.5	834.3	833.0	831.8	830.5
152.5°	849.9	850.2	850.5	850.1	849.0	847.8	846.8	845.6
155°	869.9	870.3	870.8	870.4	869.2	867.9	866.7	865.4
157.5°	886.4	886.9	887.3	887.0	885.7	884.5	883.2	882.0
160°	896.6	897.2	897.9	897.6	896.3	895.1	893.9	892.6
162.5°	906.1	907.0	907.8	907.6	906.2	904.8	903.5	902.1
165°	918.2	919.1	920.1	919.9	918.6	917.4	916.1	914.9
167.5°	927.4	928.4	929.6	929.4	928.0	926.7	925.2	923.9
170°	932.0	933.3	934.5	934.4	933.1	931.7	930.2	928.9
172.5°	935.7	936.8	938.0	937.8	936.4	935.0	933.6	932.2
175°	939.7	940.9	942.2	942.1	940.8	939.3	938.0	936.6
177.5°	941.4	942.2	943.1	943.1	942.0	941.0	940.0	939.1
180°	940.8	940.8	940.8	940.8	940.8	940.8	940.8	940.8

(END OF REPORT)