

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333115-940

Luminaire Tested: **S125DIP-S375D365U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333115-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S375D365U940-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2676.5 lumens
Efficiency: N/A
Efficacy: 131.8 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 20.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

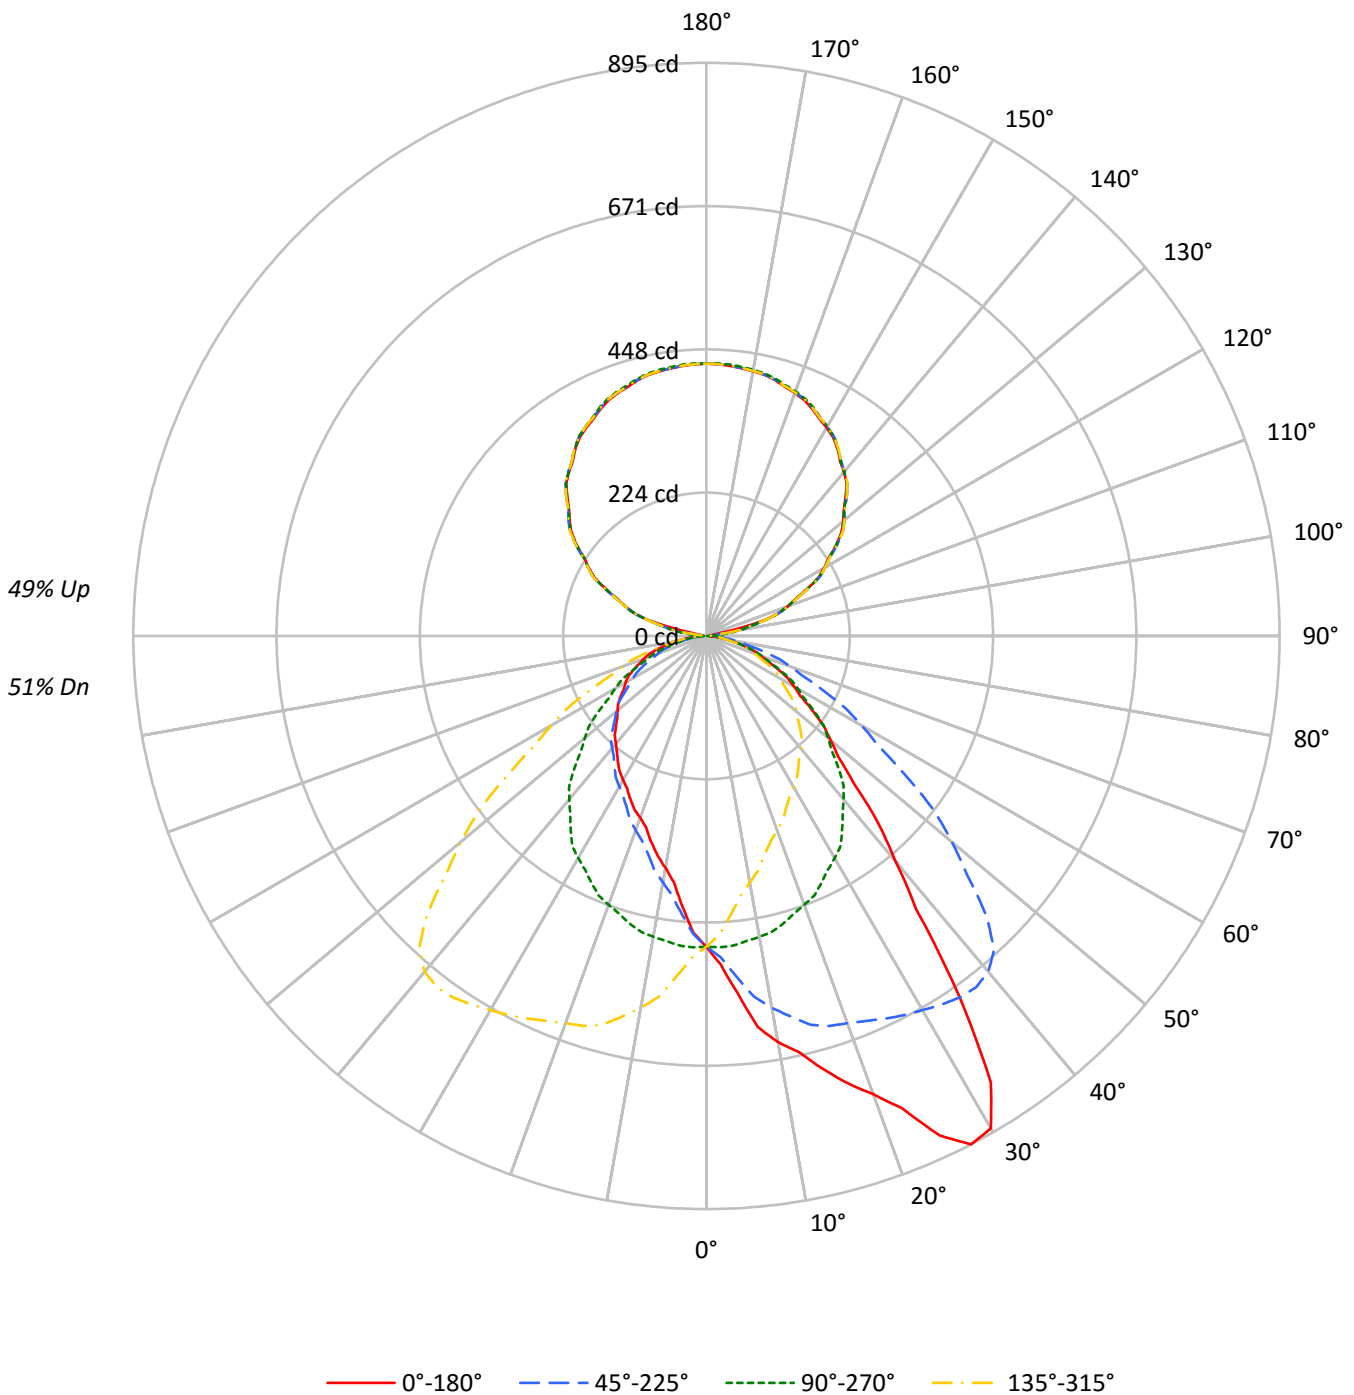



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51				51
1	98	94	90	87	91	87	84	81	74	72	69	62	60	59	51	50	49	44				44
2	90	82	76	71	83	76	71	67	65	61	58	55	52	49	45	43	41	37				37
3	82	73	65	60	75	67	61	56	58	53	49	49	45	42	40	38	35	31				31
4	75	64	56	51	69	60	53	48	51	46	42	43	39	36	36	33	31	27				27
5	69	57	49	43	63	53	46	41	46	40	36	39	35	31	32	29	27	24				24
6	63	51	43	38	59	48	41	36	41	36	32	35	31	28	29	26	24	21				21
7	59	46	39	33	54	43	36	31	38	32	28	32	28	24	27	24	21	18				18
8	54	42	34	29	50	39	33	28	34	29	25	29	25	22	25	21	19	16				16
9	51	39	31	26	47	36	29	25	31	26	22	27	23	20	23	19	17	15				15
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	21	18	15	13				13

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	3135	3135	3135	3135
5°	3630	3146	2755	3146
10°	4224	3129	2413	3129
15°	4676	3107	2226	3107
20°	5234	3070	2076	3070
25°	6131	3029	2003	3029
30°	6623	2988	1939	2988
35°	5445	2912	1898	2912
40°	3871	2807	1851	2807
45°	2974	2665	1825	2665
50°	2538	2488	1822	2488
55°	2260	2315	1838	2315
60°	2038	2126	1885	2126
65°	1883	1936	1933	1936
70°	1713	1739	1962	1739
75°	1510	1532	1941	1532
80°	1272	1250	1778	1250
85°	1008	897	1438	897



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.7	1.7
10°-20°	139.1	5.2
20°-30°	225.9	8.4
30°-40°	275.6	10.3
40°-50°	250.7	9.4
50°-60°	199.7	7.5
60°-70°	139.1	5.2
70°-80°	74.2	2.8
80°-90°	19.6	0.7
90°-100°	15.5	0.6
100°-110°	95.2	3.6
110°-120°	172.7	6.5
120°-130°	221.7	8.3
130°-140°	238.4	8.9
140°-150°	223.8	8.4
150°-160°	181.0	6.8
160°-170°	117.1	4.4
170°-180°	40.4	1.5
0°-30°	411.8	15.4
0°-40°	687.4	25.7
0°-60°	1137.8	42.5
0°-90°	1370.7	51.2
90°-120°	283.4	10.6
90°-150°	967.3	36.1
90°-180°	1306.0	48.8
0°-180°	2676.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	485	485	485	485	485	
5°	560	485	425	485	560	56
15°	699	465	333	465	699	200
25°	860	425	281	425	860	393
35°	691	369	241	369	691	423
45°	326	292	200	292	326	261
55°	201	206	163	206	201	181
65°	123	127	126	127	123	122
75°	60	61	78	61	60	65
85°	14	12	19	12	14	16
90°	8	0	8	0	8	4
95°	7	18	7	18	7	5
105°	94	93	94	93	94	85
115°	173	174	173	174	173	171
125°	247	247	247	247	247	220
135°	307	309	307	309	307	237
145°	357	358	357	358	357	223
155°	391	394	391	394	391	180
165°	414	416	414	416	414	117
175°	423	425	423	425	423	40
180°	425	425	425	425	425	



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4
2.5°	513.4	512.8	512.1	510.9	511.8	509.0	507.7	505.4	502.6	501.6	500.4
5°	560.0	561.1	562.1	557.8	558.2	555.3	548.7	543.3	539.0	533.4	529.5
7.5°	616.1	613.7	613.4	610.6	605.8	601.9	595.0	586.2	577.7	567.9	559.9
10°	644.1	644.4	642.5	639.2	634.0	630.3	621.3	612.6	602.1	589.7	580.9
12.5°	665.2	666.1	663.7	659.2	656.7	648.5	641.3	631.1	618.6	608.7	595.2
15°	699.3	697.1	695.4	689.8	685.5	676.9	665.6	654.8	641.2	628.7	616.1
17.5°	732.2	734.1	730.9	725.9	712.4	702.3	687.2	672.4	655.5	638.6	623.7
20°	761.5	763.2	758.5	749.6	733.5	723.4	703.5	684.5	664.9	643.3	626.8
22.5°	798.2	796.8	790.4	776.9	763.0	744.4	722.7	699.6	675.1	650.7	628.7
25°	860.4	851.8	847.8	831.2	812.9	785.4	755.8	722.0	691.5	659.2	631.2
27.5°	895.0	892.2	887.9	876.3	857.0	827.7	792.7	751.5	708.6	667.7	631.0
30°	888.1	888.5	888.9	885.2	872.8	850.8	815.9	771.7	720.5	674.6	632.1
32.5°	826.7	834.2	841.4	849.9	853.4	849.1	827.3	787.3	734.7	682.5	631.5
35°	690.6	692.9	716.2	739.3	770.6	795.0	811.2	793.4	749.2	689.2	630.7
37.5°	538.5	549.7	565.8	591.8	637.0	677.5	729.6	753.5	739.2	691.4	629.3
40°	459.1	469.4	479.9	506.5	544.6	593.6	652.7	703.2	715.0	684.5	624.3
42.5°	397.8	405.9	417.6	437.6	469.4	512.8	569.4	635.3	675.9	664.4	613.9
45°	325.6	330.7	339.7	355.6	378.7	412.7	462.5	534.7	597.5	618.3	589.3
47.5°	278.7	278.7	285.7	296.6	313.3	342.1	379.1	435.5	502.7	552.3	550.0
50°	252.6	251.6	257.2	266.6	279.8	299.0	334.2	379.3	443.8	500.1	515.8
52.5°	230.2	230.3	233.7	240.8	251.8	268.1	294.4	335.2	390.2	448.0	477.5
55°	200.7	199.8	203.8	208.5	216.6	227.3	246.2	277.3	322.1	378.9	417.2
57.5°	173.6	175.9	177.5	180.7	187.4	194.7	210.6	233.4	268.9	317.7	358.2
60°	157.8	160.1	161.3	164.6	170.0	176.2	188.5	207.1	236.9	279.0	319.1
62.5°	143.7	145.4	145.9	148.8	153.2	159.2	168.9	184.5	208.1	244.9	284.2
65°	123.2	123.2	124.0	127.2	129.2	134.6	142.0	153.3	172.3	200.9	234.5
67.5°	103.5	104.5	104.3	105.7	107.5	111.7	117.0	126.4	140.4	161.3	188.2
70°	90.7	91.5	91.3	92.3	94.3	97.0	101.4	110.2	120.3	138.2	161.3
72.5°	79.1	79.5	78.9	80.3	81.5	83.8	88.7	93.5	102.8	118.0	137.0
75°	60.5	61.0	61.4	62.2	63.5	64.7	67.1	71.9	78.1	89.4	101.6
77.5°	45.4	44.6	45.7	45.5	46.2	47.2	49.3	51.8	56.9	64.1	73.5
80°	34.2	34.4	34.4	34.6	35.7	36.3	38.1	39.9	43.9	49.2	55.8
82.5°	25.0	25.5	25.1	25.6	26.4	26.8	27.9	29.4	31.7	35.9	40.7
85°	13.6	12.6	13.0	13.4	13.4	13.6	14.4	15.1	16.3	17.9	19.8
87.5°	5.4	5.8	5.9	5.8	6.0	5.9	6.5	6.4	6.9	7.3	7.8
90°	7.6	7.3	7.1	7.0	6.7	6.4	6.1	5.7	5.4	5.1	4.5
92.5°	7.0	7.0	6.9	6.8	6.7	6.4	6.1	5.7	5.4	5.1	4.6
95°	6.6	6.6	6.6	6.6	6.6	6.4	6.1	5.7	5.4	5.1	7.7
97.5°	6.6	6.6	6.6	6.6	6.6	7.6	9.5	11.6	13.6	15.5	20.8
100°	6.6	6.9	7.2	7.5	7.8	13.1	23.5	34.0	44.4	54.8	54.6
102.5°	39.7	44.4	49.2	53.9	58.7	62.1	64.0	66.0	68.0	70.0	69.8
105°	93.6	93.7	93.7	93.8	93.9	93.9	93.9	93.9	93.9	93.9	93.9
107.5°	118.0	118.2	118.4	118.7	118.9	119.0	119.0	119.0	118.9	118.9	118.8
110°	134.9	134.8	134.7	134.7	134.6	134.7	134.9	135.1	135.4	135.5	135.4



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	150.1	150.2	150.3	150.3	150.4	150.6	150.9	151.1	151.4	151.7	151.6
115°	172.7	173.2	173.6	174.0	174.4	174.8	175.0	175.3	175.6	175.8	175.8
117.5°	197.0	197.2	197.3	197.5	197.7	198.0	198.3	198.7	199.0	199.4	199.1
120°	211.8	212.1	212.5	212.9	213.2	213.5	213.6	213.7	213.9	214.0	213.8
122.5°	226.0	226.3	226.8	227.1	227.6	227.8	228.0	228.1	228.3	228.4	228.3
125°	247.4	247.6	247.9	248.1	248.3	248.5	248.8	249.1	249.3	249.7	249.7
127.5°	265.6	266.1	266.5	267.1	267.6	268.0	268.0	268.2	268.4	268.6	268.6
130°	278.7	279.0	279.4	279.7	280.0	280.4	280.5	280.7	281.0	281.2	281.1
132.5°	290.8	291.1	291.4	291.8	292.1	292.3	292.4	292.4	292.5	292.5	292.7
135°	307.3	307.7	308.2	308.6	309.0	309.2	309.4	309.6	309.7	309.9	310.0
137.5°	324.0	324.3	324.7	325.0	325.4	325.6	325.6	325.6	325.5	325.5	325.6
140°	333.8	334.2	334.7	335.1	335.5	335.6	335.5	335.4	335.2	335.1	335.1
142.5°	343.1	343.6	343.9	344.4	344.8	345.0	345.0	344.9	344.9	344.9	344.8
145°	356.8	357.2	357.7	358.1	358.5	358.6	358.6	358.6	358.5	358.4	358.4
147.5°	368.1	368.6	369.1	369.6	370.1	370.3	370.2	370.1	370.1	370.0	369.9
150°	375.4	375.9	376.6	377.1	377.6	377.8	377.7	377.6	377.5	377.3	377.2
152.5°	382.2	382.7	383.3	383.7	384.2	384.4	384.2	384.1	384.0	383.9	383.7
155°	391.2	391.7	392.3	392.9	393.4	393.6	393.3	393.2	393.0	392.7	392.6
157.5°	398.7	399.2	399.8	400.4	400.9	401.1	400.8	400.6	400.4	400.2	400.2
160°	403.5	404.0	404.6	405.1	405.7	405.8	405.6	405.3	405.0	404.7	404.7
162.5°	407.8	408.4	408.9	409.6	410.2	410.4	409.9	409.6	409.1	408.8	408.7
165°	413.6	414.1	414.6	415.3	415.8	415.9	415.4	415.0	414.6	414.2	414.1
167.5°	417.6	418.2	418.8	419.5	420.1	420.2	419.6	419.2	418.7	418.1	418.1
170°	419.8	420.4	421.2	421.8	422.4	422.4	421.9	421.2	420.7	420.2	420.1
172.5°	421.3	422.0	422.6	423.3	423.9	423.9	423.5	422.9	422.4	422.0	421.8
175°	423.3	423.9	424.5	425.2	425.9	425.9	425.3	424.7	424.2	423.7	423.6
177.5°	424.5	424.9	425.3	425.8	426.2	426.2	425.9	425.5	425.1	424.7	424.6
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4
2.5°	499.4	498.3	497.0	494.6	491.9	490.4	488.1	486.6	483.7	481.2	478.5
5°	524.8	519.4	514.5	508.1	501.1	496.6	491.2	485.3	479.0	472.7	465.7
7.5°	551.1	541.5	531.3	520.2	509.3	499.4	489.8	480.5	471.8	461.2	452.3
10°	568.6	556.7	543.9	529.0	514.2	501.5	488.6	477.2	465.7	453.3	442.4
12.5°	586.3	570.4	552.3	535.8	518.3	502.8	487.6	473.1	458.6	444.9	432.1
15°	598.8	584.8	568.1	544.6	524.8	503.5	483.4	464.7	447.1	431.9	415.8
17.5°	607.0	588.9	571.0	548.5	522.5	498.8	475.9	454.4	434.7	415.4	399.9
20°	608.4	589.9	571.1	549.1	522.5	495.3	472.4	446.7	425.5	405.5	386.6
22.5°	608.0	586.9	566.5	543.9	517.9	492.8	465.2	439.0	415.9	396.3	376.5
25°	603.3	580.9	555.3	532.4	506.8	480.3	452.3	425.1	401.6	379.2	359.5
27.5°	599.4	570.3	541.4	514.7	490.0	465.7	438.8	411.0	385.0	362.2	343.8
30°	594.7	562.7	530.1	502.3	477.0	453.3	427.9	400.7	373.5	351.3	331.5
32.5°	590.4	553.1	518.8	488.5	461.6	438.6	415.3	389.4	362.7	340.1	320.3
35°	582.1	539.0	499.6	465.5	436.8	413.1	393.5	369.4	344.9	323.1	304.2
37.5°	571.6	520.5	478.2	442.4	411.0	386.0	367.8	349.3	325.7	304.7	287.6
40°	563.3	507.3	462.5	425.9	393.3	367.4	350.4	333.0	313.4	293.8	275.7
42.5°	552.9	495.4	446.7	407.2	375.1	349.7	332.0	317.2	299.9	281.6	264.8
45°	533.9	473.9	421.2	378.7	346.2	321.2	302.9	291.8	278.7	261.4	247.3
47.5°	505.8	448.1	393.5	349.7	316.1	293.0	275.8	265.1	256.0	243.2	230.2
50°	480.9	428.8	373.5	330.1	296.5	273.2	257.3	247.6	239.9	230.0	219.0
52.5°	453.1	404.6	353.9	310.9	277.7	254.8	239.2	230.7	224.2	217.1	206.3
55°	408.8	367.6	320.6	279.8	249.1	226.7	213.0	205.6	200.3	194.9	188.3
57.5°	360.1	327.8	286.2	248.9	220.6	200.2	187.5	180.3	176.1	173.3	169.5
60°	325.7	298.2	262.3	228.3	200.7	182.5	170.2	164.6	161.1	158.9	156.0
62.5°	293.9	271.3	238.1	207.1	182.9	165.8	154.7	149.3	146.0	144.8	142.5
65°	247.1	229.5	202.2	176.4	155.8	141.2	131.9	126.7	124.7	123.4	123.6
67.5°	200.8	190.2	168.2	146.2	129.7	117.5	110.0	106.1	105.0	103.4	103.4
70°	172.6	164.6	146.1	126.9	112.3	102.8	96.2	92.1	91.0	90.2	90.1
72.5°	147.8	140.7	124.7	109.3	96.1	87.8	82.4	79.9	78.2	77.8	77.7
75°	111.0	107.2	94.3	82.2	73.1	67.4	63.7	61.4	60.2	59.9	60.2
77.5°	78.9	75.5	67.4	58.8	53.1	48.7	45.6	44.8	43.4	43.4	43.2
80°	59.3	57.1	51.9	45.1	40.4	36.6	35.0	33.6	33.2	32.5	33.2
82.5°	43.0	40.6	37.1	32.7	28.8	26.7	25.0	24.5	24.3	24.0	24.1
85°	21.2	21.4	19.4	16.1	14.4	13.2	12.1	12.1	11.9	11.8	11.9
87.5°	8.0	7.7	6.9	6.2	5.4	4.7	4.5	4.5	4.1	4.1	4.4
90°	4.1	3.6	3.1	2.6	2.0	1.4	0.9	0.4	0.9	1.4	2.0
92.5°	4.2	3.7	3.3	3.3	3.7	4.1	4.5	4.8	4.5	4.1	3.7
95°	10.3	13.0	15.7	17.1	17.3	17.6	17.7	17.9	17.7	17.6	17.3
97.5°	26.0	31.3	36.6	39.1	38.6	38.3	37.9	37.5	37.9	38.3	38.6
100°	54.3	54.0	53.7	53.5	53.2	53.1	52.9	52.6	52.9	53.1	53.2
102.5°	69.6	69.5	69.3	69.1	68.8	68.6	68.3	68.0	68.3	68.6	68.8
105°	93.9	93.9	93.9	93.8	93.5	93.3	92.9	92.6	92.9	93.3	93.5
107.5°	118.6	118.5	118.3	118.2	118.2	118.2	118.2	118.2	118.2	118.2	118.2
110°	135.3	135.1	135.0	134.9	134.9	134.9	134.9	134.9	134.9	134.9	134.9



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	151.5	151.4	151.3	151.2	151.1	150.9	150.7	150.5	150.7	150.9	151.1
115°	175.8	175.7	175.6	175.4	175.0	174.7	174.3	174.0	174.3	174.7	175.0
117.5°	198.9	198.6	198.3	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2
120°	213.6	213.4	213.2	213.1	213.2	213.3	213.3	213.4	213.3	213.3	213.2
122.5°	228.2	228.1	228.0	227.8	227.6	227.3	227.0	226.8	227.0	227.3	227.6
125°	249.7	249.7	249.7	249.4	248.9	248.4	247.9	247.4	247.9	248.4	248.9
127.5°	268.7	268.7	268.8	268.6	268.2	267.9	267.5	267.2	267.5	267.9	268.2
130°	281.0	281.0	280.9	280.7	280.4	280.0	279.6	279.3	279.6	280.0	280.4
132.5°	292.8	293.0	293.1	293.0	292.6	292.2	291.8	291.4	291.8	292.2	292.6
135°	310.1	310.2	310.4	310.2	309.9	309.4	309.0	308.6	309.0	309.4	309.9
137.5°	325.7	325.8	326.0	325.8	325.5	325.1	324.8	324.4	324.8	325.1	325.5
140°	335.2	335.3	335.4	335.3	335.2	335.0	334.9	334.7	334.9	335.0	335.2
142.5°	344.7	344.6	344.5	344.4	344.3	344.3	344.2	344.1	344.2	344.3	344.3
145°	358.4	358.4	358.4	358.3	358.2	358.0	357.9	357.8	357.9	358.0	358.2
147.5°	369.8	369.7	369.6	369.6	369.6	369.7	369.7	369.7	369.7	369.7	369.6
150°	377.0	376.8	376.7	376.7	376.8	377.0	377.2	377.3	377.2	377.0	376.8
152.5°	383.6	383.4	383.3	383.3	383.7	384.0	384.3	384.6	384.3	384.0	383.7
155°	392.4	392.4	392.2	392.4	392.7	393.2	393.6	394.0	393.6	393.2	392.7
157.5°	400.2	400.1	400.1	400.3	400.5	400.7	401.0	401.3	401.0	400.7	400.5
160°	404.6	404.5	404.5	404.7	405.0	405.5	405.9	406.3	405.9	405.5	405.0
162.5°	408.6	408.6	408.5	408.7	409.0	409.5	409.9	410.4	409.9	409.5	409.0
165°	414.0	413.9	413.9	414.1	414.5	414.9	415.4	415.7	415.4	414.9	414.5
167.5°	418.0	417.9	417.9	418.0	418.5	418.9	419.4	419.8	419.4	418.9	418.5
170°	420.0	420.0	419.9	420.1	420.6	421.1	421.6	422.0	421.6	421.1	420.6
172.5°	421.7	421.5	421.4	421.6	422.1	422.6	423.1	423.6	423.1	422.6	422.1
175°	423.5	423.4	423.4	423.6	423.9	424.4	424.8	425.2	424.8	424.4	423.9
177.5°	424.6	424.5	424.5	424.6	425.0	425.3	425.6	426.0	425.6	425.3	425.0
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4
2.5°	477.1	475.2	473.8	470.5	468.6	466.2	464.2	466.4	464.0	465.0	463.5
5°	462.2	456.4	452.3	446.3	441.1	436.4	432.9	432.3	430.6	429.8	427.3
7.5°	444.3	437.0	430.0	422.1	415.5	408.8	404.6	401.0	398.7	395.6	393.4
10°	433.7	424.0	415.8	406.4	398.1	390.8	385.1	382.2	379.5	375.6	374.2
12.5°	420.7	410.7	400.6	390.5	382.5	374.5	369.6	365.2	363.4	359.0	358.6
15°	405.1	390.0	380.1	369.9	358.9	352.3	348.2	343.5	341.4	338.3	336.1
17.5°	386.5	373.0	360.7	350.0	340.6	335.1	329.9	326.7	323.2	321.1	317.4
20°	372.9	360.2	347.8	336.4	329.2	322.9	318.8	315.7	311.9	310.9	307.2
22.5°	361.6	347.5	335.6	326.1	318.3	311.0	306.6	304.4	301.9	298.7	298.0
25°	343.0	328.4	318.3	308.9	301.8	295.2	292.2	289.5	287.0	284.7	283.9
27.5°	327.1	314.0	302.0	293.5	287.3	281.3	278.7	275.4	273.6	271.7	269.5
30°	315.8	302.5	291.9	283.7	277.1	271.8	268.9	266.6	265.0	263.3	262.1
32.5°	304.3	291.9	281.8	273.7	267.1	263.1	260.5	258.9	257.1	255.1	253.5
35°	289.1	275.4	265.6	258.6	253.4	250.3	247.4	246.0	244.0	244.0	242.3
37.5°	271.9	260.1	251.4	245.0	240.4	237.6	234.5	233.5	232.2	231.3	230.8
40°	261.7	250.7	242.5	236.1	231.2	228.9	226.4	224.8	224.0	222.9	222.6
42.5°	251.1	240.7	232.8	226.9	222.6	220.7	218.4	217.2	215.5	214.2	213.9
45°	235.1	225.0	217.8	213.0	209.4	207.1	205.6	203.1	202.3	200.7	200.5
47.5°	219.9	210.2	203.1	199.2	196.0	194.1	191.9	189.4	188.4	187.6	187.5
50°	208.5	199.7	193.1	189.4	186.3	183.6	181.3	179.7	179.1	179.1	179.5
52.5°	197.0	189.4	183.9	179.3	176.4	173.5	171.4	170.4	169.5	170.5	171.2
55°	180.1	172.5	168.4	164.0	161.1	157.8	156.8	156.4	155.8	157.4	158.3
57.5°	162.2	156.9	152.0	147.8	145.2	143.2	141.9	141.6	142.8	143.6	146.2
60°	150.8	144.6	140.4	137.1	133.9	132.7	132.2	131.9	132.7	134.9	138.5
62.5°	138.3	133.3	128.6	126.2	123.9	121.8	121.7	122.0	123.6	126.3	129.7
65°	119.9	115.6	112.5	109.6	107.7	106.6	106.9	107.7	109.6	113.2	117.0
67.5°	101.2	98.3	95.5	93.2	91.4	91.4	91.8	93.1	95.2	99.2	102.8
70°	89.3	86.0	83.6	82.7	81.1	80.3	81.6	83.6	85.5	89.3	92.3
72.5°	77.2	74.4	72.6	71.9	71.2	70.6	71.1	73.3	75.8	79.5	83.1
75°	59.3	58.3	57.1	56.3	55.6	56.1	56.4	58.5	60.5	64.5	68.6
77.5°	43.3	42.3	41.5	41.3	40.9	41.2	42.4	43.9	45.8	48.7	51.8
80°	32.7	32.4	31.9	31.7	31.7	31.9	33.6	34.6	36.5	39.1	41.6
82.5°	23.9	23.6	23.5	23.5	23.6	23.7	24.7	26.0	27.6	29.6	31.7
85°	12.6	12.1	12.8	13.0	12.6	13.2	13.6	14.4	15.1	16.1	17.1
87.5°	4.6	5.1	5.0	5.3	5.4	5.8	5.7	6.4	6.9	7.2	7.1
90°	2.6	3.1	3.6	4.1	4.5	5.1	5.4	5.7	6.1	6.4	6.7
92.5°	3.3	3.3	3.7	4.2	4.6	5.1	5.4	5.7	6.1	6.4	6.7
95°	17.1	15.7	13.0	10.3	7.7	5.1	5.4	5.7	6.1	6.4	6.6
97.5°	39.1	36.6	31.3	26.0	20.8	15.5	13.6	11.6	9.5	7.6	6.6
100°	53.5	53.7	54.0	54.3	54.6	54.8	44.4	34.0	23.5	13.1	7.8
102.5°	69.1	69.3	69.5	69.6	69.8	70.0	68.0	66.0	64.0	62.1	58.7
105°	93.8	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9	93.9
107.5°	118.2	118.3	118.5	118.6	118.8	118.9	118.9	119.0	119.0	119.0	118.9
110°	134.9	135.0	135.1	135.3	135.4	135.5	135.4	135.1	134.9	134.7	134.6



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	151.2	151.3	151.4	151.5	151.6	151.7	151.4	151.1	150.9	150.6	150.4
115°	175.4	175.6	175.7	175.8	175.8	175.8	175.6	175.3	175.0	174.8	174.4
117.5°	198.2	198.3	198.6	198.9	199.1	199.4	199.0	198.7	198.3	198.0	197.7
120°	213.1	213.2	213.4	213.6	213.8	214.0	213.9	213.7	213.6	213.5	213.2
122.5°	227.8	228.0	228.1	228.2	228.3	228.4	228.3	228.1	228.0	227.8	227.6
125°	249.4	249.7	249.7	249.7	249.7	249.7	249.3	249.1	248.8	248.5	248.3
127.5°	268.6	268.8	268.7	268.7	268.6	268.6	268.4	268.2	268.0	268.0	267.6
130°	280.7	280.9	281.0	281.0	281.1	281.2	281.0	280.7	280.5	280.4	280.0
132.5°	293.0	293.1	293.0	292.8	292.7	292.5	292.5	292.4	292.4	292.3	292.1
135°	310.2	310.4	310.2	310.1	310.0	309.9	309.7	309.6	309.4	309.2	309.0
137.5°	325.8	326.0	325.8	325.7	325.6	325.5	325.5	325.6	325.6	325.6	325.4
140°	335.3	335.4	335.3	335.2	335.1	335.1	335.2	335.4	335.5	335.6	335.5
142.5°	344.4	344.5	344.6	344.7	344.8	344.9	344.9	344.9	345.0	345.0	344.8
145°	358.3	358.4	358.4	358.4	358.4	358.4	358.5	358.6	358.6	358.6	358.5
147.5°	369.6	369.6	369.7	369.8	369.9	370.0	370.1	370.1	370.2	370.3	370.1
150°	376.7	376.7	376.8	377.0	377.2	377.3	377.5	377.6	377.7	377.8	377.6
152.5°	383.3	383.3	383.4	383.6	383.7	383.9	384.0	384.1	384.2	384.4	384.2
155°	392.4	392.2	392.4	392.4	392.6	392.7	393.0	393.2	393.3	393.6	393.4
157.5°	400.3	400.1	400.1	400.2	400.2	400.2	400.4	400.6	400.8	401.1	400.9
160°	404.7	404.5	404.5	404.6	404.7	404.7	405.0	405.3	405.6	405.8	405.7
162.5°	408.7	408.5	408.6	408.6	408.7	408.8	409.1	409.6	409.9	410.4	410.2
165°	414.1	413.9	413.9	414.0	414.1	414.2	414.6	415.0	415.4	415.9	415.8
167.5°	418.0	417.9	417.9	418.0	418.1	418.1	418.7	419.2	419.6	420.2	420.1
170°	420.1	419.9	420.0	420.0	420.1	420.2	420.7	421.2	421.9	422.4	422.4
172.5°	421.6	421.4	421.5	421.7	421.8	422.0	422.4	422.9	423.5	423.9	423.9
175°	423.6	423.4	423.4	423.5	423.6	423.7	424.2	424.7	425.3	425.9	425.9
177.5°	424.6	424.5	424.5	424.6	424.6	424.7	425.1	425.5	425.9	426.2	426.2
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4
2.5°	462.5	463.7	462.7	464.0	462.7	463.7	462.5	463.5	465.0	464.0	466.4
5°	426.3	424.5	425.7	424.9	425.7	424.5	426.3	427.3	429.8	430.6	432.3
7.5°	392.9	391.1	389.1	388.1	389.1	391.1	392.9	393.4	395.6	398.7	401.0
10°	371.9	369.6	369.4	368.0	369.4	369.6	371.9	374.2	375.6	379.5	382.2
12.5°	356.6	354.5	352.1	351.5	352.1	354.5	356.6	358.6	359.0	363.4	365.2
15°	334.8	333.1	331.7	333.0	331.7	333.1	334.8	336.1	338.3	341.4	343.5
17.5°	316.7	315.4	315.1	313.6	315.1	315.4	316.7	317.4	321.1	323.2	326.7
20°	305.3	304.3	304.8	302.0	304.8	304.3	305.3	307.2	310.9	311.9	315.7
22.5°	296.3	294.3	294.0	293.5	294.0	294.3	296.3	298.0	298.7	301.9	304.4
25°	282.0	281.1	280.0	281.1	280.0	281.1	282.0	283.9	284.7	287.0	289.5
27.5°	269.7	268.4	268.1	268.3	268.1	268.4	269.7	269.5	271.7	273.6	275.4
30°	262.1	260.0	260.2	260.0	260.2	260.0	262.1	262.1	263.3	265.0	266.6
32.5°	253.9	252.4	252.2	251.8	252.2	252.4	253.9	253.5	255.1	257.1	258.9
35°	241.7	241.7	240.7	240.7	240.7	241.7	241.7	242.3	244.0	244.0	246.0
37.5°	230.2	230.1	229.4	229.5	229.4	230.1	230.2	230.8	231.3	232.2	233.5
40°	221.7	221.5	220.9	219.6	220.9	221.5	221.7	222.6	222.9	224.0	224.8
42.5°	213.5	212.8	212.5	212.0	212.5	212.8	213.5	213.9	214.2	215.5	217.2
45°	200.5	200.5	200.1	199.8	200.1	200.5	200.5	200.5	200.7	202.3	203.1
47.5°	187.9	188.2	189.0	188.9	189.0	188.2	187.9	187.5	187.6	188.4	189.4
50°	180.3	180.5	181.1	181.3	181.1	180.5	180.3	179.5	179.1	179.1	179.7
52.5°	171.9	173.1	173.9	173.7	173.9	173.1	171.9	171.2	170.5	169.5	170.4
55°	160.1	161.6	163.0	163.2	163.0	161.6	160.1	158.3	157.4	155.8	156.4
57.5°	148.5	150.4	151.9	152.5	151.9	150.4	148.5	146.2	143.6	142.8	141.6
60°	140.5	143.2	145.1	145.9	145.1	143.2	140.5	138.5	134.9	132.7	131.9
62.5°	133.0	136.0	137.8	137.9	137.8	136.0	133.0	129.7	126.3	123.6	122.0
65°	120.6	123.6	125.3	126.5	125.3	123.6	120.6	117.0	113.2	109.6	107.7
67.5°	107.2	110.3	112.1	113.1	112.1	110.3	107.2	102.8	99.2	95.2	93.1
70°	97.5	100.6	103.0	103.9	103.0	100.6	97.5	92.3	89.3	85.5	83.6
72.5°	87.9	90.7	92.6	93.6	92.6	90.7	87.9	83.1	79.5	75.8	73.3
75°	71.2	75.0	76.9	77.8	76.9	75.0	71.2	68.6	64.5	60.5	58.5
77.5°	54.9	58.3	59.5	60.0	59.5	58.3	54.9	51.8	48.7	45.8	43.9
80°	44.1	46.2	47.6	47.8	47.6	46.2	44.1	41.6	39.1	36.5	34.6
82.5°	33.9	35.6	36.0	36.6	36.0	35.6	33.9	31.7	29.6	27.6	26.0
85°	18.5	19.4	19.6	19.4	19.6	19.4	18.5	17.1	16.1	15.1	14.4
87.5°	7.5	7.4	7.4	7.8	7.4	7.4	7.5	7.1	7.2	6.9	6.4
90°	7.0	7.1	7.3	7.6	7.3	7.1	7.0	6.7	6.4	6.1	5.7
92.5°	6.8	6.9	7.0	7.0	7.0	6.9	6.8	6.7	6.4	6.1	5.7
95°	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.4	6.1	5.7
97.5°	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	7.6	9.5	11.6
100°	7.5	7.2	6.9	6.6	6.9	7.2	7.5	7.8	13.1	23.5	34.0
102.5°	53.9	49.2	44.4	39.7	44.4	49.2	53.9	58.7	62.1	64.0	66.0
105°	93.8	93.7	93.7	93.6	93.7	93.7	93.8	93.9	93.9	93.9	93.9
107.5°	118.7	118.4	118.2	118.0	118.2	118.4	118.7	118.9	119.0	119.0	119.0
110°	134.7	134.7	134.8	134.9	134.8	134.7	134.7	134.6	134.7	134.9	135.1



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	150.3	150.3	150.2	150.1	150.2	150.3	150.3	150.4	150.6	150.9	151.1
115°	174.0	173.6	173.2	172.7	173.2	173.6	174.0	174.4	174.8	175.0	175.3
117.5°	197.5	197.3	197.2	197.0	197.2	197.3	197.5	197.7	198.0	198.3	198.7
120°	212.9	212.5	212.1	211.8	212.1	212.5	212.9	213.2	213.5	213.6	213.7
122.5°	227.1	226.8	226.3	226.0	226.3	226.8	227.1	227.6	227.8	228.0	228.1
125°	248.1	247.9	247.6	247.4	247.6	247.9	248.1	248.3	248.5	248.8	249.1
127.5°	267.1	266.5	266.1	265.6	266.1	266.5	267.1	267.6	268.0	268.0	268.2
130°	279.7	279.4	279.0	278.7	279.0	279.4	279.7	280.0	280.4	280.5	280.7
132.5°	291.8	291.4	291.1	290.8	291.1	291.4	291.8	292.1	292.3	292.4	292.4
135°	308.6	308.2	307.7	307.3	307.7	308.2	308.6	309.0	309.2	309.4	309.6
137.5°	325.0	324.7	324.3	324.0	324.3	324.7	325.0	325.4	325.6	325.6	325.6
140°	335.1	334.7	334.2	333.8	334.2	334.7	335.1	335.5	335.6	335.5	335.4
142.5°	344.4	343.9	343.6	343.1	343.6	343.9	344.4	344.8	345.0	345.0	344.9
145°	358.1	357.7	357.2	356.8	357.2	357.7	358.1	358.5	358.6	358.6	358.6
147.5°	369.6	369.1	368.6	368.1	368.6	369.1	369.6	370.1	370.3	370.2	370.1
150°	377.1	376.6	375.9	375.4	375.9	376.6	377.1	377.6	377.8	377.7	377.6
152.5°	383.7	383.3	382.7	382.2	382.7	383.3	383.7	384.2	384.4	384.2	384.1
155°	392.9	392.3	391.7	391.2	391.7	392.3	392.9	393.4	393.6	393.3	393.2
157.5°	400.4	399.8	399.2	398.7	399.2	399.8	400.4	400.9	401.1	400.8	400.6
160°	405.1	404.6	404.0	403.5	404.0	404.6	405.1	405.7	405.8	405.6	405.3
162.5°	409.6	408.9	408.4	407.8	408.4	408.9	409.6	410.2	410.4	409.9	409.6
165°	415.3	414.6	414.1	413.6	414.1	414.6	415.3	415.8	415.9	415.4	415.0
167.5°	419.5	418.8	418.2	417.6	418.2	418.8	419.5	420.1	420.2	419.6	419.2
170°	421.8	421.2	420.4	419.8	420.4	421.2	421.8	422.4	422.4	421.9	421.2
172.5°	423.3	422.6	422.0	421.3	422.0	422.6	423.3	423.9	423.9	423.5	422.9
175°	425.2	424.5	423.9	423.3	423.9	424.5	425.2	425.9	425.9	425.3	424.7
177.5°	425.8	425.3	424.9	424.5	424.9	425.3	425.8	426.2	426.2	425.9	425.5
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4
2.5°	464.2	466.2	468.6	470.5	473.8	475.2	477.1	478.5	481.2	483.7	486.6
5°	432.9	436.4	441.1	446.3	452.3	456.4	462.2	465.7	472.7	479.0	485.3
7.5°	404.6	408.8	415.5	422.1	430.0	437.0	444.3	452.3	461.2	471.8	480.5
10°	385.1	390.8	398.1	406.4	415.8	424.0	433.7	442.4	453.3	465.7	477.2
12.5°	369.6	374.5	382.5	390.5	400.6	410.7	420.7	432.1	444.9	458.6	473.1
15°	348.2	352.3	358.9	369.9	380.1	390.0	405.1	415.8	431.9	447.1	464.7
17.5°	329.9	335.1	340.6	350.0	360.7	373.0	386.5	399.9	415.4	434.7	454.4
20°	318.8	322.9	329.2	336.4	347.8	360.2	372.9	386.6	405.5	425.5	446.7
22.5°	306.6	311.0	318.3	326.1	335.6	347.5	361.6	376.5	396.3	415.9	439.0
25°	292.2	295.2	301.8	308.9	318.3	328.4	343.0	359.5	379.2	401.6	425.1
27.5°	278.7	281.3	287.3	293.5	302.0	314.0	327.1	343.8	362.2	385.0	411.0
30°	268.9	271.8	277.1	283.7	291.9	302.5	315.8	331.5	351.3	373.5	400.7
32.5°	260.5	263.1	267.1	273.7	281.8	291.9	304.3	320.3	340.1	362.7	389.4
35°	247.4	250.3	253.4	258.6	265.6	275.4	289.1	304.2	323.1	344.9	369.4
37.5°	234.5	237.6	240.4	245.0	251.4	260.1	271.9	287.6	304.7	325.7	349.3
40°	226.4	228.9	231.2	236.1	242.5	250.7	261.7	275.7	293.8	313.4	333.0
42.5°	218.4	220.7	222.6	226.9	232.8	240.7	251.1	264.8	281.6	299.9	317.2
45°	205.6	207.1	209.4	213.0	217.8	225.0	235.1	247.3	261.4	278.7	291.8
47.5°	191.9	194.1	196.0	199.2	203.1	210.2	219.9	230.2	243.2	256.0	265.1
50°	181.3	183.6	186.3	189.4	193.1	199.7	208.5	219.0	230.0	239.9	247.6
52.5°	171.4	173.5	176.4	179.3	183.9	189.4	197.0	206.3	217.1	224.2	230.7
55°	156.8	157.8	161.1	164.0	168.4	172.5	180.1	188.3	194.9	200.3	205.6
57.5°	141.9	143.2	145.2	147.8	152.0	156.9	162.2	169.5	173.3	176.1	180.3
60°	132.2	132.7	133.9	137.1	140.4	144.6	150.8	156.0	158.9	161.1	164.6
62.5°	121.7	121.8	123.9	126.2	128.6	133.3	138.3	142.5	144.8	146.0	149.3
65°	106.9	106.6	107.7	109.6	112.5	115.6	119.9	123.6	123.4	124.7	126.7
67.5°	91.8	91.4	91.4	93.2	95.5	98.3	101.2	103.4	103.4	105.0	106.1
70°	81.6	80.3	81.1	82.7	83.6	86.0	89.3	90.1	90.2	91.0	92.1
72.5°	71.1	70.6	71.2	71.9	72.6	74.4	77.2	77.7	77.8	78.2	79.9
75°	56.4	56.1	55.6	56.3	57.1	58.3	59.3	60.2	59.9	60.2	61.4
77.5°	42.4	41.2	40.9	41.3	41.5	42.3	43.3	43.2	43.4	43.4	44.8
80°	33.6	31.9	31.7	31.7	31.9	32.4	32.7	33.2	32.5	33.2	33.6
82.5°	24.7	23.7	23.6	23.5	23.5	23.6	23.9	24.1	24.0	24.3	24.5
85°	13.6	13.2	12.6	13.0	12.8	12.1	12.6	11.9	11.8	11.9	12.1
87.5°	5.7	5.8	5.4	5.3	5.0	5.1	4.6	4.4	4.1	4.1	4.5
90°	5.4	5.1	4.5	4.1	3.6	3.1	2.6	2.0	1.4	0.9	0.4
92.5°	5.4	5.1	4.6	4.2	3.7	3.3	3.3	3.7	4.1	4.5	4.8
95°	5.4	5.1	7.7	10.3	13.0	15.7	17.1	17.3	17.6	17.7	17.9
97.5°	13.6	15.5	20.8	26.0	31.3	36.6	39.1	38.6	38.3	37.9	37.5
100°	44.4	54.8	54.6	54.3	54.0	53.7	53.5	53.2	53.1	52.9	52.6
102.5°	68.0	70.0	69.8	69.6	69.5	69.3	69.1	68.8	68.6	68.3	68.0
105°	93.9	93.9	93.9	93.9	93.9	93.9	93.8	93.5	93.3	92.9	92.6
107.5°	118.9	118.9	118.8	118.6	118.5	118.3	118.2	118.2	118.2	118.2	118.2
110°	135.4	135.5	135.4	135.3	135.1	135.0	134.9	134.9	134.9	134.9	134.9



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	151.4	151.7	151.6	151.5	151.4	151.3	151.2	151.1	150.9	150.7	150.5
115°	175.6	175.8	175.8	175.8	175.7	175.6	175.4	175.0	174.7	174.3	174.0
117.5°	199.0	199.4	199.1	198.9	198.6	198.3	198.2	198.2	198.2	198.2	198.2
120°	213.9	214.0	213.8	213.6	213.4	213.2	213.1	213.2	213.3	213.3	213.4
122.5°	228.3	228.4	228.3	228.2	228.1	228.0	227.8	227.6	227.3	227.0	226.8
125°	249.3	249.7	249.7	249.7	249.7	249.7	249.4	248.9	248.4	247.9	247.4
127.5°	268.4	268.6	268.6	268.7	268.7	268.8	268.6	268.2	267.9	267.5	267.2
130°	281.0	281.2	281.1	281.0	281.0	280.9	280.7	280.4	280.0	279.6	279.3
132.5°	292.5	292.5	292.7	292.8	293.0	293.1	293.0	292.6	292.2	291.8	291.4
135°	309.7	309.9	310.0	310.1	310.2	310.4	310.2	309.9	309.4	309.0	308.6
137.5°	325.5	325.5	325.6	325.7	325.8	326.0	325.8	325.5	325.1	324.8	324.4
140°	335.2	335.1	335.1	335.2	335.3	335.4	335.3	335.2	335.0	334.9	334.7
142.5°	344.9	344.9	344.8	344.7	344.6	344.5	344.4	344.3	344.3	344.2	344.1
145°	358.5	358.4	358.4	358.4	358.4	358.4	358.3	358.2	358.0	357.9	357.8
147.5°	370.1	370.0	369.9	369.8	369.7	369.6	369.6	369.6	369.7	369.7	369.7
150°	377.5	377.3	377.2	377.0	376.8	376.7	376.7	376.8	377.0	377.2	377.3
152.5°	384.0	383.9	383.7	383.6	383.4	383.3	383.3	383.7	384.0	384.3	384.6
155°	393.0	392.7	392.6	392.4	392.4	392.2	392.4	392.7	393.2	393.6	394.0
157.5°	400.4	400.2	400.2	400.2	400.1	400.1	400.3	400.5	400.7	401.0	401.3
160°	405.0	404.7	404.7	404.6	404.5	404.5	404.7	405.0	405.5	405.9	406.3
162.5°	409.1	408.8	408.7	408.6	408.6	408.5	408.7	409.0	409.5	409.9	410.4
165°	414.6	414.2	414.1	414.0	413.9	413.9	414.1	414.5	414.9	415.4	415.7
167.5°	418.7	418.1	418.1	418.0	417.9	417.9	418.0	418.5	418.9	419.4	419.8
170°	420.7	420.2	420.1	420.0	420.0	419.9	420.1	420.6	421.1	421.6	422.0
172.5°	422.4	422.0	421.8	421.7	421.5	421.4	421.6	422.1	422.6	423.1	423.6
175°	424.2	423.7	423.6	423.5	423.4	423.4	423.6	423.9	424.4	424.8	425.2
177.5°	425.1	424.7	424.6	424.6	424.5	424.5	424.6	425.0	425.3	425.6	426.0
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4	485.4
2.5°	488.1	490.4	491.9	494.6	497.0	498.3	499.4	500.4	501.6	502.6	505.4
5°	491.2	496.6	501.1	508.1	514.5	519.4	524.8	529.5	533.4	539.0	543.3
7.5°	489.8	499.4	509.3	520.2	531.3	541.5	551.1	559.9	567.9	577.7	586.2
10°	488.6	501.5	514.2	529.0	543.9	556.7	568.6	580.9	589.7	602.1	612.6
12.5°	487.6	502.8	518.3	535.8	552.3	570.4	586.3	595.2	608.7	618.6	631.1
15°	483.4	503.5	524.8	544.6	568.1	584.8	598.8	616.1	628.7	641.2	654.8
17.5°	475.9	498.8	522.5	548.5	571.0	588.9	607.0	623.7	638.6	655.5	672.4
20°	472.4	495.3	522.5	549.1	571.1	589.9	608.4	626.8	643.3	664.9	684.5
22.5°	465.2	492.8	517.9	543.9	566.5	586.9	608.0	628.7	650.7	675.1	699.6
25°	452.3	480.3	506.8	532.4	555.3	580.9	603.3	631.2	659.2	691.5	722.0
27.5°	438.8	465.7	490.0	514.7	541.4	570.3	599.4	631.0	667.7	708.6	751.5
30°	427.9	453.3	477.0	502.3	530.1	562.7	594.7	632.1	674.6	720.5	771.7
32.5°	415.3	438.6	461.6	488.5	518.8	553.1	590.4	631.5	682.5	734.7	787.3
35°	393.5	413.1	436.8	465.5	499.6	539.0	582.1	630.7	689.2	749.2	793.4
37.5°	367.8	386.0	411.0	442.4	478.2	520.5	571.6	629.3	691.4	739.2	753.5
40°	350.4	367.4	393.3	425.9	462.5	507.3	563.3	624.3	684.5	715.0	703.2
42.5°	332.0	349.7	375.1	407.2	446.7	495.4	552.9	613.9	664.4	675.9	635.3
45°	302.9	321.2	346.2	378.7	421.2	473.9	533.9	589.3	618.3	597.5	534.7
47.5°	275.8	293.0	316.1	349.7	393.5	448.1	505.8	550.0	552.3	502.7	435.5
50°	257.3	273.2	296.5	330.1	373.5	428.8	480.9	515.8	500.1	443.8	379.3
52.5°	239.2	254.8	277.7	310.9	353.9	404.6	453.1	477.5	448.0	390.2	335.2
55°	213.0	226.7	249.1	279.8	320.6	367.6	408.8	417.2	378.9	322.1	277.3
57.5°	187.5	200.2	220.6	248.9	286.2	327.8	360.1	358.2	317.7	268.9	233.4
60°	170.2	182.5	200.7	228.3	262.3	298.2	325.7	319.1	279.0	236.9	207.1
62.5°	154.7	165.8	182.9	207.1	238.1	271.3	293.9	284.2	244.9	208.1	184.5
65°	131.9	141.2	155.8	176.4	202.2	229.5	247.1	234.5	200.9	172.3	153.3
67.5°	110.0	117.5	129.7	146.2	168.2	190.2	200.8	188.2	161.3	140.4	126.4
70°	96.2	102.8	112.3	126.9	146.1	164.6	172.6	161.3	138.2	120.3	110.2
72.5°	82.4	87.8	96.1	109.3	124.7	140.7	147.8	137.0	118.0	102.8	93.5
75°	63.7	67.4	73.1	82.2	94.3	107.2	111.0	101.6	89.4	78.1	71.9
77.5°	45.6	48.7	53.1	58.8	67.4	75.5	78.9	73.5	64.1	56.9	51.8
80°	35.0	36.6	40.4	45.1	51.9	57.1	59.3	55.8	49.2	43.9	39.9
82.5°	25.0	26.7	28.8	32.7	37.1	40.6	43.0	40.7	35.9	31.7	29.4
85°	12.1	13.2	14.4	16.1	19.4	21.4	21.2	19.8	17.9	16.3	15.1
87.5°	4.5	4.7	5.4	6.2	6.9	7.7	8.0	7.8	7.3	6.9	6.4
90°	0.9	1.4	2.0	2.6	3.1	3.6	4.1	4.5	5.1	5.4	5.7
92.5°	4.5	4.1	3.7	3.3	3.3	3.7	4.2	4.6	5.1	5.4	5.7
95°	17.7	17.6	17.3	17.1	15.7	13.0	10.3	7.7	5.1	5.4	5.7
97.5°	37.9	38.3	38.6	39.1	36.6	31.3	26.0	20.8	15.5	13.6	11.6
100°	52.9	53.1	53.2	53.5	53.7	54.0	54.3	54.6	54.8	44.4	34.0
102.5°	68.3	68.6	68.8	69.1	69.3	69.5	69.6	69.8	70.0	68.0	66.0
105°	92.9	93.3	93.5	93.8	93.9	93.9	93.9	93.9	93.9	93.9	93.9
107.5°	118.2	118.2	118.2	118.2	118.3	118.5	118.6	118.8	118.9	118.9	119.0
110°	134.9	134.9	134.9	134.9	135.0	135.1	135.3	135.4	135.5	135.4	135.1



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	150.7	150.9	151.1	151.2	151.3	151.4	151.5	151.6	151.7	151.4	151.1
115°	174.3	174.7	175.0	175.4	175.6	175.7	175.8	175.8	175.8	175.6	175.3
117.5°	198.2	198.2	198.2	198.2	198.3	198.6	198.9	199.1	199.4	199.0	198.7
120°	213.3	213.3	213.2	213.1	213.2	213.4	213.6	213.8	214.0	213.9	213.7
122.5°	227.0	227.3	227.6	227.8	228.0	228.1	228.2	228.3	228.4	228.3	228.1
125°	247.9	248.4	248.9	249.4	249.7	249.7	249.7	249.7	249.7	249.3	249.1
127.5°	267.5	267.9	268.2	268.6	268.8	268.7	268.7	268.6	268.6	268.4	268.2
130°	279.6	280.0	280.4	280.7	280.9	281.0	281.0	281.1	281.2	281.0	280.7
132.5°	291.8	292.2	292.6	293.0	293.1	293.0	292.8	292.7	292.5	292.5	292.4
135°	309.0	309.4	309.9	310.2	310.4	310.2	310.1	310.0	309.9	309.7	309.6
137.5°	324.8	325.1	325.5	325.8	326.0	325.8	325.7	325.6	325.5	325.5	325.6
140°	334.9	335.0	335.2	335.3	335.4	335.3	335.2	335.1	335.1	335.2	335.4
142.5°	344.2	344.3	344.3	344.4	344.5	344.6	344.7	344.8	344.9	344.9	344.9
145°	357.9	358.0	358.2	358.3	358.4	358.4	358.4	358.4	358.4	358.5	358.6
147.5°	369.7	369.7	369.6	369.6	369.6	369.7	369.8	369.9	370.0	370.1	370.1
150°	377.2	377.0	376.8	376.7	376.7	376.8	377.0	377.2	377.3	377.5	377.6
152.5°	384.3	384.0	383.7	383.3	383.3	383.4	383.6	383.7	383.9	384.0	384.1
155°	393.6	393.2	392.7	392.4	392.2	392.4	392.4	392.6	392.7	393.0	393.2
157.5°	401.0	400.7	400.5	400.3	400.1	400.1	400.2	400.2	400.2	400.4	400.6
160°	405.9	405.5	405.0	404.7	404.5	404.5	404.6	404.7	404.7	405.0	405.3
162.5°	409.9	409.5	409.0	408.7	408.5	408.6	408.6	408.7	408.8	409.1	409.6
165°	415.4	414.9	414.5	414.1	413.9	413.9	414.0	414.1	414.2	414.6	415.0
167.5°	419.4	418.9	418.5	418.0	417.9	417.9	418.0	418.1	418.1	418.7	419.2
170°	421.6	421.1	420.6	420.1	419.9	420.0	420.0	420.1	420.2	420.7	421.2
172.5°	423.1	422.6	422.1	421.6	421.4	421.5	421.7	421.8	422.0	422.4	422.9
175°	424.8	424.4	423.9	423.6	423.4	423.4	423.5	423.6	423.7	424.2	424.7
177.5°	425.6	425.3	425.0	424.6	424.5	424.5	424.6	424.6	424.7	425.1	425.5
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	485.4	485.4	485.4	485.4	485.4	485.4	485.4
2.5°	507.7	509.0	511.8	510.9	512.1	512.8	513.4
5°	548.7	555.3	558.2	557.8	562.1	561.1	560.0
7.5°	595.0	601.9	605.8	610.6	613.4	613.7	616.1
10°	621.3	630.3	634.0	639.2	642.5	644.4	644.1
12.5°	641.3	648.5	656.7	659.2	663.7	666.1	665.2
15°	665.6	676.9	685.5	689.8	695.4	697.1	699.3
17.5°	687.2	702.3	712.4	725.9	730.9	734.1	732.2
20°	703.5	723.4	733.5	749.6	758.5	763.2	761.5
22.5°	722.7	744.4	763.0	776.9	790.4	796.8	798.2
25°	755.8	785.4	812.9	831.2	847.8	851.8	860.4
27.5°	792.7	827.7	857.0	876.3	887.9	892.2	895.0
30°	815.9	850.8	872.8	885.2	888.9	888.5	888.1
32.5°	827.3	849.1	853.4	849.9	841.4	834.2	826.7
35°	811.2	795.0	770.6	739.3	716.2	692.9	690.6
37.5°	729.6	677.5	637.0	591.8	565.8	549.7	538.5
40°	652.7	593.6	544.6	506.5	479.9	469.4	459.1
42.5°	569.4	512.8	469.4	437.6	417.6	405.9	397.8
45°	462.5	412.7	378.7	355.6	339.7	330.7	325.6
47.5°	379.1	342.1	313.3	296.6	285.7	278.7	278.7
50°	334.2	299.0	279.8	266.6	257.2	251.6	252.6
52.5°	294.4	268.1	251.8	240.8	233.7	230.3	230.2
55°	246.2	227.3	216.6	208.5	203.8	199.8	200.7
57.5°	210.6	194.7	187.4	180.7	177.5	175.9	173.6
60°	188.5	176.2	170.0	164.6	161.3	160.1	157.8
62.5°	168.9	159.2	153.2	148.8	145.9	145.4	143.7
65°	142.0	134.6	129.2	127.2	124.0	123.2	123.2
67.5°	117.0	111.7	107.5	105.7	104.3	104.5	103.5
70°	101.4	97.0	94.3	92.3	91.3	91.5	90.7
72.5°	88.7	83.8	81.5	80.3	78.9	79.5	79.1
75°	67.1	64.7	63.5	62.2	61.4	61.0	60.5
77.5°	49.3	47.2	46.2	45.5	45.7	44.6	45.4
80°	38.1	36.3	35.7	34.6	34.4	34.4	34.2
82.5°	27.9	26.8	26.4	25.6	25.1	25.5	25.0
85°	14.4	13.6	13.4	13.4	13.0	12.6	13.6
87.5°	6.5	5.9	6.0	5.8	5.9	5.8	5.4
90°	6.1	6.4	6.7	7.0	7.1	7.3	7.6
92.5°	6.1	6.4	6.7	6.8	6.9	7.0	7.0
95°	6.1	6.4	6.6	6.6	6.6	6.6	6.6
97.5°	9.5	7.6	6.6	6.6	6.6	6.6	6.6
100°	23.5	13.1	7.8	7.5	7.2	6.9	6.6
102.5°	64.0	62.1	58.7	53.9	49.2	44.4	39.7
105°	93.9	93.9	93.9	93.8	93.7	93.7	93.6
107.5°	119.0	119.0	118.9	118.7	118.4	118.2	118.0
110°	134.9	134.7	134.6	134.7	134.7	134.8	134.9



TEST NUMBER: P333115-940

CATALOG NUMBER: S125DIP-S375D365U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	150.9	150.6	150.4	150.3	150.3	150.2	150.1
115°	175.0	174.8	174.4	174.0	173.6	173.2	172.7
117.5°	198.3	198.0	197.7	197.5	197.3	197.2	197.0
120°	213.6	213.5	213.2	212.9	212.5	212.1	211.8
122.5°	228.0	227.8	227.6	227.1	226.8	226.3	226.0
125°	248.8	248.5	248.3	248.1	247.9	247.6	247.4
127.5°	268.0	268.0	267.6	267.1	266.5	266.1	265.6
130°	280.5	280.4	280.0	279.7	279.4	279.0	278.7
132.5°	292.4	292.3	292.1	291.8	291.4	291.1	290.8
135°	309.4	309.2	309.0	308.6	308.2	307.7	307.3
137.5°	325.6	325.6	325.4	325.0	324.7	324.3	324.0
140°	335.5	335.6	335.5	335.1	334.7	334.2	333.8
142.5°	345.0	345.0	344.8	344.4	343.9	343.6	343.1
145°	358.6	358.6	358.5	358.1	357.7	357.2	356.8
147.5°	370.2	370.3	370.1	369.6	369.1	368.6	368.1
150°	377.7	377.8	377.6	377.1	376.6	375.9	375.4
152.5°	384.2	384.4	384.2	383.7	383.3	382.7	382.2
155°	393.3	393.6	393.4	392.9	392.3	391.7	391.2
157.5°	400.8	401.1	400.9	400.4	399.8	399.2	398.7
160°	405.6	405.8	405.7	405.1	404.6	404.0	403.5
162.5°	409.9	410.4	410.2	409.6	408.9	408.4	407.8
165°	415.4	415.9	415.8	415.3	414.6	414.1	413.6
167.5°	419.6	420.2	420.1	419.5	418.8	418.2	417.6
170°	421.9	422.4	422.4	421.8	421.2	420.4	419.8
172.5°	423.5	423.9	423.9	423.3	422.6	422.0	421.3
175°	425.3	425.9	425.9	425.2	424.5	423.9	423.3
177.5°	425.9	426.2	426.2	425.8	425.3	424.9	424.5
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2

(END OF REPORT)