

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333195-940

Luminaire Tested: **S125DIP-S610D1035U940-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333195-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S610D1035U940-4F0-1E-UDD-F4  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5541.9 lumens  
Efficiency: N/A  
Efficacy: 124.5 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333195-940

CATALOG NUMBER: S125DIP-S610D1035U940-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

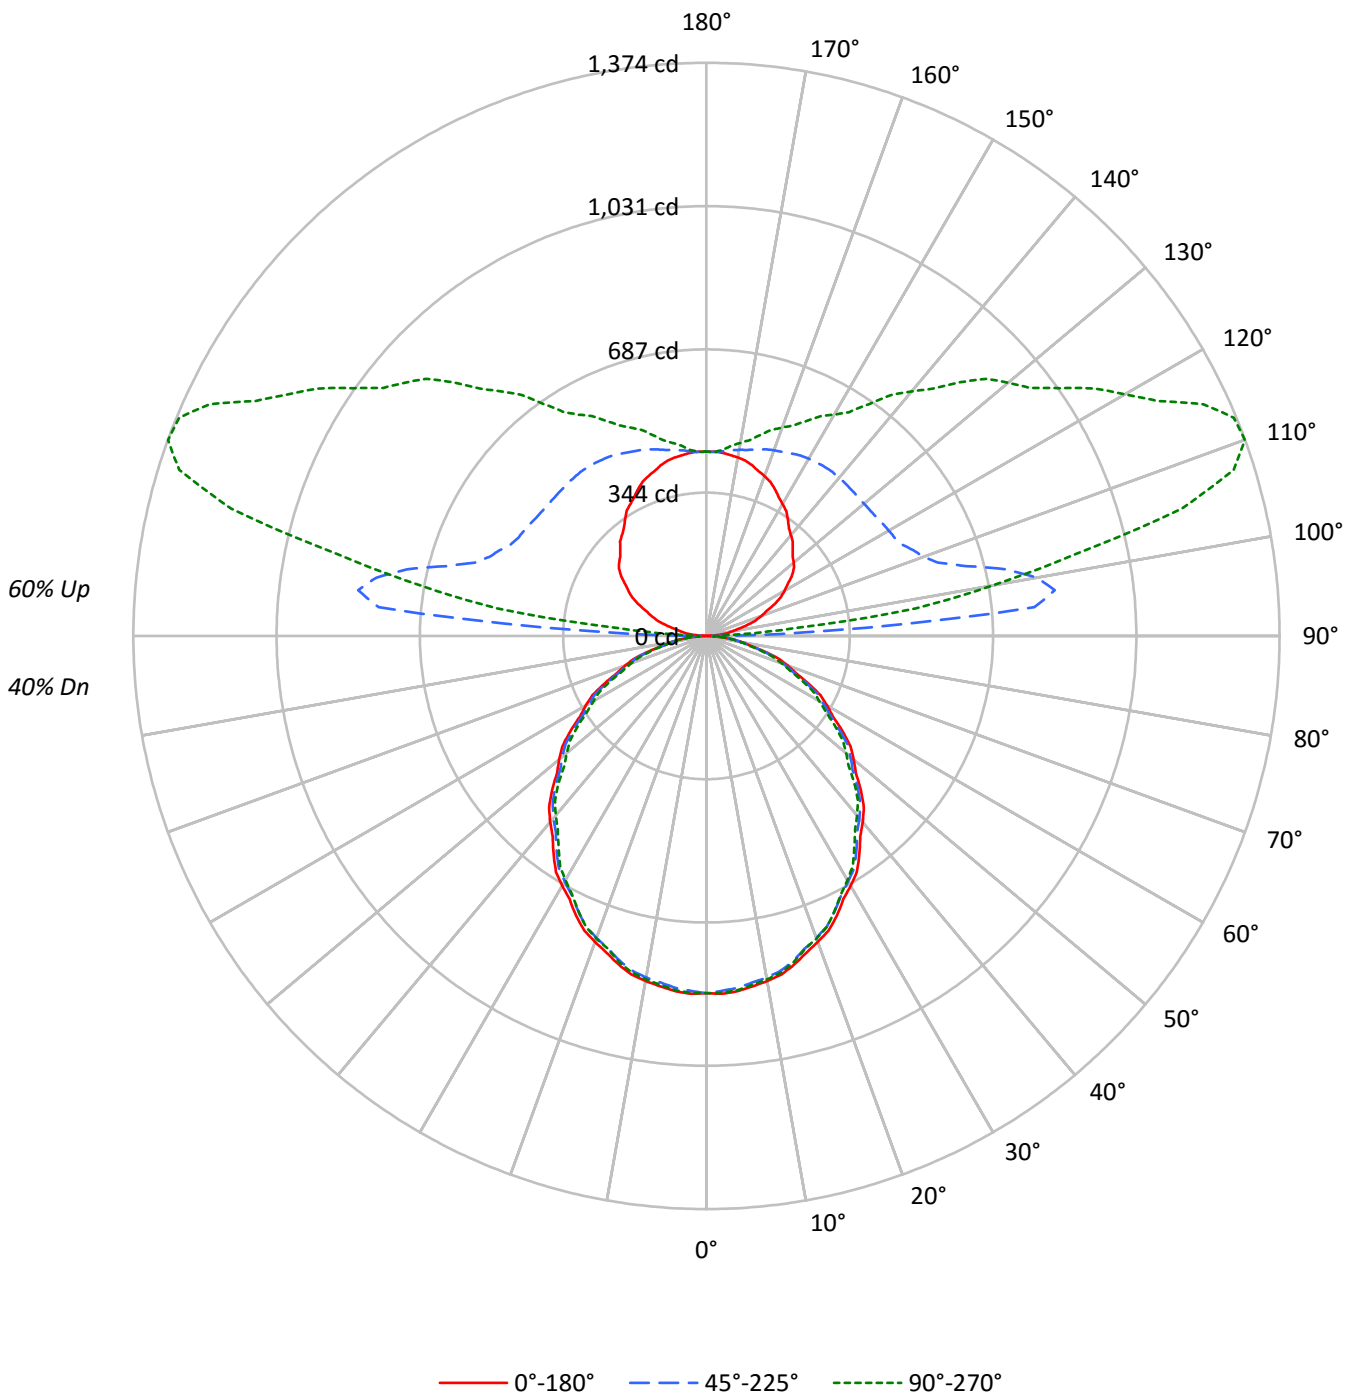



TEST NUMBER: P333195-940

CATALOG NUMBER: S125DIP-S610D1035U940-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	40
1	96	91	87	84	87	83	80	77	68	66	64	54	53	51	42	41	40	34
2	87	80	74	68	79	73	68	63	60	56	53	48	45	43	37	35	33	28
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	32	30	28	24
4	72	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24	20
5	66	55	47	41	60	50	43	38	42	36	32	34	30	27	26	23	21	18
6	61	49	41	36	55	45	38	33	38	32	28	30	26	23	24	21	19	16
7	57	44	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17	14
8	52	40	33	27	48	37	30	26	31	26	22	25	21	18	20	17	15	12
9	49	37	29	24	44	34	27	23	28	23	20	23	19	16	18	15	13	11
10	45	34	26	22	41	31	25	20	26	21	18	21	18	15	17	14	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5531	5531	5531
5°	5544	5490	5525
10°	5509	5452	5483
15°	5449	5386	5409
20°	5364	5294	5304
25°	5273	5185	5181
30°	5158	5068	5043
35°	5037	4941	4872
40°	4912	4804	4736
45°	4778	4678	4585
50°	4629	4527	4391
55°	4486	4355	4234
60°	4314	4184	4035
65°	4109	3976	3842
70°	3914	3737	3609
75°	3566	3449	3331
80°	3172	3124	3046
85°	2764	2808	2660



TEST NUMBER: P333195-940

CATALOG NUMBER: S125DIP-S610D1035U940-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	80.7	1.5
10°-20°	228.1	4.1
20°-30°	336.8	6.1
30°-40°	393.0	7.1
40°-50°	394.7	7.1
50°-60°	346.5	6.3
60°-70°	258.2	4.7
70°-80°	147.6	2.7
80°-90°	45.4	0.8
90°-100°	320.0	5.8
100°-110°	688.0	12.4
110°-120°	645.7	11.7
120°-130°	523.3	9.4
130°-140°	419.9	7.6
140°-150°	316.9	5.7
150°-160°	223.1	4.0
160°-170°	131.5	2.4
170°-180°	42.8	0.8
0°-30°	645.6	11.6
0°-40°	1038.6	18.7
0°-60°	1779.7	32.1
0°-90°	2230.9	40.3
90°-120°	1653.7	29.8
90°-150°	2913.7	52.6
90°-180°	3311.0	59.7
0°-180°	5541.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	856	856	856	856	856	
5°	855	853	847	853	852	81
15°	815	813	806	809	809	230
25°	740	736	728	729	727	340
35°	639	636	627	623	618	399
45°	523	520	512	504	502	403
55°	398	396	387	381	376	356
65°	269	267	260	254	251	267
75°	143	142	138	136	134	152
85°	37	38	38	37	36	42
90°	1	8	14	19	20	4
95°	29	87	789	358	209	31
105°	101	141	645	1271	1180	106
115°	180	217	518	1117	1314	177
125°	249	292	497	888	1035	221
135°	292	351	493	745	860	227
145°	340	389	495	616	678	213
155°	388	418	482	545	569	179
165°	424	435	463	491	498	119
175°	441	441	444	450	448	42
180°	442	442	442	442	442	



TEST NUMBER: P333195-940

CATALOG NUMBER: S125DIP-S610D1035U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4
2.5°	858.5	858.2	857.8	857.5	857.1	856.3	855.2	853.9	852.7	851.5	852.7
5°	855.1	854.7	854.4	854.1	853.8	852.9	851.4	849.9	848.4	846.9	848.3
7.5°	847.1	846.9	846.6	846.2	846.0	845.0	843.3	841.7	840.0	838.4	839.6
10°	840.1	839.8	839.5	839.2	838.9	837.9	836.2	834.6	832.9	831.3	832.5
12.5°	831.4	830.9	830.4	829.8	829.3	828.2	826.7	825.2	823.6	822.1	823.0
15°	815.0	814.6	814.1	813.7	813.2	812.2	810.6	808.9	807.2	805.6	806.3
17.5°	796.2	795.6	794.9	794.2	793.5	792.4	790.7	788.9	787.2	785.5	786.4
20°	780.5	780.2	779.9	779.6	779.3	778.2	776.2	774.3	772.3	770.3	771.4
22.5°	764.7	764.2	763.7	763.1	762.6	761.4	759.6	757.8	755.9	754.0	754.7
25°	739.9	739.0	738.3	737.6	736.8	735.5	733.5	731.6	729.6	727.6	728.0
27.5°	710.7	710.2	709.8	709.4	708.9	707.7	705.6	703.6	701.6	699.6	699.6
30°	691.7	691.3	690.8	690.4	689.9	688.6	686.3	684.0	681.8	679.6	679.2
32.5°	671.1	670.5	669.8	669.1	668.3	667.0	665.0	663.0	660.9	659.0	658.4
35°	638.9	638.3	637.7	637.1	636.5	635.2	633.0	630.9	628.8	626.7	626.0
37.5°	605.4	604.7	604.0	603.2	602.4	601.0	599.1	597.1	595.0	593.1	592.0
40°	582.6	581.9	581.1	580.4	579.6	578.2	576.1	574.0	571.9	569.8	568.5
42.5°	558.3	557.7	557.0	556.3	555.7	554.4	552.2	550.2	548.0	545.9	544.7
45°	523.1	522.5	521.8	521.2	520.7	519.4	517.6	515.9	514.0	512.2	510.4
47.5°	485.1	485.1	485.2	485.2	485.2	484.1	482.0	479.8	477.7	475.5	473.7
50°	460.7	460.2	459.8	459.3	458.9	457.8	455.9	454.1	452.4	450.6	448.6
52.5°	435.8	435.4	435.2	434.8	434.4	433.3	431.4	429.4	427.6	425.6	423.9
55°	398.4	397.9	397.4	397.0	396.5	395.3	393.2	391.1	389.0	386.8	385.5
57.5°	358.9	358.7	358.5	358.2	358.0	357.0	355.2	353.4	351.6	349.9	348.1
60°	334.0	333.4	332.8	332.2	331.6	330.5	328.9	327.2	325.5	323.9	322.4
62.5°	308.0	307.6	307.0	306.6	306.0	305.1	303.7	302.3	300.9	299.4	297.8
65°	268.9	268.7	268.4	268.0	267.8	266.8	265.1	263.5	261.8	260.2	258.8
67.5°	231.1	230.5	229.9	229.3	228.6	227.7	226.5	225.2	224.0	222.7	221.6
70°	207.3	206.6	205.8	205.1	204.3	203.2	201.9	200.5	199.2	197.9	196.9
72.5°	181.3	180.7	180.3	179.8	179.2	178.5	177.7	176.8	175.9	175.0	174.1
75°	142.9	142.7	142.3	142.0	141.8	141.2	140.4	139.7	138.9	138.2	137.8
77.5°	107.6	107.5	107.4	107.2	107.1	106.8	106.4	106.0	105.6	105.1	104.9
80°	85.3	85.3	85.3	85.3	85.3	85.2	84.9	84.6	84.4	84.0	83.8
82.5°	65.9	65.6	65.4	65.1	64.9	64.7	64.6	64.6	64.6	64.5	64.2
85°	37.3	37.5	37.5	37.7	37.9	37.9	37.9	37.9	37.9	37.9	37.8
87.5°	14.8	15.0	15.3	15.7	16.1	16.3	16.4	16.7	16.7	16.9	17.1
90°	0.9	1.8	3.6	5.4	7.1	8.9	9.8	11.6	12.5	14.3	15.2
92.5°	10.9	13.2	20.7	31.7	47.0	73.0	121.6	203.1	291.6	287.0	232.3
95°	29.3	30.2	37.4	47.2	66.8	106.8	202.1	397.9	643.6	788.7	771.8
97.5°	48.8	49.8	54.8	64.6	82.2	111.1	174.2	317.6	574.7	842.3	976.5
100°	62.3	64.1	67.7	77.4	94.3	121.1	172.7	288.4	512.7	803.8	1026.4
102.5°	77.3	78.3	81.1	91.7	107.2	133.1	179.1	276.3	465.7	736.2	996.5
105°	100.6	100.6	105.0	114.0	128.2	153.1	192.3	271.5	420.2	645.3	900.9
107.5°	123.4	125.2	129.4	136.7	151.5	174.0	211.9	279.7	400.9	582.9	803.3
110°	139.7	141.5	145.1	153.1	166.5	189.6	226.1	287.5	395.2	553.7	747.7



TEST NUMBER: P333195-940

CATALOG NUMBER: S125DIP-S610D1035U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	156.1	157.9	160.8	168.8	182.1	204.6	239.6	297.5	395.2	536.6	706.4
115°	179.9	181.6	184.2	192.3	205.6	227.9	260.8	312.5	397.9	518.1	661.4
117.5°	201.2	203.8	206.7	214.7	229.9	251.4	282.6	329.6	403.8	509.0	634.5
120°	215.4	218.1	221.7	229.7	244.8	267.1	298.2	340.9	409.5	504.7	619.6
122.5°	230.4	232.3	235.1	243.2	259.8	282.0	313.2	353.7	414.5	501.1	606.7
125°	249.2	251.0	255.5	263.5	280.4	303.5	333.0	371.2	422.8	496.7	589.3
127.5°	264.0	266.7	272.4	282.6	300.5	323.7	352.0	387.2	432.3	494.5	573.3
130°	273.3	276.0	283.1	294.6	313.3	336.4	364.1	397.9	438.0	493.1	562.6
132.5°	280.4	283.7	292.3	305.3	324.8	347.9	375.5	407.2	444.3	493.1	554.0
135°	291.9	295.5	306.2	320.5	339.1	363.2	390.7	420.2	453.1	493.1	543.9
137.5°	306.6	309.2	319.2	333.5	351.8	376.6	401.6	429.8	461.1	494.2	534.8
140°	315.1	317.8	328.5	342.7	359.6	383.7	409.5	436.2	464.7	494.9	530.6
142.5°	325.1	327.1	337.0	351.2	367.5	390.0	414.5	439.7	466.8	495.6	527.0
145°	340.0	341.8	350.7	363.2	379.2	399.7	422.8	445.1	469.1	494.9	521.7
147.5°	355.7	356.8	364.4	376.0	389.9	407.9	428.2	448.3	470.0	492.6	516.1
150°	365.0	366.8	373.0	384.6	397.0	412.1	431.8	450.4	470.0	490.4	511.8
152.5°	375.0	376.0	381.6	391.6	403.4	417.1	435.3	451.8	469.3	487.7	506.8
155°	388.1	388.1	393.4	402.3	411.3	423.7	438.8	453.1	467.3	482.5	498.5
157.5°	399.8	399.7	403.9	411.6	419.5	428.9	441.8	454.0	465.0	477.2	490.6
160°	407.7	406.8	410.4	416.6	423.7	431.8	443.3	454.0	462.9	473.6	484.3
162.5°	414.1	413.2	416.8	422.3	428.0	434.6	444.7	453.3	460.7	469.3	478.6
165°	423.7	422.0	424.6	429.1	432.7	438.0	445.1	452.2	457.5	462.9	470.0
167.5°	430.2	429.3	430.9	433.4	435.9	439.2	445.1	450.0	452.5	456.6	461.6
170°	434.4	433.5	434.4	436.2	438.0	440.6	445.1	448.6	450.4	453.1	456.6
172.5°	437.3	435.7	436.6	438.3	439.3	440.6	444.3	447.2	447.5	448.8	451.7
175°	440.6	438.8	439.7	440.6	440.6	440.6	443.3	445.1	444.2	444.2	445.1
177.5°	442.2	440.8	440.8	441.5	440.8	440.8	442.2	442.9	441.5	441.5	442.2
180°	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5



TEST NUMBER: P333195-940

CATALOG NUMBER: S125DIP-S610D1035U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4
2.5°	853.9	855.2	856.3	856.8	856.8	856.6	856.5	856.4
5°	849.6	851.0	852.3	852.9	852.7	852.7	852.5	852.3
7.5°	841.0	842.3	843.6	844.3	844.1	843.9	843.8	843.6
10°	833.7	834.9	836.2	836.7	836.5	836.3	836.2	836.1
12.5°	824.0	825.0	825.9	826.4	826.3	826.3	826.3	826.3
15°	807.1	807.8	808.6	809.0	809.0	809.0	809.0	809.0
17.5°	787.4	788.3	789.3	789.3	788.5	787.8	787.1	786.3
20°	772.4	773.5	774.5	774.7	773.9	773.2	772.4	771.7
22.5°	755.5	756.2	756.9	757.0	756.4	755.9	755.4	754.9
25°	728.3	728.5	728.9	728.8	728.3	727.9	727.5	727.0
27.5°	699.7	699.8	699.8	699.6	699.2	698.7	698.3	697.9
30°	678.9	678.7	678.3	678.0	677.5	677.1	676.6	676.2
32.5°	657.9	657.3	656.7	656.1	655.3	654.5	653.6	652.8
35°	625.2	624.5	623.7	622.7	621.5	620.3	619.1	617.9
37.5°	590.8	589.8	588.6	587.7	587.0	586.4	585.7	585.0
40°	567.0	565.7	564.4	563.5	563.0	562.6	562.1	561.7
42.5°	543.5	542.2	541.0	540.0	539.3	538.7	538.0	537.3
45°	508.5	506.8	505.0	503.8	503.4	502.9	502.5	502.0
47.5°	471.8	469.9	468.1	466.7	465.7	464.6	463.5	462.4
50°	446.7	444.7	442.7	441.2	440.1	439.1	438.0	437.0
52.5°	422.1	420.4	418.7	417.3	416.2	414.9	413.8	412.6
55°	384.1	382.8	381.5	380.2	379.2	378.1	377.1	376.0
57.5°	346.3	344.6	342.9	341.7	341.2	340.5	340.0	339.5
60°	320.8	319.3	317.8	316.6	315.5	314.4	313.3	312.4
62.5°	296.2	294.6	292.9	291.8	291.0	290.1	289.3	288.5
65°	257.4	256.1	254.8	253.8	253.2	252.5	252.0	251.4
67.5°	220.5	219.4	218.2	217.4	217.0	216.7	216.3	216.0
70°	196.0	195.1	194.2	193.5	192.9	192.3	191.6	191.1
72.5°	173.0	172.0	170.9	170.1	169.5	169.0	168.4	167.7
75°	137.3	136.9	136.4	135.9	135.3	134.6	134.1	133.5
77.5°	104.6	104.3	104.1	103.7	103.3	102.9	102.5	102.0
80°	83.7	83.6	83.4	83.2	82.8	82.6	82.3	81.9
82.5°	63.9	63.7	63.4	63.2	63.2	63.1	63.0	63.0
85°	37.6	37.5	37.4	37.1	36.8	36.5	36.2	35.9
87.5°	17.3	17.5	17.7	17.9	17.7	17.4	17.4	17.1
90°	16.1	16.9	17.8	19.6	19.6	19.6	20.5	20.5
92.5°	157.7	114.5	86.1	73.0	61.6	59.5	58.2	56.8
95°	640.1	504.7	395.2	320.5	257.3	230.6	223.5	209.2
97.5°	953.2	858.3	751.6	647.6	592.7	542.8	517.0	505.6
100°	1094.9	1051.3	959.6	867.0	805.6	741.5	708.6	694.4
102.5°	1142.6	1169.5	1125.5	1062.8	997.2	951.6	915.8	905.1
105°	1114.5	1236.4	1275.6	1265.8	1237.3	1208.0	1190.2	1179.5
107.5°	1014.1	1176.8	1277.4	1323.8	1338.3	1338.1	1332.2	1325.1
110°	940.0	1109.1	1234.7	1310.4	1350.4	1367.3	1373.5	1373.5





TEST NUMBER: P333195-940

CATALOG NUMBER: S125DIP-S610D1035U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	881.6	1042.2	1169.1	1258.4	1316.9	1345.9	1361.5	1367.8
115°	808.2	946.3	1068.2	1165.2	1234.7	1277.4	1302.3	1313.9
117.5°	760.9	879.9	984.9	1073.9	1143.4	1187.5	1212.2	1219.3
120°	735.3	842.1	940.0	1018.3	1084.2	1126.9	1151.0	1158.2
122.5°	716.0	815.0	902.2	975.6	1034.4	1073.5	1097.6	1104.0
125°	688.1	778.9	856.3	920.4	970.3	1006.7	1026.4	1035.3
127.5°	659.6	744.4	816.6	876.6	921.9	954.0	972.6	976.5
130°	641.9	720.1	789.6	847.5	892.0	921.3	939.1	944.5
132.5°	624.0	697.3	760.4	816.1	860.6	890.0	906.3	912.4
135°	600.8	662.3	719.3	770.0	809.1	838.6	854.5	859.9
137.5°	581.3	631.0	678.3	721.4	756.4	783.2	798.0	803.8
140°	570.6	612.4	653.4	690.8	723.7	746.9	760.2	764.6
142.5°	561.3	596.7	632.0	664.4	692.4	711.9	724.6	728.3
145°	549.2	576.8	604.4	628.5	649.8	664.9	674.8	678.3
147.5°	537.9	560.3	581.5	599.6	616.5	628.7	634.4	636.0
150°	531.5	551.0	567.9	584.0	597.3	608.0	611.5	612.4
152.5°	524.3	541.7	557.2	569.7	580.9	589.5	593.0	593.9
155°	513.6	527.9	540.4	550.1	559.0	565.3	567.9	568.8
157.5°	502.9	514.7	524.3	532.0	539.0	544.0	546.5	546.4
160°	495.8	504.7	513.6	519.9	526.1	530.6	532.4	531.5
162.5°	488.0	496.1	503.6	509.2	514.0	517.7	518.1	517.9
165°	477.2	483.4	488.7	493.1	496.7	498.5	498.5	498.5
167.5°	466.8	470.9	475.0	478.2	480.0	481.6	480.9	480.7
170°	461.1	463.8	466.5	468.2	470.0	470.9	470.9	470.0
172.5°	454.7	457.4	459.3	460.4	460.7	462.4	460.9	460.0
175°	447.7	447.7	449.5	449.5	449.5	450.4	448.6	447.7
177.5°	442.9	443.6	443.6	443.6	442.9	443.6	441.5	441.5
180°	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5

(END OF REPORT)