

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333240-940

Luminaire Tested: **S125DIP-S850D1035U940-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333240-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S850D1035U940-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6359.6 lumens
Efficiency: N/A
Efficacy: 122.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333240-940

CATALOG NUMBER: S125DIP-S850D1035U940-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

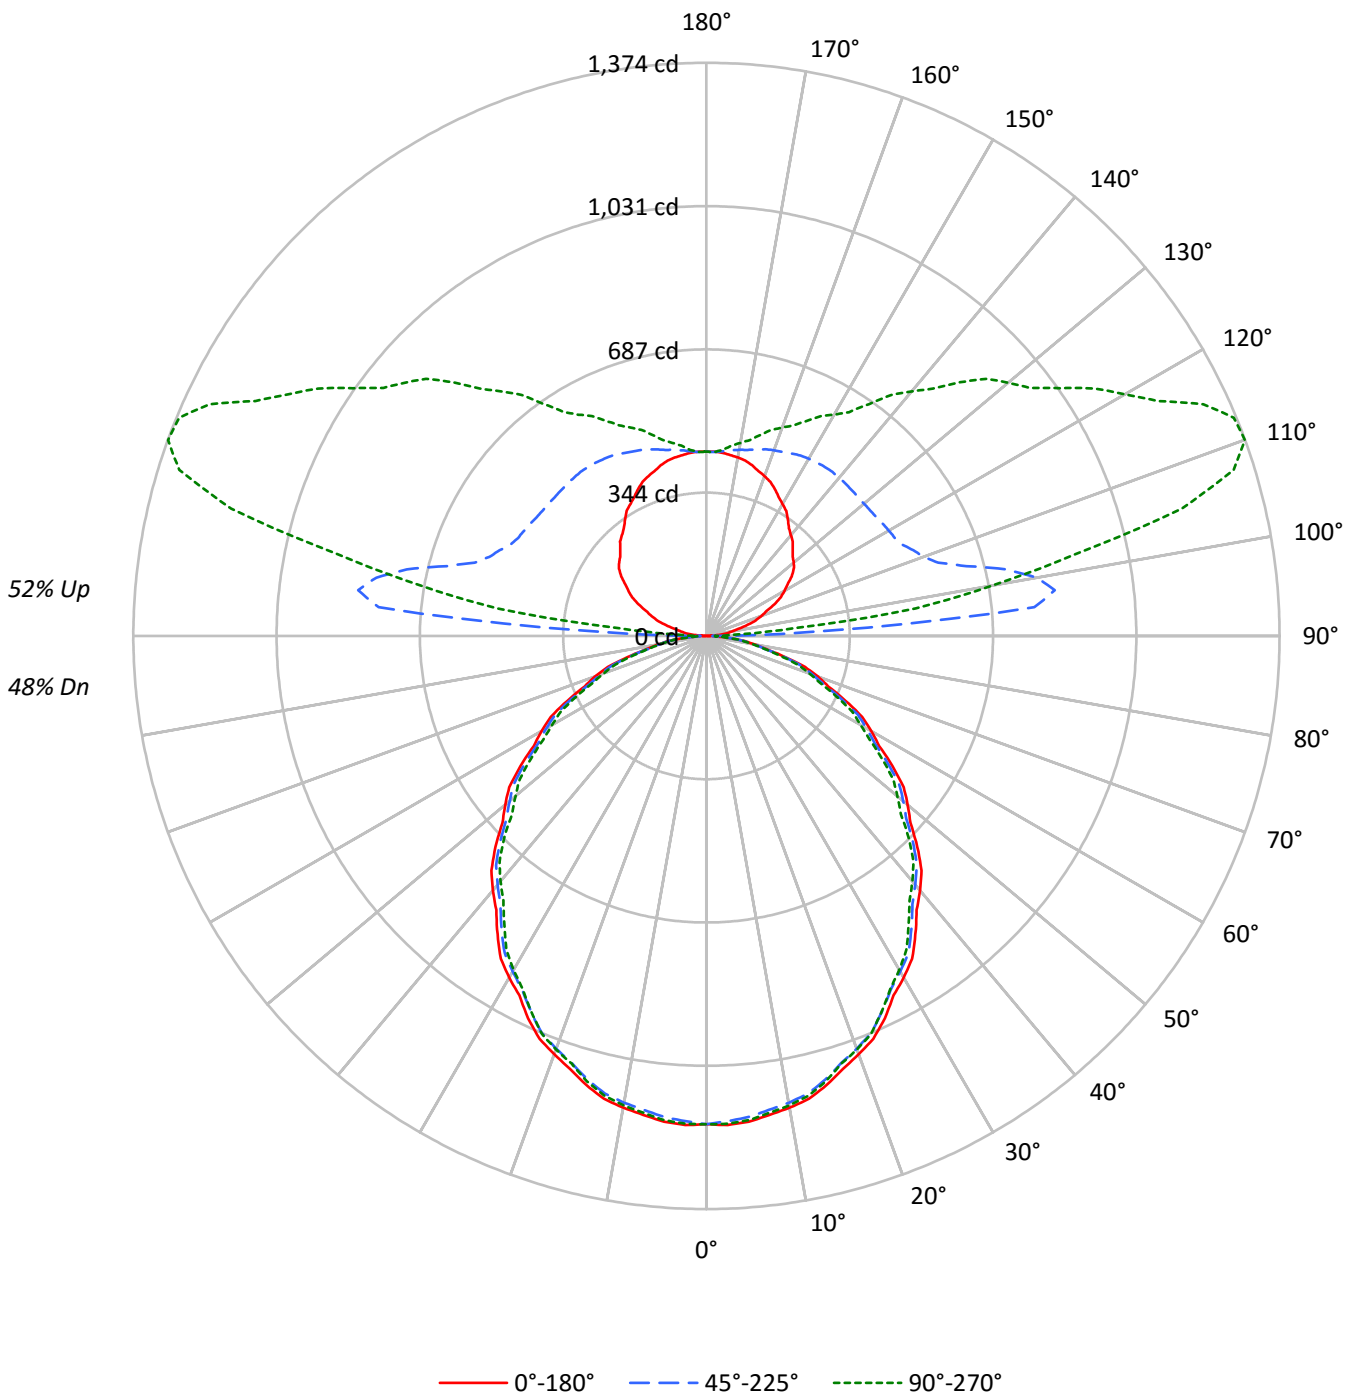



TEST NUMBER: P333240-940

CATALOG NUMBER: S125DIP-S850D1035U940-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48	48	48	48	48	48	48													
1	97	93	89	85	89	86	82	79	72	70	67	59	58	56	48	47	46	40	40	40	40	40	40	40													
2	89	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38	34	34	34	34	34	34	34													
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33	28	28	28	28	28	28	28													
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24	24	24	24	24	24	24													
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	24	21	21	21	21	21	21	21													
6	62	50	42	36	57	47	39	34	40	34	30	33	29	26	27	24	22	19	19	19	19	19	19	19													
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	25	22	19	16	16	16	16	16	16	16													
8	54	41	33	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15	15	15	15	15	15	15													
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13	13	13	13	13	13	13													
10	47	34	27	22	43	32	26	21	28	22	19	23	19	16	19	16	14	12	12	12	12	12	12	12													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7559	7559	7559
5°	7577	7505	7553
10°	7531	7452	7494
15°	7449	7362	7393
20°	7332	7236	7249
25°	7207	7088	7081
30°	7052	6927	6893
35°	6885	6754	6659
40°	6715	6566	6473
45°	6530	6395	6268
50°	6327	6187	6002
55°	6132	5954	5788
60°	5898	5717	5515
65°	5619	5434	5251
70°	5351	5108	4932
75°	4876	4716	4551
80°	4340	4273	4169
85°	3772	3846	3631



TEST NUMBER: P333240-940

CATALOG NUMBER: S125DIP-S850D1035U940-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	110.4	1.7
10°-20°	311.8	4.9
20°-30°	460.3	7.2
30°-40°	537.2	8.4
40°-50°	539.5	8.5
50°-60°	473.6	7.4
60°-70°	352.9	5.5
70°-80°	201.8	3.2
80°-90°	61.2	1.0
90°-100°	320.0	5.0
100°-110°	688.0	10.8
110°-120°	645.7	10.2
120°-130°	523.3	8.2
130°-140°	419.9	6.6
140°-150°	316.9	5.0
150°-160°	223.1	3.5
160°-170°	131.5	2.1
170°-180°	42.8	0.7
0°-30°	882.5	13.9
0°-40°	1419.6	22.3
0°-60°	2432.7	38.3
0°-90°	3048.5	47.9
90°-120°	1653.7	26.0
90°-150°	2913.7	45.8
90°-180°	3311.0	52.1
0°-180°	6359.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1170	1170	1170	1170	1170	
5°	1169	1166	1158	1165	1165	111
15°	1114	1111	1101	1106	1106	314
25°	1011	1006	995	996	994	465
35°	873	869	857	852	845	546
45°	715	711	700	690	686	551
55°	545	541	529	521	514	486
65°	368	365	356	348	344	365
75°	195	193	189	186	182	208
85°	51	52	52	51	49	57
90°	1	8	14	19	20	5
95°	29	87	789	358	209	31
105°	101	141	645	1271	1180	106
115°	180	217	518	1117	1314	177
125°	249	292	497	888	1035	221
135°	292	351	493	745	860	227
145°	340	389	495	616	678	213
155°	388	418	482	545	569	179
165°	424	435	463	491	498	119
175°	441	441	444	450	448	42
180°	442	442	442	442	442	



TEST NUMBER: P333240-940

CATALOG NUMBER: S125DIP-S850D1035U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5
2.5°	1173.6	1173.0	1172.6	1172.1	1171.5	1170.5	1168.9	1167.2	1165.6	1164.0	1165.6
5°	1168.8	1168.3	1167.9	1167.5	1167.1	1165.8	1163.8	1161.7	1159.7	1157.6	1159.5
7.5°	1158.0	1157.6	1157.2	1156.7	1156.4	1155.0	1152.7	1150.5	1148.3	1145.9	1147.7
10°	1148.3	1148.0	1147.5	1147.1	1146.7	1145.4	1143.1	1140.9	1138.6	1136.3	1138.0
12.5°	1136.5	1135.8	1135.1	1134.3	1133.5	1132.1	1130.1	1127.9	1125.8	1123.7	1125.1
15°	1114.1	1113.5	1112.9	1112.2	1111.6	1110.2	1108.0	1105.6	1103.4	1101.1	1102.2
17.5°	1088.3	1087.4	1086.5	1085.7	1084.8	1083.1	1080.8	1078.4	1076.0	1073.7	1075.0
20°	1066.8	1066.5	1066.0	1065.6	1065.2	1063.6	1061.0	1058.3	1055.6	1052.9	1054.4
22.5°	1045.4	1044.6	1043.9	1043.1	1042.4	1040.8	1038.3	1035.7	1033.2	1030.7	1031.7
25°	1011.3	1010.3	1009.2	1008.2	1007.2	1005.3	1002.6	1000.0	997.3	994.6	995.1
27.5°	971.4	970.9	970.3	969.6	969.0	967.3	964.6	961.8	959.0	956.3	956.4
30°	945.6	944.9	944.3	943.7	943.1	941.2	938.2	935.0	931.9	928.9	928.4
32.5°	917.4	916.4	915.5	914.5	913.6	911.8	909.0	906.2	903.5	900.7	900.0
35°	873.3	872.4	871.6	870.8	870.0	868.2	865.3	862.4	859.5	856.7	855.6
37.5°	827.6	826.5	825.5	824.5	823.4	821.5	818.9	816.1	813.4	810.7	809.1
40°	796.5	795.4	794.4	793.4	792.3	790.4	787.5	784.6	781.8	778.8	777.0
42.5°	763.1	762.2	761.3	760.5	759.6	757.8	754.9	752.0	749.1	746.3	744.6
45°	715.0	714.1	713.3	712.5	711.7	710.0	707.6	705.1	702.6	700.2	697.7
47.5°	663.1	663.2	663.2	663.2	663.3	661.8	658.8	655.9	652.9	650.0	647.4
50°	629.7	629.1	628.5	627.9	627.3	625.7	623.3	620.8	618.3	615.8	613.1
52.5°	595.7	595.2	594.8	594.3	593.9	592.3	589.7	587.0	584.4	581.8	579.4
55°	544.6	543.9	543.3	542.7	542.1	540.3	537.4	534.6	531.6	528.8	526.9
57.5°	490.6	490.4	490.0	489.6	489.4	487.9	485.5	483.1	480.6	478.2	475.8
60°	456.6	455.8	455.0	454.1	453.3	451.7	449.4	447.2	445.0	442.6	440.6
62.5°	421.0	420.4	419.7	419.0	418.4	417.1	415.2	413.2	411.3	409.3	407.2
65°	367.7	367.2	366.8	366.4	366.0	364.7	362.4	360.2	357.8	355.6	353.7
67.5°	316.0	315.1	314.2	313.3	312.5	311.2	309.6	307.9	306.2	304.5	302.9
70°	283.4	282.3	281.3	280.3	279.3	277.9	276.0	274.1	272.2	270.5	269.2
72.5°	247.8	247.1	246.4	245.8	245.0	244.1	242.9	241.7	240.5	239.3	237.9
75°	195.4	195.0	194.6	194.2	193.8	193.1	192.0	191.0	189.9	189.0	188.3
77.5°	147.0	146.9	146.8	146.6	146.4	146.1	145.4	144.9	144.3	143.7	143.4
80°	116.7	116.7	116.7	116.7	116.7	116.5	116.1	115.7	115.2	114.9	114.7
82.5°	90.0	89.7	89.3	89.0	88.7	88.5	88.4	88.4	88.3	88.2	87.8
85°	50.9	51.2	51.4	51.5	51.7	51.9	51.9	51.9	51.9	51.9	51.6
87.5°	20.2	20.3	20.7	21.0	21.4	21.7	21.8	21.9	21.9	22.1	22.3
90°	0.9	1.8	3.6	5.4	7.1	8.9	9.8	11.6	12.5	14.3	15.2
92.5°	10.9	13.2	20.7	31.7	47.0	73.0	121.6	203.1	291.6	287.0	232.3
95°	29.3	30.2	37.4	47.2	66.8	106.8	202.1	397.9	643.6	788.7	771.8
97.5°	48.8	49.8	54.8	64.6	82.2	111.1	174.2	317.6	574.7	842.3	976.5
100°	62.3	64.1	67.7	77.4	94.3	121.1	172.7	288.4	512.7	803.8	1026.4
102.5°	77.3	78.3	81.1	91.7	107.2	133.1	179.1	276.3	465.7	736.2	996.5
105°	100.6	100.6	105.0	114.0	128.2	153.1	192.3	271.5	420.2	645.3	900.9
107.5°	123.4	125.2	129.4	136.7	151.5	174.0	211.9	279.7	400.9	582.9	803.3
110°	139.7	141.5	145.1	153.1	166.5	189.6	226.1	287.5	395.2	553.7	747.7



TEST NUMBER: P333240-940

CATALOG NUMBER: S125DIP-S850D1035U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	156.1	157.9	160.8	168.8	182.1	204.6	239.6	297.5	395.2	536.6	706.4
115°	179.9	181.6	184.2	192.3	205.6	227.9	260.8	312.5	397.9	518.1	661.4
117.5°	201.2	203.8	206.7	214.7	229.9	251.4	282.6	329.6	403.8	509.0	634.5
120°	215.4	218.1	221.7	229.7	244.8	267.1	298.2	340.9	409.5	504.7	619.6
122.5°	230.4	232.3	235.1	243.2	259.8	282.0	313.2	353.7	414.5	501.1	606.7
125°	249.2	251.0	255.5	263.5	280.4	303.5	333.0	371.2	422.8	496.7	589.3
127.5°	264.0	266.7	272.4	282.6	300.5	323.7	352.0	387.2	432.3	494.5	573.3
130°	273.3	276.0	283.1	294.6	313.3	336.4	364.1	397.9	438.0	493.1	562.6
132.5°	280.4	283.7	292.3	305.3	324.8	347.9	375.5	407.2	444.3	493.1	554.0
135°	291.9	295.5	306.2	320.5	339.1	363.2	390.7	420.2	453.1	493.1	543.9
137.5°	306.6	309.2	319.2	333.5	351.8	376.6	401.6	429.8	461.1	494.2	534.8
140°	315.1	317.8	328.5	342.7	359.6	383.7	409.5	436.2	464.7	494.9	530.6
142.5°	325.1	327.1	337.0	351.2	367.5	390.0	414.5	439.7	466.8	495.6	527.0
145°	340.0	341.8	350.7	363.2	379.2	399.7	422.8	445.1	469.1	494.9	521.7
147.5°	355.7	356.8	364.4	376.0	389.9	407.9	428.2	448.3	470.0	492.6	516.1
150°	365.0	366.8	373.0	384.6	397.0	412.1	431.8	450.4	470.0	490.4	511.8
152.5°	375.0	376.0	381.6	391.6	403.4	417.1	435.3	451.8	469.3	487.7	506.8
155°	388.1	388.1	393.4	402.3	411.3	423.7	438.8	453.1	467.3	482.5	498.5
157.5°	399.8	399.7	403.9	411.6	419.5	428.9	441.8	454.0	465.0	477.2	490.6
160°	407.7	406.8	410.4	416.6	423.7	431.8	443.3	454.0	462.9	473.6	484.3
162.5°	414.1	413.2	416.8	422.3	428.0	434.6	444.7	453.3	460.7	469.3	478.6
165°	423.7	422.0	424.6	429.1	432.7	438.0	445.1	452.2	457.5	462.9	470.0
167.5°	430.2	429.3	430.9	433.4	435.9	439.2	445.1	450.0	452.5	456.6	461.6
170°	434.4	433.5	434.4	436.2	438.0	440.6	445.1	448.6	450.4	453.1	456.6
172.5°	437.3	435.7	436.6	438.3	439.3	440.6	444.3	447.2	447.5	448.8	451.7
175°	440.6	438.8	439.7	440.6	440.6	440.6	443.3	445.1	444.2	444.2	445.1
177.5°	442.2	440.8	440.8	441.5	440.8	440.8	442.2	442.9	441.5	441.5	442.2
180°	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5



TEST NUMBER: P333240-940

CATALOG NUMBER: S125DIP-S850D1035U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5
2.5°	1167.2	1168.9	1170.5	1171.3	1171.1	1170.9	1170.7	1170.5
5°	1161.4	1163.1	1165.0	1165.8	1165.6	1165.5	1165.2	1165.0
7.5°	1149.6	1151.4	1153.2	1154.0	1153.8	1153.6	1153.3	1153.2
10°	1139.6	1141.3	1142.9	1143.6	1143.4	1143.2	1143.0	1142.8
12.5°	1126.3	1127.7	1129.0	1129.6	1129.6	1129.5	1129.5	1129.4
15°	1103.2	1104.2	1105.3	1105.7	1105.7	1105.7	1105.7	1105.7
17.5°	1076.3	1077.5	1078.8	1079.0	1077.9	1076.9	1075.8	1074.9
20°	1055.9	1057.3	1058.7	1058.9	1057.9	1056.9	1055.9	1054.8
22.5°	1032.6	1033.6	1034.6	1034.7	1033.9	1033.2	1032.5	1031.9
25°	995.4	995.9	996.3	996.1	995.6	995.0	994.3	993.7
27.5°	956.4	956.5	956.6	956.4	955.7	955.1	954.5	953.9
30°	928.1	927.6	927.2	926.8	926.1	925.5	924.9	924.3
32.5°	899.2	898.5	897.8	896.8	895.7	894.6	893.5	892.4
35°	854.6	853.5	852.6	851.2	849.5	847.9	846.2	844.6
37.5°	807.6	806.1	804.6	803.3	802.5	801.5	800.6	799.6
40°	775.2	773.3	771.4	770.2	769.5	769.0	768.4	767.8
42.5°	742.9	741.2	739.5	738.2	737.3	736.3	735.3	734.4
45°	695.2	692.7	690.3	688.7	688.1	687.5	686.9	686.3
47.5°	644.9	642.4	639.9	637.9	636.5	635.1	633.6	632.1
50°	610.5	607.8	605.1	603.1	601.6	600.2	598.8	597.4
52.5°	577.1	574.7	572.4	570.4	568.8	567.2	565.6	564.0
55°	525.1	523.3	521.4	519.8	518.3	516.8	515.4	514.0
57.5°	473.5	471.1	468.7	467.1	466.3	465.6	464.8	464.0
60°	438.5	436.5	434.4	432.7	431.2	429.8	428.4	427.0
62.5°	404.9	402.7	400.5	398.8	397.7	396.5	395.5	394.3
65°	352.0	350.1	348.2	346.9	346.1	345.3	344.4	343.6
67.5°	301.4	299.8	298.3	297.2	296.8	296.2	295.7	295.2
70°	268.0	266.7	265.5	264.5	263.6	262.8	262.0	261.2
72.5°	236.5	235.1	233.7	232.6	231.8	231.0	230.2	229.3
75°	187.7	187.1	186.5	185.7	184.9	184.0	183.2	182.4
77.5°	143.0	142.6	142.2	141.8	141.2	140.6	140.1	139.5
80°	114.4	114.2	114.0	113.7	113.3	112.9	112.4	112.1
82.5°	87.4	87.0	86.7	86.5	86.4	86.3	86.2	86.1
85°	51.5	51.3	51.0	50.7	50.3	49.9	49.5	49.0
87.5°	22.5	22.6	22.8	23.0	22.6	22.4	22.2	21.8
90°	16.1	16.9	17.8	19.6	19.6	19.6	20.5	20.5
92.5°	157.7	114.5	86.1	73.0	61.6	59.5	58.2	56.8
95°	640.1	504.7	395.2	320.5	257.3	230.6	223.5	209.2
97.5°	953.2	858.3	751.6	647.6	592.7	542.8	517.0	505.6
100°	1094.9	1051.3	959.6	867.0	805.6	741.5	708.6	694.4
102.5°	1142.6	1169.5	1125.5	1062.8	997.2	951.6	915.8	905.1
105°	1114.5	1236.4	1275.6	1265.8	1237.3	1208.0	1190.2	1179.5
107.5°	1014.1	1176.8	1277.4	1323.8	1338.3	1338.1	1332.2	1325.1
110°	940.0	1109.1	1234.7	1310.4	1350.4	1367.3	1373.5	1373.5



TEST NUMBER: P333240-940

CATALOG NUMBER: S125DIP-S850D1035U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	881.6	1042.2	1169.1	1258.4	1316.9	1345.9	1361.5	1367.8
115°	808.2	946.3	1068.2	1165.2	1234.7	1277.4	1302.3	1313.9
117.5°	760.9	879.9	984.9	1073.9	1143.4	1187.5	1212.2	1219.3
120°	735.3	842.1	940.0	1018.3	1084.2	1126.9	1151.0	1158.2
122.5°	716.0	815.0	902.2	975.6	1034.4	1073.5	1097.6	1104.0
125°	688.1	778.9	856.3	920.4	970.3	1006.7	1026.4	1035.3
127.5°	659.6	744.4	816.6	876.6	921.9	954.0	972.6	976.5
130°	641.9	720.1	789.6	847.5	892.0	921.3	939.1	944.5
132.5°	624.0	697.3	760.4	816.1	860.6	890.0	906.3	912.4
135°	600.8	662.3	719.3	770.0	809.1	838.6	854.5	859.9
137.5°	581.3	631.0	678.3	721.4	756.4	783.2	798.0	803.8
140°	570.6	612.4	653.4	690.8	723.7	746.9	760.2	764.6
142.5°	561.3	596.7	632.0	664.4	692.4	711.9	724.6	728.3
145°	549.2	576.8	604.4	628.5	649.8	664.9	674.8	678.3
147.5°	537.9	560.3	581.5	599.6	616.5	628.7	634.4	636.0
150°	531.5	551.0	567.9	584.0	597.3	608.0	611.5	612.4
152.5°	524.3	541.7	557.2	569.7	580.9	589.5	593.0	593.9
155°	513.6	527.9	540.4	550.1	559.0	565.3	567.9	568.8
157.5°	502.9	514.7	524.3	532.0	539.0	544.0	546.5	546.4
160°	495.8	504.7	513.6	519.9	526.1	530.6	532.4	531.5
162.5°	488.0	496.1	503.6	509.2	514.0	517.7	518.1	517.9
165°	477.2	483.4	488.7	493.1	496.7	498.5	498.5	498.5
167.5°	466.8	470.9	475.0	478.2	480.0	481.6	480.9	480.7
170°	461.1	463.8	466.5	468.2	470.0	470.9	470.9	470.0
172.5°	454.7	457.4	459.3	460.4	460.7	462.4	460.9	460.0
175°	447.7	447.7	449.5	449.5	449.5	450.4	448.6	447.7
177.5°	442.9	443.6	443.6	443.6	442.9	443.6	441.5	441.5
180°	441.5	441.5	441.5	441.5	441.5	441.5	441.5	441.5

(END OF REPORT)