

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333598-940

Luminaire Tested: **S125RDIP-S1090D1035U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333598-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1090D1035U940-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1035 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7489.3 lumens
Efficiency: N/A
Efficacy: 123.8 lumens/watt
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

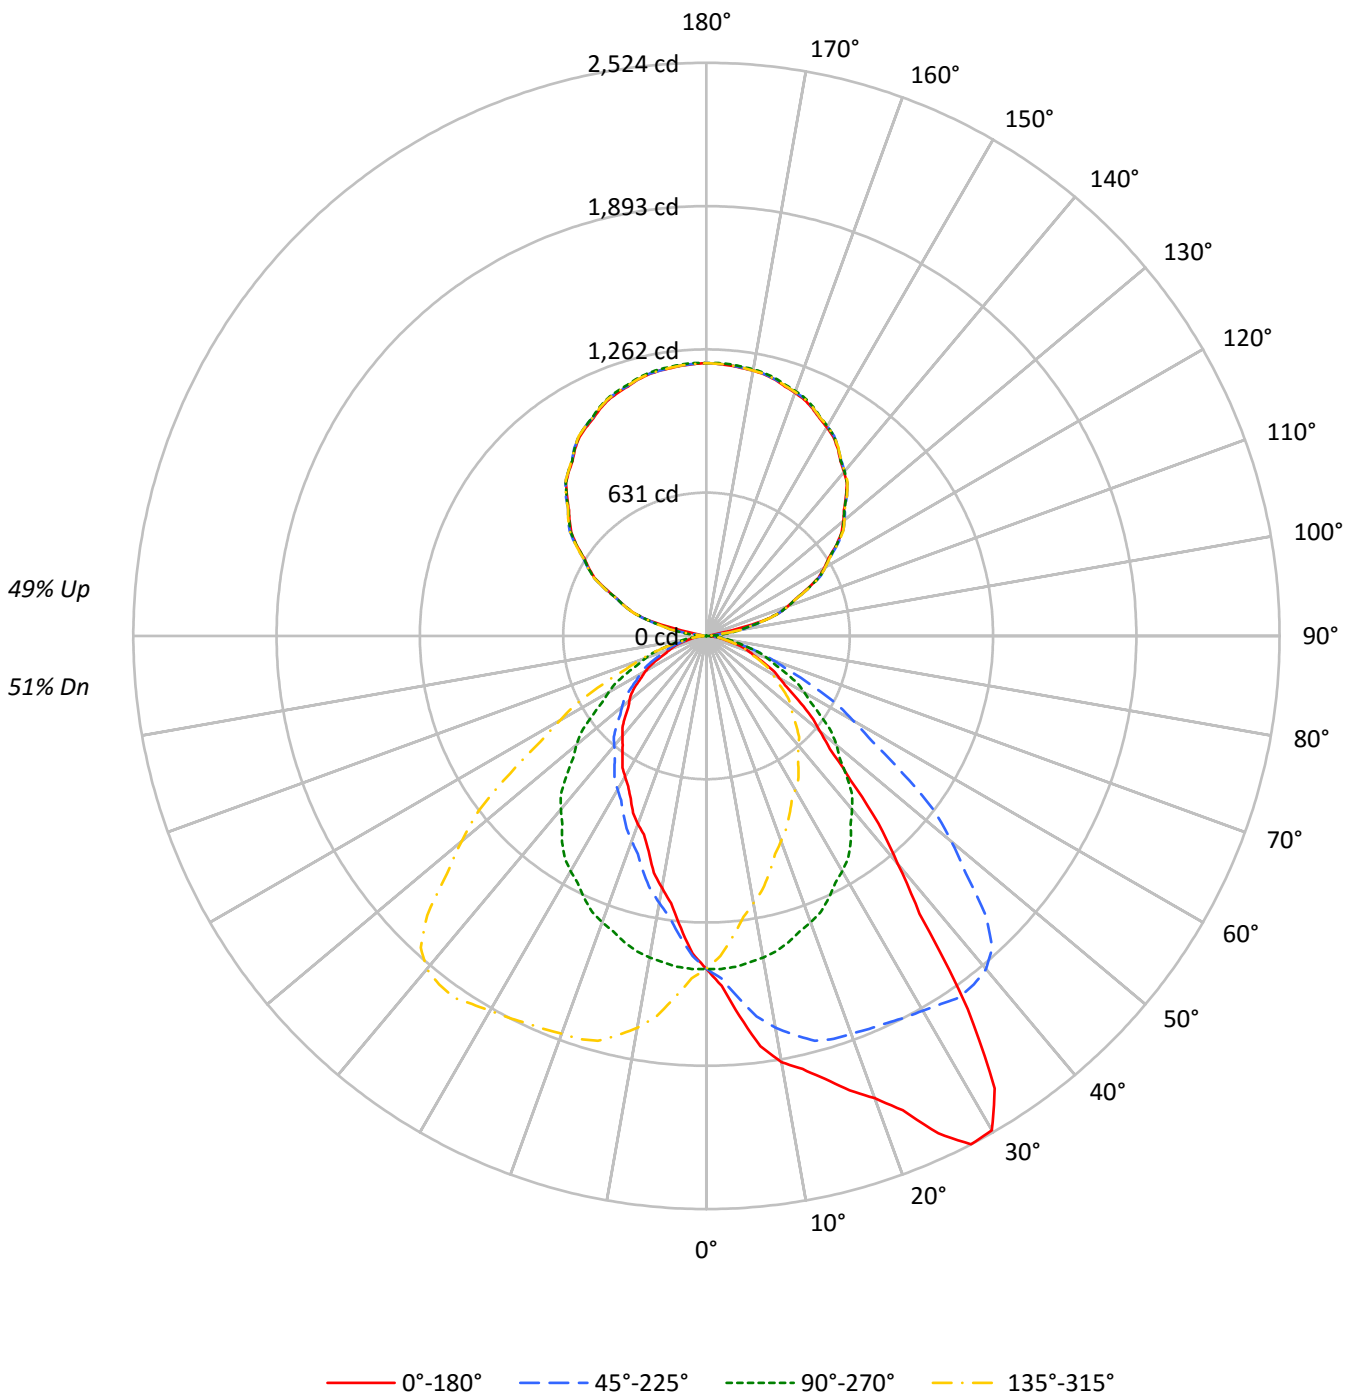



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51																												
1	98	94	91	87	91	87	84	81	74	72	70	62	60	59	51	50	49	44																												
2	90	83	77	72	83	77	72	67	65	62	58	55	52	50	45	43	42	37																												
3	82	73	66	60	76	68	62	57	58	53	49	49	45	43	40	38	36	32																												
4	75	65	57	51	69	60	54	48	52	47	42	44	40	37	36	34	31	28																												
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	33	30	27	24																												
6	64	52	44	38	59	49	41	36	42	36	32	36	31	28	30	27	24	21																												
7	59	47	39	34	55	44	37	32	38	32	28	32	28	25	27	24	22	19																												
8	55	43	35	30	51	40	33	28	35	29	25	30	25	22	25	22	19	17																												
9	51	39	32	27	47	37	30	25	32	26	23	27	23	20	23	20	18	15																												
10	48	36	29	24	44	34	27	23	29	24	20	25	21	18	21	18	16	14																												

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9469	9469	9469	9469
5°	10893	9481	8373	9481
10°	12496	9433	7389	9433
15°	13497	9336	6567	9336
20°	14882	9224	6064	9224
25°	17224	9075	5627	9075
30°	18744	8918	5341	8918
35°	15811	8736	5077	8736
40°	11042	8408	4850	8408
45°	8191	7965	4629	7965
50°	6531	7504	4439	7504
55°	5543	6933	4270	6933
60°	4790	6421	3995	6421
65°	4268	5868	3440	5868
70°	3750	5374	3136	5374
75°	3244	4654	2944	4654
80°	2462	3916	2462	3916
85°	2045	3083	2319	3083



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.6	1.9
10°-20°	412.0	5.5
20°-30°	653.3	8.7
30°-40°	787.8	10.5
40°-50°	703.5	9.4
50°-60°	539.5	7.2
60°-70°	350.6	4.7
70°-80°	170.5	2.3
80°-90°	43.2	0.6
90°-100°	43.6	0.6
100°-110°	269.0	3.6
110°-120°	487.9	6.5
120°-130°	626.1	8.4
130°-140°	673.4	9.0
140°-150°	632.1	8.4
150°-160°	511.3	6.8
160°-170°	330.7	4.4
170°-180°	114.1	1.5
0°-30°	1205.9	16.1
0°-40°	1993.7	26.6
0°-60°	3236.7	43.2
0°-90°	3801.0	50.8
90°-120°	800.5	10.7
90°-150°	2732.2	36.5
90°-180°	3688.0	49.2
0°-180°	7489.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1466	1466	1466	1466	1466	
5°	1680	1462	1292	1462	1680	168
15°	2019	1396	982	1396	2019	578
25°	2417	1274	790	1274	2417	1110
35°	2005	1108	644	1108	2005	1211
45°	897	872	507	872	897	716
55°	492	616	379	616	492	447
65°	279	384	225	384	279	278
75°	130	186	118	186	130	138
85°	28	42	31	42	28	32
90°	21	1	21	1	21	11
95°	19	51	19	51	19	15
105°	264	262	264	262	264	239
115°	488	492	488	492	488	484
125°	699	699	699	699	699	622
135°	868	872	868	872	868	670
145°	1008	1011	1008	1011	1008	630
155°	1105	1113	1105	1113	1105	509
165°	1168	1174	1168	1174	1168	330
175°	1196	1201	1196	1201	1196	114
180°	1201	1201	1201	1201	1201	



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1542.2	1541.2	1543.2	1537.8	1538.4	1530.2	1530.2	1523.9	1515.7	1509.5	1506.5
5°	1680.3	1681.6	1679.2	1670.2	1664.1	1655.1	1644.8	1626.8	1611.8	1597.3	1585.9
7.5°	1822.7	1823.5	1815.5	1812.8	1797.6	1786.5	1763.8	1739.2	1717.4	1689.8	1668.6
10°	1905.5	1904.9	1896.4	1889.8	1876.6	1859.8	1837.5	1808.6	1781.5	1751.4	1722.5
12.5°	1953.6	1952.0	1949.4	1941.3	1929.0	1914.1	1895.2	1866.8	1833.4	1800.5	1766.8
15°	2018.7	2014.4	2006.6	1996.4	1978.9	1961.4	1940.4	1915.1	1883.2	1845.8	1814.6
17.5°	2099.0	2099.2	2087.1	2072.9	2049.2	2018.4	1985.8	1945.1	1901.8	1860.7	1827.4
20°	2165.4	2163.6	2151.6	2124.0	2096.9	2058.3	2021.1	1971.0	1918.1	1864.6	1823.0
22.5°	2260.8	2256.1	2243.5	2207.3	2165.3	2115.7	2058.6	1997.5	1933.5	1872.7	1818.2
25°	2417.1	2413.4	2388.7	2346.6	2287.7	2211.2	2136.5	2052.9	1960.9	1880.8	1814.6
27.5°	2523.9	2520.0	2501.7	2466.7	2412.3	2331.8	2230.8	2119.0	2004.0	1893.9	1798.5
30°	2513.4	2522.4	2520.0	2503.7	2462.8	2390.6	2297.3	2171.5	2034.9	1905.5	1791.7
32.5°	2362.1	2370.3	2391.4	2423.3	2425.7	2396.8	2327.1	2211.0	2069.6	1922.4	1786.5
35°	2005.4	2016.2	2057.2	2121.6	2205.8	2276.2	2290.6	2228.0	2101.0	1942.8	1778.5
37.5°	1541.7	1600.9	1635.4	1703.2	1830.5	1960.0	2084.6	2130.5	2076.3	1934.4	1765.6
40°	1309.7	1324.1	1385.5	1461.9	1569.1	1703.9	1881.4	2009.6	2013.8	1915.1	1745.3
42.5°	1120.9	1139.2	1181.3	1242.3	1334.1	1468.9	1652.3	1821.3	1899.7	1862.2	1718.9
45°	896.8	910.6	941.3	988.3	1058.6	1170.0	1327.7	1523.3	1678.6	1739.4	1647.9
47.5°	736.6	744.1	770.9	806.6	858.7	939.9	1061.9	1231.7	1418.0	1548.5	1535.7
50°	650.0	658.4	678.9	706.0	749.9	818.5	916.1	1057.5	1249.5	1408.9	1440.8
52.5°	582.6	589.6	602.4	627.9	664.2	716.9	795.7	923.6	1096.4	1266.0	1339.7
55°	492.3	497.1	507.4	521.8	550.7	588.6	656.7	745.1	884.8	1055.6	1164.0
57.5°	417.9	420.4	426.9	440.2	460.2	487.9	537.0	612.0	712.1	866.0	985.6
60°	370.8	373.2	381.6	390.6	406.3	431.5	470.0	522.4	618.7	745.7	866.7
62.5°	333.1	334.7	338.2	347.2	361.0	380.5	410.8	453.5	530.1	641.7	755.9
65°	279.3	279.8	281.1	288.3	296.7	311.1	331.0	361.1	418.9	503.2	604.2
67.5°	227.5	228.4	232.6	235.1	243.9	251.5	263.1	286.1	326.8	383.6	462.3
70°	198.6	198.0	202.2	205.3	208.2	217.3	225.1	243.8	269.0	312.4	378.0
72.5°	171.7	170.0	171.9	173.0	176.9	183.1	190.9	202.3	221.9	251.7	301.9
75°	130.0	130.6	130.6	131.8	134.8	137.2	139.6	145.6	156.5	176.4	203.4
77.5°	91.2	90.2	92.8	93.2	95.0	97.6	99.7	102.1	106.6	114.7	128.7
80°	66.2	66.2	66.8	68.6	68.0	69.2	72.2	74.6	80.1	84.9	89.7
82.5°	50.8	50.3	50.9	51.3	51.2	52.3	53.4	53.9	56.0	58.4	61.7
85°	27.6	27.6	28.3	28.3	28.9	28.9	29.5	29.5	29.5	30.1	30.7
87.5°	14.9	14.3	13.6	13.6	13.9	14.7	14.0	13.4	13.2	12.9	13.2
90°	21.4	20.8	20.2	19.6	19.0	18.2	17.2	16.2	15.2	14.3	12.8
92.5°	20.0	19.7	19.4	19.1	18.8	18.2	17.2	16.2	15.2	14.3	13.0
95°	18.7	18.7	18.7	18.7	18.7	18.2	17.2	16.2	15.2	14.3	21.8
97.5°	18.7	18.7	18.7	18.7	18.7	21.5	27.1	32.6	38.3	43.8	58.7
100°	18.7	19.5	20.2	21.0	21.8	37.0	66.5	95.9	125.5	154.9	154.1
102.5°	112.0	125.5	138.9	152.4	165.9	175.3	180.9	186.5	192.1	197.7	197.2
105°	264.4	264.7	264.8	265.0	265.2	265.3	265.3	265.3	265.3	265.3	265.3
107.5°	333.3	333.9	334.6	335.1	335.7	336.0	336.0	335.9	335.9	335.8	335.5
110°	381.0	380.8	380.7	380.5	380.3	380.5	381.0	381.7	382.3	382.8	382.5



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	423.8	424.1	424.4	424.6	424.9	425.4	426.1	427.0	427.7	428.5	428.2
115°	487.9	489.1	490.3	491.5	492.7	493.7	494.5	495.3	496.1	496.8	496.6
117.5°	556.2	556.8	557.3	557.9	558.3	559.1	560.2	561.2	562.2	563.2	562.5
120°	598.3	599.3	600.3	601.3	602.3	603.0	603.3	603.8	604.1	604.6	604.0
122.5°	638.2	639.4	640.5	641.7	642.7	643.5	644.0	644.4	644.7	645.2	644.9
125°	698.9	699.5	700.1	700.7	701.3	702.0	702.8	703.6	704.4	705.2	705.2
127.5°	750.0	751.5	753.0	754.4	755.9	756.8	757.2	757.7	758.1	758.6	758.7
130°	787.0	788.1	789.1	790.1	791.0	791.8	792.4	793.0	793.6	794.2	794.0
132.5°	821.3	822.2	823.2	824.2	825.2	825.7	825.9	826.0	826.1	826.3	826.7
135°	868.1	869.2	870.5	871.6	872.8	873.6	874.1	874.4	874.8	875.2	875.6
137.5°	915.1	916.1	917.1	918.2	919.2	919.7	919.6	919.5	919.4	919.4	919.7
140°	942.9	944.1	945.2	946.5	947.6	948.0	947.6	947.3	946.8	946.5	946.6
142.5°	969.2	970.4	971.6	972.8	974.0	974.6	974.5	974.4	974.3	974.2	973.9
145°	1007.9	1009.1	1010.2	1011.5	1012.6	1013.1	1012.9	1012.7	1012.5	1012.4	1012.4
147.5°	1039.7	1041.2	1042.6	1044.0	1045.4	1046.1	1045.8	1045.5	1045.4	1045.1	1044.8
150°	1060.4	1061.9	1063.5	1065.1	1066.8	1067.3	1066.9	1066.6	1066.1	1065.8	1065.3
152.5°	1079.6	1081.0	1082.4	1083.9	1085.3	1085.8	1085.5	1085.0	1084.7	1084.2	1083.9
155°	1104.9	1106.5	1108.0	1109.6	1111.3	1111.8	1111.2	1110.5	1110.0	1109.4	1108.9
157.5°	1126.1	1127.7	1129.3	1130.9	1132.5	1132.9	1132.3	1131.7	1131.0	1130.4	1130.3
160°	1139.6	1141.2	1142.8	1144.4	1145.9	1146.4	1145.6	1144.8	1144.0	1143.2	1143.0
162.5°	1151.7	1153.5	1155.2	1157.0	1158.7	1159.0	1157.9	1156.8	1155.7	1154.6	1154.4
165°	1168.1	1169.7	1171.3	1172.9	1174.5	1174.7	1173.5	1172.2	1171.1	1169.9	1169.7
167.5°	1179.6	1181.3	1183.1	1184.9	1186.7	1186.9	1185.4	1184.0	1182.6	1181.2	1180.9
170°	1186.0	1187.8	1189.5	1191.2	1193.0	1193.2	1191.6	1190.0	1188.4	1186.9	1186.6
172.5°	1190.3	1191.9	1193.7	1195.5	1197.3	1197.5	1196.1	1194.6	1193.2	1191.8	1191.4
175°	1195.7	1197.5	1199.3	1201.0	1202.8	1202.9	1201.4	1199.8	1198.2	1196.6	1196.4
177.5°	1198.9	1200.2	1201.5	1202.7	1204.0	1204.1	1203.0	1201.8	1200.8	1199.6	1199.5
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1506.5	1503.2	1496.9	1491.1	1483.9	1477.7	1473.4	1468.0	1461.3	1453.1	1446.4
5°	1573.2	1560.0	1542.6	1527.5	1508.2	1493.2	1477.6	1462.5	1447.4	1428.2	1411.3
7.5°	1647.2	1619.8	1593.2	1559.8	1529.5	1502.4	1476.3	1450.0	1424.2	1396.9	1370.6
10°	1692.4	1659.3	1622.6	1580.5	1541.9	1505.2	1471.5	1438.4	1403.6	1372.8	1339.7
12.5°	1734.8	1692.0	1650.0	1596.9	1550.6	1505.7	1462.9	1421.6	1384.3	1344.4	1308.9
15°	1773.1	1730.9	1684.0	1619.0	1554.6	1500.4	1449.8	1396.3	1350.0	1305.4	1265.7
17.5°	1787.9	1743.7	1689.2	1626.7	1556.3	1488.2	1423.0	1364.3	1309.7	1257.8	1213.2
20°	1782.1	1739.4	1683.4	1623.8	1548.5	1477.6	1407.1	1342.1	1281.4	1226.5	1179.0
22.5°	1768.1	1723.9	1669.9	1607.0	1535.5	1460.2	1385.0	1315.6	1252.0	1195.2	1143.4
25°	1747.2	1687.0	1631.7	1570.2	1502.3	1427.6	1350.0	1273.5	1205.5	1147.7	1091.2
27.5°	1725.4	1650.3	1579.8	1518.9	1447.0	1380.4	1305.6	1227.2	1155.7	1096.8	1038.8
30°	1705.7	1621.4	1543.7	1474.5	1406.5	1343.4	1272.3	1195.9	1122.5	1061.7	1002.7
32.5°	1681.1	1591.5	1506.2	1426.4	1360.8	1298.1	1233.8	1160.7	1089.2	1026.5	966.6
35°	1650.3	1536.0	1443.2	1358.3	1285.6	1224.8	1167.0	1108.0	1036.4	971.4	913.0
37.5°	1609.8	1480.1	1372.8	1280.4	1203.5	1142.5	1096.9	1043.0	977.7	915.4	861.2
40°	1585.3	1439.7	1322.2	1230.8	1150.1	1085.7	1043.0	997.3	937.7	879.3	825.1
42.5°	1552.6	1402.6	1271.2	1175.9	1094.8	1032.8	989.5	949.6	899.6	844.6	786.6
45°	1488.4	1330.7	1192.8	1090.6	1008.7	947.9	907.6	872.1	834.2	783.6	733.1
47.5°	1404.8	1255.7	1111.5	999.8	919.6	863.2	824.0	796.0	768.9	725.9	676.8
50°	1337.9	1194.1	1053.2	944.9	859.4	805.8	769.2	746.9	722.2	683.1	642.2
52.5°	1258.9	1130.5	992.6	881.8	801.2	751.0	715.7	693.5	673.2	641.2	602.2
55°	1134.5	1022.0	895.5	795.0	721.0	670.5	636.8	615.7	603.7	576.6	545.9
57.5°	990.9	910.3	798.8	701.9	636.4	586.5	561.8	543.9	530.2	511.1	489.5
60°	890.7	834.2	734.2	642.2	582.0	534.4	512.2	497.1	484.5	468.2	451.4
62.5°	789.2	748.0	661.1	582.0	526.6	486.8	465.9	452.4	437.8	426.9	410.5
65°	653.0	616.3	556.1	494.1	443.0	411.1	396.0	384.0	375.0	362.9	351.5
67.5°	508.0	493.0	451.5	408.8	372.0	343.7	330.6	322.3	311.4	304.2	296.3
70°	418.9	411.7	382.2	353.9	319.6	300.3	288.3	284.6	271.4	264.2	258.8
72.5°	339.9	336.5	319.6	300.0	275.8	259.0	247.8	243.8	235.3	229.5	226.0
75°	232.9	234.2	231.1	218.5	209.5	198.6	189.0	186.5	180.6	175.8	172.7
77.5°	147.3	153.5	153.7	153.1	149.5	142.9	138.9	137.1	131.2	129.4	128.7
80°	101.1	107.7	113.8	113.2	111.9	110.1	107.1	105.3	102.3	100.5	99.3
82.5°	67.4	73.6	78.6	81.9	81.6	79.8	77.8	77.0	76.3	75.0	74.7
85°	31.9	33.1	34.9	39.1	42.1	42.7	42.1	41.6	39.7	40.3	40.9
87.5°	13.4	13.1	13.3	13.0	12.2	14.3	15.4	15.6	15.0	14.3	13.6
90°	11.5	10.1	8.7	7.2	5.6	4.0	2.5	0.9	2.5	4.0	5.6
92.5°	11.8	10.5	9.4	9.3	10.3	11.5	12.6	13.7	12.6	11.5	10.3
95°	29.2	36.8	44.3	48.4	49.0	49.6	50.1	50.7	50.1	49.6	49.0
97.5°	73.6	88.5	103.3	110.2	109.1	108.1	107.0	105.9	107.0	108.1	109.1
100°	153.4	152.6	151.8	151.1	150.4	149.9	149.3	148.6	149.3	149.9	150.4
102.5°	196.7	196.3	195.7	195.1	194.4	193.7	192.9	192.2	192.9	193.7	194.4
105°	265.3	265.3	265.3	264.9	264.1	263.3	262.5	261.7	262.5	263.3	264.1
107.5°	335.0	334.7	334.2	334.0	334.0	334.0	334.0	334.0	334.0	334.0	334.0
110°	382.1	381.7	381.3	381.0	381.0	381.0	381.0	381.0	381.0	381.0	381.0



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	427.9	427.8	427.5	427.1	426.7	426.1	425.7	425.3	425.7	426.1	426.7
115°	496.4	496.2	496.1	495.4	494.5	493.5	492.5	491.5	492.5	493.5	494.5
117.5°	561.7	561.0	560.3	559.9	559.9	559.9	560.0	560.0	560.0	559.9	559.9
120°	603.3	602.8	602.2	602.0	602.2	602.4	602.5	602.8	602.5	602.4	602.2
122.5°	644.6	644.4	644.0	643.5	642.7	642.0	641.2	640.5	641.2	642.0	642.7
125°	705.2	705.2	705.2	704.5	703.1	701.7	700.3	698.9	700.3	701.7	703.1
127.5°	758.8	758.9	759.0	758.6	757.6	756.6	755.6	754.7	755.6	756.6	757.6
130°	793.8	793.6	793.4	792.8	791.8	790.9	789.9	788.8	789.9	790.9	791.8
132.5°	827.2	827.5	828.0	827.6	826.4	825.4	824.2	823.0	824.2	825.4	826.4
135°	876.0	876.4	876.8	876.4	875.2	874.1	872.8	871.6	872.8	874.1	875.2
137.5°	920.1	920.4	920.8	920.4	919.4	918.4	917.4	916.3	917.4	918.4	919.4
140°	946.8	947.0	947.3	947.1	946.7	946.4	945.9	945.6	945.9	946.4	946.7
142.5°	973.7	973.4	973.1	972.9	972.6	972.4	972.1	971.9	972.1	972.4	972.6
145°	1012.4	1012.4	1012.4	1012.1	1011.7	1011.3	1010.9	1010.6	1010.9	1011.3	1011.7
147.5°	1044.6	1044.4	1044.1	1044.0	1044.1	1044.2	1044.3	1044.4	1044.3	1044.2	1044.1
150°	1065.0	1064.5	1064.2	1064.2	1064.5	1065.0	1065.3	1065.8	1065.3	1065.0	1064.5
152.5°	1083.4	1083.1	1082.7	1082.9	1083.8	1084.7	1085.6	1086.4	1085.6	1084.7	1083.8
155°	1108.6	1108.2	1107.8	1108.2	1109.4	1110.5	1111.8	1112.9	1111.8	1110.5	1109.4
157.5°	1130.3	1130.2	1130.2	1130.6	1131.3	1132.0	1132.7	1133.4	1132.7	1132.0	1131.3
160°	1142.8	1142.6	1142.4	1142.9	1144.1	1145.3	1146.5	1147.6	1146.5	1145.3	1144.1
162.5°	1154.2	1154.0	1153.8	1154.3	1155.5	1156.6	1157.9	1159.0	1157.9	1156.6	1155.5
165°	1169.5	1169.3	1169.1	1169.7	1170.8	1172.0	1173.1	1174.4	1173.1	1172.0	1170.8
167.5°	1180.7	1180.5	1180.4	1180.9	1182.1	1183.3	1184.5	1185.8	1184.5	1183.3	1182.1
170°	1186.4	1186.2	1186.1	1186.6	1188.0	1189.4	1190.8	1192.1	1190.8	1189.4	1188.0
172.5°	1191.1	1190.7	1190.4	1190.9	1192.3	1193.6	1195.1	1196.4	1195.1	1193.6	1192.3
175°	1196.2	1196.1	1195.9	1196.3	1197.5	1198.7	1199.9	1201.0	1199.9	1198.7	1197.5
177.5°	1199.4	1199.2	1199.0	1199.4	1200.3	1201.3	1202.3	1203.2	1202.3	1201.3	1200.3
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1441.5	1434.9	1430.0	1420.4	1413.6	1410.8	1405.4	1404.0	1409.3	1405.4	1405.0
5°	1398.7	1381.3	1367.4	1353.5	1338.5	1328.9	1314.5	1312.1	1308.4	1303.0	1301.8
7.5°	1347.3	1324.5	1306.7	1283.9	1264.0	1248.0	1229.9	1221.4	1216.7	1209.7	1200.3
10°	1312.6	1285.6	1261.5	1238.6	1214.0	1194.1	1176.0	1162.2	1153.2	1144.7	1141.1
12.5°	1278.4	1250.9	1220.0	1192.4	1164.8	1142.5	1122.6	1113.6	1103.6	1093.7	1085.3
15°	1225.4	1188.7	1154.9	1123.0	1099.6	1075.5	1056.2	1043.0	1028.0	1023.8	1007.5
17.5°	1169.0	1133.0	1093.6	1060.0	1032.8	1006.3	985.1	970.1	958.8	943.3	935.8
20°	1133.9	1091.2	1052.7	1022.0	991.8	960.6	938.9	926.2	915.4	902.8	896.8
22.5°	1096.4	1054.5	1015.1	979.1	948.5	917.7	902.3	889.2	876.9	865.2	857.3
25°	1041.2	999.1	957.5	920.2	888.3	866.0	848.0	832.9	826.3	814.9	806.5
27.5°	986.7	941.9	898.8	861.6	836.6	814.6	799.8	787.8	775.9	765.9	758.6
30°	951.5	905.8	858.8	829.4	802.9	781.8	765.5	754.1	745.1	736.1	730.7
32.5°	916.4	869.2	827.5	795.7	770.6	752.4	735.7	724.8	715.2	705.3	698.8
35°	860.1	811.9	778.2	746.9	722.2	705.3	693.9	678.3	670.5	663.3	656.7
37.5°	807.7	762.9	726.5	699.0	677.5	660.8	646.0	637.6	627.9	621.4	615.9
40°	769.2	728.3	695.2	666.3	650.6	632.0	618.1	607.3	600.0	591.7	585.6
42.5°	734.5	696.4	664.3	638.3	618.8	603.1	589.7	578.9	569.7	563.7	558.7
45°	685.5	647.6	616.3	592.2	574.2	559.1	545.3	539.8	527.8	520.6	518.2
47.5°	634.8	600.9	570.7	548.5	530.0	515.8	502.7	491.7	485.1	478.0	474.1
50°	600.7	568.1	539.8	518.2	500.2	484.5	472.4	465.2	456.2	449.6	444.8
52.5°	566.5	536.4	508.1	487.4	471.7	456.1	442.6	435.4	426.9	422.6	419.3
55°	517.6	485.7	461.6	441.1	424.9	410.5	397.8	390.6	385.2	380.9	379.8
57.5°	462.3	436.9	414.6	396.1	379.2	365.7	354.6	347.8	343.0	342.3	338.8
60°	426.1	403.2	382.8	362.9	348.5	335.8	326.2	318.3	313.5	313.0	311.7
62.5°	390.0	368.1	349.1	331.6	318.6	306.5	297.3	288.6	285.6	282.7	280.0
65°	336.4	316.6	301.0	287.0	273.2	263.0	254.0	248.6	241.9	238.4	231.8
67.5°	283.8	268.4	253.4	241.7	230.9	221.1	213.7	205.6	201.2	198.2	193.4
70°	249.1	237.1	222.1	209.5	201.0	193.2	187.2	178.2	175.1	172.7	170.3
72.5°	216.4	205.8	193.2	183.0	174.5	167.2	160.2	156.0	153.0	150.6	149.2
75°	170.3	160.1	149.3	142.0	136.0	130.0	126.4	123.4	122.2	121.5	119.1
77.5°	125.1	119.7	111.0	105.2	101.2	98.8	95.6	94.0	93.9	91.2	90.4
80°	95.7	92.6	85.4	83.0	80.1	77.7	75.8	72.9	69.8	68.6	66.8
82.5°	71.2	68.1	65.3	61.3	58.9	57.4	55.6	54.5	54.9	53.2	52.3
85°	37.9	34.9	33.7	33.1	31.9	33.1	32.5	31.9	31.3	30.7	31.3
87.5°	13.5	13.8	13.6	14.8	13.6	14.4	14.6	14.4	14.5	14.7	14.4
90°	7.2	8.7	10.1	11.5	12.8	14.3	15.2	16.2	17.2	18.2	19.0
92.5°	9.3	9.4	10.5	11.8	13.0	14.3	15.2	16.2	17.2	18.2	18.8
95°	48.4	44.3	36.8	29.2	21.8	14.3	15.2	16.2	17.2	18.2	18.7
97.5°	110.2	103.3	88.5	73.6	58.7	43.8	38.3	32.6	27.1	21.5	18.7
100°	151.1	151.8	152.6	153.4	154.1	154.9	125.5	95.9	66.5	37.0	21.8
102.5°	195.1	195.7	196.3	196.7	197.2	197.7	192.1	186.5	180.9	175.3	165.9
105°	264.9	265.3	265.3	265.3	265.3	265.3	265.3	265.3	265.3	265.3	265.2
107.5°	334.0	334.2	334.7	335.0	335.5	335.8	335.9	335.9	336.0	336.0	335.7
110°	381.0	381.3	381.7	382.1	382.5	382.8	382.3	381.7	381.0	380.5	380.3



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	427.1	427.5	427.8	427.9	428.2	428.5	427.7	427.0	426.1	425.4	424.9
115°	495.4	496.1	496.2	496.4	496.6	496.8	496.1	495.3	494.5	493.7	492.7
117.5°	559.9	560.3	561.0	561.7	562.5	563.2	562.2	561.2	560.2	559.1	558.3
120°	602.0	602.2	602.8	603.3	604.0	604.6	604.1	603.8	603.3	603.0	602.3
122.5°	643.5	644.0	644.4	644.6	644.9	645.2	644.7	644.4	644.0	643.5	642.7
125°	704.5	705.2	705.2	705.2	705.2	705.2	704.4	703.6	702.8	702.0	701.3
127.5°	758.6	759.0	758.9	758.8	758.7	758.6	758.1	757.7	757.2	756.8	755.9
130°	792.8	793.4	793.6	793.8	794.0	794.2	793.6	793.0	792.4	791.8	791.0
132.5°	827.6	828.0	827.5	827.2	826.7	826.3	826.1	826.0	825.9	825.7	825.2
135°	876.4	876.8	876.4	876.0	875.6	875.2	874.8	874.4	874.1	873.6	872.8
137.5°	920.4	920.8	920.4	920.1	919.7	919.4	919.4	919.5	919.6	919.7	919.2
140°	947.1	947.3	947.0	946.8	946.6	946.5	946.8	947.3	947.6	948.0	947.6
142.5°	972.9	973.1	973.4	973.7	973.9	974.2	974.3	974.4	974.5	974.6	974.0
145°	1012.1	1012.4	1012.4	1012.4	1012.4	1012.4	1012.5	1012.7	1012.9	1013.1	1012.6
147.5°	1044.0	1044.1	1044.4	1044.6	1044.8	1045.1	1045.4	1045.5	1045.8	1046.1	1045.4
150°	1064.2	1064.2	1064.5	1065.0	1065.3	1065.8	1066.1	1066.6	1066.9	1067.3	1066.8
152.5°	1082.9	1082.7	1083.1	1083.4	1083.9	1084.2	1084.7	1085.0	1085.5	1085.8	1085.3
155°	1108.2	1107.8	1108.2	1108.6	1108.9	1109.4	1110.0	1110.5	1111.2	1111.8	1111.3
157.5°	1130.6	1130.2	1130.2	1130.3	1130.3	1130.4	1131.0	1131.7	1132.3	1132.9	1132.5
160°	1142.9	1142.4	1142.6	1142.8	1143.0	1143.2	1144.0	1144.8	1145.6	1146.4	1145.9
162.5°	1154.3	1153.8	1154.0	1154.2	1154.4	1154.6	1155.7	1156.8	1157.9	1159.0	1158.7
165°	1169.7	1169.1	1169.3	1169.5	1169.7	1169.9	1171.1	1172.2	1173.5	1174.7	1174.5
167.5°	1180.9	1180.4	1180.5	1180.7	1180.9	1181.2	1182.6	1184.0	1185.4	1186.9	1186.7
170°	1186.6	1186.1	1186.2	1186.4	1186.6	1186.9	1188.4	1190.0	1191.6	1193.2	1193.0
172.5°	1190.9	1190.4	1190.7	1191.1	1191.4	1191.8	1193.2	1194.6	1196.1	1197.5	1197.3
175°	1196.3	1195.9	1196.1	1196.2	1196.4	1196.6	1198.2	1199.8	1201.4	1202.9	1202.8
177.5°	1199.4	1199.0	1199.2	1199.4	1199.5	1199.6	1200.8	1201.8	1203.0	1204.1	1204.0
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1404.4	1399.2	1397.8	1399.6	1397.8	1399.2	1404.4	1405.0	1405.4	1409.3	1404.0
5°	1295.8	1289.8	1292.8	1291.6	1292.8	1289.8	1295.8	1301.8	1303.0	1308.4	1312.1
7.5°	1200.2	1192.8	1184.8	1187.3	1184.8	1192.8	1200.2	1200.3	1209.7	1216.7	1221.4
10°	1133.3	1127.3	1123.6	1126.7	1123.6	1127.3	1133.3	1141.1	1144.7	1153.2	1162.2
12.5°	1076.9	1073.4	1070.2	1068.9	1070.2	1073.4	1076.9	1085.3	1093.7	1103.6	1113.6
15°	1000.3	993.1	990.1	982.2	990.1	993.1	1000.3	1007.5	1023.8	1028.0	1043.0
17.5°	929.6	927.2	919.4	916.1	919.4	927.2	929.6	935.8	943.3	958.8	970.1
20°	887.7	885.3	877.5	882.3	877.5	885.3	887.7	896.8	902.8	915.4	926.2
22.5°	853.1	847.7	845.3	843.8	845.3	847.7	853.1	857.3	865.2	876.9	889.2
25°	804.1	796.2	793.3	789.6	793.3	796.2	804.1	806.5	814.9	826.3	832.9
27.5°	755.2	751.0	747.0	746.1	747.0	751.0	755.2	758.6	765.9	775.9	787.8
30°	723.4	719.3	716.2	716.2	716.2	719.3	723.4	730.7	736.1	745.1	754.1
32.5°	695.0	691.8	688.8	688.3	688.8	691.8	695.0	698.8	705.3	715.2	724.8
35°	653.6	648.8	647.6	644.0	647.6	648.8	653.6	656.7	663.3	670.5	678.3
37.5°	610.6	606.6	606.5	606.2	606.5	606.6	610.6	615.9	621.4	627.9	637.6
40°	583.2	580.1	579.6	575.3	579.6	580.1	583.2	585.6	591.7	600.0	607.3
42.5°	553.8	552.2	550.2	548.4	550.2	552.2	553.8	558.7	563.7	569.7	578.9
45°	514.0	509.8	509.8	506.8	509.8	509.8	514.0	518.2	520.6	527.8	539.8
47.5°	472.8	469.6	469.9	466.8	469.9	469.6	472.8	474.1	478.0	485.1	491.7
50°	445.4	443.5	443.0	441.8	443.0	443.5	445.4	444.8	449.6	456.2	465.2
52.5°	417.9	417.1	419.4	416.7	419.4	417.1	417.9	419.3	422.6	426.9	435.4
55°	380.9	379.2	382.8	379.2	382.8	379.2	380.9	379.8	380.9	385.2	390.6
57.5°	338.5	336.8	340.0	338.2	340.0	336.8	338.5	338.8	342.3	343.0	347.8
60°	310.6	306.9	308.7	309.3	308.7	306.9	310.6	311.7	313.0	313.5	318.3
62.5°	277.3	275.2	276.5	273.8	276.5	275.2	277.3	280.0	282.7	285.6	288.6
65°	230.5	228.7	226.3	225.1	226.3	228.7	230.5	231.8	238.4	241.9	248.6
67.5°	193.7	189.3	189.2	190.2	189.2	189.3	193.7	193.4	198.2	201.2	205.6
70°	166.7	166.7	166.1	166.1	166.1	166.7	166.7	170.3	172.7	175.1	178.2
72.5°	147.9	147.5	146.3	145.9	146.3	147.5	147.9	149.2	150.6	153.0	156.0
75°	119.1	119.8	118.6	118.0	118.6	119.8	119.1	119.1	121.5	122.2	123.4
77.5°	88.0	85.4	86.8	85.4	86.8	85.4	88.0	90.4	91.2	93.9	94.0
80°	66.8	66.2	68.0	66.2	68.0	66.2	66.8	66.8	68.6	69.8	72.9
82.5°	52.9	52.3	53.1	51.7	53.1	52.3	52.9	52.3	53.2	54.9	54.5
85°	31.9	31.3	30.7	31.3	30.7	31.3	31.9	31.3	30.7	31.3	31.9
87.5°	15.0	14.6	14.7	14.9	14.7	14.6	15.0	14.4	14.7	14.5	14.4
90°	19.6	20.2	20.8	21.4	20.8	20.2	19.6	19.0	18.2	17.2	16.2
92.5°	19.1	19.4	19.7	20.0	19.7	19.4	19.1	18.8	18.2	17.2	16.2
95°	18.7	18.7	18.7	18.7	18.7	18.7	18.7	18.7	18.2	17.2	16.2
97.5°	18.7	18.7	18.7	18.7	18.7	18.7	18.7	18.7	21.5	27.1	32.6
100°	21.0	20.2	19.5	18.7	19.5	20.2	21.0	21.8	37.0	66.5	95.9
102.5°	152.4	138.9	125.5	112.0	125.5	138.9	152.4	165.9	175.3	180.9	186.5
105°	265.0	264.8	264.7	264.4	264.7	264.8	265.0	265.2	265.3	265.3	265.3
107.5°	335.1	334.6	333.9	333.3	333.9	334.6	335.1	335.7	336.0	336.0	335.9
110°	380.5	380.7	380.8	381.0	380.8	380.7	380.5	380.3	380.5	381.0	381.7



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	424.6	424.4	424.1	423.8	424.1	424.4	424.6	424.9	425.4	426.1	427.0
115°	491.5	490.3	489.1	487.9	489.1	490.3	491.5	492.7	493.7	494.5	495.3
117.5°	557.9	557.3	556.8	556.2	556.8	557.3	557.9	558.3	559.1	560.2	561.2
120°	601.3	600.3	599.3	598.3	599.3	600.3	601.3	602.3	603.0	603.3	603.8
122.5°	641.7	640.5	639.4	638.2	639.4	640.5	641.7	642.7	643.5	644.0	644.4
125°	700.7	700.1	699.5	698.9	699.5	700.1	700.7	701.3	702.0	702.8	703.6
127.5°	754.4	753.0	751.5	750.0	751.5	753.0	754.4	755.9	756.8	757.2	757.7
130°	790.1	789.1	788.1	787.0	788.1	789.1	790.1	791.0	791.8	792.4	793.0
132.5°	824.2	823.2	822.2	821.3	822.2	823.2	824.2	825.2	825.7	825.9	826.0
135°	871.6	870.5	869.2	868.1	869.2	870.5	871.6	872.8	873.6	874.1	874.4
137.5°	918.2	917.1	916.1	915.1	916.1	917.1	918.2	919.2	919.7	919.6	919.5
140°	946.5	945.2	944.1	942.9	944.1	945.2	946.5	947.6	948.0	947.6	947.3
142.5°	972.8	971.6	970.4	969.2	970.4	971.6	972.8	974.0	974.6	974.5	974.4
145°	1011.5	1010.2	1009.1	1007.9	1009.1	1010.2	1011.5	1012.6	1013.1	1012.9	1012.7
147.5°	1044.0	1042.6	1041.2	1039.7	1041.2	1042.6	1044.0	1045.4	1046.1	1045.8	1045.5
150°	1065.1	1063.5	1061.9	1060.4	1061.9	1063.5	1065.1	1066.8	1067.3	1066.9	1066.6
152.5°	1083.9	1082.4	1081.0	1079.6	1081.0	1082.4	1083.9	1085.3	1085.8	1085.5	1085.0
155°	1109.6	1108.0	1106.5	1104.9	1106.5	1108.0	1109.6	1111.3	1111.8	1111.2	1110.5
157.5°	1130.9	1129.3	1127.7	1126.1	1127.7	1129.3	1130.9	1132.5	1132.9	1132.3	1131.7
160°	1144.4	1142.8	1141.2	1139.6	1141.2	1142.8	1144.4	1145.9	1146.4	1145.6	1144.8
162.5°	1157.0	1155.2	1153.5	1151.7	1153.5	1155.2	1157.0	1158.7	1159.0	1157.9	1156.8
165°	1172.9	1171.3	1169.7	1168.1	1169.7	1171.3	1172.9	1174.5	1174.7	1173.5	1172.2
167.5°	1184.9	1183.1	1181.3	1179.6	1181.3	1183.1	1184.9	1186.7	1186.9	1185.4	1184.0
170°	1191.2	1189.5	1187.8	1186.0	1187.8	1189.5	1191.2	1193.0	1193.2	1191.6	1190.0
172.5°	1195.5	1193.7	1191.9	1190.3	1191.9	1193.7	1195.5	1197.3	1197.5	1196.1	1194.6
175°	1201.0	1199.3	1197.5	1195.7	1197.5	1199.3	1201.0	1202.8	1202.9	1201.4	1199.8
177.5°	1202.7	1201.5	1200.2	1198.9	1200.2	1201.5	1202.7	1204.0	1204.1	1203.0	1201.8
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1405.4	1410.8	1413.6	1420.4	1430.0	1434.9	1441.5	1446.4	1453.1	1461.3	1468.0
5°	1314.5	1328.9	1338.5	1353.5	1367.4	1381.3	1398.7	1411.3	1428.2	1447.4	1462.5
7.5°	1229.9	1248.0	1264.0	1283.9	1306.7	1324.5	1347.3	1370.6	1396.9	1424.2	1450.0
10°	1176.0	1194.1	1214.0	1238.6	1261.5	1285.6	1312.6	1339.7	1372.8	1403.6	1438.4
12.5°	1122.6	1142.5	1164.8	1192.4	1220.0	1250.9	1278.4	1308.9	1344.4	1384.3	1421.6
15°	1056.2	1075.5	1099.6	1123.0	1154.9	1188.7	1225.4	1265.7	1305.4	1350.0	1396.3
17.5°	985.1	1006.3	1032.8	1060.0	1093.6	1133.0	1169.0	1213.2	1257.8	1309.7	1364.3
20°	938.9	960.6	991.8	1022.0	1052.7	1091.2	1133.9	1179.0	1226.5	1281.4	1342.1
22.5°	902.3	917.7	948.5	979.1	1015.1	1054.5	1096.4	1143.4	1195.2	1252.0	1315.6
25°	848.0	866.0	888.3	920.2	957.5	999.1	1041.2	1091.2	1147.7	1205.5	1273.5
27.5°	799.8	814.6	836.6	861.6	898.8	941.9	986.7	1038.8	1096.8	1155.7	1227.2
30°	765.5	781.8	802.9	829.4	858.8	905.8	951.5	1002.7	1061.7	1122.5	1195.9
32.5°	735.7	752.4	770.6	795.7	827.5	869.2	916.4	966.6	1026.5	1089.2	1160.7
35°	693.9	705.3	722.2	746.9	778.2	811.9	860.1	913.0	971.4	1036.4	1108.0
37.5°	646.0	660.8	677.5	699.0	726.5	762.9	807.7	861.2	915.4	977.7	1043.0
40°	618.1	632.0	650.6	666.3	695.2	728.3	769.2	825.1	879.3	937.7	997.3
42.5°	589.7	603.1	618.8	638.3	664.3	696.4	734.5	786.6	844.6	899.6	949.6
45°	545.3	559.1	574.2	592.2	616.3	647.6	685.5	733.1	783.6	834.2	872.1
47.5°	502.7	515.8	530.0	548.5	570.7	600.9	634.8	676.8	725.9	768.9	796.0
50°	472.4	484.5	500.2	518.2	539.8	568.1	600.7	642.2	683.1	722.2	746.9
52.5°	442.6	456.1	471.7	487.4	508.1	536.4	566.5	602.2	641.2	673.2	693.5
55°	397.8	410.5	424.9	441.1	461.6	485.7	517.6	545.9	576.6	603.7	615.7
57.5°	354.6	365.7	379.2	396.1	414.6	436.9	462.3	489.5	511.1	530.2	543.9
60°	326.2	335.8	348.5	362.9	382.8	403.2	426.1	451.4	468.2	484.5	497.1
62.5°	297.3	306.5	318.6	331.6	349.1	368.1	390.0	410.5	426.9	437.8	452.4
65°	254.0	263.0	273.2	287.0	301.0	316.6	336.4	351.5	362.9	375.0	384.0
67.5°	213.7	221.1	230.9	241.7	253.4	268.4	283.8	296.3	304.2	311.4	322.3
70°	187.2	193.2	201.0	209.5	222.1	237.1	249.1	258.8	264.2	271.4	284.6
72.5°	160.2	167.2	174.5	183.0	193.2	205.8	216.4	226.0	229.5	235.3	243.8
75°	126.4	130.0	136.0	142.0	149.3	160.1	170.3	172.7	175.8	180.6	186.5
77.5°	95.6	98.8	101.2	105.2	111.0	119.7	125.1	128.7	129.4	131.2	137.1
80°	75.8	77.7	80.1	83.0	85.4	92.6	95.7	99.3	100.5	102.3	105.3
82.5°	55.6	57.4	58.9	61.3	65.3	68.1	71.2	74.7	75.0	76.3	77.0
85°	32.5	33.1	31.9	33.1	33.7	34.9	37.9	40.9	40.3	39.7	41.6
87.5°	14.6	14.4	13.6	14.8	13.6	13.8	13.5	13.6	14.3	15.0	15.6
90°	15.2	14.3	12.8	11.5	10.1	8.7	7.2	5.6	4.0	2.5	0.9
92.5°	15.2	14.3	13.0	11.8	10.5	9.4	9.3	10.3	11.5	12.6	13.7
95°	15.2	14.3	21.8	29.2	36.8	44.3	48.4	49.0	49.6	50.1	50.7
97.5°	38.3	43.8	58.7	73.6	88.5	103.3	110.2	109.1	108.1	107.0	105.9
100°	125.5	154.9	154.1	153.4	152.6	151.8	151.1	150.4	149.9	149.3	148.6
102.5°	192.1	197.7	197.2	196.7	196.3	195.7	195.1	194.4	193.7	192.9	192.2
105°	265.3	265.3	265.3	265.3	265.3	265.3	264.9	264.1	263.3	262.5	261.7
107.5°	335.9	335.8	335.5	335.0	334.7	334.2	334.0	334.0	334.0	334.0	334.0
110°	382.3	382.8	382.5	382.1	381.7	381.3	381.0	381.0	381.0	381.0	381.0



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	427.7	428.5	428.2	427.9	427.8	427.5	427.1	426.7	426.1	425.7	425.3
115°	496.1	496.8	496.6	496.4	496.2	496.1	495.4	494.5	493.5	492.5	491.5
117.5°	562.2	563.2	562.5	561.7	561.0	560.3	559.9	559.9	559.9	560.0	560.0
120°	604.1	604.6	604.0	603.3	602.8	602.2	602.0	602.2	602.4	602.5	602.8
122.5°	644.7	645.2	644.9	644.6	644.4	644.0	643.5	642.7	642.0	641.2	640.5
125°	704.4	705.2	705.2	705.2	705.2	705.2	704.5	703.1	701.7	700.3	698.9
127.5°	758.1	758.6	758.7	758.8	758.9	759.0	758.6	757.6	756.6	755.6	754.7
130°	793.6	794.2	794.0	793.8	793.6	793.4	792.8	791.8	790.9	789.9	788.8
132.5°	826.1	826.3	826.7	827.2	827.5	828.0	827.6	826.4	825.4	824.2	823.0
135°	874.8	875.2	875.6	876.0	876.4	876.8	876.4	875.2	874.1	872.8	871.6
137.5°	919.4	919.4	919.7	920.1	920.4	920.8	920.4	919.4	918.4	917.4	916.3
140°	946.8	946.5	946.6	946.8	947.0	947.3	947.1	946.7	946.4	945.9	945.6
142.5°	974.3	974.2	973.9	973.7	973.4	973.1	972.9	972.6	972.4	972.1	971.9
145°	1012.5	1012.4	1012.4	1012.4	1012.4	1012.4	1012.1	1011.7	1011.3	1010.9	1010.6
147.5°	1045.4	1045.1	1044.8	1044.6	1044.4	1044.1	1044.0	1044.1	1044.2	1044.3	1044.4
150°	1066.1	1065.8	1065.3	1065.0	1064.5	1064.2	1064.2	1064.5	1065.0	1065.3	1065.8
152.5°	1084.7	1084.2	1083.9	1083.4	1083.1	1082.7	1082.9	1083.8	1084.7	1085.6	1086.4
155°	1110.0	1109.4	1108.9	1108.6	1108.2	1107.8	1108.2	1109.4	1110.5	1111.8	1112.9
157.5°	1131.0	1130.4	1130.3	1130.3	1130.2	1130.2	1130.6	1131.3	1132.0	1132.7	1133.4
160°	1144.0	1143.2	1143.0	1142.8	1142.6	1142.4	1142.9	1144.1	1145.3	1146.5	1147.6
162.5°	1155.7	1154.6	1154.4	1154.2	1154.0	1153.8	1154.3	1155.5	1156.6	1157.9	1159.0
165°	1171.1	1169.9	1169.7	1169.5	1169.3	1169.1	1169.7	1170.8	1172.0	1173.1	1174.4
167.5°	1182.6	1181.2	1180.9	1180.7	1180.5	1180.4	1180.9	1182.1	1183.3	1184.5	1185.8
170°	1188.4	1186.9	1186.6	1186.4	1186.2	1186.1	1186.6	1188.0	1189.4	1190.8	1192.1
172.5°	1193.2	1191.8	1191.4	1191.1	1190.7	1190.4	1190.9	1192.3	1193.6	1195.1	1196.4
175°	1198.2	1196.6	1196.4	1196.2	1196.1	1195.9	1196.3	1197.5	1198.7	1199.9	1201.0
177.5°	1200.8	1199.6	1199.5	1199.4	1199.2	1199.0	1199.4	1200.3	1201.3	1202.3	1203.2
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1473.4	1477.7	1483.9	1491.1	1496.9	1503.2	1506.5	1506.5	1509.5	1515.7	1523.9
5°	1477.6	1493.2	1508.2	1527.5	1542.6	1560.0	1573.2	1585.9	1597.3	1611.8	1626.8
7.5°	1476.3	1502.4	1529.5	1559.8	1593.2	1619.8	1647.2	1668.6	1689.8	1717.4	1739.2
10°	1471.5	1505.2	1541.9	1580.5	1622.6	1659.3	1692.4	1722.5	1751.4	1781.5	1808.6
12.5°	1462.9	1505.7	1550.6	1596.9	1650.0	1692.0	1734.8	1766.8	1800.5	1833.4	1866.8
15°	1449.8	1500.4	1554.6	1619.0	1684.0	1730.9	1773.1	1814.6	1845.8	1883.2	1915.1
17.5°	1423.0	1488.2	1556.3	1626.7	1689.2	1743.7	1787.9	1827.4	1860.7	1901.8	1945.1
20°	1407.1	1477.6	1548.5	1623.8	1683.4	1739.4	1782.1	1823.0	1864.6	1918.1	1971.0
22.5°	1385.0	1460.2	1535.5	1607.0	1669.9	1723.9	1768.1	1818.2	1872.7	1933.5	1997.5
25°	1350.0	1427.6	1502.3	1570.2	1631.7	1687.0	1747.2	1814.6	1880.8	1960.9	2052.9
27.5°	1305.6	1380.4	1447.0	1518.9	1579.8	1650.3	1725.4	1798.5	1893.9	2004.0	2119.0
30°	1272.3	1343.4	1406.5	1474.5	1543.7	1621.4	1705.7	1791.7	1905.5	2034.9	2171.5
32.5°	1233.8	1298.1	1360.8	1426.4	1506.2	1591.5	1681.1	1786.5	1922.4	2069.6	2211.0
35°	1167.0	1224.8	1285.6	1358.3	1443.2	1536.0	1650.3	1778.5	1942.8	2101.0	2228.0
37.5°	1096.9	1142.5	1203.5	1280.4	1372.8	1480.1	1609.8	1765.6	1934.4	2076.3	2130.5
40°	1043.0	1085.7	1150.1	1230.8	1322.2	1439.7	1585.3	1745.3	1915.1	2013.8	2009.6
42.5°	989.5	1032.8	1094.8	1175.9	1271.2	1402.6	1552.6	1718.9	1862.2	1899.7	1821.3
45°	907.6	947.9	1008.7	1090.6	1192.8	1330.7	1488.4	1647.9	1739.4	1678.6	1523.3
47.5°	824.0	863.2	919.6	999.8	1111.5	1255.7	1404.8	1535.7	1548.5	1418.0	1231.7
50°	769.2	805.8	859.4	944.9	1053.2	1194.1	1337.9	1440.8	1408.9	1249.5	1057.5
52.5°	715.7	751.0	801.2	881.8	992.6	1130.5	1258.9	1339.7	1266.0	1096.4	923.6
55°	636.8	670.5	721.0	795.0	895.5	1022.0	1134.5	1164.0	1055.6	884.8	745.1
57.5°	561.8	586.5	636.4	701.9	798.8	910.3	990.9	985.6	866.0	712.1	612.0
60°	512.2	534.4	582.0	642.2	734.2	834.2	890.7	866.7	745.7	618.7	522.4
62.5°	465.9	486.8	526.6	582.0	661.1	748.0	789.2	755.9	641.7	530.1	453.5
65°	396.0	411.1	443.0	494.1	556.1	616.3	653.0	604.2	503.2	418.9	361.1
67.5°	330.6	343.7	372.0	408.8	451.5	493.0	508.0	462.3	383.6	326.8	286.1
70°	288.3	300.3	319.6	353.9	382.2	411.7	418.9	378.0	312.4	269.0	243.8
72.5°	247.8	259.0	275.8	300.0	319.6	336.5	339.9	301.9	251.7	221.9	202.3
75°	189.0	198.6	209.5	218.5	231.1	234.2	232.9	203.4	176.4	156.5	145.6
77.5°	138.9	142.9	149.5	153.1	153.7	153.5	147.3	128.7	114.7	106.6	102.1
80°	107.1	110.1	111.9	113.2	113.8	107.7	101.1	89.7	84.9	80.1	74.6
82.5°	77.8	79.8	81.6	81.9	78.6	73.6	67.4	61.7	58.4	56.0	53.9
85°	42.1	42.7	42.1	39.1	34.9	33.1	31.9	30.7	30.1	29.5	29.5
87.5°	15.4	14.3	12.2	13.0	13.3	13.1	13.4	13.2	12.9	13.2	13.4
90°	2.5	4.0	5.6	7.2	8.7	10.1	11.5	12.8	14.3	15.2	16.2
92.5°	12.6	11.5	10.3	9.3	9.4	10.5	11.8	13.0	14.3	15.2	16.2
95°	50.1	49.6	49.0	48.4	44.3	36.8	29.2	21.8	14.3	15.2	16.2
97.5°	107.0	108.1	109.1	110.2	103.3	88.5	73.6	58.7	43.8	38.3	32.6
100°	149.3	149.9	150.4	151.1	151.8	152.6	153.4	154.1	154.9	125.5	95.9
102.5°	192.9	193.7	194.4	195.1	195.7	196.3	196.7	197.2	197.7	192.1	186.5
105°	262.5	263.3	264.1	264.9	265.3	265.3	265.3	265.3	265.3	265.3	265.3
107.5°	334.0	334.0	334.0	334.0	334.2	334.7	335.0	335.5	335.8	335.9	335.9
110°	381.0	381.0	381.0	381.0	381.3	381.7	382.1	382.5	382.8	382.3	381.7



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	425.7	426.1	426.7	427.1	427.5	427.8	427.9	428.2	428.5	427.7	427.0
115°	492.5	493.5	494.5	495.4	496.1	496.2	496.4	496.6	496.8	496.1	495.3
117.5°	560.0	559.9	559.9	559.9	560.3	561.0	561.7	562.5	563.2	562.2	561.2
120°	602.5	602.4	602.2	602.0	602.2	602.8	603.3	604.0	604.6	604.1	603.8
122.5°	641.2	642.0	642.7	643.5	644.0	644.4	644.6	644.9	645.2	644.7	644.4
125°	700.3	701.7	703.1	704.5	705.2	705.2	705.2	705.2	705.2	704.4	703.6
127.5°	755.6	756.6	757.6	758.6	759.0	758.9	758.8	758.7	758.6	758.1	757.7
130°	789.9	790.9	791.8	792.8	793.4	793.6	793.8	794.0	794.2	793.6	793.0
132.5°	824.2	825.4	826.4	827.6	828.0	827.5	827.2	826.7	826.3	826.1	826.0
135°	872.8	874.1	875.2	876.4	876.8	876.4	876.0	875.6	875.2	874.8	874.4
137.5°	917.4	918.4	919.4	920.4	920.8	920.4	920.1	919.7	919.4	919.4	919.5
140°	945.9	946.4	946.7	947.1	947.3	947.0	946.8	946.6	946.5	946.8	947.3
142.5°	972.1	972.4	972.6	972.9	973.1	973.4	973.7	973.9	974.2	974.3	974.4
145°	1010.9	1011.3	1011.7	1012.1	1012.4	1012.4	1012.4	1012.4	1012.4	1012.5	1012.7
147.5°	1044.3	1044.2	1044.1	1044.0	1044.1	1044.4	1044.6	1044.8	1045.1	1045.4	1045.5
150°	1065.3	1065.0	1064.5	1064.2	1064.2	1064.5	1065.0	1065.3	1065.8	1066.1	1066.6
152.5°	1085.6	1084.7	1083.8	1082.9	1082.7	1083.1	1083.4	1083.9	1084.2	1084.7	1085.0
155°	1111.8	1110.5	1109.4	1108.2	1107.8	1108.2	1108.6	1108.9	1109.4	1110.0	1110.5
157.5°	1132.7	1132.0	1131.3	1130.6	1130.2	1130.2	1130.3	1130.3	1130.4	1131.0	1131.7
160°	1146.5	1145.3	1144.1	1142.9	1142.4	1142.6	1142.8	1143.0	1143.2	1144.0	1144.8
162.5°	1157.9	1156.6	1155.5	1154.3	1153.8	1154.0	1154.2	1154.4	1154.6	1155.7	1156.8
165°	1173.1	1172.0	1170.8	1169.7	1169.1	1169.3	1169.5	1169.7	1169.9	1171.1	1172.2
167.5°	1184.5	1183.3	1182.1	1180.9	1180.4	1180.5	1180.7	1180.9	1181.2	1182.6	1184.0
170°	1190.8	1189.4	1188.0	1186.6	1186.1	1186.2	1186.4	1186.6	1186.9	1188.4	1190.0
172.5°	1195.1	1193.6	1192.3	1190.9	1190.4	1190.7	1191.1	1191.4	1191.8	1193.2	1194.6
175°	1199.9	1198.7	1197.5	1196.3	1195.9	1196.1	1196.2	1196.4	1196.6	1198.2	1199.8
177.5°	1202.3	1201.3	1200.3	1199.4	1199.0	1199.2	1199.4	1199.5	1199.6	1200.8	1201.8
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2	1466.2
2.5°	1530.2	1530.2	1538.4	1537.8	1543.2	1541.2	1542.2
5°	1644.8	1655.1	1664.1	1670.2	1679.2	1681.6	1680.3
7.5°	1763.8	1786.5	1797.6	1812.8	1815.5	1823.5	1822.7
10°	1837.5	1859.8	1876.6	1889.8	1896.4	1904.9	1905.5
12.5°	1895.2	1914.1	1929.0	1941.3	1949.4	1952.0	1953.6
15°	1940.4	1961.4	1978.9	1996.4	2006.6	2014.4	2018.7
17.5°	1985.8	2018.4	2049.2	2072.9	2087.1	2099.2	2099.0
20°	2021.1	2058.3	2096.9	2124.0	2151.6	2163.6	2165.4
22.5°	2058.6	2115.7	2165.3	2207.3	2243.5	2256.1	2260.8
25°	2136.5	2211.2	2287.7	2346.6	2388.7	2413.4	2417.1
27.5°	2230.8	2331.8	2412.3	2466.7	2501.7	2520.0	2523.9
30°	2297.3	2390.6	2462.8	2503.7	2520.0	2522.4	2513.4
32.5°	2327.1	2396.8	2425.7	2423.3	2391.4	2370.3	2362.1
35°	2290.6	2276.2	2205.8	2121.6	2057.2	2016.2	2005.4
37.5°	2084.6	1960.0	1830.5	1703.2	1635.4	1600.9	1541.7
40°	1881.4	1703.9	1569.1	1461.9	1385.5	1324.1	1309.7
42.5°	1652.3	1468.9	1334.1	1242.3	1181.3	1139.2	1120.9
45°	1327.7	1170.0	1058.6	988.3	941.3	910.6	896.8
47.5°	1061.9	939.9	858.7	806.6	770.9	744.1	736.6
50°	916.1	818.5	749.9	706.0	678.9	658.4	650.0
52.5°	795.7	716.9	664.2	627.9	602.4	589.6	582.6
55°	656.7	588.6	550.7	521.8	507.4	497.1	492.3
57.5°	537.0	487.9	460.2	440.2	426.9	420.4	417.9
60°	470.0	431.5	406.3	390.6	381.6	373.2	370.8
62.5°	410.8	380.5	361.0	347.2	338.2	334.7	333.1
65°	331.0	311.1	296.7	288.3	281.1	279.8	279.3
67.5°	263.1	251.5	243.9	235.1	232.6	228.4	227.5
70°	225.1	217.3	208.2	205.3	202.2	198.0	198.6
72.5°	190.9	183.1	176.9	173.0	171.9	170.0	171.7
75°	139.6	137.2	134.8	131.8	130.6	130.6	130.0
77.5°	99.7	97.6	95.0	93.2	92.8	90.2	91.2
80°	72.2	69.2	68.0	68.6	66.8	66.2	66.2
82.5°	53.4	52.3	51.2	51.3	50.9	50.3	50.8
85°	29.5	28.9	28.9	28.3	28.3	27.6	27.6
87.5°	14.0	14.7	13.9	13.6	13.6	14.3	14.9
90°	17.2	18.2	19.0	19.6	20.2	20.8	21.4
92.5°	17.2	18.2	18.8	19.1	19.4	19.7	20.0
95°	17.2	18.2	18.7	18.7	18.7	18.7	18.7
97.5°	27.1	21.5	18.7	18.7	18.7	18.7	18.7
100°	66.5	37.0	21.8	21.0	20.2	19.5	18.7
102.5°	180.9	175.3	165.9	152.4	138.9	125.5	112.0
105°	265.3	265.3	265.2	265.0	264.8	264.7	264.4
107.5°	336.0	336.0	335.7	335.1	334.6	333.9	333.3
110°	381.0	380.5	380.3	380.5	380.7	380.8	381.0



TEST NUMBER: P333598-940

CATALOG NUMBER: S125RDIP-S1090D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	426.1	425.4	424.9	424.6	424.4	424.1	423.8
115°	494.5	493.7	492.7	491.5	490.3	489.1	487.9
117.5°	560.2	559.1	558.3	557.9	557.3	556.8	556.2
120°	603.3	603.0	602.3	601.3	600.3	599.3	598.3
122.5°	644.0	643.5	642.7	641.7	640.5	639.4	638.2
125°	702.8	702.0	701.3	700.7	700.1	699.5	698.9
127.5°	757.2	756.8	755.9	754.4	753.0	751.5	750.0
130°	792.4	791.8	791.0	790.1	789.1	788.1	787.0
132.5°	825.9	825.7	825.2	824.2	823.2	822.2	821.3
135°	874.1	873.6	872.8	871.6	870.5	869.2	868.1
137.5°	919.6	919.7	919.2	918.2	917.1	916.1	915.1
140°	947.6	948.0	947.6	946.5	945.2	944.1	942.9
142.5°	974.5	974.6	974.0	972.8	971.6	970.4	969.2
145°	1012.9	1013.1	1012.6	1011.5	1010.2	1009.1	1007.9
147.5°	1045.8	1046.1	1045.4	1044.0	1042.6	1041.2	1039.7
150°	1066.9	1067.3	1066.8	1065.1	1063.5	1061.9	1060.4
152.5°	1085.5	1085.8	1085.3	1083.9	1082.4	1081.0	1079.6
155°	1111.2	1111.8	1111.3	1109.6	1108.0	1106.5	1104.9
157.5°	1132.3	1132.9	1132.5	1130.9	1129.3	1127.7	1126.1
160°	1145.6	1146.4	1145.9	1144.4	1142.8	1141.2	1139.6
162.5°	1157.9	1159.0	1158.7	1157.0	1155.2	1153.5	1151.7
165°	1173.5	1174.7	1174.5	1172.9	1171.3	1169.7	1168.1
167.5°	1185.4	1186.9	1186.7	1184.9	1183.1	1181.3	1179.6
170°	1191.6	1193.2	1193.0	1191.2	1189.5	1187.8	1186.0
172.5°	1196.1	1197.5	1197.3	1195.5	1193.7	1191.9	1190.3
175°	1201.4	1202.9	1202.8	1201.0	1199.3	1197.5	1195.7
177.5°	1203.0	1204.1	1204.0	1202.7	1201.5	1200.2	1198.9
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0

(END OF REPORT)