

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333584-940

Luminaire Tested: **S125RDIP-S1090D365U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333584-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1090D365U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4896.3 lumens
Efficiency: N/A
Efficacy: 112.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 43.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333584-940

CATALOG NUMBER: S125RDIP-S1090D365U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

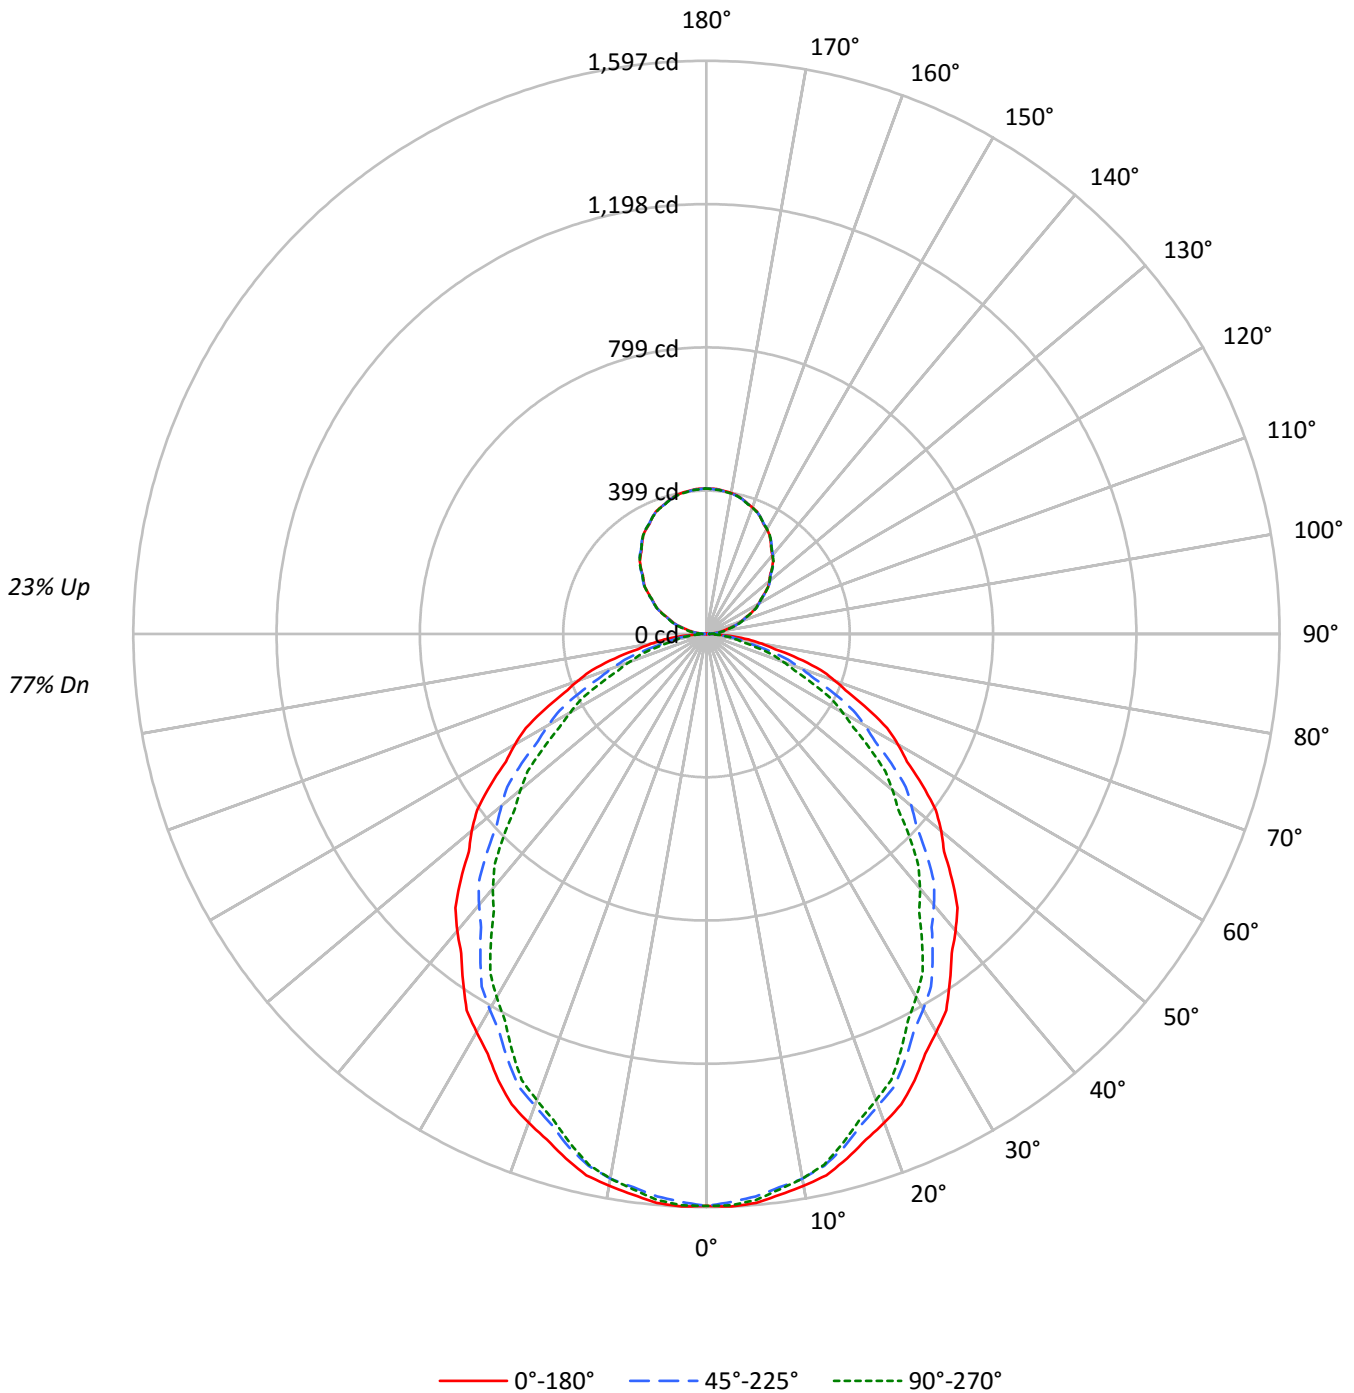



TEST NUMBER: P333584-940

CATALOG NUMBER: S125RDIP-S1090D365U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	114	114	114	114	108	108	108	108	98	98	98	89	89	89	81	81	81	77
1	104	100	96	92	99	95	92	89	87	84	82	79	77	75	72	71	69	66
2	95	88	81	76	90	84	78	73	77	72	68	70	66	63	64	61	59	55
3	87	77	70	64	83	74	67	62	68	62	58	62	58	54	57	53	50	47
4	80	69	61	54	76	66	59	53	61	54	50	56	51	47	51	47	44	41
5	74	62	53	47	70	59	51	46	54	48	43	50	45	41	46	42	38	36
6	68	56	47	41	65	53	46	40	49	43	38	46	40	36	42	37	34	31
7	63	50	42	36	60	48	41	35	45	38	34	42	36	32	38	34	30	28
8	59	46	38	32	56	44	37	32	41	35	30	38	33	29	35	31	27	25
9	55	42	34	29	52	41	33	29	38	32	27	35	30	26	33	28	25	23
10	51	39	31	26	49	38	31	26	35	29	25	33	27	24	30	26	22	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10293	10293	10293
5°	10317	10200	10263
10°	10239	10105	10105
15°	10117	9900	9819
20°	9961	9614	9498
25°	9779	9333	9128
30°	9552	9004	8717
35°	9320	8665	8257
40°	9104	8312	7804
45°	8840	7916	7311
50°	8575	7486	6797
55°	8268	7076	6248
60°	7962	6577	5660
65°	7597	5997	4985
70°	7183	5274	4296
75°	6608	4447	3573
80°	5821	3492	2998
85°	4905	2853	2675



TEST NUMBER: P333584-940

CATALOG NUMBER: S125RDIP-S1090D365U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.9	3.1
10°-20°	418.8	8.6
20°-30°	607.3	12.4
30°-40°	692.2	14.1
40°-50°	674.7	13.8
50°-60°	567.9	11.6
60°-70°	398.1	8.1
70°-80°	204.6	4.2
80°-90°	52.6	1.1
90°-100°	27.1	0.6
100°-110°	80.1	1.6
110°-120°	135.7	2.8
120°-130°	178.6	3.6
130°-140°	200.1	4.1
140°-150°	196.1	4.0
150°-160°	164.7	3.4
160°-170°	109.5	2.2
170°-180°	38.3	0.8
0°-30°	1176.0	24.0
0°-40°	1868.2	38.2
0°-60°	3110.9	63.5
0°-90°	3766.2	76.9
90°-120°	242.9	5.0
90°-150°	817.6	16.7
90°-180°	1130.0	23.1
0°-180°	4896.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1594	1594	1594	1594	1594	
5°	1591	1586	1573	1585	1583	151
15°	1513	1505	1481	1479	1469	426
25°	1372	1353	1310	1294	1281	631
35°	1182	1152	1099	1065	1047	740
45°	968	931	867	820	800	746
55°	734	694	628	576	555	657
65°	497	455	392	346	326	492
75°	265	228	178	153	143	280
85°	66	45	38	37	36	74
90°	0	3	5	7	8	4
95°	20	21	24	26	27	22
105°	72	74	75	77	78	77
115°	136	137	138	137	137	134
125°	198	200	200	200	200	177
135°	258	260	260	260	259	199
145°	312	314	314	314	314	195
155°	357	357	358	359	357	165
165°	389	388	388	389	388	110
175°	404	403	403	404	402	38
180°	405	405	405	405	405	



TEST NUMBER: P333584-940

CATALOG NUMBER: S125RDIP-S1090D365U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8
2.5°	1596.7	1596.1	1595.4	1594.7	1594.1	1592.8	1590.6	1588.5	1586.4	1584.2	1586.4
5°	1591.4	1590.4	1589.3	1588.2	1587.2	1585.1	1582.2	1579.2	1576.3	1573.3	1576.0
7.5°	1575.7	1574.8	1573.7	1572.7	1571.6	1569.4	1565.8	1562.4	1558.8	1555.3	1557.2
10°	1561.3	1560.5	1559.7	1558.9	1558.1	1555.9	1552.1	1548.4	1544.6	1540.9	1541.7
12.5°	1544.9	1543.9	1542.9	1541.9	1540.9	1537.8	1532.9	1527.8	1522.8	1517.7	1518.3
15°	1513.1	1511.5	1509.9	1508.3	1506.7	1503.2	1497.5	1491.9	1486.3	1480.7	1480.4
17.5°	1477.3	1474.8	1472.4	1469.9	1467.4	1462.7	1455.6	1448.6	1441.5	1434.4	1433.1
20°	1449.4	1446.7	1444.0	1441.4	1438.7	1433.1	1424.5	1415.9	1407.4	1398.8	1397.5
22.5°	1418.5	1415.9	1413.2	1410.5	1407.8	1402.0	1393.0	1384.0	1375.0	1366.0	1363.4
25°	1372.3	1368.3	1364.3	1360.3	1356.3	1349.3	1339.4	1329.5	1319.6	1309.7	1306.3
27.5°	1319.4	1314.5	1309.6	1304.8	1299.8	1292.2	1281.6	1271.0	1260.3	1249.7	1244.9
30°	1280.9	1275.8	1270.7	1265.6	1260.5	1252.3	1241.1	1229.8	1218.6	1207.4	1201.2
32.5°	1243.2	1237.3	1231.4	1225.5	1219.5	1210.9	1199.4	1187.9	1176.4	1165.0	1158.2
35°	1182.1	1175.7	1169.3	1162.9	1156.5	1147.2	1135.1	1123.1	1111.1	1099.0	1091.3
37.5°	1122.1	1114.4	1106.5	1098.8	1090.9	1080.8	1068.4	1056.0	1043.6	1031.2	1021.8
40°	1079.8	1071.7	1063.7	1055.7	1047.7	1037.2	1024.4	1011.6	998.7	985.9	975.7
42.5°	1035.5	1027.3	1019.0	1010.8	1002.6	991.8	978.5	965.3	952.0	938.7	929.0
45°	967.9	960.1	952.3	944.6	936.8	925.6	910.9	896.2	881.5	866.7	856.0
47.5°	897.8	889.6	881.4	873.3	865.0	853.5	838.7	823.9	809.0	794.2	783.2
50°	853.5	844.6	835.8	827.0	818.1	806.1	790.9	775.6	760.4	745.1	733.9
52.5°	805.3	796.3	787.2	778.2	769.2	757.4	743.1	728.6	714.3	699.9	687.8
55°	734.3	725.8	717.2	708.6	700.1	688.3	673.3	658.4	643.4	628.4	616.4
57.5°	662.5	653.4	644.3	635.1	626.0	614.2	599.8	585.3	570.9	556.4	544.7
60°	616.4	607.0	597.6	588.3	578.9	566.9	552.5	538.1	523.6	509.2	497.4
62.5°	567.2	558.3	549.4	540.4	531.5	519.7	505.1	490.4	475.7	461.0	450.1
65°	497.1	488.0	478.9	469.8	460.7	449.2	435.0	420.8	406.6	392.4	381.7
67.5°	427.6	418.5	409.4	400.3	391.2	379.9	366.2	352.7	339.1	325.5	315.8
70°	380.4	371.3	362.2	353.1	344.0	332.8	319.4	306.0	292.7	279.3	271.0
72.5°	334.2	325.3	316.4	307.6	298.6	287.9	275.4	262.9	250.4	237.9	230.2
75°	264.8	256.8	248.8	240.8	232.7	223.1	211.9	200.6	189.4	178.2	172.3
77.5°	196.0	189.6	183.2	176.7	170.3	162.6	153.6	144.6	135.6	126.6	122.5
80°	156.5	150.1	143.7	137.2	130.8	123.9	116.4	108.9	101.4	93.9	91.5
82.5°	118.0	112.2	106.4	100.7	94.9	89.4	84.3	79.1	74.0	68.8	67.8
85°	66.2	61.3	56.5	51.7	46.9	43.9	42.5	41.2	39.9	38.5	38.3
87.5°	22.2	20.9	19.4	18.0	16.7	16.0	15.8	15.7	15.6	15.4	15.5
90°	0.4	0.9	1.4	2.0	2.6	3.1	3.6	4.1	4.5	5.1	5.4
92.5°	7.7	8.0	8.4	8.8	9.2	9.7	10.3	10.9	11.5	12.1	12.6
95°	20.5	20.6	20.8	20.9	21.0	21.5	22.2	22.8	23.5	24.3	24.8
97.5°	34.1	34.1	34.2	34.2	34.2	34.8	35.8	36.7	37.6	38.6	39.1
100°	44.1	44.1	44.1	44.1	44.1	44.6	45.5	46.4	47.3	48.2	48.9
102.5°	54.9	55.3	55.6	55.8	56.1	56.4	56.9	57.3	57.9	58.3	59.0
105°	71.9	72.2	72.6	72.9	73.3	73.7	74.1	74.5	74.9	75.3	75.7
107.5°	90.5	90.9	91.2	91.6	91.9	92.3	92.6	92.9	93.2	93.5	93.7
110°	103.3	103.7	104.1	104.4	104.8	105.0	105.2	105.5	105.7	105.9	106.1



TEST NUMBER: P333584-940

CATALOG NUMBER: S125RDIP-S1090D365U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	116.5	116.6	116.8	117.0	117.2	117.4	117.7	118.0	118.2	118.5	118.6
115°	135.8	136.1	136.4	136.7	137.0	137.1	137.3	137.4	137.6	137.8	137.7
117.5°	155.2	155.3	155.5	155.6	155.8	155.9	156.0	156.1	156.2	156.4	156.4
120°	167.4	167.7	168.1	168.4	168.7	169.0	169.1	169.1	169.2	169.2	169.2
122.5°	180.5	180.6	180.7	180.8	180.9	181.1	181.3	181.5	181.6	181.8	181.8
125°	198.2	198.7	199.1	199.5	199.9	200.2	200.3	200.3	200.4	200.5	200.3
127.5°	217.1	217.4	217.7	217.8	218.1	218.3	218.4	218.5	218.6	218.6	218.6
130°	228.5	228.8	229.2	229.5	229.9	230.2	230.2	230.4	230.6	230.7	230.6
132.5°	239.9	240.4	241.0	241.6	242.1	242.5	242.4	242.4	242.4	242.3	242.2
135°	257.8	258.2	258.7	259.0	259.5	259.8	259.8	259.8	259.9	260.0	260.0
137.5°	274.7	275.1	275.5	275.9	276.3	276.6	276.8	276.9	277.1	277.2	277.3
140°	285.5	285.9	286.2	286.6	287.0	287.2	287.4	287.7	287.8	288.0	288.2
142.5°	296.4	296.7	296.9	297.3	297.6	297.8	298.1	298.4	298.6	298.9	299.0
145°	312.4	312.6	312.9	313.2	313.4	313.7	313.9	314.1	314.3	314.5	314.5
147.5°	327.1	327.3	327.3	327.5	327.7	327.9	328.1	328.2	328.3	328.5	328.7
150°	336.9	336.9	336.8	336.7	336.6	336.7	337.0	337.3	337.6	337.9	337.9
152.5°	345.0	345.1	345.2	345.3	345.4	345.4	345.6	345.7	345.8	345.9	346.1
155°	357.4	357.4	357.4	357.4	357.4	357.4	357.5	357.6	357.7	357.8	358.0
157.5°	368.5	368.4	368.2	368.0	367.9	367.8	367.9	368.0	368.0	368.1	368.4
160°	375.1	374.9	374.6	374.4	374.3	374.2	374.3	374.3	374.3	374.4	374.7
162.5°	380.8	380.7	380.6	380.4	380.2	380.1	380.1	380.2	380.2	380.2	380.6
165°	388.6	388.4	388.3	388.2	388.1	388.0	388.1	388.2	388.3	388.3	388.6
167.5°	395.1	394.8	394.6	394.3	394.0	393.9	393.9	393.9	393.9	393.9	394.3
170°	398.7	398.4	398.1	397.9	397.5	397.4	397.4	397.4	397.4	397.4	397.9
172.5°	401.2	400.9	400.6	400.4	400.1	399.9	399.9	399.9	399.9	399.9	400.4
175°	404.0	403.8	403.5	403.2	403.0	402.8	402.8	402.8	402.8	402.8	403.2
177.5°	405.5	405.3	405.0	404.8	404.6	404.5	404.4	404.4	404.3	404.2	404.6
180°	405.0	405.0	405.0	405.0	405.0	405.0	405.0	405.0	405.0	405.0	405.0



TEST NUMBER: P333584-940

CATALOG NUMBER: S125RDIP-S1090D365U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8
2.5°	1588.5	1590.6	1592.8	1593.7	1593.5	1593.3	1593.0	1592.9
5°	1578.7	1581.4	1584.0	1585.1	1584.6	1584.0	1583.5	1583.0
7.5°	1559.1	1560.9	1562.8	1563.4	1562.8	1562.3	1561.7	1561.0
10°	1542.5	1543.3	1544.1	1544.1	1543.3	1542.5	1541.7	1540.9
12.5°	1518.9	1519.5	1520.1	1519.7	1518.5	1517.3	1516.1	1514.8
15°	1480.2	1479.9	1479.6	1478.3	1475.9	1473.5	1471.1	1468.6
17.5°	1431.7	1430.4	1429.1	1427.5	1425.4	1423.4	1421.5	1419.5
20°	1396.2	1394.8	1393.5	1391.6	1389.2	1386.8	1384.4	1382.0
22.5°	1360.8	1358.2	1355.6	1353.3	1351.3	1349.3	1347.3	1345.3
25°	1302.8	1299.3	1295.8	1292.6	1289.7	1286.7	1283.8	1280.9
27.5°	1240.0	1235.2	1230.3	1226.5	1223.6	1220.8	1217.9	1215.1
30°	1195.1	1188.9	1182.8	1178.5	1176.1	1173.7	1171.3	1168.9
32.5°	1151.5	1144.6	1137.8	1132.9	1129.9	1126.9	1123.7	1120.7
35°	1083.5	1075.8	1068.0	1062.3	1058.5	1054.8	1051.1	1047.3
37.5°	1012.5	1003.3	993.9	987.5	983.8	980.2	976.5	972.9
40°	965.5	955.4	945.2	938.5	935.3	932.1	928.9	925.7
42.5°	919.3	909.5	899.7	892.5	887.8	883.2	878.4	873.7
45°	845.3	834.6	823.9	816.5	812.5	808.5	804.5	800.5
47.5°	772.2	761.2	750.2	742.4	738.0	733.5	729.2	724.7
50°	722.6	711.4	700.2	692.6	688.6	684.6	680.6	676.5
52.5°	675.7	663.6	651.5	643.5	639.4	635.4	631.4	627.4
55°	604.3	592.3	580.2	572.0	567.8	563.5	559.2	554.9
57.5°	532.9	521.1	509.3	501.5	497.8	493.9	490.1	486.3
60°	485.6	473.9	462.1	454.2	450.2	446.2	442.2	438.2
62.5°	439.3	428.3	417.4	409.9	405.9	401.9	397.9	393.9
65°	371.0	360.3	349.6	342.2	338.2	334.2	330.2	326.2
67.5°	305.9	296.1	286.3	279.8	276.6	273.4	270.2	267.0
70°	262.7	254.4	246.1	240.3	237.1	233.9	230.7	227.5
72.5°	222.6	214.9	207.2	202.3	200.2	198.0	195.9	193.8
75°	166.4	160.5	154.6	150.7	148.8	147.0	145.1	143.2
77.5°	118.4	114.3	110.1	107.4	106.0	104.6	103.3	101.8
80°	89.1	86.7	84.3	82.8	82.2	81.7	81.1	80.6
82.5°	66.6	65.5	64.4	63.7	63.3	63.0	62.7	62.3
85°	38.0	37.7	37.5	37.2	36.9	36.6	36.4	36.1
87.5°	15.6	15.7	15.7	15.7	15.5	15.3	15.2	15.0
90°	5.7	6.1	6.4	6.7	7.0	7.1	7.3	7.6
92.5°	13.0	13.5	13.9	14.3	14.4	14.5	14.7	14.9
95°	25.2	25.8	26.2	26.6	26.7	26.8	26.9	27.1
97.5°	39.6	40.0	40.5	40.8	40.8	40.9	41.0	41.1
100°	49.5	50.1	50.7	51.1	51.3	51.5	51.5	51.7
102.5°	59.7	60.4	61.1	61.5	61.7	61.9	62.1	62.2
105°	76.2	76.6	77.0	77.3	77.5	77.8	77.9	78.2
107.5°	94.0	94.2	94.3	94.5	94.4	94.4	94.4	94.4
110°	106.3	106.6	106.7	106.8	106.7	106.6	106.6	106.6



TEST NUMBER: P333584-940

CATALOG NUMBER: S125RDIP-S1090D365U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	118.7	118.8	118.9	118.9	118.8	118.6	118.5	118.4
115°	137.6	137.5	137.4	137.4	137.3	137.2	137.1	137.1
117.5°	156.5	156.6	156.6	156.5	156.2	156.0	155.7	155.3
120°	169.2	169.2	169.2	169.1	168.8	168.5	168.3	168.0
122.5°	181.7	181.6	181.6	181.5	181.3	181.0	180.8	180.6
125°	200.2	200.0	199.9	199.7	199.7	199.7	199.6	199.5
127.5°	218.5	218.4	218.3	218.2	218.1	217.9	217.8	217.7
130°	230.6	230.5	230.4	230.3	230.2	230.1	229.9	229.8
132.5°	242.2	242.1	242.0	241.9	241.7	241.5	241.3	241.1
135°	260.0	260.0	260.0	259.8	259.6	259.3	259.0	258.8
137.5°	277.4	277.5	277.6	277.4	277.1	276.7	276.3	276.0
140°	288.4	288.5	288.6	288.6	288.2	287.8	287.5	287.1
142.5°	299.1	299.2	299.3	299.1	298.7	298.4	298.1	297.7
145°	314.5	314.5	314.5	314.4	314.2	314.0	313.8	313.6
147.5°	328.9	329.0	329.2	329.0	328.6	328.1	327.6	327.2
150°	337.9	337.9	337.9	337.8	337.7	337.5	337.3	337.2
152.5°	346.3	346.4	346.6	346.5	346.3	346.1	345.8	345.5
155°	358.3	358.6	358.8	358.8	358.5	358.1	357.8	357.4
157.5°	368.6	369.0	369.3	369.2	368.7	368.2	367.7	367.3
160°	375.0	375.2	375.5	375.5	375.1	374.8	374.4	374.1
162.5°	380.8	381.2	381.6	381.6	381.1	380.7	380.3	379.9
165°	388.9	389.1	389.4	389.3	388.9	388.5	388.1	387.6
167.5°	394.8	395.1	395.6	395.6	395.1	394.7	394.2	393.9
170°	398.2	398.7	399.1	399.0	398.6	398.1	397.6	397.1
172.5°	400.8	401.2	401.6	401.6	401.2	400.7	400.3	399.8
175°	403.6	404.0	404.5	404.4	403.9	403.4	403.0	402.4
177.5°	404.9	405.3	405.6	405.6	405.2	404.7	404.4	403.9
180°	405.0	405.0	405.0	405.0	405.0	405.0	405.0	405.0

(END OF REPORT)