

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333637-940

Luminaire Tested: **S125RDIP-S1270D1205U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333637-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1270D1205U940-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8644.6 lumens
Efficiency: N/A
Efficacy: 120.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333637-940

CATALOG NUMBER: S125RDIP-S1270D1205U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

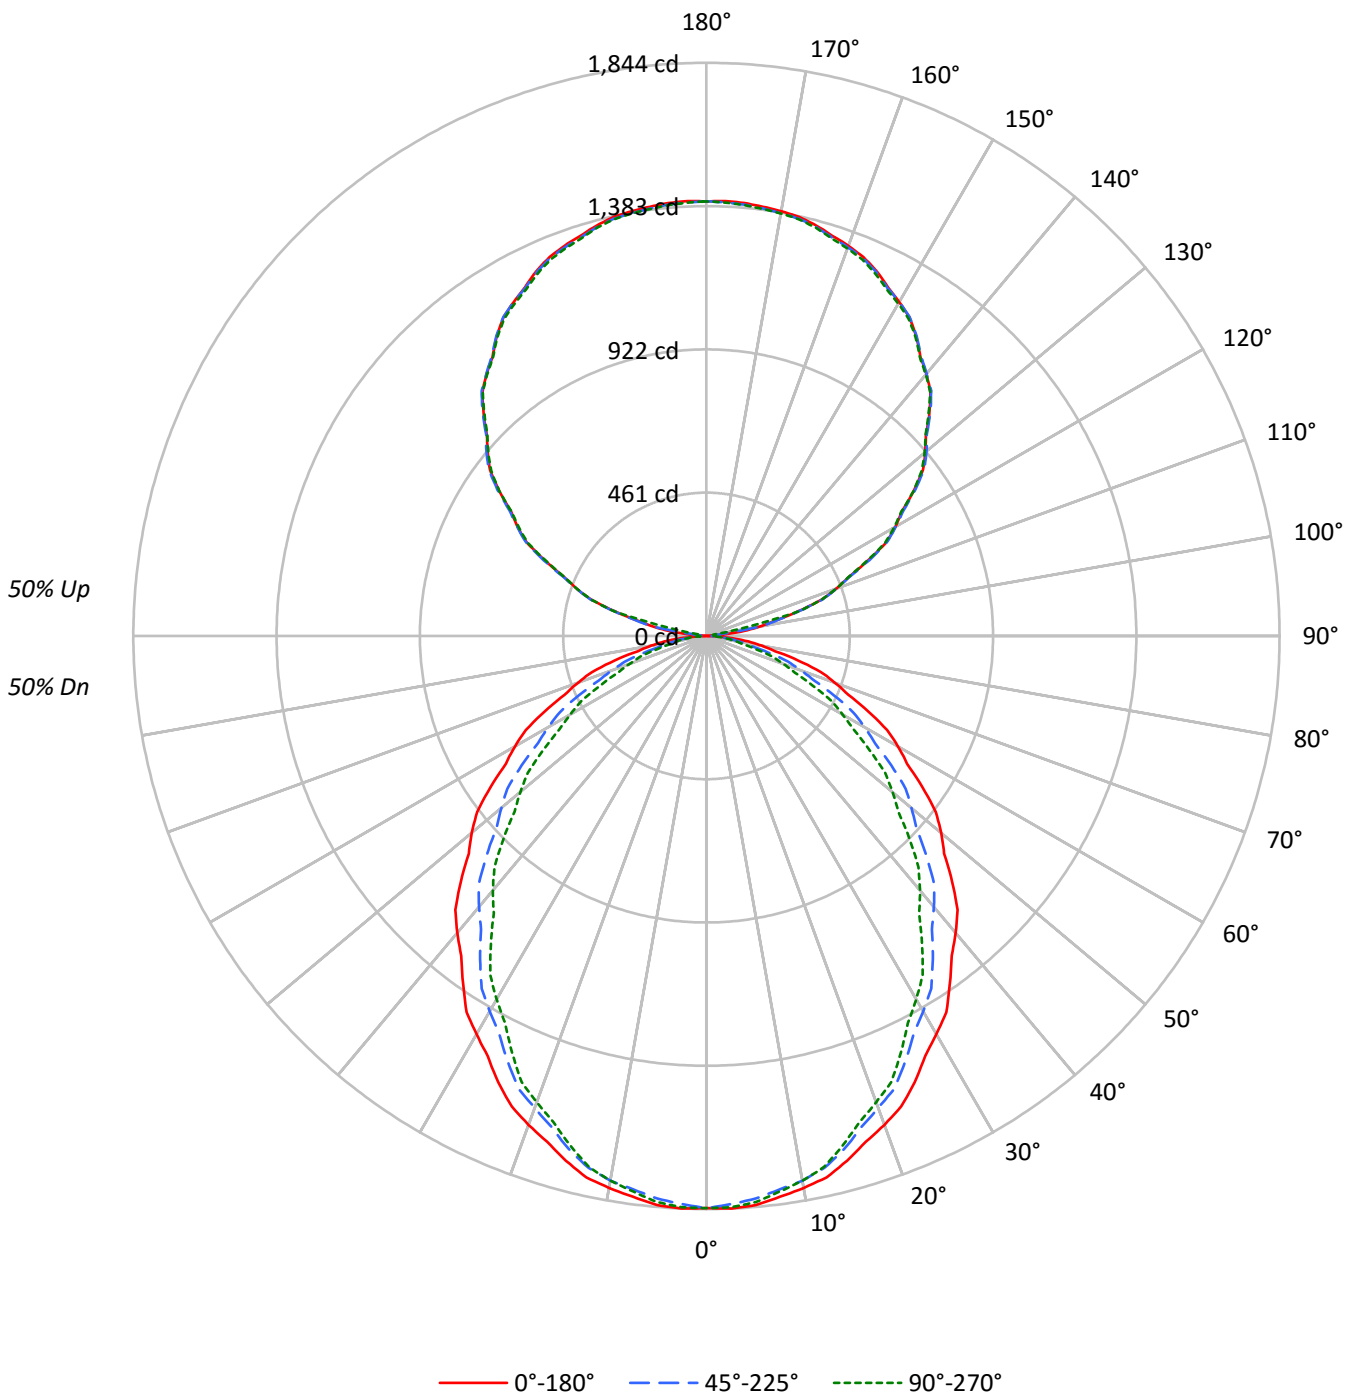



TEST NUMBER: P333637-940

CATALOG NUMBER: S125RDIP-S1270D1205U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	69	69	69	56	56	56	50
1	98	94	90	87	90	87	84	81	74	71	69	61	60	58	50	49	48	43
2	89	82	76	71	82	76	71	66	65	61	58	54	51	49	44	43	41	36
3	82	72	65	59	75	67	61	56	57	52	49	48	45	42	40	37	35	31
4	75	64	56	50	69	60	53	47	51	46	42	43	39	36	35	33	30	27
5	69	57	49	43	63	53	46	41	46	40	36	39	34	31	32	29	26	23
6	63	51	43	38	58	48	41	36	41	36	31	35	31	27	29	26	23	21
7	59	47	39	33	54	43	36	31	37	32	28	32	28	24	27	23	21	18
8	54	42	35	29	50	39	33	28	34	29	25	29	25	22	24	21	19	16
9	51	39	31	26	47	36	29	25	31	26	22	27	23	20	23	19	17	15
10	47	35	28	24	44	33	27	22	29	24	20	25	21	18	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11889	11889	11889
5°	11916	11780	11852
10°	11825	11671	11671
15°	11685	11433	11340
20°	11504	11103	10970
25°	11294	10779	10541
30°	11032	10399	10068
35°	10764	10008	9536
40°	10514	9599	9014
45°	10209	9143	8444
50°	9904	8647	7850
55°	9549	8172	7218
60°	9195	7596	6536
65°	8775	6927	5757
70°	8295	6090	4962
75°	7633	5133	4127
80°	6721	4032	3466
85°	5669	3298	3090



TEST NUMBER: P333637-940

CATALOG NUMBER: S125RDIP-S1270D1205U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	173.1	2.0
10°-20°	483.7	5.6
20°-30°	701.4	8.1
30°-40°	799.4	9.2
40°-50°	779.2	9.0
50°-60°	655.9	7.6
60°-70°	459.8	5.3
70°-80°	236.3	2.7
80°-90°	62.6	0.7
90°-100°	50.8	0.6
100°-110°	313.1	3.6
110°-120°	567.9	6.6
120°-130°	728.8	8.4
130°-140°	783.9	9.1
140°-150°	735.8	8.5
150°-160°	595.2	6.9
160°-170°	384.9	4.5
170°-180°	132.8	1.5
0°-30°	1358.2	15.7
0°-40°	2157.6	25.0
0°-60°	3592.8	41.6
0°-90°	4351.6	50.3
90°-120°	931.8	10.8
90°-150°	3180.2	36.8
90°-180°	4293.0	49.7
0°-180°	8644.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1841	1841	1841	1841	1841	
5°	1838	1832	1817	1830	1828	174
15°	1748	1738	1710	1708	1696	492
25°	1585	1562	1513	1495	1479	729
35°	1365	1330	1269	1230	1210	854
45°	1118	1075	1001	947	924	862
55°	848	802	726	665	641	758
65°	574	525	453	400	377	569
75°	306	263	206	176	165	324
85°	76	52	44	43	42	86
90°	1	9	17	22	25	6
95°	59	54	17	22	22	75
105°	305	309	309	309	308	323
115°	572	577	578	574	568	567
125°	814	820	821	817	814	726
135°	1015	1020	1019	1016	1010	782
145°	1176	1178	1178	1179	1173	735
155°	1295	1290	1291	1294	1286	597
165°	1367	1361	1362	1367	1360	386
175°	1398	1392	1393	1400	1392	133
180°	1398	1398	1398	1398	1398	



TEST NUMBER: P333637-940

CATALOG NUMBER: S125RDIP-S1270D1205U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8
2.5°	1844.1	1843.3	1842.5	1841.8	1841.1	1839.5	1837.0	1834.5	1832.1	1829.6	1832.1
5°	1838.0	1836.7	1835.5	1834.2	1833.0	1830.7	1827.3	1823.9	1820.5	1817.1	1820.2
7.5°	1819.9	1818.7	1817.6	1816.3	1815.2	1812.6	1808.5	1804.4	1800.4	1796.3	1798.4
10°	1803.2	1802.2	1801.3	1800.5	1799.5	1796.9	1792.5	1788.2	1783.9	1779.6	1780.5
12.5°	1784.3	1783.2	1781.9	1780.7	1779.6	1776.1	1770.3	1764.5	1758.6	1752.8	1753.5
15°	1747.6	1745.7	1743.9	1742.0	1740.2	1736.0	1729.5	1723.1	1716.5	1710.0	1709.8
17.5°	1706.1	1703.3	1700.5	1697.6	1694.8	1689.3	1681.1	1672.9	1664.8	1656.6	1655.1
20°	1673.9	1670.8	1667.7	1664.6	1661.5	1655.0	1645.2	1635.3	1625.4	1615.5	1614.0
22.5°	1638.3	1635.2	1632.1	1629.1	1625.9	1619.3	1608.8	1598.5	1588.0	1577.7	1574.7
25°	1584.9	1580.3	1575.7	1571.0	1566.4	1558.4	1546.9	1535.5	1524.0	1512.6	1508.6
27.5°	1523.8	1518.1	1512.5	1506.9	1501.3	1492.4	1480.1	1467.8	1455.6	1443.4	1437.8
30°	1479.3	1473.4	1467.5	1461.7	1455.8	1446.4	1433.3	1420.4	1407.4	1394.5	1387.3
32.5°	1435.9	1429.1	1422.2	1415.3	1408.5	1398.4	1385.2	1372.0	1358.7	1345.5	1337.7
35°	1365.3	1357.8	1350.4	1343.0	1335.6	1324.9	1311.0	1297.2	1283.3	1269.4	1260.3
37.5°	1296.0	1287.0	1278.0	1269.0	1259.9	1248.2	1233.9	1219.6	1205.2	1190.9	1180.2
40°	1247.1	1237.8	1228.5	1219.2	1210.1	1197.9	1183.1	1168.3	1153.4	1138.6	1126.9
42.5°	1196.0	1186.4	1176.9	1167.3	1157.9	1145.4	1130.2	1114.8	1099.5	1084.1	1072.9
45°	1117.8	1108.8	1099.8	1090.9	1081.9	1069.0	1052.0	1035.0	1018.0	1001.0	988.6
47.5°	1036.9	1027.4	1018.0	1008.5	999.1	985.8	968.7	951.5	934.4	917.3	904.6
50°	985.7	975.5	965.3	955.1	944.9	931.0	913.4	895.8	878.2	860.6	847.6
52.5°	930.1	919.6	909.2	898.8	888.3	874.8	858.2	841.6	824.9	808.3	794.3
55°	848.1	838.2	828.3	818.4	808.5	795.0	777.7	760.4	743.1	725.8	711.9
57.5°	765.2	754.7	744.0	733.5	722.9	709.4	692.7	675.9	659.2	642.6	629.0
60°	711.9	701.0	690.2	679.4	668.6	654.8	638.1	621.4	604.8	588.1	574.5
62.5°	655.1	644.8	634.5	624.1	613.9	600.2	583.3	566.3	549.4	532.4	519.9
65°	574.2	563.7	553.2	542.7	532.2	518.7	502.4	486.0	469.6	453.3	440.9
67.5°	493.8	483.3	472.8	462.4	451.8	438.7	423.0	407.3	391.6	375.9	364.6
70°	439.3	428.8	418.3	407.8	397.3	384.3	368.9	353.5	338.0	322.5	313.0
72.5°	385.9	375.7	365.4	355.2	344.9	332.5	318.1	303.6	289.2	274.7	265.9
75°	305.9	296.6	287.3	278.0	268.8	257.7	244.7	231.8	218.7	205.7	198.9
77.5°	226.3	218.9	211.5	204.1	196.7	187.8	177.4	167.0	156.7	146.2	141.5
80°	180.7	173.3	165.9	158.5	151.1	143.0	134.4	125.7	117.1	108.4	105.7
82.5°	136.3	129.6	122.9	116.2	109.6	103.3	97.3	91.4	85.4	79.5	78.2
85°	76.5	70.9	65.4	59.7	54.2	50.6	49.1	47.6	46.0	44.5	44.1
87.5°	25.8	24.4	23.1	21.7	20.3	19.7	19.8	19.9	19.9	20.0	20.2
90°	1.1	2.9	4.7	6.6	8.4	10.2	11.8	13.4	15.0	16.6	17.7
92.5°	16.0	14.7	13.4	12.1	10.8	10.9	12.3	13.7	15.2	16.6	17.7
95°	59.0	58.4	57.7	57.0	56.3	51.6	42.8	34.1	25.3	16.6	17.7
97.5°	123.3	124.6	125.8	127.1	128.3	120.3	102.9	85.6	68.3	51.0	44.5
100°	173.1	173.8	174.4	175.1	175.8	176.6	177.5	178.5	179.4	180.3	146.0
102.5°	223.6	224.5	225.4	226.2	227.1	227.8	228.4	229.0	229.5	230.1	223.6
105°	304.7	305.6	306.5	307.5	308.4	308.8	308.8	308.8	308.8	308.8	308.8
107.5°	388.9	388.9	388.9	388.9	388.9	389.1	389.5	389.9	390.5	390.9	390.9
110°	443.5	443.5	443.5	443.5	443.5	443.8	444.3	444.7	445.1	445.6	445.0



TEST NUMBER: P333637-940

CATALOG NUMBER: S125RDIP-S1270D1205U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	495.0	495.5	496.1	496.6	497.1	497.6	497.8	498.1	498.4	498.6	497.8
115°	572.0	573.2	574.4	575.5	576.7	577.4	577.6	577.8	578.0	578.3	577.4
117.5°	651.8	651.8	651.8	651.8	651.7	652.1	653.0	653.8	654.7	655.6	654.4
120°	701.6	701.3	701.2	700.9	700.7	700.9	701.6	702.3	702.9	703.6	703.2
122.5°	745.6	746.5	747.3	748.1	749.0	749.7	749.9	750.3	750.6	750.9	750.5
125°	813.5	815.1	816.7	818.3	819.9	820.7	820.7	820.7	820.7	820.7	819.8
127.5°	878.4	879.6	880.7	881.8	883.0	883.5	883.3	883.2	883.1	883.0	882.4
130°	918.2	919.4	920.5	921.7	922.8	923.5	923.7	924.0	924.2	924.4	923.7
132.5°	958.0	959.3	960.6	962.0	963.3	963.8	963.2	962.7	962.2	961.7	961.6
135°	1014.6	1015.9	1017.4	1018.7	1020.1	1020.6	1020.1	1019.7	1019.1	1018.7	1018.2
137.5°	1066.6	1067.8	1069.0	1070.1	1071.4	1071.7	1071.4	1070.9	1070.5	1070.1	1070.2
140°	1100.5	1101.1	1101.5	1102.0	1102.4	1102.5	1102.3	1102.1	1101.9	1101.6	1102.1
142.5°	1131.2	1131.5	1131.8	1132.1	1132.4	1132.7	1133.0	1133.3	1133.6	1134.0	1134.1
145°	1176.3	1176.7	1177.1	1177.6	1178.0	1178.3	1178.3	1178.3	1178.3	1178.3	1178.6
147.5°	1215.6	1215.5	1215.4	1215.3	1215.2	1215.3	1215.6	1215.8	1216.2	1216.5	1216.7
150°	1240.5	1240.0	1239.6	1239.1	1238.7	1238.7	1239.1	1239.6	1240.0	1240.5	1240.9
152.5°	1264.5	1263.6	1262.5	1261.5	1260.4	1260.2	1260.7	1261.1	1261.6	1262.0	1262.5
155°	1295.4	1294.1	1292.6	1291.3	1289.9	1289.4	1289.9	1290.3	1290.8	1291.3	1292.0
157.5°	1319.3	1318.4	1317.6	1316.8	1315.9	1315.5	1315.6	1315.6	1315.7	1315.7	1316.4
160°	1335.9	1334.4	1333.1	1331.7	1330.3	1329.7	1330.0	1330.2	1330.4	1330.6	1331.6
162.5°	1349.1	1347.7	1346.3	1345.0	1343.5	1343.0	1343.2	1343.5	1343.7	1343.9	1345.2
165°	1366.9	1365.6	1364.1	1362.8	1361.4	1360.8	1361.0	1361.3	1361.5	1361.7	1363.2
167.5°	1380.2	1378.8	1377.3	1375.9	1374.5	1373.9	1374.1	1374.3	1374.6	1374.8	1376.4
170°	1387.7	1386.1	1384.4	1382.8	1381.2	1380.5	1380.7	1381.0	1381.2	1381.4	1383.3
172.5°	1392.6	1391.0	1389.4	1387.8	1386.2	1385.5	1386.0	1386.4	1386.8	1387.2	1388.9
175°	1398.0	1396.6	1395.3	1393.8	1392.5	1391.9	1392.1	1392.4	1392.6	1392.9	1394.6
177.5°	1400.5	1399.4	1398.3	1397.2	1396.1	1395.6	1395.8	1396.0	1396.2	1396.3	1397.7
180°	1398.0	1398.0	1398.0	1398.0	1398.0	1398.0	1398.0	1398.0	1398.0	1398.0	1398.0



TEST NUMBER: P333637-940

CATALOG NUMBER: S125RDIP-S1270D1205U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8	1840.8
2.5°	1834.5	1837.0	1839.5	1840.6	1840.4	1840.1	1839.9	1839.6
5°	1823.3	1826.4	1829.4	1830.7	1830.1	1829.4	1828.8	1828.2
7.5°	1800.5	1802.8	1804.9	1805.6	1804.9	1804.3	1803.6	1803.0
10°	1781.4	1782.4	1783.2	1783.2	1782.4	1781.4	1780.5	1779.6
12.5°	1754.3	1754.9	1755.6	1755.2	1753.8	1752.4	1751.0	1749.5
15°	1709.4	1709.1	1708.8	1707.3	1704.5	1701.7	1698.9	1696.1
17.5°	1653.6	1652.0	1650.5	1648.6	1646.3	1644.0	1641.7	1639.4
20°	1612.4	1610.9	1609.4	1607.1	1604.4	1601.6	1598.8	1596.1
22.5°	1571.6	1568.6	1565.6	1562.9	1560.7	1558.4	1556.0	1553.8
25°	1504.6	1500.6	1496.6	1492.8	1489.4	1486.0	1482.6	1479.3
27.5°	1432.2	1426.6	1420.9	1416.5	1413.2	1409.9	1406.6	1403.4
30°	1380.3	1373.1	1366.0	1361.1	1358.3	1355.5	1352.7	1350.0
32.5°	1329.8	1322.0	1314.1	1308.4	1304.9	1301.4	1297.9	1294.3
35°	1251.4	1242.4	1233.5	1226.8	1222.5	1218.2	1213.9	1209.5
37.5°	1169.4	1158.7	1147.9	1140.4	1136.2	1132.0	1127.8	1123.6
40°	1115.2	1103.4	1091.7	1084.0	1080.2	1076.6	1072.8	1069.2
42.5°	1061.7	1050.4	1039.2	1030.8	1025.4	1019.9	1014.5	1009.1
45°	976.2	963.9	951.5	943.1	938.4	933.8	929.2	924.5
47.5°	891.9	879.1	866.4	857.5	852.3	847.2	842.0	837.0
50°	834.6	821.6	808.7	799.9	795.2	790.6	786.0	781.3
52.5°	780.3	766.4	752.4	743.2	738.5	733.9	729.2	724.6
55°	697.9	684.0	670.1	660.7	655.8	650.8	645.9	641.0
57.5°	615.4	601.8	588.2	579.3	574.8	570.4	566.1	561.7
60°	560.9	547.3	533.7	524.6	520.0	515.3	510.7	506.0
62.5°	507.3	494.6	482.1	473.4	468.8	464.1	459.5	454.9
65°	428.6	416.2	403.8	395.3	390.7	386.0	381.4	376.7
67.5°	353.3	342.0	330.7	323.2	319.5	315.8	312.1	308.4
70°	303.4	293.8	284.3	277.6	273.8	270.2	266.4	262.8
72.5°	257.1	248.3	239.3	233.7	231.2	228.8	226.3	223.8
75°	192.2	185.4	178.6	174.1	171.9	169.8	167.6	165.4
77.5°	136.7	132.0	127.2	124.0	122.4	120.8	119.2	117.6
80°	102.9	100.1	97.3	95.6	95.0	94.3	93.8	93.2
82.5°	77.0	75.6	74.4	73.5	73.1	72.8	72.4	72.1
85°	43.9	43.6	43.2	43.0	42.6	42.4	42.0	41.7
87.5°	20.4	20.7	21.0	21.0	20.9	20.8	20.7	20.5
90°	18.9	20.1	21.2	22.1	22.8	23.5	24.2	24.9
92.5°	18.9	20.1	21.2	21.9	22.2	22.6	22.9	23.2
95°	18.9	20.1	21.2	21.8	21.8	21.8	21.8	21.8
97.5°	38.0	31.5	25.0	21.8	21.8	21.8	21.8	21.8
100°	111.7	77.4	43.1	25.4	24.5	23.6	22.6	21.8
102.5°	217.0	210.6	204.1	193.1	177.4	161.7	146.1	130.4
105°	308.8	308.8	308.8	308.7	308.4	308.3	308.0	307.8
107.5°	391.0	391.0	391.1	390.7	390.0	389.4	388.7	388.0
110°	444.3	443.5	442.8	442.6	442.8	443.1	443.4	443.5



TEST NUMBER: P333637-940

CATALOG NUMBER: S125RDIP-S1270D1205U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	497.0	496.1	495.2	494.5	494.3	493.9	493.7	493.3
115°	576.4	575.5	574.6	573.5	572.0	570.7	569.3	567.9
117.5°	653.2	652.0	650.8	649.9	649.3	648.7	648.1	647.5
120°	702.8	702.3	701.9	701.1	699.9	698.7	697.6	696.4
122.5°	750.0	749.6	749.1	748.1	746.8	745.5	744.2	742.9
125°	818.9	818.0	817.1	816.3	815.6	814.9	814.2	813.5
127.5°	881.9	881.5	880.9	879.9	878.2	876.4	874.7	873.0
130°	923.0	922.3	921.7	920.7	919.5	918.5	917.3	916.1
132.5°	961.4	961.3	961.2	960.6	959.4	958.2	957.1	955.9
135°	1017.8	1017.4	1016.9	1015.9	1014.6	1013.2	1011.8	1010.4
137.5°	1070.3	1070.4	1070.5	1070.0	1068.7	1067.6	1066.3	1065.1
140°	1102.5	1103.0	1103.5	1103.0	1101.6	1100.3	1098.9	1097.5
142.5°	1134.2	1134.3	1134.3	1133.7	1132.3	1131.0	1129.5	1128.2
145°	1178.8	1179.0	1179.2	1178.7	1177.2	1175.9	1174.5	1173.1
147.5°	1217.0	1217.3	1217.5	1216.8	1215.2	1213.5	1211.9	1210.2
150°	1241.4	1241.9	1242.3	1241.6	1239.8	1238.0	1236.1	1234.3
152.5°	1262.9	1263.5	1263.9	1263.3	1261.6	1260.0	1258.3	1256.7
155°	1292.6	1293.3	1294.1	1293.4	1291.6	1289.8	1287.9	1286.1
157.5°	1317.2	1317.9	1318.7	1318.1	1316.3	1314.5	1312.6	1310.7
160°	1332.5	1333.4	1334.4	1333.9	1332.0	1330.2	1328.4	1326.5
162.5°	1346.5	1347.8	1349.1	1348.7	1346.7	1344.6	1342.6	1340.6
165°	1364.5	1365.9	1367.3	1367.0	1365.2	1363.3	1361.5	1359.7
167.5°	1378.1	1379.7	1381.4	1381.3	1379.1	1377.1	1375.0	1373.0
170°	1385.1	1387.0	1388.8	1388.7	1386.6	1384.6	1382.5	1380.4
172.5°	1390.5	1392.2	1393.8	1393.7	1391.6	1389.6	1387.4	1385.4
175°	1396.5	1398.4	1400.2	1400.1	1398.0	1396.0	1393.8	1391.8
177.5°	1398.9	1400.3	1401.5	1401.4	1400.0	1398.5	1397.0	1395.5
180°	1398.0	1398.0	1398.0	1398.0	1398.0	1398.0	1398.0	1398.0

(END OF REPORT)