

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333538-940

Luminaire Tested: **S125RDIP-S610D1035U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333538-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S610D1035U940-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1035 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5828.7 lumens
Efficiency: N/A
Efficacy: 131.0 lumens/watt
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 44.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

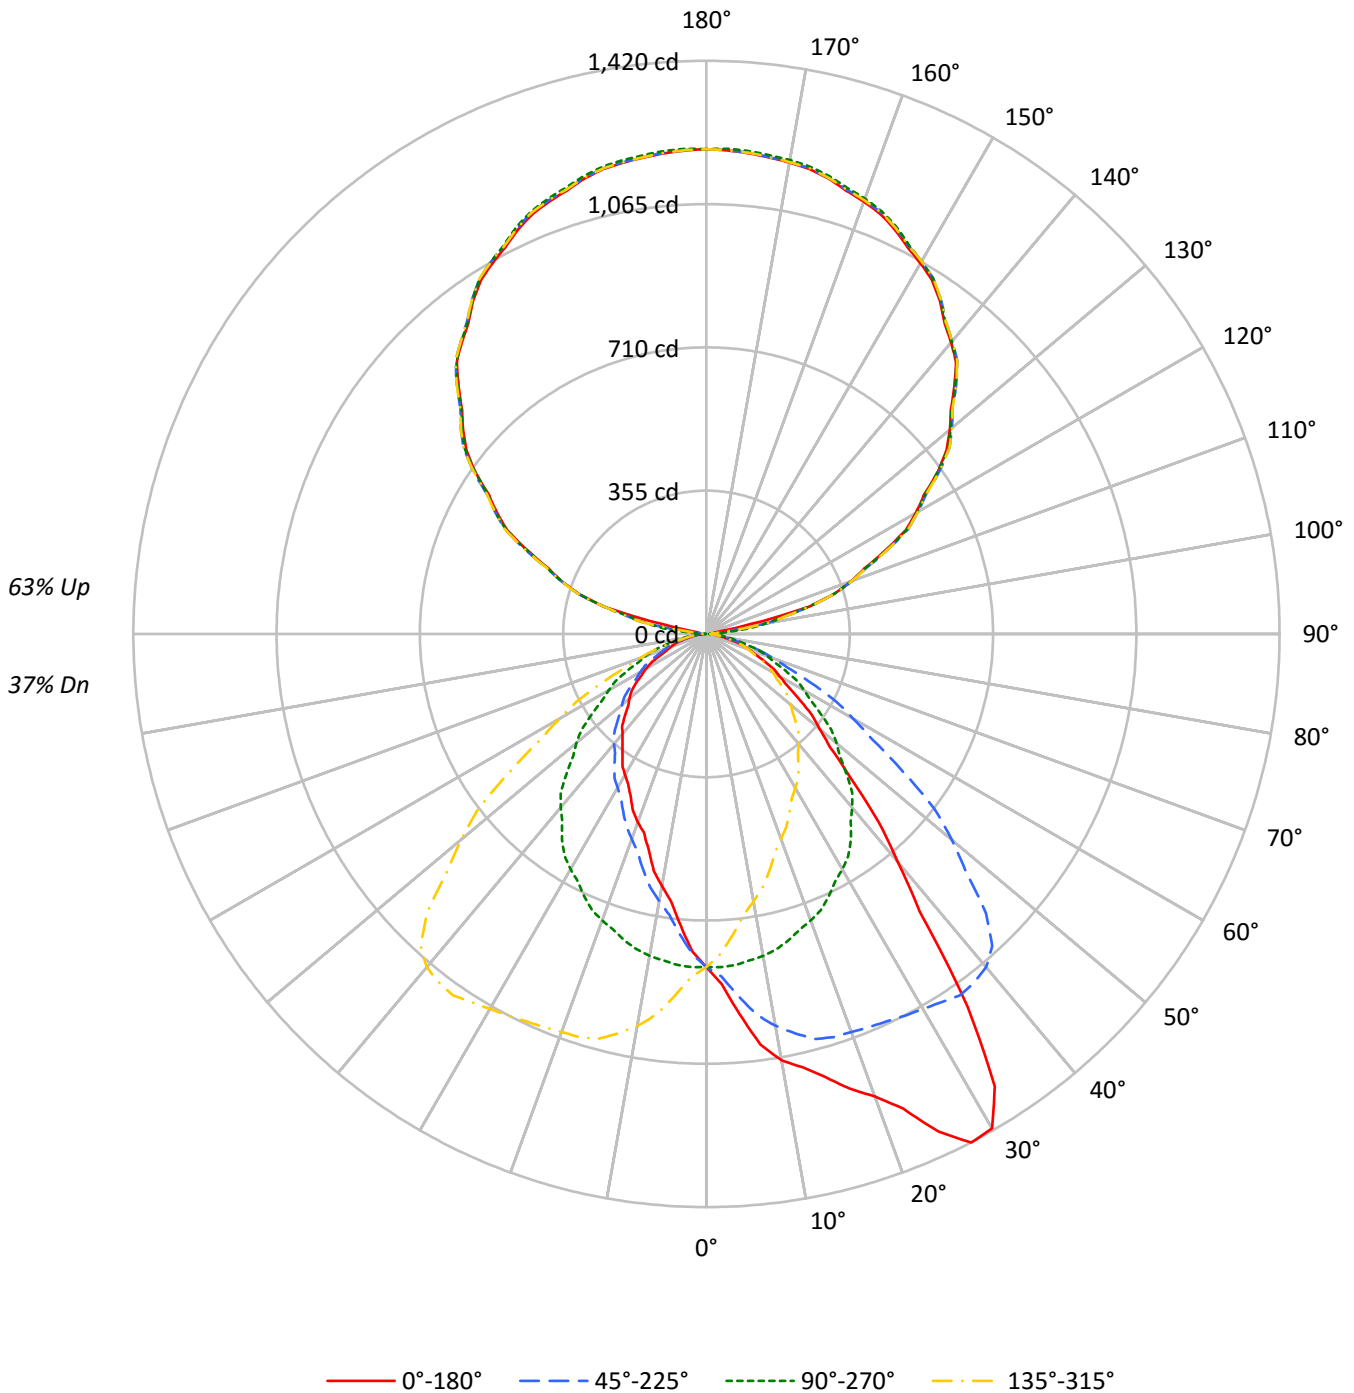



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	37
1	95	91	87	84	86	83	80	77	67	65	63	53	51	50	39	38	38	32
2	87	80	74	69	78	73	68	63	59	56	52	46	44	42	35	33	32	27
3	79	70	63	58	72	64	58	53	52	48	44	41	38	36	31	29	28	23
4	73	62	55	49	66	57	50	45	46	42	38	37	34	31	28	26	24	20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	25	23	21	17
6	61	50	42	36	55	46	39	34	37	32	29	30	26	24	23	20	19	15
7	57	45	37	32	51	41	34	30	34	29	25	27	24	21	21	18	17	14
8	53	41	33	28	48	37	31	26	31	26	22	25	21	19	19	17	15	12
9	49	37	30	25	44	34	28	23	28	23	20	23	19	17	18	15	13	11
10	46	34	27	22	41	31	25	21	26	21	18	21	18	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	5329	5329	5329	5329
5°	6131	5336	4713	5336
10°	7033	5309	4158	5309
15°	7596	5255	3697	5255
20°	8377	5192	3413	5192
25°	9694	5108	3167	5108
30°	10549	5020	3006	5020
35°	8898	4917	2858	4917
40°	6214	4731	2731	4731
45°	4610	4483	2606	4483
50°	3676	4224	2498	4224
55°	3120	3902	2403	3902
60°	2696	3614	2250	3614
65°	2402	3304	1936	3304
70°	2111	3025	1766	3025
75°	1827	2620	1657	2620
80°	1387	2205	1387	2205
85°	1156	1734	1312	1734



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.1	1.4
10°-20°	231.9	4.0
20°-30°	367.7	6.3
30°-40°	443.4	7.6
40°-50°	396.0	6.8
50°-60°	303.6	5.2
60°-70°	197.3	3.4
70°-80°	95.9	1.6
80°-90°	25.4	0.4
90°-100°	43.6	0.7
100°-110°	269.0	4.6
110°-120°	487.9	8.4
120°-130°	626.1	10.7
130°-140°	673.4	11.6
140°-150°	632.1	10.8
150°-160°	511.3	8.8
160°-170°	330.7	5.7
170°-180°	114.1	2.0
0°-30°	678.7	11.6
0°-40°	1122.1	19.3
0°-60°	1821.7	31.3
0°-90°	2140.4	36.7
90°-120°	800.5	13.7
90°-150°	2732.2	46.9
90°-180°	3688.0	63.3
0°-180°	5828.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	825	825	825	825	825	
5°	946	823	727	823	946	94
15°	1136	786	553	786	1136	326
25°	1360	717	444	717	1360	625
35°	1129	624	362	624	1129	682
45°	505	491	285	491	505	403
55°	277	346	213	346	277	251
65°	157	216	127	216	157	156
75°	73	105	66	105	73	78
85°	16	23	18	23	16	18
90°	21	1	21	1	21	10
95°	19	51	19	51	19	15
105°	264	262	264	262	264	239
115°	488	492	488	492	488	484
125°	699	699	699	699	699	622
135°	868	872	868	872	868	670
145°	1008	1011	1008	1011	1008	630
155°	1105	1113	1105	1113	1105	509
165°	1168	1174	1168	1174	1168	330
175°	1196	1201	1196	1201	1196	114
180°	1201	1201	1201	1201	1201	



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	868.0	867.5	868.5	865.5	865.9	861.2	861.2	857.6	853.1	849.5	847.9
5°	945.7	946.5	945.0	940.0	936.6	931.5	925.8	915.6	907.1	899.0	892.6
7.5°	1025.8	1026.3	1021.8	1020.3	1011.7	1005.5	992.7	978.9	966.6	951.0	939.1
10°	1072.5	1072.1	1067.4	1063.6	1056.1	1046.7	1034.1	1017.9	1002.6	985.7	969.5
12.5°	1099.6	1098.7	1097.2	1092.6	1085.7	1077.3	1066.7	1050.7	1031.9	1013.3	994.4
15°	1136.1	1133.7	1129.4	1123.6	1113.7	1103.9	1092.1	1077.9	1059.9	1038.9	1021.3
17.5°	1181.3	1181.4	1174.7	1166.7	1153.3	1136.0	1117.7	1094.8	1070.3	1047.2	1028.5
20°	1218.8	1217.7	1210.9	1195.4	1180.2	1158.5	1137.5	1109.4	1079.6	1049.4	1026.0
22.5°	1272.4	1269.8	1262.8	1242.2	1218.6	1190.7	1158.6	1124.3	1088.2	1054.0	1023.3
25°	1360.4	1358.3	1344.4	1320.7	1287.5	1244.5	1202.5	1155.4	1103.6	1058.5	1021.3
27.5°	1420.5	1418.3	1408.0	1388.3	1357.6	1312.4	1255.5	1192.7	1127.9	1066.0	1012.2
30°	1414.5	1419.6	1418.3	1409.2	1386.1	1345.4	1293.0	1222.2	1145.2	1072.5	1008.4
32.5°	1329.5	1334.0	1345.9	1363.9	1365.2	1349.0	1309.7	1244.4	1164.8	1081.9	1005.4
35°	1128.6	1134.8	1157.8	1194.0	1241.4	1281.1	1289.2	1254.0	1182.5	1093.4	1000.9
37.5°	867.7	901.1	920.4	958.6	1030.2	1103.1	1173.2	1199.1	1168.7	1088.7	993.7
40°	737.1	745.2	779.8	822.8	883.1	958.9	1058.9	1131.0	1133.4	1077.9	982.3
42.5°	630.9	641.1	664.9	699.2	750.8	826.7	929.9	1025.1	1069.2	1048.0	967.4
45°	504.7	512.5	529.8	556.2	595.8	658.5	747.3	857.4	944.8	978.9	927.5
47.5°	414.6	418.8	433.8	454.0	483.3	529.0	597.6	693.2	798.1	871.6	864.3
50°	365.9	370.6	382.1	397.3	422.0	460.7	515.6	595.1	703.2	793.0	810.9
52.5°	327.9	331.8	339.0	353.5	373.8	403.5	447.8	519.9	617.1	712.5	754.0
55°	277.1	279.8	285.5	293.6	310.0	331.3	369.5	419.4	497.9	594.1	655.1
57.5°	235.2	236.6	240.2	247.7	259.0	274.6	302.2	344.5	400.8	487.4	554.7
60°	208.7	210.0	214.7	219.8	228.6	242.9	264.6	294.0	348.2	419.7	487.8
62.5°	187.5	188.3	190.4	195.5	203.1	214.2	231.2	255.3	298.4	361.1	425.4
65°	157.2	157.5	158.2	162.3	167.0	175.1	186.3	203.2	235.8	283.2	340.1
67.5°	128.0	128.5	130.9	132.3	137.2	141.5	148.1	161.0	184.0	215.9	260.1
70°	111.8	111.5	113.8	115.5	117.2	122.3	126.7	137.1	151.4	175.8	212.8
72.5°	96.6	95.8	96.8	97.4	99.6	103.1	107.5	113.9	124.8	141.7	169.9
75°	73.2	73.5	73.5	74.2	75.9	77.2	78.6	81.9	88.1	99.2	114.5
77.5°	51.4	50.8	52.3	52.4	53.4	54.9	56.1	57.4	59.9	64.6	72.4
80°	37.3	37.3	37.6	38.6	38.3	39.0	40.7	42.0	45.0	47.8	50.5
82.5°	28.6	28.4	28.6	28.9	28.8	29.4	30.1	30.3	31.5	32.8	34.8
85°	15.6	15.6	16.0	16.0	16.2	16.2	16.6	16.6	16.6	16.9	17.3
87.5°	10.3	9.8	9.5	9.4	9.5	9.9	9.4	8.9	8.7	8.6	8.6
90°	21.4	20.8	20.2	19.6	19.0	18.2	17.2	16.2	15.2	14.3	12.8
92.5°	20.0	19.7	19.4	19.1	18.8	18.2	17.2	16.2	15.2	14.3	13.0
95°	18.7	18.7	18.7	18.7	18.7	18.2	17.2	16.2	15.2	14.3	21.8
97.5°	18.7	18.7	18.7	18.7	18.7	21.5	27.1	32.6	38.3	43.8	58.7
100°	18.7	19.5	20.2	21.0	21.8	37.0	66.5	95.9	125.5	154.9	154.1
102.5°	112.0	125.5	138.9	152.4	165.9	175.3	180.9	186.5	192.1	197.7	197.2
105°	264.4	264.7	264.8	265.0	265.2	265.3	265.3	265.3	265.3	265.3	265.3
107.5°	333.3	333.9	334.6	335.1	335.7	336.0	336.0	335.9	335.9	335.8	335.5
110°	381.0	380.8	380.7	380.5	380.3	380.5	381.0	381.7	382.3	382.8	382.5



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	423.8	424.1	424.4	424.6	424.9	425.4	426.1	427.0	427.7	428.5	428.2
115°	487.9	489.1	490.3	491.5	492.7	493.7	494.5	495.3	496.1	496.8	496.6
117.5°	556.2	556.8	557.3	557.9	558.3	559.1	560.2	561.2	562.2	563.2	562.5
120°	598.3	599.3	600.3	601.3	602.3	603.0	603.3	603.8	604.1	604.6	604.0
122.5°	638.2	639.4	640.5	641.7	642.7	643.5	644.0	644.4	644.7	645.2	644.9
125°	698.9	699.5	700.1	700.7	701.3	702.0	702.8	703.6	704.4	705.2	705.2
127.5°	750.0	751.5	753.0	754.4	755.9	756.8	757.2	757.7	758.1	758.6	758.7
130°	787.0	788.1	789.1	790.1	791.0	791.8	792.4	793.0	793.6	794.2	794.0
132.5°	821.3	822.2	823.2	824.2	825.2	825.7	825.9	826.0	826.1	826.3	826.7
135°	868.1	869.2	870.5	871.6	872.8	873.6	874.1	874.4	874.8	875.2	875.6
137.5°	915.1	916.1	917.1	918.2	919.2	919.7	919.6	919.5	919.4	919.4	919.7
140°	942.9	944.1	945.2	946.5	947.6	948.0	947.6	947.3	946.8	946.5	946.6
142.5°	969.2	970.4	971.6	972.8	974.0	974.6	974.5	974.4	974.3	974.2	973.9
145°	1007.9	1009.1	1010.2	1011.5	1012.6	1013.1	1012.9	1012.7	1012.5	1012.4	1012.4
147.5°	1039.7	1041.2	1042.6	1044.0	1045.4	1046.1	1045.8	1045.5	1045.4	1045.1	1044.8
150°	1060.4	1061.9	1063.5	1065.1	1066.8	1067.3	1066.9	1066.6	1066.1	1065.8	1065.3
152.5°	1079.6	1081.0	1082.4	1083.9	1085.3	1085.8	1085.5	1085.0	1084.7	1084.2	1083.9
155°	1104.9	1106.5	1108.0	1109.6	1111.3	1111.8	1111.2	1110.5	1110.0	1109.4	1108.9
157.5°	1126.1	1127.7	1129.3	1130.9	1132.5	1132.9	1132.3	1131.7	1131.0	1130.4	1130.3
160°	1139.6	1141.2	1142.8	1144.4	1145.9	1146.4	1145.6	1144.8	1144.0	1143.2	1143.0
162.5°	1151.7	1153.5	1155.2	1157.0	1158.7	1159.0	1157.9	1156.8	1155.7	1154.6	1154.4
165°	1168.1	1169.7	1171.3	1172.9	1174.5	1174.7	1173.5	1172.2	1171.1	1169.9	1169.7
167.5°	1179.6	1181.3	1183.1	1184.9	1186.7	1186.9	1185.4	1184.0	1182.6	1181.2	1180.9
170°	1186.0	1187.8	1189.5	1191.2	1193.0	1193.2	1191.6	1190.0	1188.4	1186.9	1186.6
172.5°	1190.3	1191.9	1193.7	1195.5	1197.3	1197.5	1196.1	1194.6	1193.2	1191.8	1191.4
175°	1195.7	1197.5	1199.3	1201.0	1202.8	1202.9	1201.4	1199.8	1198.2	1196.6	1196.4
177.5°	1198.9	1200.2	1201.5	1202.7	1204.0	1204.1	1203.0	1201.8	1200.8	1199.6	1199.5
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	847.9	846.1	842.5	839.3	835.2	831.7	829.2	826.3	822.4	817.9	814.0
5°	885.5	878.0	868.2	859.7	848.9	840.4	831.6	823.1	814.7	803.8	794.3
7.5°	927.0	911.7	896.7	877.9	860.8	845.5	830.9	816.1	801.6	786.2	771.3
10°	952.5	933.9	913.2	889.5	867.8	847.2	828.2	809.6	790.0	772.7	754.0
12.5°	976.3	952.3	928.7	898.8	872.7	847.5	823.3	800.1	779.1	756.7	736.6
15°	997.9	974.2	947.8	911.2	874.9	844.5	816.0	785.9	759.8	734.7	712.4
17.5°	1006.2	981.4	950.7	915.5	875.9	837.6	800.9	767.9	737.2	707.9	682.8
20°	1003.0	978.9	947.4	913.9	871.6	831.6	791.9	755.4	721.1	690.4	663.6
22.5°	995.1	970.3	939.9	904.5	864.2	821.8	779.5	740.5	704.6	672.7	643.5
25°	983.4	949.5	918.3	883.8	845.5	803.5	759.8	716.8	678.5	646.0	614.1
27.5°	971.1	928.8	889.2	854.8	814.4	776.9	734.8	690.7	650.4	617.3	584.7
30°	960.0	912.6	868.9	829.9	791.7	756.1	716.0	673.1	631.8	597.5	564.4
32.5°	946.2	895.7	847.7	802.8	765.9	730.6	694.4	653.3	613.1	577.7	544.0
35°	928.8	864.4	812.3	764.6	723.5	689.3	656.8	623.6	583.3	546.7	513.9
37.5°	906.1	833.0	772.7	720.6	677.4	643.0	617.4	587.0	550.3	515.2	484.7
40°	892.2	810.3	744.2	692.7	647.3	611.1	587.0	561.2	527.7	494.9	464.4
42.5°	873.8	789.4	715.5	661.8	616.2	581.3	557.0	534.5	506.3	475.4	442.7
45°	837.7	748.9	671.4	613.8	567.8	533.5	510.8	490.8	469.5	441.0	412.6
47.5°	790.7	706.8	625.5	562.7	517.5	485.8	463.8	448.0	432.7	408.6	380.9
50°	753.0	672.1	592.8	531.8	483.8	453.5	432.9	420.4	406.4	384.5	361.4
52.5°	708.6	636.3	558.7	496.3	450.9	422.7	402.8	390.3	378.8	360.9	338.9
55°	638.6	575.2	504.0	447.5	405.8	377.4	358.4	346.5	339.7	324.5	307.2
57.5°	557.7	512.3	449.6	395.0	358.2	330.0	316.2	306.1	298.5	287.7	275.4
60°	501.3	469.5	413.2	361.4	327.5	300.8	288.3	279.8	272.7	263.5	254.0
62.5°	444.2	421.0	372.1	327.5	296.4	273.9	262.3	254.6	246.4	240.2	231.0
65°	367.6	346.9	313.0	278.1	249.3	231.4	222.9	216.2	211.1	204.3	197.8
67.5°	285.9	277.5	254.1	230.1	209.4	193.4	186.1	181.4	175.2	171.2	166.7
70°	235.8	231.7	215.1	199.2	179.9	169.1	162.3	160.2	152.8	148.7	145.6
72.5°	191.4	189.4	179.9	168.8	155.2	145.7	139.5	137.1	132.4	129.2	127.2
75°	131.1	131.8	130.1	123.0	117.9	111.8	106.4	105.0	101.7	98.9	97.2
77.5°	82.9	86.4	86.5	86.1	84.2	80.4	78.2	77.1	73.8	72.9	72.4
80°	56.9	60.6	64.0	63.7	63.0	62.0	60.3	59.3	57.6	56.5	55.9
82.5°	37.9	41.4	44.2	46.1	45.9	44.9	43.8	43.2	43.0	42.2	42.1
85°	17.9	18.6	19.6	22.0	23.7	24.1	23.7	23.4	22.4	22.7	23.0
87.5°	8.6	8.3	8.2	7.9	7.4	8.4	8.9	8.8	8.6	8.4	8.2
90°	11.5	10.1	8.7	7.2	5.6	4.0	2.5	0.9	2.5	4.0	5.6
92.5°	11.8	10.5	9.4	9.3	10.3	11.5	12.6	13.7	12.6	11.5	10.3
95°	29.2	36.8	44.3	48.4	49.0	49.6	50.1	50.7	50.1	49.6	49.0
97.5°	73.6	88.5	103.3	110.2	109.1	108.1	107.0	105.9	107.0	108.1	109.1
100°	153.4	152.6	151.8	151.1	150.4	149.9	149.3	148.6	149.3	149.9	150.4
102.5°	196.7	196.3	195.7	195.1	194.4	193.7	192.9	192.2	192.9	193.7	194.4
105°	265.3	265.3	265.3	264.9	264.1	263.3	262.5	261.7	262.5	263.3	264.1
107.5°	335.0	334.7	334.2	334.0	334.0	334.0	334.0	334.0	334.0	334.0	334.0
110°	382.1	381.7	381.3	381.0	381.0	381.0	381.0	381.0	381.0	381.0	381.0



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	427.9	427.8	427.5	427.1	426.7	426.1	425.7	425.3	425.7	426.1	426.7
115°	496.4	496.2	496.1	495.4	494.5	493.5	492.5	491.5	492.5	493.5	494.5
117.5°	561.7	561.0	560.3	559.9	559.9	559.9	560.0	560.0	560.0	559.9	559.9
120°	603.3	602.8	602.2	602.0	602.2	602.4	602.5	602.8	602.5	602.4	602.2
122.5°	644.6	644.4	644.0	643.5	642.7	642.0	641.2	640.5	641.2	642.0	642.7
125°	705.2	705.2	705.2	704.5	703.1	701.7	700.3	698.9	700.3	701.7	703.1
127.5°	758.8	758.9	759.0	758.6	757.6	756.6	755.6	754.7	755.6	756.6	757.6
130°	793.8	793.6	793.4	792.8	791.8	790.9	789.9	788.8	789.9	790.9	791.8
132.5°	827.2	827.5	828.0	827.6	826.4	825.4	824.2	823.0	824.2	825.4	826.4
135°	876.0	876.4	876.8	876.4	875.2	874.1	872.8	871.6	872.8	874.1	875.2
137.5°	920.1	920.4	920.8	920.4	919.4	918.4	917.4	916.3	917.4	918.4	919.4
140°	946.8	947.0	947.3	947.1	946.7	946.4	945.9	945.6	945.9	946.4	946.7
142.5°	973.7	973.4	973.1	972.9	972.6	972.4	972.1	971.9	972.1	972.4	972.6
145°	1012.4	1012.4	1012.4	1012.1	1011.7	1011.3	1010.9	1010.6	1010.9	1011.3	1011.7
147.5°	1044.6	1044.4	1044.1	1044.0	1044.1	1044.2	1044.3	1044.4	1044.3	1044.2	1044.1
150°	1065.0	1064.5	1064.2	1064.2	1064.5	1065.0	1065.3	1065.8	1065.3	1065.0	1064.5
152.5°	1083.4	1083.1	1082.7	1082.9	1083.8	1084.7	1085.6	1086.4	1085.6	1084.7	1083.8
155°	1108.6	1108.2	1107.8	1108.2	1109.4	1110.5	1111.8	1112.9	1111.8	1110.5	1109.4
157.5°	1130.3	1130.2	1130.2	1130.6	1131.3	1132.0	1132.7	1133.4	1132.7	1132.0	1131.3
160°	1142.8	1142.6	1142.4	1142.9	1144.1	1145.3	1146.5	1147.6	1146.5	1145.3	1144.1
162.5°	1154.2	1154.0	1153.8	1154.3	1155.5	1156.6	1157.9	1159.0	1157.9	1156.6	1155.5
165°	1169.5	1169.3	1169.1	1169.7	1170.8	1172.0	1173.1	1174.4	1173.1	1172.0	1170.8
167.5°	1180.7	1180.5	1180.4	1180.9	1182.1	1183.3	1184.5	1185.8	1184.5	1183.3	1182.1
170°	1186.4	1186.2	1186.1	1186.6	1188.0	1189.4	1190.8	1192.1	1190.8	1189.4	1188.0
172.5°	1191.1	1190.7	1190.4	1190.9	1192.3	1193.6	1195.1	1196.4	1195.1	1193.6	1192.3
175°	1196.2	1196.1	1195.9	1196.3	1197.5	1198.7	1199.9	1201.0	1199.9	1198.7	1197.5
177.5°	1199.4	1199.2	1199.0	1199.4	1200.3	1201.3	1202.3	1203.2	1202.3	1201.3	1200.3
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	811.4	807.5	804.9	799.4	795.6	794.0	791.0	790.2	793.2	791.0	790.8
5°	787.2	777.4	769.6	761.8	753.3	748.0	739.8	738.4	736.4	733.3	732.7
7.5°	758.3	745.5	735.5	722.6	711.4	702.4	692.2	687.4	684.7	680.8	675.6
10°	738.8	723.5	710.0	697.1	683.2	672.1	661.9	654.1	649.0	644.3	642.2
12.5°	719.5	704.0	686.7	671.1	655.6	643.0	631.8	626.7	621.1	615.5	610.8
15°	689.6	669.0	650.1	632.0	618.8	605.3	594.5	587.0	578.5	576.2	567.0
17.5°	658.0	637.7	615.5	596.6	581.3	566.3	554.5	546.0	539.6	530.8	526.6
20°	638.2	614.1	592.5	575.2	558.2	540.6	528.4	521.3	515.2	508.1	504.7
22.5°	617.1	593.5	571.3	551.1	533.9	516.5	507.8	500.4	493.6	487.0	482.5
25°	586.0	562.3	539.0	517.9	500.0	487.4	477.2	468.8	465.1	458.6	453.9
27.5°	555.4	530.1	505.9	484.9	470.8	458.4	450.1	443.4	436.7	431.1	427.0
30°	535.6	509.8	483.4	466.8	451.8	440.1	430.9	424.5	419.4	414.3	411.3
32.5°	515.8	489.2	465.7	447.8	433.7	423.5	414.1	407.9	402.5	396.9	393.3
35°	484.0	456.9	438.0	420.4	406.4	397.0	390.6	381.7	377.4	373.3	369.5
37.5°	454.6	429.4	408.8	393.4	381.4	371.9	363.6	358.8	353.5	349.8	346.7
40°	432.9	409.8	391.3	375.0	366.1	355.7	347.9	341.8	337.7	333.0	329.6
42.5°	413.4	392.0	373.9	359.3	348.3	339.4	331.9	325.8	320.7	317.3	314.4
45°	385.8	364.4	346.9	333.3	323.2	314.7	306.9	303.8	297.0	293.0	291.7
47.5°	357.3	338.2	321.2	308.7	298.3	290.3	282.9	276.8	273.0	269.0	266.9
50°	338.0	319.8	303.8	291.7	281.5	272.7	265.9	261.8	256.7	253.1	250.3
52.5°	318.8	301.8	286.0	274.3	265.5	256.7	249.1	245.0	240.2	237.8	235.9
55°	291.3	273.4	259.8	248.3	239.2	231.0	223.9	219.8	216.8	214.5	213.7
57.5°	260.1	245.9	233.4	222.9	213.5	205.8	199.6	195.7	193.1	192.7	190.6
60°	239.8	226.9	215.4	204.3	196.1	189.0	183.6	179.2	176.5	176.1	175.5
62.5°	219.5	207.1	196.4	186.6	179.3	172.5	167.4	162.4	160.8	159.1	157.6
65°	189.3	178.2	169.3	161.6	153.8	148.0	142.9	139.9	136.2	134.1	130.5
67.5°	159.7	151.1	142.6	136.1	129.9	124.5	120.3	115.7	113.2	111.6	108.9
70°	140.3	133.5	125.0	117.9	113.2	108.7	105.3	100.2	98.5	97.2	95.9
72.5°	121.8	115.8	108.7	103.0	98.3	94.1	90.2	87.8	86.1	84.7	83.9
75°	95.9	90.1	84.0	79.9	76.6	73.2	71.2	69.5	68.8	68.4	67.1
77.5°	70.4	67.3	62.4	59.2	57.0	55.6	53.8	52.9	52.9	51.4	50.9
80°	53.9	52.2	48.1	46.7	45.0	43.7	42.7	41.0	39.3	38.6	37.6
82.5°	40.0	38.3	36.7	34.5	33.2	32.3	31.3	30.7	30.9	30.0	29.4
85°	21.3	19.6	19.0	18.6	17.9	18.6	18.3	17.9	17.7	17.3	17.7
87.5°	8.2	8.5	8.6	9.4	8.8	9.4	9.5	9.5	9.7	9.9	9.7
90°	7.2	8.7	10.1	11.5	12.8	14.3	15.2	16.2	17.2	18.2	19.0
92.5°	9.3	9.4	10.5	11.8	13.0	14.3	15.2	16.2	17.2	18.2	18.8
95°	48.4	44.3	36.8	29.2	21.8	14.3	15.2	16.2	17.2	18.2	18.7
97.5°	110.2	103.3	88.5	73.6	58.7	43.8	38.3	32.6	27.1	21.5	18.7
100°	151.1	151.8	152.6	153.4	154.1	154.9	125.5	95.9	66.5	37.0	21.8
102.5°	195.1	195.7	196.3	196.7	197.2	197.7	192.1	186.5	180.9	175.3	165.9
105°	264.9	265.3	265.3	265.3	265.3	265.3	265.3	265.3	265.3	265.3	265.2
107.5°	334.0	334.2	334.7	335.0	335.5	335.8	335.9	335.9	336.0	336.0	335.7
110°	381.0	381.3	381.7	382.1	382.5	382.8	382.3	381.7	381.0	380.5	380.3



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	427.1	427.5	427.8	427.9	428.2	428.5	427.7	427.0	426.1	425.4	424.9
115°	495.4	496.1	496.2	496.4	496.6	496.8	496.1	495.3	494.5	493.7	492.7
117.5°	559.9	560.3	561.0	561.7	562.5	563.2	562.2	561.2	560.2	559.1	558.3
120°	602.0	602.2	602.8	603.3	604.0	604.6	604.1	603.8	603.3	603.0	602.3
122.5°	643.5	644.0	644.4	644.6	644.9	645.2	644.7	644.4	644.0	643.5	642.7
125°	704.5	705.2	705.2	705.2	705.2	705.2	704.4	703.6	702.8	702.0	701.3
127.5°	758.6	759.0	758.9	758.8	758.7	758.6	758.1	757.7	757.2	756.8	755.9
130°	792.8	793.4	793.6	793.8	794.0	794.2	793.6	793.0	792.4	791.8	791.0
132.5°	827.6	828.0	827.5	827.2	826.7	826.3	826.1	826.0	825.9	825.7	825.2
135°	876.4	876.8	876.4	876.0	875.6	875.2	874.8	874.4	874.1	873.6	872.8
137.5°	920.4	920.8	920.4	920.1	919.7	919.4	919.4	919.5	919.6	919.7	919.2
140°	947.1	947.3	947.0	946.8	946.6	946.5	946.8	947.3	947.6	948.0	947.6
142.5°	972.9	973.1	973.4	973.7	973.9	974.2	974.3	974.4	974.5	974.6	974.0
145°	1012.1	1012.4	1012.4	1012.4	1012.4	1012.4	1012.5	1012.7	1012.9	1013.1	1012.6
147.5°	1044.0	1044.1	1044.4	1044.6	1044.8	1045.1	1045.4	1045.5	1045.8	1046.1	1045.4
150°	1064.2	1064.2	1064.5	1065.0	1065.3	1065.8	1066.1	1066.6	1066.9	1067.3	1066.8
152.5°	1082.9	1082.7	1083.1	1083.4	1083.9	1084.2	1084.7	1085.0	1085.5	1085.8	1085.3
155°	1108.2	1107.8	1108.2	1108.6	1108.9	1109.4	1110.0	1110.5	1111.2	1111.8	1111.3
157.5°	1130.6	1130.2	1130.2	1130.3	1130.3	1130.4	1131.0	1131.7	1132.3	1132.9	1132.5
160°	1142.9	1142.4	1142.6	1142.8	1143.0	1143.2	1144.0	1144.8	1145.6	1146.4	1145.9
162.5°	1154.3	1153.8	1154.0	1154.2	1154.4	1154.6	1155.7	1156.8	1157.9	1159.0	1158.7
165°	1169.7	1169.1	1169.3	1169.5	1169.7	1169.9	1171.1	1172.2	1173.5	1174.7	1174.5
167.5°	1180.9	1180.4	1180.5	1180.7	1180.9	1181.2	1182.6	1184.0	1185.4	1186.9	1186.7
170°	1186.6	1186.1	1186.2	1186.4	1186.6	1186.9	1188.4	1190.0	1191.6	1193.2	1193.0
172.5°	1190.9	1190.4	1190.7	1191.1	1191.4	1191.8	1193.2	1194.6	1196.1	1197.5	1197.3
175°	1196.3	1195.9	1196.1	1196.2	1196.4	1196.6	1198.2	1199.8	1201.4	1202.9	1202.8
177.5°	1199.4	1199.0	1199.2	1199.4	1199.5	1199.6	1200.8	1201.8	1203.0	1204.1	1204.0
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	790.5	787.5	786.7	787.7	786.7	787.5	790.5	790.8	791.0	793.2	790.2
5°	729.3	725.9	727.6	726.9	727.6	725.9	729.3	732.7	733.3	736.4	738.4
7.5°	675.5	671.3	666.8	668.2	666.8	671.3	675.5	675.6	680.8	684.7	687.4
10°	637.8	634.5	632.4	634.1	632.4	634.5	637.8	642.2	644.3	649.0	654.1
12.5°	606.1	604.1	602.4	601.6	602.4	604.1	606.1	610.8	615.5	621.1	626.7
15°	562.9	558.9	557.2	552.9	557.2	558.9	562.9	567.0	576.2	578.5	587.0
17.5°	523.2	521.8	517.5	515.6	517.5	521.8	523.2	526.6	530.8	539.6	546.0
20°	499.6	498.3	493.9	496.6	493.9	498.3	499.6	504.7	508.1	515.2	521.3
22.5°	480.1	477.2	475.7	474.9	475.7	477.2	480.1	482.5	487.0	493.6	500.4
25°	452.5	448.2	446.5	444.4	446.5	448.2	452.5	453.9	458.6	465.1	468.8
27.5°	425.1	422.7	420.4	419.9	420.4	422.7	425.1	427.0	431.1	436.7	443.4
30°	407.2	404.7	403.1	403.1	403.1	404.7	407.2	411.3	414.3	419.4	424.5
32.5°	391.2	389.3	387.6	387.4	387.6	389.3	391.2	393.3	396.9	402.5	407.9
35°	367.8	365.2	364.4	362.5	364.4	365.2	367.8	369.5	373.3	377.4	381.7
37.5°	343.7	341.4	341.3	341.2	341.3	341.4	343.7	346.7	349.8	353.5	358.8
40°	328.2	326.5	326.2	323.9	326.2	326.5	328.2	329.6	333.0	337.7	341.8
42.5°	311.7	310.9	309.7	308.6	309.7	310.9	311.7	314.4	317.3	320.7	325.8
45°	289.3	287.0	287.0	285.3	287.0	287.0	289.3	291.7	293.0	297.0	303.8
47.5°	266.1	264.3	264.5	262.7	264.5	264.3	266.1	266.9	269.0	273.0	276.8
50°	250.7	249.7	249.3	248.6	249.3	249.7	250.7	250.3	253.1	256.7	261.8
52.5°	235.2	234.8	236.0	234.5	236.0	234.8	235.2	235.9	237.8	240.2	245.0
55°	214.5	213.4	215.4	213.4	215.4	213.4	214.5	213.7	214.5	216.8	219.8
57.5°	190.5	189.6	191.4	190.4	191.4	189.6	190.5	190.6	192.7	193.1	195.7
60°	174.8	172.7	173.8	174.2	173.8	172.7	174.8	175.5	176.1	176.5	179.2
62.5°	156.0	154.9	155.6	154.1	155.6	154.9	156.0	157.6	159.1	160.8	162.4
65°	129.7	128.8	127.3	126.7	127.3	128.8	129.7	130.5	134.1	136.2	139.9
67.5°	109.0	106.6	106.5	107.0	106.5	106.6	109.0	108.9	111.6	113.2	115.7
70°	93.8	93.8	93.5	93.5	93.5	93.8	93.8	95.9	97.2	98.5	100.2
72.5°	83.3	83.0	82.4	82.1	82.4	83.0	83.3	83.9	84.7	86.1	87.8
75°	67.1	67.4	66.7	66.4	66.7	67.4	67.1	67.1	68.4	68.8	69.5
77.5°	49.5	48.1	48.9	48.1	48.9	48.1	49.5	50.9	51.4	52.9	52.9
80°	37.6	37.3	38.3	37.3	38.3	37.3	37.6	37.6	38.6	39.3	41.0
82.5°	29.8	29.4	29.9	29.2	29.9	29.4	29.8	29.4	30.0	30.9	30.7
85°	17.9	17.7	17.3	17.7	17.3	17.7	17.9	17.7	17.3	17.7	17.9
87.5°	10.2	10.0	10.1	10.3	10.1	10.0	10.2	9.7	9.9	9.7	9.5
90°	19.6	20.2	20.8	21.4	20.8	20.2	19.6	19.0	18.2	17.2	16.2
92.5°	19.1	19.4	19.7	20.0	19.7	19.4	19.1	18.8	18.2	17.2	16.2
95°	18.7	18.7	18.7	18.7	18.7	18.7	18.7	18.7	18.2	17.2	16.2
97.5°	18.7	18.7	18.7	18.7	18.7	18.7	18.7	18.7	21.5	27.1	32.6
100°	21.0	20.2	19.5	18.7	19.5	20.2	21.0	21.8	37.0	66.5	95.9
102.5°	152.4	138.9	125.5	112.0	125.5	138.9	152.4	165.9	175.3	180.9	186.5
105°	265.0	264.8	264.7	264.4	264.7	264.8	265.0	265.2	265.3	265.3	265.3
107.5°	335.1	334.6	333.9	333.3	333.9	334.6	335.1	335.7	336.0	336.0	335.9
110°	380.5	380.7	380.8	381.0	380.8	380.7	380.5	380.3	380.5	381.0	381.7



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	424.6	424.4	424.1	423.8	424.1	424.4	424.6	424.9	425.4	426.1	427.0
115°	491.5	490.3	489.1	487.9	489.1	490.3	491.5	492.7	493.7	494.5	495.3
117.5°	557.9	557.3	556.8	556.2	556.8	557.3	557.9	558.3	559.1	560.2	561.2
120°	601.3	600.3	599.3	598.3	599.3	600.3	601.3	602.3	603.0	603.3	603.8
122.5°	641.7	640.5	639.4	638.2	639.4	640.5	641.7	642.7	643.5	644.0	644.4
125°	700.7	700.1	699.5	698.9	699.5	700.1	700.7	701.3	702.0	702.8	703.6
127.5°	754.4	753.0	751.5	750.0	751.5	753.0	754.4	755.9	756.8	757.2	757.7
130°	790.1	789.1	788.1	787.0	788.1	789.1	790.1	791.0	791.8	792.4	793.0
132.5°	824.2	823.2	822.2	821.3	822.2	823.2	824.2	825.2	825.7	825.9	826.0
135°	871.6	870.5	869.2	868.1	869.2	870.5	871.6	872.8	873.6	874.1	874.4
137.5°	918.2	917.1	916.1	915.1	916.1	917.1	918.2	919.2	919.7	919.6	919.5
140°	946.5	945.2	944.1	942.9	944.1	945.2	946.5	947.6	948.0	947.6	947.3
142.5°	972.8	971.6	970.4	969.2	970.4	971.6	972.8	974.0	974.6	974.5	974.4
145°	1011.5	1010.2	1009.1	1007.9	1009.1	1010.2	1011.5	1012.6	1013.1	1012.9	1012.7
147.5°	1044.0	1042.6	1041.2	1039.7	1041.2	1042.6	1044.0	1045.4	1046.1	1045.8	1045.5
150°	1065.1	1063.5	1061.9	1060.4	1061.9	1063.5	1065.1	1066.8	1067.3	1066.9	1066.6
152.5°	1083.9	1082.4	1081.0	1079.6	1081.0	1082.4	1083.9	1085.3	1085.8	1085.5	1085.0
155°	1109.6	1108.0	1106.5	1104.9	1106.5	1108.0	1109.6	1111.3	1111.8	1111.2	1110.5
157.5°	1130.9	1129.3	1127.7	1126.1	1127.7	1129.3	1130.9	1132.5	1132.9	1132.3	1131.7
160°	1144.4	1142.8	1141.2	1139.6	1141.2	1142.8	1144.4	1145.9	1146.4	1145.6	1144.8
162.5°	1157.0	1155.2	1153.5	1151.7	1153.5	1155.2	1157.0	1158.7	1159.0	1157.9	1156.8
165°	1172.9	1171.3	1169.7	1168.1	1169.7	1171.3	1172.9	1174.5	1174.7	1173.5	1172.2
167.5°	1184.9	1183.1	1181.3	1179.6	1181.3	1183.1	1184.9	1186.7	1186.9	1185.4	1184.0
170°	1191.2	1189.5	1187.8	1186.0	1187.8	1189.5	1191.2	1193.0	1193.2	1191.6	1190.0
172.5°	1195.5	1193.7	1191.9	1190.3	1191.9	1193.7	1195.5	1197.3	1197.5	1196.1	1194.6
175°	1201.0	1199.3	1197.5	1195.7	1197.5	1199.3	1201.0	1202.8	1202.9	1201.4	1199.8
177.5°	1202.7	1201.5	1200.2	1198.9	1200.2	1201.5	1202.7	1204.0	1204.1	1203.0	1201.8
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	791.0	794.0	795.6	799.4	804.9	807.5	811.4	814.0	817.9	822.4	826.3
5°	739.8	748.0	753.3	761.8	769.6	777.4	787.2	794.3	803.8	814.7	823.1
7.5°	692.2	702.4	711.4	722.6	735.5	745.5	758.3	771.3	786.2	801.6	816.1
10°	661.9	672.1	683.2	697.1	710.0	723.5	738.8	754.0	772.7	790.0	809.6
12.5°	631.8	643.0	655.6	671.1	686.7	704.0	719.5	736.6	756.7	779.1	800.1
15°	594.5	605.3	618.8	632.0	650.1	669.0	689.6	712.4	734.7	759.8	785.9
17.5°	554.5	566.3	581.3	596.6	615.5	637.7	658.0	682.8	707.9	737.2	767.9
20°	528.4	540.6	558.2	575.2	592.5	614.1	638.2	663.6	690.4	721.1	755.4
22.5°	507.8	516.5	533.9	551.1	571.3	593.5	617.1	643.5	672.7	704.6	740.5
25°	477.2	487.4	500.0	517.9	539.0	562.3	586.0	614.1	646.0	678.5	716.8
27.5°	450.1	458.4	470.8	484.9	505.9	530.1	555.4	584.7	617.3	650.4	690.7
30°	430.9	440.1	451.8	466.8	483.4	509.8	535.6	564.4	597.5	631.8	673.1
32.5°	414.1	423.5	433.7	447.8	465.7	489.2	515.8	544.0	577.7	613.1	653.3
35°	390.6	397.0	406.4	420.4	438.0	456.9	484.0	513.9	546.7	583.3	623.6
37.5°	363.6	371.9	381.4	393.4	408.8	429.4	454.6	484.7	515.2	550.3	587.0
40°	347.9	355.7	366.1	375.0	391.3	409.8	432.9	464.4	494.9	527.7	561.2
42.5°	331.9	339.4	348.3	359.3	373.9	392.0	413.4	442.7	475.4	506.3	534.5
45°	306.9	314.7	323.2	333.3	346.9	364.4	385.8	412.6	441.0	469.5	490.8
47.5°	282.9	290.3	298.3	308.7	321.2	338.2	357.3	380.9	408.6	432.7	448.0
50°	265.9	272.7	281.5	291.7	303.8	319.8	338.0	361.4	384.5	406.4	420.4
52.5°	249.1	256.7	265.5	274.3	286.0	301.8	318.8	338.9	360.9	378.8	390.3
55°	223.9	231.0	239.2	248.3	259.8	273.4	291.3	307.2	324.5	339.7	346.5
57.5°	199.6	205.8	213.5	222.9	233.4	245.9	260.1	275.4	287.7	298.5	306.1
60°	183.6	189.0	196.1	204.3	215.4	226.9	239.8	254.0	263.5	272.7	279.8
62.5°	167.4	172.5	179.3	186.6	196.4	207.1	219.5	231.0	240.2	246.4	254.6
65°	142.9	148.0	153.8	161.6	169.3	178.2	189.3	197.8	204.3	211.1	216.2
67.5°	120.3	124.5	129.9	136.1	142.6	151.1	159.7	166.7	171.2	175.2	181.4
70°	105.3	108.7	113.2	117.9	125.0	133.5	140.3	145.6	148.7	152.8	160.2
72.5°	90.2	94.1	98.3	103.0	108.7	115.8	121.8	127.2	129.2	132.4	137.1
75°	71.2	73.2	76.6	79.9	84.0	90.1	95.9	97.2	98.9	101.7	105.0
77.5°	53.8	55.6	57.0	59.2	62.4	67.3	70.4	72.4	72.9	73.8	77.1
80°	42.7	43.7	45.0	46.7	48.1	52.2	53.9	55.9	56.5	57.6	59.3
82.5°	31.3	32.3	33.2	34.5	36.7	38.3	40.0	42.1	42.2	43.0	43.2
85°	18.3	18.6	17.9	18.6	19.0	19.6	21.3	23.0	22.7	22.4	23.4
87.5°	9.5	9.4	8.8	9.4	8.6	8.5	8.2	8.2	8.4	8.6	8.8
90°	15.2	14.3	12.8	11.5	10.1	8.7	7.2	5.6	4.0	2.5	0.9
92.5°	15.2	14.3	13.0	11.8	10.5	9.4	9.3	10.3	11.5	12.6	13.7
95°	15.2	14.3	21.8	29.2	36.8	44.3	48.4	49.0	49.6	50.1	50.7
97.5°	38.3	43.8	58.7	73.6	88.5	103.3	110.2	109.1	108.1	107.0	105.9
100°	125.5	154.9	154.1	153.4	152.6	151.8	151.1	150.4	149.9	149.3	148.6
102.5°	192.1	197.7	197.2	196.7	196.3	195.7	195.1	194.4	193.7	192.9	192.2
105°	265.3	265.3	265.3	265.3	265.3	265.3	264.9	264.1	263.3	262.5	261.7
107.5°	335.9	335.8	335.5	335.0	334.7	334.2	334.0	334.0	334.0	334.0	334.0
110°	382.3	382.8	382.5	382.1	381.7	381.3	381.0	381.0	381.0	381.0	381.0



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	427.7	428.5	428.2	427.9	427.8	427.5	427.1	426.7	426.1	425.7	425.3
115°	496.1	496.8	496.6	496.4	496.2	496.1	495.4	494.5	493.5	492.5	491.5
117.5°	562.2	563.2	562.5	561.7	561.0	560.3	559.9	559.9	559.9	560.0	560.0
120°	604.1	604.6	604.0	603.3	602.8	602.2	602.0	602.2	602.4	602.5	602.8
122.5°	644.7	645.2	644.9	644.6	644.4	644.0	643.5	642.7	642.0	641.2	640.5
125°	704.4	705.2	705.2	705.2	705.2	705.2	704.5	703.1	701.7	700.3	698.9
127.5°	758.1	758.6	758.7	758.8	758.9	759.0	758.6	757.6	756.6	755.6	754.7
130°	793.6	794.2	794.0	793.8	793.6	793.4	792.8	791.8	790.9	789.9	788.8
132.5°	826.1	826.3	826.7	827.2	827.5	828.0	827.6	826.4	825.4	824.2	823.0
135°	874.8	875.2	875.6	876.0	876.4	876.8	876.4	875.2	874.1	872.8	871.6
137.5°	919.4	919.4	919.7	920.1	920.4	920.8	920.4	919.4	918.4	917.4	916.3
140°	946.8	946.5	946.6	946.8	947.0	947.3	947.1	946.7	946.4	945.9	945.6
142.5°	974.3	974.2	973.9	973.7	973.4	973.1	972.9	972.6	972.4	972.1	971.9
145°	1012.5	1012.4	1012.4	1012.4	1012.4	1012.4	1012.1	1011.7	1011.3	1010.9	1010.6
147.5°	1045.4	1045.1	1044.8	1044.6	1044.4	1044.1	1044.0	1044.1	1044.2	1044.3	1044.4
150°	1066.1	1065.8	1065.3	1065.0	1064.5	1064.2	1064.2	1064.5	1065.0	1065.3	1065.8
152.5°	1084.7	1084.2	1083.9	1083.4	1083.1	1082.7	1082.9	1083.8	1084.7	1085.6	1086.4
155°	1110.0	1109.4	1108.9	1108.6	1108.2	1107.8	1108.2	1109.4	1110.5	1111.8	1112.9
157.5°	1131.0	1130.4	1130.3	1130.3	1130.2	1130.2	1130.6	1131.3	1132.0	1132.7	1133.4
160°	1144.0	1143.2	1143.0	1142.8	1142.6	1142.4	1142.9	1144.1	1145.3	1146.5	1147.6
162.5°	1155.7	1154.6	1154.4	1154.2	1154.0	1153.8	1154.3	1155.5	1156.6	1157.9	1159.0
165°	1171.1	1169.9	1169.7	1169.5	1169.3	1169.1	1169.7	1170.8	1172.0	1173.1	1174.4
167.5°	1182.6	1181.2	1180.9	1180.7	1180.5	1180.4	1180.9	1182.1	1183.3	1184.5	1185.8
170°	1188.4	1186.9	1186.6	1186.4	1186.2	1186.1	1186.6	1188.0	1189.4	1190.8	1192.1
172.5°	1193.2	1191.8	1191.4	1191.1	1190.7	1190.4	1190.9	1192.3	1193.6	1195.1	1196.4
175°	1198.2	1196.6	1196.4	1196.2	1196.1	1195.9	1196.3	1197.5	1198.7	1199.9	1201.0
177.5°	1200.8	1199.6	1199.5	1199.4	1199.2	1199.0	1199.4	1200.3	1201.3	1202.3	1203.2
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	829.2	831.7	835.2	839.3	842.5	846.1	847.9	847.9	849.5	853.1	857.6
5°	831.6	840.4	848.9	859.7	868.2	878.0	885.5	892.6	899.0	907.1	915.6
7.5°	830.9	845.5	860.8	877.9	896.7	911.7	927.0	939.1	951.0	966.6	978.9
10°	828.2	847.2	867.8	889.5	913.2	933.9	952.5	969.5	985.7	1002.6	1017.9
12.5°	823.3	847.5	872.7	898.8	928.7	952.3	976.3	994.4	1013.3	1031.9	1050.7
15°	816.0	844.5	874.9	911.2	947.8	974.2	997.9	1021.3	1038.9	1059.9	1077.9
17.5°	800.9	837.6	875.9	915.5	950.7	981.4	1006.2	1028.5	1047.2	1070.3	1094.8
20°	791.9	831.6	871.6	913.9	947.4	978.9	1003.0	1026.0	1049.4	1079.6	1109.4
22.5°	779.5	821.8	864.2	904.5	939.9	970.3	995.1	1023.3	1054.0	1088.2	1124.3
25°	759.8	803.5	845.5	883.8	918.3	949.5	983.4	1021.3	1058.5	1103.6	1155.4
27.5°	734.8	776.9	814.4	854.8	889.2	928.8	971.1	1012.2	1066.0	1127.9	1192.7
30°	716.0	756.1	791.7	829.9	868.9	912.6	960.0	1008.4	1072.5	1145.2	1222.2
32.5°	694.4	730.6	765.9	802.8	847.7	895.7	946.2	1005.4	1081.9	1164.8	1244.4
35°	656.8	689.3	723.5	764.6	812.3	864.4	928.8	1000.9	1093.4	1182.5	1254.0
37.5°	617.4	643.0	677.4	720.6	772.7	833.0	906.1	993.7	1088.7	1168.7	1199.1
40°	587.0	611.1	647.3	692.7	744.2	810.3	892.2	982.3	1077.9	1133.4	1131.0
42.5°	557.0	581.3	616.2	661.8	715.5	789.4	873.8	967.4	1048.0	1069.2	1025.1
45°	510.8	533.5	567.8	613.8	671.4	748.9	837.7	927.5	978.9	944.8	857.4
47.5°	463.8	485.8	517.5	562.7	625.5	706.8	790.7	864.3	871.6	798.1	693.2
50°	432.9	453.5	483.8	531.8	592.8	672.1	753.0	810.9	793.0	703.2	595.1
52.5°	402.8	422.7	450.9	496.3	558.7	636.3	708.6	754.0	712.5	617.1	519.9
55°	358.4	377.4	405.8	447.5	504.0	575.2	638.6	655.1	594.1	497.9	419.4
57.5°	316.2	330.0	358.2	395.0	449.6	512.3	557.7	554.7	487.4	400.8	344.5
60°	288.3	300.8	327.5	361.4	413.2	469.5	501.3	487.8	419.7	348.2	294.0
62.5°	262.3	273.9	296.4	327.5	372.1	421.0	444.2	425.4	361.1	298.4	255.3
65°	222.9	231.4	249.3	278.1	313.0	346.9	367.6	340.1	283.2	235.8	203.2
67.5°	186.1	193.4	209.4	230.1	254.1	277.5	285.9	260.1	215.9	184.0	161.0
70°	162.3	169.1	179.9	199.2	215.1	231.7	235.8	212.8	175.8	151.4	137.1
72.5°	139.5	145.7	155.2	168.8	179.9	189.4	191.4	169.9	141.7	124.8	113.9
75°	106.4	111.8	117.9	123.0	130.1	131.8	131.1	114.5	99.2	88.1	81.9
77.5°	78.2	80.4	84.2	86.1	86.5	86.4	82.9	72.4	64.6	59.9	57.4
80°	60.3	62.0	63.0	63.7	64.0	60.6	56.9	50.5	47.8	45.0	42.0
82.5°	43.8	44.9	45.9	46.1	44.2	41.4	37.9	34.8	32.8	31.5	30.3
85°	23.7	24.1	23.7	22.0	19.6	18.6	17.9	17.3	16.9	16.6	16.6
87.5°	8.9	8.4	7.4	7.9	8.2	8.3	8.6	8.6	8.6	8.7	8.9
90°	2.5	4.0	5.6	7.2	8.7	10.1	11.5	12.8	14.3	15.2	16.2
92.5°	12.6	11.5	10.3	9.3	9.4	10.5	11.8	13.0	14.3	15.2	16.2
95°	50.1	49.6	49.0	48.4	44.3	36.8	29.2	21.8	14.3	15.2	16.2
97.5°	107.0	108.1	109.1	110.2	103.3	88.5	73.6	58.7	43.8	38.3	32.6
100°	149.3	149.9	150.4	151.1	151.8	152.6	153.4	154.1	154.9	125.5	95.9
102.5°	192.9	193.7	194.4	195.1	195.7	196.3	196.7	197.2	197.7	192.1	186.5
105°	262.5	263.3	264.1	264.9	265.3	265.3	265.3	265.3	265.3	265.3	265.3
107.5°	334.0	334.0	334.0	334.0	334.2	334.7	335.0	335.5	335.8	335.9	335.9
110°	381.0	381.0	381.0	381.0	381.3	381.7	382.1	382.5	382.8	382.3	381.7



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	425.7	426.1	426.7	427.1	427.5	427.8	427.9	428.2	428.5	427.7	427.0
115°	492.5	493.5	494.5	495.4	496.1	496.2	496.4	496.6	496.8	496.1	495.3
117.5°	560.0	559.9	559.9	559.9	560.3	561.0	561.7	562.5	563.2	562.2	561.2
120°	602.5	602.4	602.2	602.0	602.2	602.8	603.3	604.0	604.6	604.1	603.8
122.5°	641.2	642.0	642.7	643.5	644.0	644.4	644.6	644.9	645.2	644.7	644.4
125°	700.3	701.7	703.1	704.5	705.2	705.2	705.2	705.2	705.2	704.4	703.6
127.5°	755.6	756.6	757.6	758.6	759.0	758.9	758.8	758.7	758.6	758.1	757.7
130°	789.9	790.9	791.8	792.8	793.4	793.6	793.8	794.0	794.2	793.6	793.0
132.5°	824.2	825.4	826.4	827.6	828.0	827.5	827.2	826.7	826.3	826.1	826.0
135°	872.8	874.1	875.2	876.4	876.8	876.4	876.0	875.6	875.2	874.8	874.4
137.5°	917.4	918.4	919.4	920.4	920.8	920.4	920.1	919.7	919.4	919.4	919.5
140°	945.9	946.4	946.7	947.1	947.3	947.0	946.8	946.6	946.5	946.8	947.3
142.5°	972.1	972.4	972.6	972.9	973.1	973.4	973.7	973.9	974.2	974.3	974.4
145°	1010.9	1011.3	1011.7	1012.1	1012.4	1012.4	1012.4	1012.4	1012.4	1012.5	1012.7
147.5°	1044.3	1044.2	1044.1	1044.0	1044.1	1044.4	1044.6	1044.8	1045.1	1045.4	1045.5
150°	1065.3	1065.0	1064.5	1064.2	1064.2	1064.5	1065.0	1065.3	1065.8	1066.1	1066.6
152.5°	1085.6	1084.7	1083.8	1082.9	1082.7	1083.1	1083.4	1083.9	1084.2	1084.7	1085.0
155°	1111.8	1110.5	1109.4	1108.2	1107.8	1108.2	1108.6	1108.9	1109.4	1110.0	1110.5
157.5°	1132.7	1132.0	1131.3	1130.6	1130.2	1130.2	1130.3	1130.3	1130.4	1131.0	1131.7
160°	1146.5	1145.3	1144.1	1142.9	1142.4	1142.6	1142.8	1143.0	1143.2	1144.0	1144.8
162.5°	1157.9	1156.6	1155.5	1154.3	1153.8	1154.0	1154.2	1154.4	1154.6	1155.7	1156.8
165°	1173.1	1172.0	1170.8	1169.7	1169.1	1169.3	1169.5	1169.7	1169.9	1171.1	1172.2
167.5°	1184.5	1183.3	1182.1	1180.9	1180.4	1180.5	1180.7	1180.9	1181.2	1182.6	1184.0
170°	1190.8	1189.4	1188.0	1186.6	1186.1	1186.2	1186.4	1186.6	1186.9	1188.4	1190.0
172.5°	1195.1	1193.6	1192.3	1190.9	1190.4	1190.7	1191.1	1191.4	1191.8	1193.2	1194.6
175°	1199.9	1198.7	1197.5	1196.3	1195.9	1196.1	1196.2	1196.4	1196.6	1198.2	1199.8
177.5°	1202.3	1201.3	1200.3	1199.4	1199.0	1199.2	1199.4	1199.5	1199.6	1200.8	1201.8
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	861.2	861.2	865.9	865.5	868.5	867.5	868.0
5°	925.8	931.5	936.6	940.0	945.0	946.5	945.7
7.5°	992.7	1005.5	1011.7	1020.3	1021.8	1026.3	1025.8
10°	1034.1	1046.7	1056.1	1063.6	1067.4	1072.1	1072.5
12.5°	1066.7	1077.3	1085.7	1092.6	1097.2	1098.7	1099.6
15°	1092.1	1103.9	1113.7	1123.6	1129.4	1133.7	1136.1
17.5°	1117.7	1136.0	1153.3	1166.7	1174.7	1181.4	1181.3
20°	1137.5	1158.5	1180.2	1195.4	1210.9	1217.7	1218.8
22.5°	1158.6	1190.7	1218.6	1242.2	1262.8	1269.8	1272.4
25°	1202.5	1244.5	1287.5	1320.7	1344.4	1358.3	1360.4
27.5°	1255.5	1312.4	1357.6	1388.3	1408.0	1418.3	1420.5
30°	1293.0	1345.4	1386.1	1409.2	1418.3	1419.6	1414.5
32.5°	1309.7	1349.0	1365.2	1363.9	1345.9	1334.0	1329.5
35°	1289.2	1281.1	1241.4	1194.0	1157.8	1134.8	1128.6
37.5°	1173.2	1103.1	1030.2	958.6	920.4	901.1	867.7
40°	1058.9	958.9	883.1	822.8	779.8	745.2	737.1
42.5°	929.9	826.7	750.8	699.2	664.9	641.1	630.9
45°	747.3	658.5	595.8	556.2	529.8	512.5	504.7
47.5°	597.6	529.0	483.3	454.0	433.8	418.8	414.6
50°	515.6	460.7	422.0	397.3	382.1	370.6	365.9
52.5°	447.8	403.5	373.8	353.5	339.0	331.8	327.9
55°	369.5	331.3	310.0	293.6	285.5	279.8	277.1
57.5°	302.2	274.6	259.0	247.7	240.2	236.6	235.2
60°	264.6	242.9	228.6	219.8	214.7	210.0	208.7
62.5°	231.2	214.2	203.1	195.5	190.4	188.3	187.5
65°	186.3	175.1	167.0	162.3	158.2	157.5	157.2
67.5°	148.1	141.5	137.2	132.3	130.9	128.5	128.0
70°	126.7	122.3	117.2	115.5	113.8	111.5	111.8
72.5°	107.5	103.1	99.6	97.4	96.8	95.8	96.6
75°	78.6	77.2	75.9	74.2	73.5	73.5	73.2
77.5°	56.1	54.9	53.4	52.4	52.3	50.8	51.4
80°	40.7	39.0	38.3	38.6	37.6	37.3	37.3
82.5°	30.1	29.4	28.8	28.9	28.6	28.4	28.6
85°	16.6	16.2	16.2	16.0	16.0	15.6	15.6
87.5°	9.4	9.9	9.5	9.4	9.5	9.8	10.3
90°	17.2	18.2	19.0	19.6	20.2	20.8	21.4
92.5°	17.2	18.2	18.8	19.1	19.4	19.7	20.0
95°	17.2	18.2	18.7	18.7	18.7	18.7	18.7
97.5°	27.1	21.5	18.7	18.7	18.7	18.7	18.7
100°	66.5	37.0	21.8	21.0	20.2	19.5	18.7
102.5°	180.9	175.3	165.9	152.4	138.9	125.5	112.0
105°	265.3	265.3	265.2	265.0	264.8	264.7	264.4
107.5°	336.0	336.0	335.7	335.1	334.6	333.9	333.3
110°	381.0	380.5	380.3	380.5	380.7	380.8	381.0



TEST NUMBER: P333538-940

CATALOG NUMBER: S125RDIP-S610D1035U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	426.1	425.4	424.9	424.6	424.4	424.1	423.8
115°	494.5	493.7	492.7	491.5	490.3	489.1	487.9
117.5°	560.2	559.1	558.3	557.9	557.3	556.8	556.2
120°	603.3	603.0	602.3	601.3	600.3	599.3	598.3
122.5°	644.0	643.5	642.7	641.7	640.5	639.4	638.2
125°	702.8	702.0	701.3	700.7	700.1	699.5	698.9
127.5°	757.2	756.8	755.9	754.4	753.0	751.5	750.0
130°	792.4	791.8	791.0	790.1	789.1	788.1	787.0
132.5°	825.9	825.7	825.2	824.2	823.2	822.2	821.3
135°	874.1	873.6	872.8	871.6	870.5	869.2	868.1
137.5°	919.6	919.7	919.2	918.2	917.1	916.1	915.1
140°	947.6	948.0	947.6	946.5	945.2	944.1	942.9
142.5°	974.5	974.6	974.0	972.8	971.6	970.4	969.2
145°	1012.9	1013.1	1012.6	1011.5	1010.2	1009.1	1007.9
147.5°	1045.8	1046.1	1045.4	1044.0	1042.6	1041.2	1039.7
150°	1066.9	1067.3	1066.8	1065.1	1063.5	1061.9	1060.4
152.5°	1085.5	1085.8	1085.3	1083.9	1082.4	1081.0	1079.6
155°	1111.2	1111.8	1111.3	1109.6	1108.0	1106.5	1104.9
157.5°	1132.3	1132.9	1132.5	1130.9	1129.3	1127.7	1126.1
160°	1145.6	1146.4	1145.9	1144.4	1142.8	1141.2	1139.6
162.5°	1157.9	1159.0	1158.7	1157.0	1155.2	1153.5	1151.7
165°	1173.5	1174.7	1174.5	1172.9	1171.3	1169.7	1168.1
167.5°	1185.4	1186.9	1186.7	1184.9	1183.1	1181.3	1179.6
170°	1191.6	1193.2	1193.0	1191.2	1189.5	1187.8	1186.0
172.5°	1196.1	1197.5	1197.3	1195.5	1193.7	1191.9	1190.3
175°	1201.4	1202.9	1202.8	1201.0	1199.3	1197.5	1195.7
177.5°	1203.0	1204.1	1204.0	1202.7	1201.5	1200.2	1198.9
180°	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0	1201.0

(END OF REPORT)