

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333579-940

Luminaire Tested: **S125RDIP-S850D1205U940-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333579-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D1205U940-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6753.6 lumens
Efficiency: N/A
Efficacy: 118.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333579-940

CATALOG NUMBER: S125RDIP-S850D1205U940-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

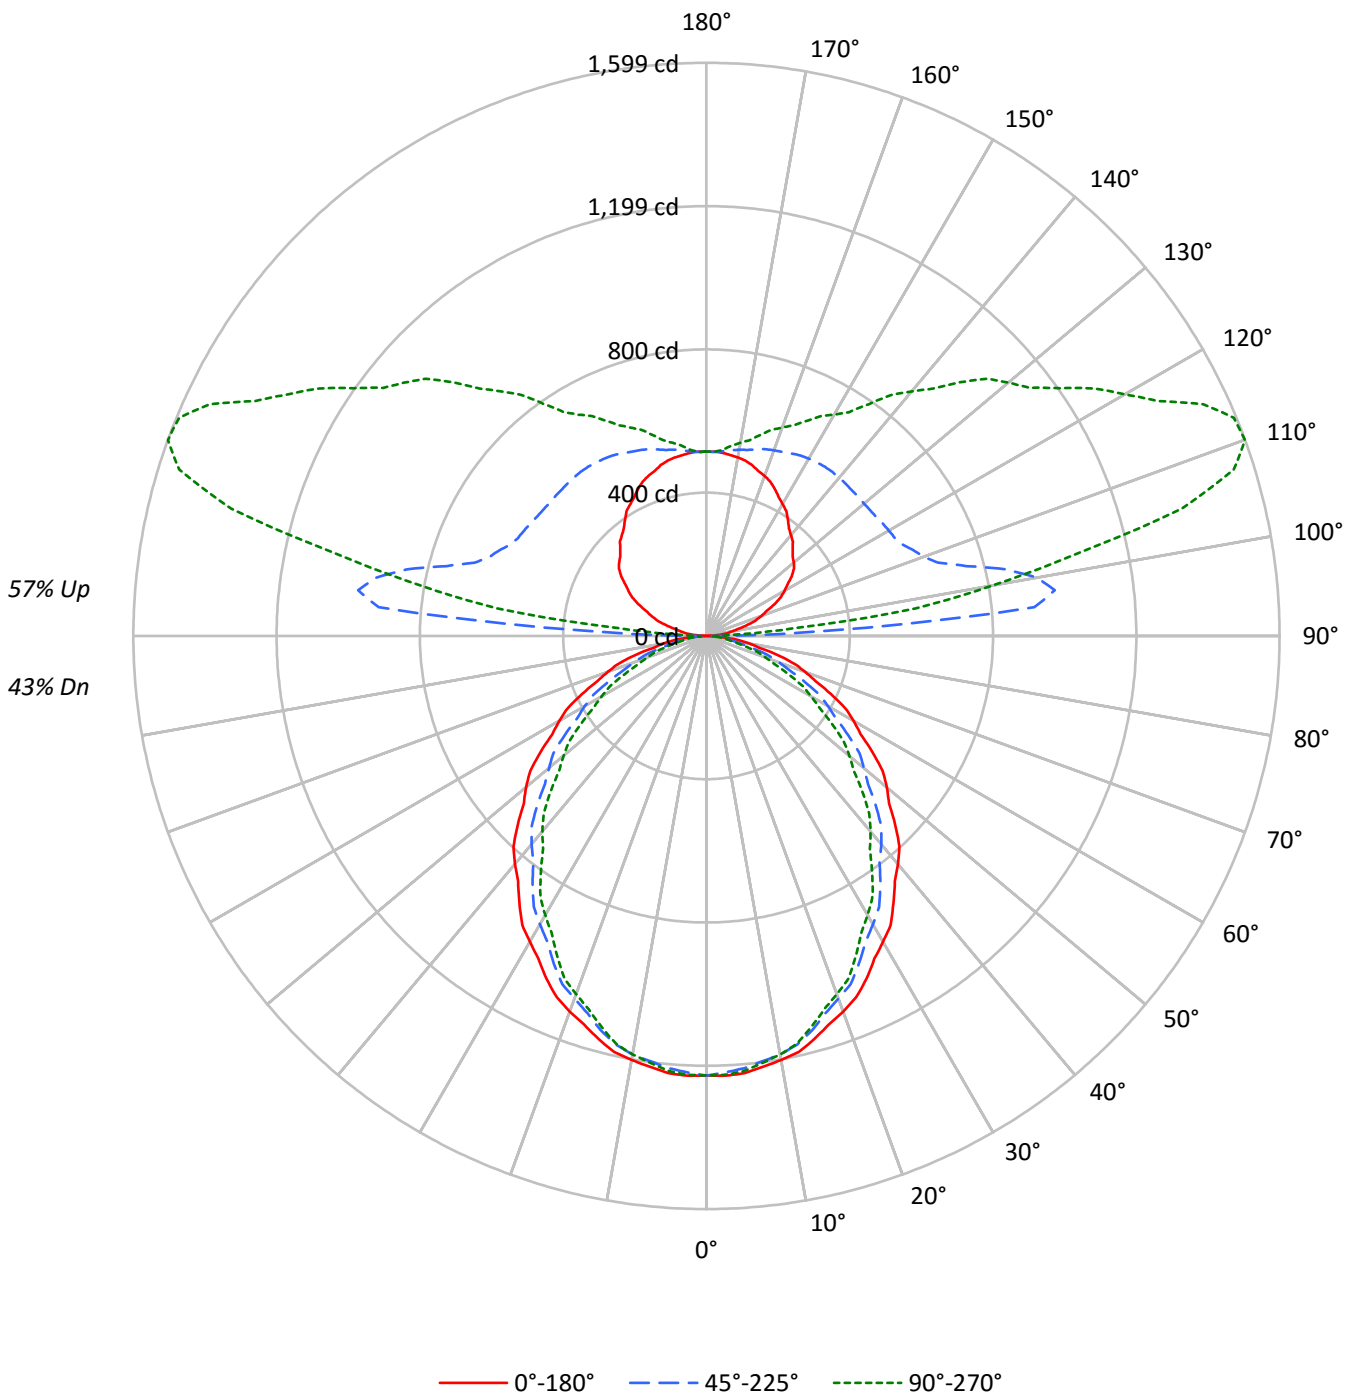



TEST NUMBER: P333579-940

CATALOG NUMBER: S125RDIP-S850D1205U940-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50	43
1	96	92	88	85	88	84	81	78	70	68	66	56	55	54	44	43	42	37
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36	31
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	35	33	31	26
4	73	63	55	49	67	58	51	46	48	43	39	39	36	33	31	29	27	23
5	67	56	48	42	61	52	45	39	43	38	34	35	32	29	28	25	23	20
6	62	50	42	37	57	46	39	34	39	34	30	32	28	25	26	23	21	18
7	57	45	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	16
8	53	41	34	28	49	38	31	27	32	27	23	27	23	20	21	19	16	14
9	50	38	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15	13
10	46	34	27	23	42	32	26	21	27	22	19	23	19	16	18	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7919	7919	7919
5°	7937	7847	7895
10°	7877	7774	7774
15°	7783	7616	7554
20°	7663	7396	7307
25°	7524	7180	7021
30°	7348	6927	6706
35°	7171	6666	6352
40°	7003	6395	6004
45°	6801	6090	5624
50°	6597	5760	5230
55°	6361	5443	4808
60°	6124	5059	4354
65°	5845	4614	3834
70°	5527	4056	3305
75°	5085	3421	2750
80°	4478	2685	2310
85°	3772	2193	2060



TEST NUMBER: P333579-940

CATALOG NUMBER: S125RDIP-S850D1205U940-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.3	1.7
10°-20°	322.2	4.8
20°-30°	467.2	6.9
30°-40°	532.5	7.9
40°-50°	519.1	7.7
50°-60°	436.9	6.5
60°-70°	306.3	4.5
70°-80°	157.4	2.3
80°-90°	42.6	0.6
90°-100°	372.5	5.5
100°-110°	800.8	11.9
110°-120°	751.5	11.1
120°-130°	609.1	9.0
130°-140°	488.8	7.2
140°-150°	368.8	5.5
150°-160°	259.6	3.8
160°-170°	153.0	2.3
170°-180°	49.8	0.7
0°-30°	904.7	13.4
0°-40°	1437.3	21.3
0°-60°	2393.2	35.4
0°-90°	2899.6	42.9
90°-120°	1924.8	28.5
90°-150°	3391.5	50.2
90°-180°	3854.0	57.1
0°-180°	6753.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1226	1226	1226	1226	1226	
5°	1224	1220	1210	1219	1218	116
15°	1164	1158	1139	1138	1130	328
25°	1056	1041	1008	996	985	486
35°	910	886	846	819	806	569
45°	745	716	667	631	616	574
55°	565	534	483	443	427	505
65°	382	350	302	266	251	379
75°	204	175	137	118	110	216
85°	51	35	30	29	28	57
90°	1	9	17	22	24	4
95°	34	101	918	416	244	36
105°	117	164	751	1479	1373	123
115°	209	252	603	1300	1529	206
125°	290	340	578	1034	1205	257
135°	340	409	574	867	1001	264
145°	396	453	576	718	790	248
155°	452	486	562	635	662	208
165°	493	507	539	571	580	139
175°	513	513	517	523	521	49
180°	514	514	514	514	514	



TEST NUMBER: P333579-940

CATALOG NUMBER: S125RDIP-S850D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1228.3	1227.9	1227.4	1226.9	1226.4	1225.3	1223.7	1222.0	1220.4	1218.7	1220.4
5°	1224.3	1223.5	1222.6	1221.8	1221.0	1219.5	1217.2	1215.0	1212.6	1210.4	1212.5
7.5°	1212.3	1211.5	1210.7	1209.9	1209.2	1207.4	1204.7	1201.9	1199.3	1196.5	1197.9
10°	1201.1	1200.5	1199.9	1199.3	1198.6	1196.9	1194.1	1191.1	1188.3	1185.4	1186.0
12.5°	1188.6	1187.8	1187.0	1186.2	1185.4	1183.1	1179.2	1175.4	1171.5	1167.6	1168.1
15°	1164.1	1162.9	1161.6	1160.4	1159.1	1156.4	1152.1	1147.7	1143.4	1139.1	1138.9
17.5°	1136.5	1134.6	1132.7	1130.9	1128.9	1125.2	1119.8	1114.4	1108.9	1103.5	1102.5
20°	1115.0	1112.9	1110.9	1108.8	1106.8	1102.4	1095.9	1089.3	1082.7	1076.1	1075.1
22.5°	1091.3	1089.2	1087.2	1085.1	1083.1	1078.6	1071.7	1064.8	1057.8	1051.0	1048.9
25°	1055.8	1052.7	1049.5	1046.5	1043.4	1038.0	1030.5	1022.8	1015.2	1007.6	1005.0
27.5°	1015.0	1011.3	1007.5	1003.8	1000.1	994.1	986.0	977.8	969.6	961.4	957.7
30°	985.3	981.4	977.6	973.7	969.7	963.4	954.8	946.2	937.5	928.9	924.2
32.5°	956.4	951.9	947.4	942.8	938.2	931.5	922.7	913.9	905.1	896.3	891.1
35°	909.5	904.5	899.6	894.6	889.7	882.5	873.3	864.1	854.8	845.5	839.5
37.5°	863.3	857.3	851.3	845.3	839.3	831.5	822.0	812.3	802.8	793.3	786.1
40°	830.7	824.6	818.3	812.2	806.0	798.0	788.1	778.2	768.4	758.5	750.6
42.5°	796.7	790.3	784.0	777.6	771.2	763.0	752.8	742.6	732.4	722.2	714.7
45°	744.6	738.6	732.6	726.7	720.7	712.0	700.7	689.5	678.1	666.8	658.5
47.5°	690.7	684.4	678.1	671.8	665.5	656.7	645.2	633.8	622.4	611.0	602.5
50°	656.6	649.8	643.0	636.2	629.5	620.2	608.4	596.7	585.0	573.3	564.6
52.5°	619.6	612.6	605.6	598.7	591.7	582.7	571.7	560.6	549.5	538.4	529.1
55°	564.9	558.3	551.8	545.2	538.6	529.5	518.0	506.5	495.0	483.4	474.1
57.5°	509.7	502.7	495.6	488.6	481.6	472.5	461.4	450.2	439.2	428.0	419.0
60°	474.1	467.0	459.8	452.5	445.3	436.2	425.1	413.9	402.9	391.7	382.7
62.5°	436.4	429.5	422.7	415.7	408.8	399.8	388.5	377.3	366.0	354.7	346.3
65°	382.5	375.5	368.5	361.5	354.5	345.5	334.7	323.7	312.8	301.9	293.6
67.5°	329.0	321.9	315.0	308.0	301.0	292.2	281.8	271.3	260.9	250.4	242.9
70°	292.7	285.6	278.7	271.6	264.7	256.0	245.8	235.4	225.2	214.8	208.5
72.5°	257.1	250.2	243.4	236.6	229.8	221.5	211.9	202.2	192.6	183.0	177.1
75°	203.8	197.6	191.4	185.2	179.1	171.7	163.0	154.4	145.7	137.1	132.5
77.5°	150.8	145.8	140.9	136.0	131.0	125.1	118.2	111.3	104.3	97.5	94.3
80°	120.4	115.5	110.5	105.6	100.7	95.3	89.5	83.7	78.0	72.2	70.4
82.5°	90.8	86.3	81.9	77.4	72.9	68.8	64.8	60.9	56.9	53.0	52.1
85°	50.9	47.3	43.5	39.9	36.1	33.7	32.7	31.7	30.7	29.6	29.4
87.5°	17.2	16.3	15.6	14.8	14.1	13.8	13.9	14.2	14.2	14.4	14.6
90°	1.1	2.1	4.1	6.2	8.3	10.3	11.4	13.5	14.5	16.6	17.7
92.5°	12.7	15.3	24.1	36.9	54.8	85.0	141.5	236.5	339.5	334.0	270.5
95°	34.2	35.2	43.5	54.9	77.7	124.3	235.2	463.2	749.1	918.0	898.3
97.5°	56.8	58.1	63.8	75.3	95.8	129.3	202.7	369.7	669.0	980.3	1136.7
100°	72.5	74.6	78.7	90.2	109.9	140.9	201.0	335.7	596.8	935.6	1194.6
102.5°	90.0	91.2	94.5	106.7	124.8	155.0	208.5	321.6	542.1	856.8	1159.8
105°	117.1	117.1	122.3	132.6	149.2	178.3	223.8	316.0	489.0	751.2	1048.6
107.5°	143.6	145.7	150.6	159.2	176.4	202.4	246.6	325.6	466.6	678.4	935.0
110°	162.6	164.8	168.9	178.3	193.8	220.7	263.1	334.7	460.0	644.4	870.3



TEST NUMBER: P333579-940

CATALOG NUMBER: S125RDIP-S850D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	181.7	183.8	187.1	196.4	212.0	238.1	278.9	346.3	460.0	624.6	822.2
115°	209.3	211.3	214.5	223.8	239.3	265.3	303.6	363.6	463.2	603.1	769.8
117.5°	234.2	237.3	240.6	249.9	267.5	292.6	328.9	383.6	470.0	592.5	738.5
120°	250.7	253.9	258.0	267.3	284.9	310.9	347.1	396.8	476.6	587.5	721.1
122.5°	268.1	270.5	273.8	283.0	302.4	328.2	364.5	411.8	482.4	583.4	706.2
125°	290.1	292.2	297.4	306.7	326.4	353.3	387.5	432.0	492.1	578.2	685.9
127.5°	307.3	310.4	317.1	328.9	349.8	376.7	409.7	450.8	503.1	575.7	667.3
130°	318.1	321.2	329.5	343.0	364.7	391.6	423.7	463.2	509.8	574.0	654.9
132.5°	326.4	330.3	340.3	355.4	378.0	404.9	437.0	473.9	517.2	574.0	644.9
135°	339.8	344.0	356.4	373.0	394.8	422.8	454.9	489.0	527.4	574.0	633.1
137.5°	356.9	360.0	371.6	388.2	409.5	438.3	467.5	500.2	536.7	575.2	622.5
140°	366.8	369.9	382.4	399.0	418.6	446.6	476.6	507.7	540.8	576.0	617.5
142.5°	378.4	380.7	392.3	408.8	427.8	454.1	482.4	511.8	543.3	576.9	613.4
145°	395.8	397.9	408.2	422.8	441.4	465.2	492.1	518.1	546.1	576.0	607.2
147.5°	414.0	415.3	424.2	437.7	453.8	474.7	498.4	521.8	547.1	573.4	600.7
150°	424.8	426.9	434.2	447.6	462.1	479.7	502.5	524.3	547.1	570.9	595.8
152.5°	436.4	437.7	444.1	455.9	469.6	485.5	506.7	525.9	546.3	567.6	590.0
155°	451.7	451.7	458.0	468.3	478.7	493.2	510.8	527.4	543.9	561.6	580.2
157.5°	465.5	465.2	470.2	479.1	488.2	499.2	514.3	528.4	541.3	555.4	571.1
160°	474.6	473.5	477.7	484.9	493.2	502.5	516.0	528.4	538.8	551.3	563.7
162.5°	482.0	481.0	485.1	491.5	498.2	505.9	517.6	527.6	536.3	546.3	557.1
165°	493.2	491.2	494.3	499.4	503.5	509.8	518.1	526.4	532.5	538.8	547.1
167.5°	500.7	499.6	501.5	504.4	507.3	511.2	518.1	523.9	526.7	531.5	537.3
170°	505.6	504.6	505.6	507.7	509.8	512.9	518.1	522.2	524.3	527.4	531.5
172.5°	509.0	507.1	508.1	510.1	511.4	512.9	517.2	520.6	520.9	522.5	525.8
175°	512.9	510.8	511.8	512.9	512.9	512.9	516.0	518.1	517.0	517.0	518.1
177.5°	514.8	513.1	513.1	513.9	513.1	513.1	514.8	515.6	513.9	513.9	514.8
180°	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9



TEST NUMBER: P333579-940

CATALOG NUMBER: S125RDIP-S850D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1222.0	1223.7	1225.3	1226.1	1225.9	1225.7	1225.6	1225.4
5°	1214.5	1216.6	1218.6	1219.5	1219.1	1218.6	1218.3	1217.8
7.5°	1199.4	1200.9	1202.3	1202.7	1202.3	1201.8	1201.4	1201.0
10°	1186.6	1187.2	1187.8	1187.8	1187.2	1186.6	1186.0	1185.4
12.5°	1168.5	1168.9	1169.4	1169.2	1168.2	1167.2	1166.4	1165.4
15°	1138.7	1138.4	1138.3	1137.3	1135.4	1133.5	1131.7	1129.8
17.5°	1101.4	1100.5	1099.4	1098.1	1096.6	1095.1	1093.6	1092.1
20°	1074.1	1073.0	1072.0	1070.6	1068.7	1066.8	1065.0	1063.2
22.5°	1046.9	1044.9	1042.9	1041.1	1039.6	1038.0	1036.5	1035.0
25°	1002.3	999.6	996.9	994.4	992.1	989.9	987.7	985.3
27.5°	954.0	950.2	946.5	943.5	941.4	939.1	937.0	934.8
30°	919.4	914.7	909.9	906.7	904.8	902.9	901.1	899.2
32.5°	885.8	880.6	875.4	871.6	869.2	866.9	864.5	862.2
35°	833.6	827.6	821.6	817.3	814.3	811.5	808.6	805.7
37.5°	779.0	771.8	764.6	759.6	756.9	754.0	751.3	748.5
40°	742.8	735.0	727.2	722.0	719.6	717.1	714.6	712.2
42.5°	707.2	699.7	692.2	686.6	683.1	679.4	675.7	672.2
45°	650.3	642.1	633.8	628.2	625.1	622.1	618.9	615.8
47.5°	594.1	585.6	577.1	571.1	567.8	564.4	560.9	557.5
50°	556.0	547.3	538.7	532.8	529.8	526.6	523.5	520.5
52.5°	519.9	510.5	501.2	495.0	492.0	488.8	485.8	482.7
55°	464.9	455.7	446.4	440.1	436.8	433.5	430.3	427.0
57.5°	409.9	400.9	391.8	385.8	382.9	380.0	377.1	374.2
60°	373.6	364.5	355.5	349.5	346.3	343.3	340.2	337.1
62.5°	337.9	329.5	321.1	315.4	312.3	309.2	306.1	303.0
65°	285.4	277.2	268.9	263.3	260.2	257.2	254.0	250.9
67.5°	235.3	227.8	220.3	215.3	212.9	210.4	207.9	205.5
70°	202.1	195.7	189.3	184.9	182.4	179.9	177.5	175.0
72.5°	171.2	165.3	159.4	155.7	154.0	152.4	150.8	149.1
75°	128.0	123.5	119.0	116.0	114.5	113.1	111.6	110.2
77.5°	91.0	87.9	84.7	82.7	81.6	80.5	79.5	78.4
80°	68.6	66.7	64.8	63.7	63.3	62.9	62.4	62.1
82.5°	51.3	50.4	49.5	49.0	48.7	48.5	48.2	48.0
85°	29.2	29.0	28.8	28.6	28.4	28.2	28.0	27.8
87.5°	14.8	15.1	15.2	15.6	15.4	15.2	15.3	15.2
90°	18.6	19.7	20.7	22.8	22.8	22.8	23.8	23.8
92.5°	183.6	133.2	100.3	85.0	71.7	69.2	67.8	66.1
95°	744.9	587.5	460.0	373.0	299.4	268.3	260.1	243.5
97.5°	1109.5	999.1	874.9	753.9	689.8	631.9	601.8	588.5
100°	1274.4	1223.7	1117.0	1009.1	937.7	863.1	824.7	808.2
102.5°	1330.0	1361.3	1310.1	1237.2	1160.7	1107.6	1066.0	1053.6
105°	1297.3	1439.2	1484.8	1473.4	1440.2	1406.0	1385.3	1372.9
107.5°	1180.4	1369.8	1486.8	1541.0	1557.7	1557.6	1550.7	1542.4
110°	1094.1	1291.0	1437.1	1525.2	1571.8	1591.5	1598.7	1598.7



TEST NUMBER: P333579-940

CATALOG NUMBER: S125RDIP-S850D1205U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1026.2	1213.1	1360.8	1464.6	1532.9	1566.6	1584.7	1592.1
115°	940.8	1101.4	1243.3	1356.3	1437.1	1486.8	1515.8	1529.3
117.5°	885.6	1024.1	1146.4	1250.0	1330.8	1382.2	1411.0	1419.2
120°	855.9	980.2	1094.1	1185.4	1262.0	1311.7	1339.7	1348.0
122.5°	833.5	948.7	1050.3	1135.6	1204.0	1249.6	1277.6	1285.0
125°	800.9	906.6	996.8	1071.4	1129.4	1171.9	1194.6	1205.1
127.5°	767.8	866.4	950.6	1020.4	1073.0	1110.5	1132.1	1136.7
130°	747.1	838.2	919.1	986.4	1038.2	1072.4	1093.1	1099.3
132.5°	726.3	811.7	885.0	949.9	1001.7	1035.9	1055.0	1062.0
135°	699.4	770.9	837.2	896.3	941.8	976.1	994.7	1000.9
137.5°	676.6	734.4	789.5	839.7	880.5	911.6	928.8	935.6
140°	664.1	712.8	760.5	804.1	842.4	869.3	884.8	890.0
142.5°	653.4	694.6	735.7	773.4	805.9	828.7	843.4	847.7
145°	639.3	671.4	703.6	731.5	756.3	774.0	785.4	789.5
147.5°	626.1	652.1	676.8	697.9	717.6	731.7	738.3	740.2
150°	618.6	641.4	661.0	679.7	695.3	707.7	711.9	712.8
152.5°	610.3	630.6	648.6	663.2	676.2	686.1	690.3	691.3
155°	597.8	614.4	628.9	640.3	650.7	657.9	661.0	662.1
157.5°	585.4	599.1	610.3	619.2	627.2	633.3	636.1	636.0
160°	577.1	587.5	597.8	605.1	612.3	617.5	619.6	618.6
162.5°	568.0	577.6	586.2	592.6	598.2	602.6	603.1	602.8
165°	555.4	562.6	568.8	574.0	578.2	580.2	580.2	580.2
167.5°	543.3	548.1	552.9	556.6	558.7	560.5	559.7	559.5
170°	536.7	539.8	543.0	545.0	547.1	548.1	548.1	547.1
172.5°	529.2	532.4	534.7	535.9	536.3	538.1	536.5	535.5
175°	521.2	521.2	523.3	523.3	523.3	524.3	522.2	521.2
177.5°	515.6	516.4	516.4	516.4	515.6	516.4	513.9	513.9
180°	513.9	513.9	513.9	513.9	513.9	513.9	513.9	513.9

(END OF REPORT)