

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333553-940

Luminaire Tested: **S125RDIP-S850D365U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333553-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D365U940-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4203.4 lumens
Efficiency: N/A
Efficacy: 120.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333553-940

CATALOG NUMBER: S125RDIP-S850D365U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

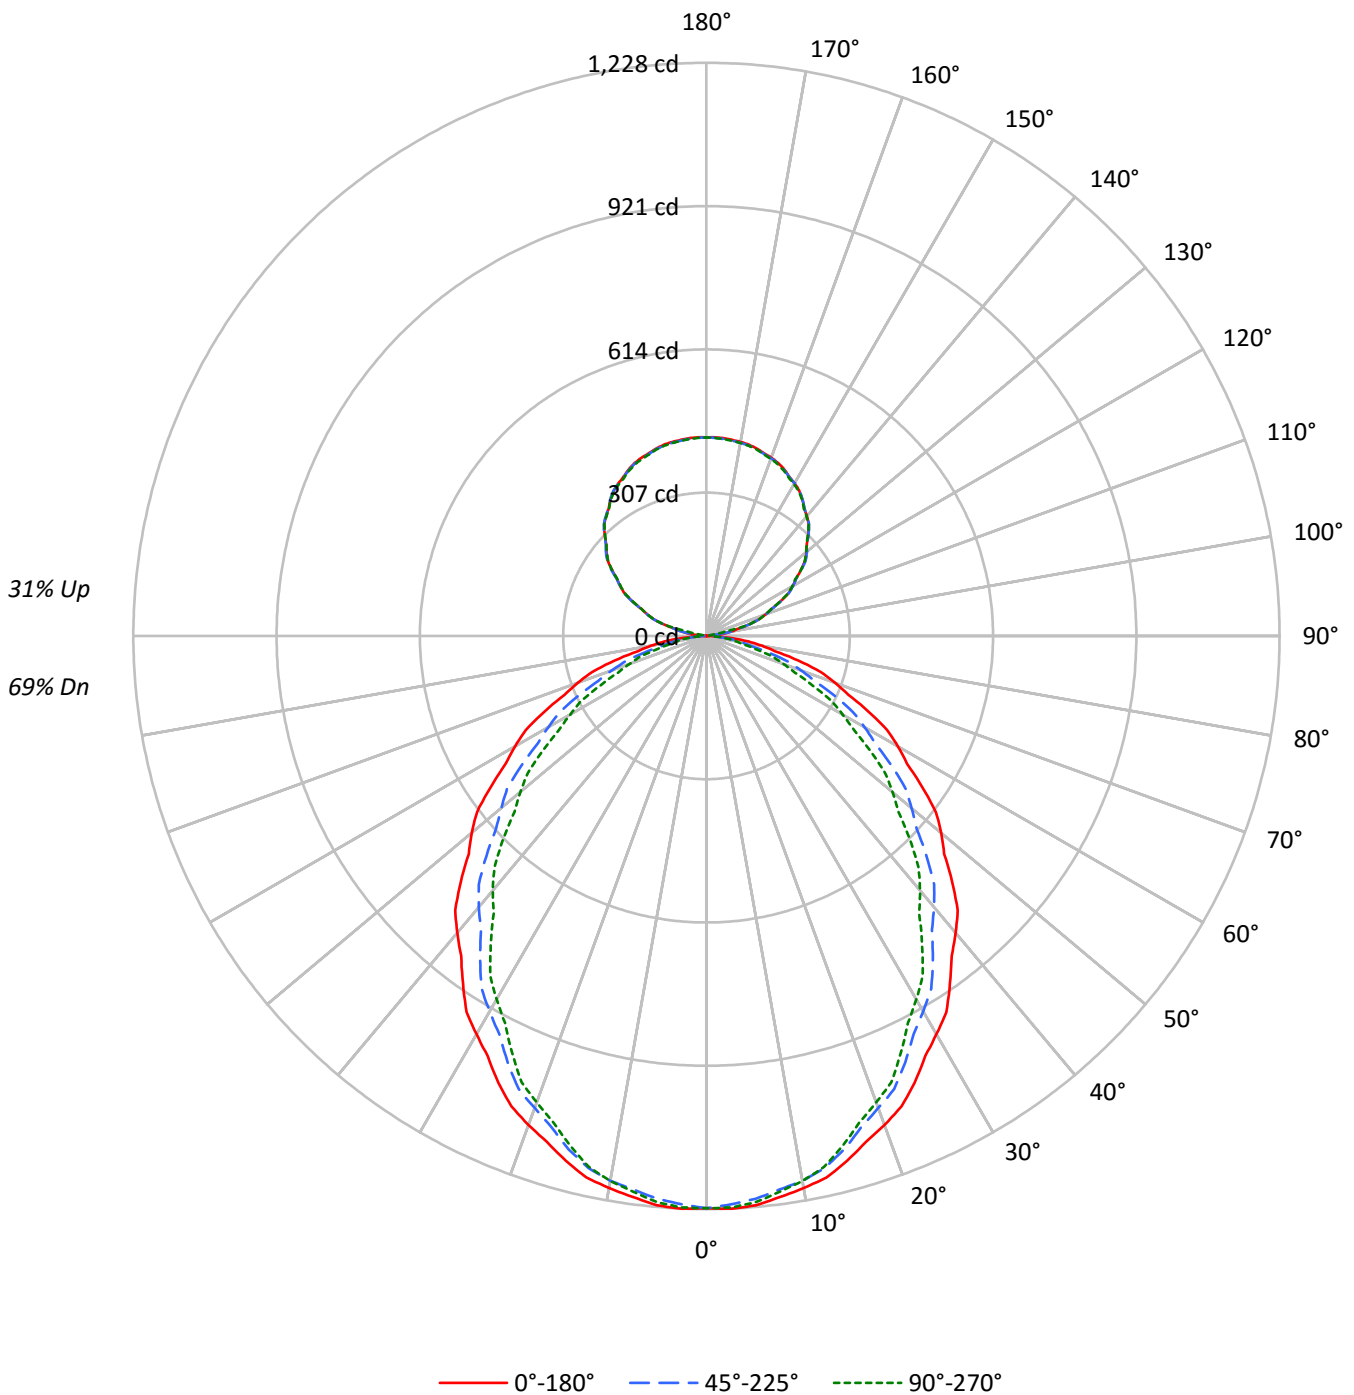



TEST NUMBER: P333553-940

CATALOG NUMBER: S125RDIP-S850D365U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	112	112	112	112	105	105	105	105	94	94	94	83	83	83	74	74	74	69																			
1	102	98	94	91	97	93	89	86	83	80	78	74	72	70	66	64	63	59																			
2	93	86	80	75	88	81	76	71	73	69	65	65	62	59	58	56	53	50																			
3	85	76	68	62	80	72	65	60	65	59	55	58	54	50	52	48	46	42																			
4	78	67	59	53	74	64	57	51	58	52	47	52	47	43	46	43	40	37																			
5	72	60	52	46	68	57	50	44	52	46	41	47	42	38	42	38	35	32																			
6	67	54	46	40	63	52	44	39	47	41	36	42	37	33	38	34	31	28																			
7	62	49	41	35	58	47	40	34	43	36	32	39	33	30	35	31	27	25																			
8	57	45	37	32	54	43	36	31	39	33	29	35	30	27	32	28	25	22																			
9	54	41	33	28	51	39	32	27	36	30	26	33	28	24	30	25	22	20																			
10	50	38	30	26	47	36	29	25	33	27	23	30	25	22	28	23	20	18																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7919	7919	7919
5°	7937	7847	7895
10°	7877	7774	7774
15°	7783	7616	7554
20°	7663	7396	7307
25°	7524	7180	7021
30°	7348	6927	6706
35°	7171	6666	6352
40°	7003	6395	6004
45°	6801	6090	5624
50°	6597	5760	5230
55°	6361	5443	4808
60°	6124	5059	4354
65°	5845	4614	3834
70°	5527	4056	3305
75°	5085	3421	2750
80°	4478	2685	2310
85°	3772	2193	2060



TEST NUMBER: P333553-940

CATALOG NUMBER: S125RDIP-S850D365U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.3	2.7
10°-20°	322.2	7.7
20°-30°	467.2	11.1
30°-40°	532.5	12.7
40°-50°	519.1	12.3
50°-60°	436.9	10.4
60°-70°	306.3	7.3
70°-80°	157.4	3.7
80°-90°	40.6	1.0
90°-100°	15.5	0.4
100°-110°	95.2	2.3
110°-120°	172.7	4.1
120°-130°	221.7	5.3
130°-140°	238.4	5.7
140°-150°	223.8	5.3
150°-160°	181.0	4.3
160°-170°	117.1	2.8
170°-180°	40.4	1.0
0°-30°	904.7	21.5
0°-40°	1437.3	34.2
0°-60°	2393.2	56.9
0°-90°	2897.6	68.9
90°-120°	283.4	6.7
90°-150°	967.3	23.0
90°-180°	1306.0	31.1
0°-180°	4203.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1226	1226	1226	1226	1226	
5°	1224	1220	1210	1219	1218	116
15°	1164	1158	1139	1138	1130	328
25°	1056	1041	1008	996	985	486
35°	910	886	846	819	806	569
45°	745	716	667	631	616	574
55°	565	534	483	443	427	505
65°	382	350	302	266	251	379
75°	204	175	137	118	110	216
85°	51	35	30	29	28	57
90°	0	3	5	7	8	3
95°	18	16	5	6	7	23
105°	93	94	94	94	94	98
115°	174	176	176	175	173	172
125°	247	250	250	248	247	221
135°	309	310	310	309	307	238
145°	358	358	358	359	357	224
155°	394	392	393	394	391	181
165°	416	414	414	416	414	117
175°	425	424	424	426	423	40
180°	425	425	425	425	425	



TEST NUMBER: P333553-940

CATALOG NUMBER: S125RDIP-S850D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1228.3	1227.9	1227.4	1226.9	1226.4	1225.3	1223.7	1222.0	1220.4	1218.7	1220.4
5°	1224.3	1223.5	1222.6	1221.8	1221.0	1219.5	1217.2	1215.0	1212.6	1210.4	1212.5
7.5°	1212.3	1211.5	1210.7	1209.9	1209.2	1207.4	1204.7	1201.9	1199.3	1196.5	1197.9
10°	1201.1	1200.5	1199.9	1199.3	1198.6	1196.9	1194.1	1191.1	1188.3	1185.4	1186.0
12.5°	1188.6	1187.8	1187.0	1186.2	1185.4	1183.1	1179.2	1175.4	1171.5	1167.6	1168.1
15°	1164.1	1162.9	1161.6	1160.4	1159.1	1156.4	1152.1	1147.7	1143.4	1139.1	1138.9
17.5°	1136.5	1134.6	1132.7	1130.9	1128.9	1125.2	1119.8	1114.4	1108.9	1103.5	1102.5
20°	1115.0	1112.9	1110.9	1108.8	1106.8	1102.4	1095.9	1089.3	1082.7	1076.1	1075.1
22.5°	1091.3	1089.2	1087.2	1085.1	1083.1	1078.6	1071.7	1064.8	1057.8	1051.0	1048.9
25°	1055.8	1052.7	1049.5	1046.5	1043.4	1038.0	1030.5	1022.8	1015.2	1007.6	1005.0
27.5°	1015.0	1011.3	1007.5	1003.8	1000.1	994.1	986.0	977.8	969.6	961.4	957.7
30°	985.3	981.4	977.6	973.7	969.7	963.4	954.8	946.2	937.5	928.9	924.2
32.5°	956.4	951.9	947.4	942.8	938.2	931.5	922.7	913.9	905.1	896.3	891.1
35°	909.5	904.5	899.6	894.6	889.7	882.5	873.3	864.1	854.8	845.5	839.5
37.5°	863.3	857.3	851.3	845.3	839.3	831.5	822.0	812.3	802.8	793.3	786.1
40°	830.7	824.6	818.3	812.2	806.0	798.0	788.1	778.2	768.4	758.5	750.6
42.5°	796.7	790.3	784.0	777.6	771.2	763.0	752.8	742.6	732.4	722.2	714.7
45°	744.6	738.6	732.6	726.7	720.7	712.0	700.7	689.5	678.1	666.8	658.5
47.5°	690.7	684.4	678.1	671.8	665.5	656.7	645.2	633.8	622.4	611.0	602.5
50°	656.6	649.8	643.0	636.2	629.5	620.2	608.4	596.7	585.0	573.3	564.6
52.5°	619.6	612.6	605.6	598.7	591.7	582.7	571.7	560.6	549.5	538.4	529.1
55°	564.9	558.3	551.8	545.2	538.6	529.5	518.0	506.5	495.0	483.4	474.1
57.5°	509.7	502.7	495.6	488.6	481.6	472.5	461.4	450.2	439.2	428.0	419.0
60°	474.1	467.0	459.8	452.5	445.3	436.2	425.1	413.9	402.9	391.7	382.7
62.5°	436.4	429.5	422.7	415.7	408.8	399.8	388.5	377.3	366.0	354.7	346.3
65°	382.5	375.5	368.5	361.5	354.5	345.5	334.7	323.7	312.8	301.9	293.6
67.5°	329.0	321.9	315.0	308.0	301.0	292.2	281.8	271.3	260.9	250.4	242.9
70°	292.7	285.6	278.7	271.6	264.7	256.0	245.8	235.4	225.2	214.8	208.5
72.5°	257.1	250.2	243.4	236.6	229.8	221.5	211.9	202.2	192.6	183.0	177.1
75°	203.8	197.6	191.4	185.2	179.1	171.7	163.0	154.4	145.7	137.1	132.5
77.5°	150.8	145.8	140.9	136.0	131.0	125.1	118.2	111.3	104.3	97.5	94.3
80°	120.4	115.5	110.5	105.6	100.7	95.3	89.5	83.7	78.0	72.2	70.4
82.5°	90.8	86.3	81.9	77.4	72.9	68.8	64.8	60.9	56.9	53.0	52.1
85°	50.9	47.3	43.5	39.9	36.1	33.7	32.7	31.7	30.7	29.6	29.4
87.5°	17.1	16.1	15.0	14.0	12.9	12.4	12.3	12.2	12.2	12.1	12.2
90°	0.4	0.9	1.4	2.0	2.6	3.1	3.6	4.1	4.5	5.1	5.4
92.5°	4.8	4.5	4.1	3.7	3.3	3.3	3.7	4.2	4.6	5.1	5.4
95°	17.9	17.7	17.6	17.3	17.1	15.7	13.0	10.3	7.7	5.1	5.4
97.5°	37.5	37.9	38.3	38.6	39.1	36.6	31.3	26.0	20.8	15.5	13.6
100°	52.6	52.9	53.1	53.2	53.5	53.7	54.0	54.3	54.6	54.8	44.4
102.5°	68.0	68.3	68.6	68.8	69.1	69.3	69.5	69.6	69.8	70.0	68.0
105°	92.6	92.9	93.3	93.5	93.8	93.9	93.9	93.9	93.9	93.9	93.9
107.5°	118.2	118.2	118.2	118.2	118.2	118.3	118.5	118.6	118.8	118.9	118.9
110°	134.9	134.9	134.9	134.9	134.9	135.0	135.1	135.3	135.4	135.5	135.4



TEST NUMBER: P333553-940

CATALOG NUMBER: S125RDIP-S850D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	150.5	150.7	150.9	151.1	151.2	151.3	151.4	151.5	151.6	151.7	151.4
115°	174.0	174.3	174.7	175.0	175.4	175.6	175.7	175.8	175.8	175.8	175.6
117.5°	198.2	198.2	198.2	198.2	198.2	198.3	198.6	198.9	199.1	199.4	199.0
120°	213.4	213.3	213.3	213.2	213.1	213.2	213.4	213.6	213.8	214.0	213.9
122.5°	226.8	227.0	227.3	227.6	227.8	228.0	228.1	228.2	228.3	228.4	228.3
125°	247.4	247.9	248.4	248.9	249.4	249.7	249.7	249.7	249.7	249.7	249.3
127.5°	267.2	267.5	267.9	268.2	268.6	268.8	268.7	268.7	268.6	268.6	268.4
130°	279.3	279.6	280.0	280.4	280.7	280.9	281.0	281.0	281.1	281.2	281.0
132.5°	291.4	291.8	292.2	292.6	293.0	293.1	293.0	292.8	292.7	292.5	292.5
135°	308.6	309.0	309.4	309.9	310.2	310.4	310.2	310.1	310.0	309.9	309.7
137.5°	324.4	324.8	325.1	325.5	325.8	326.0	325.8	325.7	325.6	325.5	325.5
140°	334.7	334.9	335.0	335.2	335.3	335.4	335.3	335.2	335.1	335.1	335.2
142.5°	344.1	344.2	344.3	344.3	344.4	344.5	344.6	344.7	344.8	344.9	344.9
145°	357.8	357.9	358.0	358.2	358.3	358.4	358.4	358.4	358.4	358.4	358.5
147.5°	369.7	369.7	369.7	369.6	369.6	369.6	369.7	369.8	369.9	370.0	370.1
150°	377.3	377.2	377.0	376.8	376.7	376.7	376.8	377.0	377.2	377.3	377.5
152.5°	384.6	384.3	384.0	383.7	383.3	383.3	383.4	383.6	383.7	383.9	384.0
155°	394.0	393.6	393.2	392.7	392.4	392.2	392.4	392.4	392.6	392.7	393.0
157.5°	401.3	401.0	400.7	400.5	400.3	400.1	400.1	400.2	400.2	400.2	400.4
160°	406.3	405.9	405.5	405.0	404.7	404.5	404.5	404.6	404.7	404.7	405.0
162.5°	410.4	409.9	409.5	409.0	408.7	408.5	408.6	408.6	408.7	408.8	409.1
165°	415.7	415.4	414.9	414.5	414.1	413.9	413.9	414.0	414.1	414.2	414.6
167.5°	419.8	419.4	418.9	418.5	418.0	417.9	417.9	418.0	418.1	418.1	418.7
170°	422.0	421.6	421.1	420.6	420.1	419.9	420.0	420.0	420.1	420.2	420.7
172.5°	423.6	423.1	422.6	422.1	421.6	421.4	421.5	421.7	421.8	422.0	422.4
175°	425.2	424.8	424.4	423.9	423.6	423.4	423.4	423.5	423.6	423.7	424.2
177.5°	426.0	425.6	425.3	425.0	424.6	424.5	424.5	424.6	424.6	424.7	425.1
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2



TEST NUMBER: P333553-940

CATALOG NUMBER: S125RDIP-S850D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1222.0	1223.7	1225.3	1226.1	1225.9	1225.7	1225.6	1225.4
5°	1214.5	1216.6	1218.6	1219.5	1219.1	1218.6	1218.3	1217.8
7.5°	1199.4	1200.9	1202.3	1202.7	1202.3	1201.8	1201.4	1201.0
10°	1186.6	1187.2	1187.8	1187.8	1187.2	1186.6	1186.0	1185.4
12.5°	1168.5	1168.9	1169.4	1169.2	1168.2	1167.2	1166.4	1165.4
15°	1138.7	1138.4	1138.3	1137.3	1135.4	1133.5	1131.7	1129.8
17.5°	1101.4	1100.5	1099.4	1098.1	1096.6	1095.1	1093.6	1092.1
20°	1074.1	1073.0	1072.0	1070.6	1068.7	1066.8	1065.0	1063.2
22.5°	1046.9	1044.9	1042.9	1041.1	1039.6	1038.0	1036.5	1035.0
25°	1002.3	999.6	996.9	994.4	992.1	989.9	987.7	985.3
27.5°	954.0	950.2	946.5	943.5	941.4	939.1	937.0	934.8
30°	919.4	914.7	909.9	906.7	904.8	902.9	901.1	899.2
32.5°	885.8	880.6	875.4	871.6	869.2	866.9	864.5	862.2
35°	833.6	827.6	821.6	817.3	814.3	811.5	808.6	805.7
37.5°	779.0	771.8	764.6	759.6	756.9	754.0	751.3	748.5
40°	742.8	735.0	727.2	722.0	719.6	717.1	714.6	712.2
42.5°	707.2	699.7	692.2	686.6	683.1	679.4	675.7	672.2
45°	650.3	642.1	633.8	628.2	625.1	622.1	618.9	615.8
47.5°	594.1	585.6	577.1	571.1	567.8	564.4	560.9	557.5
50°	556.0	547.3	538.7	532.8	529.8	526.6	523.5	520.5
52.5°	519.9	510.5	501.2	495.0	492.0	488.8	485.8	482.7
55°	464.9	455.7	446.4	440.1	436.8	433.5	430.3	427.0
57.5°	409.9	400.9	391.8	385.8	382.9	380.0	377.1	374.2
60°	373.6	364.5	355.5	349.5	346.3	343.3	340.2	337.1
62.5°	337.9	329.5	321.1	315.4	312.3	309.2	306.1	303.0
65°	285.4	277.2	268.9	263.3	260.2	257.2	254.0	250.9
67.5°	235.3	227.8	220.3	215.3	212.9	210.4	207.9	205.5
70°	202.1	195.7	189.3	184.9	182.4	179.9	177.5	175.0
72.5°	171.2	165.3	159.4	155.7	154.0	152.4	150.8	149.1
75°	128.0	123.5	119.0	116.0	114.5	113.1	111.6	110.2
77.5°	91.0	87.9	84.7	82.7	81.6	80.5	79.5	78.4
80°	68.6	66.7	64.8	63.7	63.3	62.9	62.4	62.1
82.5°	51.3	50.4	49.5	49.0	48.7	48.5	48.2	48.0
85°	29.2	29.0	28.8	28.6	28.4	28.2	28.0	27.8
87.5°	12.3	12.3	12.4	12.4	12.2	12.1	12.0	11.9
90°	5.7	6.1	6.4	6.7	7.0	7.1	7.3	7.6
92.5°	5.7	6.1	6.4	6.7	6.8	6.9	7.0	7.0
95°	5.7	6.1	6.4	6.6	6.6	6.6	6.6	6.6
97.5°	11.6	9.5	7.6	6.6	6.6	6.6	6.6	6.6
100°	34.0	23.5	13.1	7.8	7.5	7.2	6.9	6.6
102.5°	66.0	64.0	62.1	58.7	53.9	49.2	44.4	39.7
105°	93.9	93.9	93.9	93.9	93.8	93.7	93.7	93.6
107.5°	119.0	119.0	119.0	118.9	118.7	118.4	118.2	118.0
110°	135.1	134.9	134.7	134.6	134.7	134.7	134.8	134.9



TEST NUMBER: P333553-940

CATALOG NUMBER: S125RDIP-S850D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	151.1	150.9	150.6	150.4	150.3	150.3	150.2	150.1
115°	175.3	175.0	174.8	174.4	174.0	173.6	173.2	172.7
117.5°	198.7	198.3	198.0	197.7	197.5	197.3	197.2	197.0
120°	213.7	213.6	213.5	213.2	212.9	212.5	212.1	211.8
122.5°	228.1	228.0	227.8	227.6	227.1	226.8	226.3	226.0
125°	249.1	248.8	248.5	248.3	248.1	247.9	247.6	247.4
127.5°	268.2	268.0	268.0	267.6	267.1	266.5	266.1	265.6
130°	280.7	280.5	280.4	280.0	279.7	279.4	279.0	278.7
132.5°	292.4	292.4	292.3	292.1	291.8	291.4	291.1	290.8
135°	309.6	309.4	309.2	309.0	308.6	308.2	307.7	307.3
137.5°	325.6	325.6	325.6	325.4	325.0	324.7	324.3	324.0
140°	335.4	335.5	335.6	335.5	335.1	334.7	334.2	333.8
142.5°	344.9	345.0	345.0	344.8	344.4	343.9	343.6	343.1
145°	358.6	358.6	358.6	358.5	358.1	357.7	357.2	356.8
147.5°	370.1	370.2	370.3	370.1	369.6	369.1	368.6	368.1
150°	377.6	377.7	377.8	377.6	377.1	376.6	375.9	375.4
152.5°	384.1	384.2	384.4	384.2	383.7	383.3	382.7	382.2
155°	393.2	393.3	393.6	393.4	392.9	392.3	391.7	391.2
157.5°	400.6	400.8	401.1	400.9	400.4	399.8	399.2	398.7
160°	405.3	405.6	405.8	405.7	405.1	404.6	404.0	403.5
162.5°	409.6	409.9	410.4	410.2	409.6	408.9	408.4	407.8
165°	415.0	415.4	415.9	415.8	415.3	414.6	414.1	413.6
167.5°	419.2	419.6	420.2	420.1	419.5	418.8	418.2	417.6
170°	421.2	421.9	422.4	422.4	421.8	421.2	420.4	419.8
172.5°	422.9	423.5	423.9	423.9	423.3	422.6	422.0	421.3
175°	424.7	425.3	425.9	425.9	425.2	424.5	423.9	423.3
177.5°	425.5	425.9	426.2	426.2	425.8	425.3	424.9	424.5
180°	425.2	425.2	425.2	425.2	425.2	425.2	425.2	425.2

(END OF REPORT)