

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333560-940

Luminaire Tested: **S125RDIP-S850D590U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333560-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D590U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4722.2 lumens
Efficiency: N/A
Efficacy: 117.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333560-940

CATALOG NUMBER: S125RDIP-S850D590U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

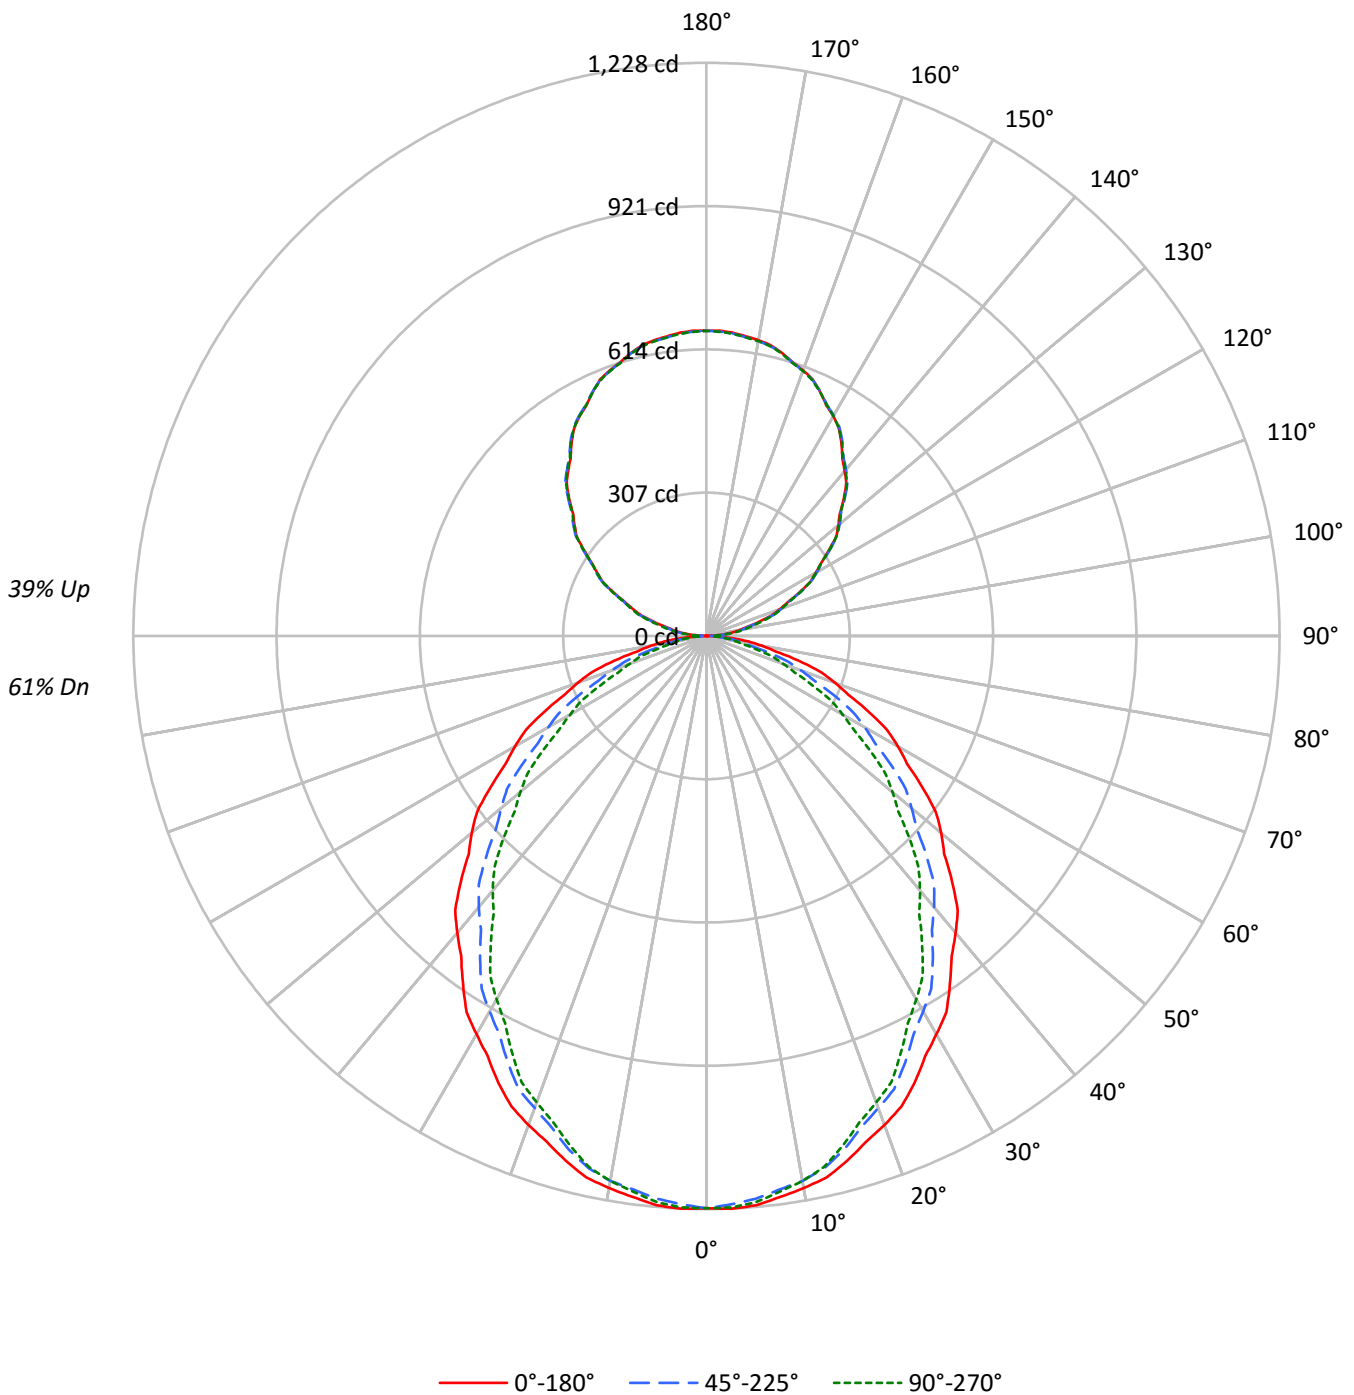



TEST NUMBER: P333560-940

CATALOG NUMBER: S125RDIP-S850D590U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	61
1	101	96	92	89	94	90	87	84	79	77	74	69	67	65	59	58	57	52
2	92	84	78	73	86	79	74	69	70	66	62	61	58	55	52	50	48	44
3	84	74	67	61	78	70	63	58	62	57	52	54	50	47	47	44	41	38
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	39	36	33
5	71	59	51	45	66	56	48	43	49	43	39	43	39	35	38	34	31	28
6	65	53	45	39	61	50	43	37	45	39	34	39	35	31	34	31	28	25
7	60	48	40	34	57	45	38	33	41	35	30	36	31	27	32	28	25	22
8	56	44	36	31	53	41	34	29	37	31	27	33	28	25	29	25	22	20
9	52	40	33	27	49	38	31	26	34	28	24	30	26	22	27	23	20	18
10	49	37	30	25	46	35	28	24	31	26	22	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7919	7919	7919
5°	7937	7847	7895
10°	7877	7774	7774
15°	7783	7616	7554
20°	7663	7396	7307
25°	7524	7180	7021
30°	7348	6927	6706
35°	7171	6666	6352
40°	7003	6395	6004
45°	6801	6090	5624
50°	6597	5760	5230
55°	6361	5443	4808
60°	6124	5059	4354
65°	5845	4614	3834
70°	5527	4056	3305
75°	5085	3421	2750
80°	4478	2685	2310
85°	3772	2193	2060



TEST NUMBER: P333560-940

CATALOG NUMBER: S125RDIP-S850D590U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.3	2.4
10°-20°	322.2	6.8
20°-30°	467.2	9.9
30°-40°	532.5	11.3
40°-50°	519.1	11.0
50°-60°	436.9	9.3
60°-70°	306.3	6.5
70°-80°	157.4	3.3
80°-90°	41.2	0.9
90°-100°	43.8	0.9
100°-110°	129.3	2.7
110°-120°	219.0	4.6
120°-130°	288.2	6.1
130°-140°	322.9	6.8
140°-150°	316.5	6.7
150°-160°	265.8	5.6
160°-170°	176.7	3.7
170°-180°	61.8	1.3
0°-30°	904.7	19.2
0°-40°	1437.3	30.4
0°-60°	2393.2	50.7
0°-90°	2898.2	61.4
90°-120°	392.0	8.3
90°-150°	1319.7	27.9
90°-180°	1824.0	38.6
0°-180°	4722.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1226	1226	1226	1226	1226	
5°	1224	1220	1210	1219	1218	116
15°	1164	1158	1139	1138	1130	328
25°	1056	1041	1008	996	985	486
35°	910	886	846	819	806	569
45°	745	716	667	631	616	574
55°	565	534	483	443	427	505
65°	382	350	302	266	251	379
75°	204	175	137	118	110	216
85°	51	35	30	29	28	57
90°	0	5	8	11	12	4
95°	33	34	39	43	44	35
105°	116	119	122	125	126	124
115°	219	221	222	222	221	217
125°	320	323	324	322	322	286
135°	416	419	420	420	418	321
145°	504	506	508	508	506	315
155°	577	577	577	579	577	266
165°	627	626	627	628	626	177
175°	652	650	650	653	650	62
180°	654	654	654	654	654	



TEST NUMBER: P333560-940

CATALOG NUMBER: S125RDIP-S850D590U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1228.3	1227.9	1227.4	1226.9	1226.4	1225.3	1223.7	1222.0	1220.4	1218.7	1220.4
5°	1224.3	1223.5	1222.6	1221.8	1221.0	1219.5	1217.2	1215.0	1212.6	1210.4	1212.5
7.5°	1212.3	1211.5	1210.7	1209.9	1209.2	1207.4	1204.7	1201.9	1199.3	1196.5	1197.9
10°	1201.1	1200.5	1199.9	1199.3	1198.6	1196.9	1194.1	1191.1	1188.3	1185.4	1186.0
12.5°	1188.6	1187.8	1187.0	1186.2	1185.4	1183.1	1179.2	1175.4	1171.5	1167.6	1168.1
15°	1164.1	1162.9	1161.6	1160.4	1159.1	1156.4	1152.1	1147.7	1143.4	1139.1	1138.9
17.5°	1136.5	1134.6	1132.7	1130.9	1128.9	1125.2	1119.8	1114.4	1108.9	1103.5	1102.5
20°	1115.0	1112.9	1110.9	1108.8	1106.8	1102.4	1095.9	1089.3	1082.7	1076.1	1075.1
22.5°	1091.3	1089.2	1087.2	1085.1	1083.1	1078.6	1071.7	1064.8	1057.8	1051.0	1048.9
25°	1055.8	1052.7	1049.5	1046.5	1043.4	1038.0	1030.5	1022.8	1015.2	1007.6	1005.0
27.5°	1015.0	1011.3	1007.5	1003.8	1000.1	994.1	986.0	977.8	969.6	961.4	957.7
30°	985.3	981.4	977.6	973.7	969.7	963.4	954.8	946.2	937.5	928.9	924.2
32.5°	956.4	951.9	947.4	942.8	938.2	931.5	922.7	913.9	905.1	896.3	891.1
35°	909.5	904.5	899.6	894.6	889.7	882.5	873.3	864.1	854.8	845.5	839.5
37.5°	863.3	857.3	851.3	845.3	839.3	831.5	822.0	812.3	802.8	793.3	786.1
40°	830.7	824.6	818.3	812.2	806.0	798.0	788.1	778.2	768.4	758.5	750.6
42.5°	796.7	790.3	784.0	777.6	771.2	763.0	752.8	742.6	732.4	722.2	714.7
45°	744.6	738.6	732.6	726.7	720.7	712.0	700.7	689.5	678.1	666.8	658.5
47.5°	690.7	684.4	678.1	671.8	665.5	656.7	645.2	633.8	622.4	611.0	602.5
50°	656.6	649.8	643.0	636.2	629.5	620.2	608.4	596.7	585.0	573.3	564.6
52.5°	619.6	612.6	605.6	598.7	591.7	582.7	571.7	560.6	549.5	538.4	529.1
55°	564.9	558.3	551.8	545.2	538.6	529.5	518.0	506.5	495.0	483.4	474.1
57.5°	509.7	502.7	495.6	488.6	481.6	472.5	461.4	450.2	439.2	428.0	419.0
60°	474.1	467.0	459.8	452.5	445.3	436.2	425.1	413.9	402.9	391.7	382.7
62.5°	436.4	429.5	422.7	415.7	408.8	399.8	388.5	377.3	366.0	354.7	346.3
65°	382.5	375.5	368.5	361.5	354.5	345.5	334.7	323.7	312.8	301.9	293.6
67.5°	329.0	321.9	315.0	308.0	301.0	292.2	281.8	271.3	260.9	250.4	242.9
70°	292.7	285.6	278.7	271.6	264.7	256.0	245.8	235.4	225.2	214.8	208.5
72.5°	257.1	250.2	243.4	236.6	229.8	221.5	211.9	202.2	192.6	183.0	177.1
75°	203.8	197.6	191.4	185.2	179.1	171.7	163.0	154.4	145.7	137.1	132.5
77.5°	150.8	145.8	140.9	136.0	131.0	125.1	118.2	111.3	104.3	97.5	94.3
80°	120.4	115.5	110.5	105.6	100.7	95.3	89.5	83.7	78.0	72.2	70.4
82.5°	90.8	86.3	81.9	77.4	72.9	68.8	64.8	60.9	56.9	53.0	52.1
85°	50.9	47.3	43.5	39.9	36.1	33.7	32.7	31.7	30.7	29.6	29.4
87.5°	17.1	16.1	15.2	14.3	13.3	12.8	12.8	12.8	12.8	12.8	12.8
90°	0.5	1.4	2.3	3.2	4.1	5.0	5.8	6.6	7.3	8.1	8.7
92.5°	12.3	12.9	13.6	14.2	14.8	15.6	16.6	17.6	18.5	19.5	20.2
95°	33.1	33.3	33.5	33.7	34.0	34.7	35.8	36.9	38.1	39.1	39.9
97.5°	54.9	55.0	55.1	55.2	55.3	56.1	57.7	59.2	60.8	62.3	63.1
100°	71.2	71.2	71.2	71.2	71.2	72.0	73.4	74.9	76.3	77.8	78.8
102.5°	88.7	89.2	89.6	90.1	90.5	91.1	91.8	92.6	93.4	94.1	95.2
105°	116.0	116.5	117.1	117.7	118.2	118.9	119.6	120.2	120.9	121.5	122.3
107.5°	146.1	146.7	147.2	147.8	148.4	148.9	149.5	149.9	150.4	151.0	151.3
110°	166.8	167.4	168.0	168.5	169.2	169.6	169.9	170.2	170.6	170.9	171.3



TEST NUMBER: P333560-940

CATALOG NUMBER: S125RDIP-S850D590U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	188.0	188.3	188.6	188.9	189.2	189.6	190.0	190.4	190.8	191.3	191.5
115°	219.3	219.7	220.2	220.6	221.1	221.4	221.6	221.9	222.0	222.3	222.2
117.5°	250.6	250.7	251.0	251.2	251.4	251.6	251.8	252.0	252.2	252.4	252.5
120°	270.1	270.7	271.3	271.8	272.4	272.7	272.9	273.0	273.0	273.1	273.1
122.5°	291.3	291.5	291.7	291.9	292.1	292.3	292.7	292.9	293.2	293.6	293.5
125°	319.9	320.7	321.3	322.0	322.7	323.1	323.2	323.3	323.4	323.5	323.3
127.5°	350.5	350.9	351.2	351.6	352.0	352.3	352.4	352.6	352.7	352.8	352.8
130°	368.8	369.3	370.0	370.5	371.0	371.5	371.7	371.9	372.1	372.4	372.3
132.5°	387.1	388.1	389.0	389.9	390.8	391.3	391.2	391.2	391.1	391.1	391.0
135°	416.1	416.8	417.5	418.1	418.8	419.2	419.4	419.5	419.5	419.6	419.6
137.5°	443.4	444.1	444.7	445.3	446.0	446.5	446.7	446.9	447.2	447.5	447.5
140°	460.8	461.5	462.0	462.5	463.2	463.6	464.0	464.3	464.6	464.9	465.2
142.5°	478.4	478.8	479.3	479.8	480.3	480.7	481.2	481.6	482.1	482.4	482.6
145°	504.1	504.5	505.1	505.5	506.0	506.3	506.7	507.0	507.4	507.7	507.7
147.5°	527.9	528.2	528.4	528.7	529.0	529.1	529.4	529.8	530.0	530.3	530.6
150°	543.8	543.7	543.6	543.5	543.3	543.5	543.9	544.4	544.8	545.3	545.3
152.5°	556.8	557.0	557.1	557.3	557.4	557.6	557.8	557.9	558.1	558.4	558.7
155°	576.8	576.8	576.8	576.8	576.8	576.9	577.0	577.1	577.3	577.4	577.8
157.5°	594.8	594.5	594.2	594.1	593.8	593.7	593.8	594.0	594.1	594.1	594.6
160°	605.4	605.0	604.7	604.3	604.0	603.9	604.0	604.1	604.2	604.3	604.8
162.5°	614.7	614.5	614.2	613.9	613.7	613.6	613.6	613.7	613.7	613.7	614.2
165°	627.2	627.0	626.8	626.5	626.3	626.2	626.3	626.5	626.6	626.7	627.1
167.5°	637.8	637.4	636.9	636.4	636.0	635.8	635.8	635.8	635.8	635.8	636.4
170°	643.5	643.0	642.6	642.1	641.7	641.5	641.5	641.5	641.5	641.5	642.1
172.5°	647.6	647.1	646.7	646.2	645.8	645.5	645.5	645.5	645.5	645.5	646.2
175°	652.1	651.7	651.2	650.8	650.3	650.1	650.1	650.1	650.1	650.1	650.8
177.5°	654.5	654.2	653.8	653.4	653.0	652.8	652.7	652.6	652.6	652.5	653.0
180°	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7



TEST NUMBER: P333560-940

CATALOG NUMBER: S125RDIP-S850D590U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1222.0	1223.7	1225.3	1226.1	1225.9	1225.7	1225.6	1225.4
5°	1214.5	1216.6	1218.6	1219.5	1219.1	1218.6	1218.3	1217.8
7.5°	1199.4	1200.9	1202.3	1202.7	1202.3	1201.8	1201.4	1201.0
10°	1186.6	1187.2	1187.8	1187.8	1187.2	1186.6	1186.0	1185.4
12.5°	1168.5	1168.9	1169.4	1169.2	1168.2	1167.2	1166.4	1165.4
15°	1138.7	1138.4	1138.3	1137.3	1135.4	1133.5	1131.7	1129.8
17.5°	1101.4	1100.5	1099.4	1098.1	1096.6	1095.1	1093.6	1092.1
20°	1074.1	1073.0	1072.0	1070.6	1068.7	1066.8	1065.0	1063.2
22.5°	1046.9	1044.9	1042.9	1041.1	1039.6	1038.0	1036.5	1035.0
25°	1002.3	999.6	996.9	994.4	992.1	989.9	987.7	985.3
27.5°	954.0	950.2	946.5	943.5	941.4	939.1	937.0	934.8
30°	919.4	914.7	909.9	906.7	904.8	902.9	901.1	899.2
32.5°	885.8	880.6	875.4	871.6	869.2	866.9	864.5	862.2
35°	833.6	827.6	821.6	817.3	814.3	811.5	808.6	805.7
37.5°	779.0	771.8	764.6	759.6	756.9	754.0	751.3	748.5
40°	742.8	735.0	727.2	722.0	719.6	717.1	714.6	712.2
42.5°	707.2	699.7	692.2	686.6	683.1	679.4	675.7	672.2
45°	650.3	642.1	633.8	628.2	625.1	622.1	618.9	615.8
47.5°	594.1	585.6	577.1	571.1	567.8	564.4	560.9	557.5
50°	556.0	547.3	538.7	532.8	529.8	526.6	523.5	520.5
52.5°	519.9	510.5	501.2	495.0	492.0	488.8	485.8	482.7
55°	464.9	455.7	446.4	440.1	436.8	433.5	430.3	427.0
57.5°	409.9	400.9	391.8	385.8	382.9	380.0	377.1	374.2
60°	373.6	364.5	355.5	349.5	346.3	343.3	340.2	337.1
62.5°	337.9	329.5	321.1	315.4	312.3	309.2	306.1	303.0
65°	285.4	277.2	268.9	263.3	260.2	257.2	254.0	250.9
67.5°	235.3	227.8	220.3	215.3	212.9	210.4	207.9	205.5
70°	202.1	195.7	189.3	184.9	182.4	179.9	177.5	175.0
72.5°	171.2	165.3	159.4	155.7	154.0	152.4	150.8	149.1
75°	128.0	123.5	119.0	116.0	114.5	113.1	111.6	110.2
77.5°	91.0	87.9	84.7	82.7	81.6	80.5	79.5	78.4
80°	68.6	66.7	64.8	63.7	63.3	62.9	62.4	62.1
82.5°	51.3	50.4	49.5	49.0	48.7	48.5	48.2	48.0
85°	29.2	29.0	28.8	28.6	28.4	28.2	28.0	27.8
87.5°	12.9	13.1	13.2	13.2	13.1	13.0	12.9	12.8
90°	9.3	9.8	10.4	10.9	11.2	11.5	11.9	12.2
92.5°	21.0	21.8	22.6	23.0	23.3	23.5	23.7	24.0
95°	40.8	41.6	42.4	42.8	43.1	43.3	43.5	43.8
97.5°	63.8	64.6	65.4	65.8	65.9	66.1	66.2	66.3
100°	79.9	80.9	81.9	82.5	82.8	83.0	83.2	83.5
102.5°	96.3	97.5	98.5	99.2	99.6	99.9	100.2	100.5
105°	123.0	123.6	124.3	124.8	125.1	125.5	125.8	126.2
107.5°	151.7	152.0	152.3	152.5	152.5	152.5	152.4	152.4
110°	171.6	171.9	172.3	172.4	172.3	172.2	172.0	171.9



TEST NUMBER: P333560-940

CATALOG NUMBER: S125RDIP-S850D590U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	191.6	191.7	191.9	191.9	191.7	191.5	191.3	191.1
115°	222.0	221.9	221.9	221.8	221.6	221.5	221.4	221.3
117.5°	252.6	252.7	252.8	252.6	252.2	251.7	251.3	250.7
120°	273.1	273.1	273.1	273.0	272.5	272.1	271.6	271.2
122.5°	293.4	293.3	293.2	292.9	292.6	292.2	291.9	291.5
125°	323.1	322.9	322.6	322.4	322.4	322.3	322.1	322.0
127.5°	352.6	352.5	352.4	352.2	352.0	351.8	351.5	351.3
130°	372.1	372.0	371.9	371.8	371.5	371.3	371.0	370.9
132.5°	390.8	390.7	390.7	390.4	390.1	389.8	389.5	389.1
135°	419.6	419.6	419.6	419.5	419.0	418.6	418.1	417.7
137.5°	447.7	447.8	448.0	447.8	447.2	446.7	446.1	445.5
140°	465.4	465.7	465.8	465.7	465.1	464.6	464.0	463.4
142.5°	482.7	482.9	483.0	482.8	482.2	481.6	481.1	480.5
145°	507.7	507.7	507.7	507.5	507.2	506.8	506.5	506.1
147.5°	530.8	531.1	531.4	531.1	530.3	529.6	528.8	528.1
150°	545.3	545.3	545.3	545.2	545.0	544.7	544.6	544.3
152.5°	558.9	559.2	559.5	559.4	558.9	558.6	558.1	557.8
155°	578.3	578.7	579.2	579.2	578.5	578.0	577.4	576.8
157.5°	595.0	595.5	595.9	595.8	595.0	594.3	593.6	592.8
160°	605.2	605.6	606.1	606.1	605.6	604.9	604.4	603.9
162.5°	614.7	615.3	615.9	615.8	615.2	614.5	613.9	613.1
165°	627.6	628.0	628.6	628.4	627.8	627.1	626.3	625.7
167.5°	637.1	637.8	638.5	638.5	637.8	637.0	636.3	635.7
170°	642.8	643.5	644.2	644.1	643.4	642.6	641.8	641.0
172.5°	646.9	647.6	648.3	648.3	647.6	646.8	646.1	645.4
175°	651.5	652.1	652.8	652.7	652.0	651.2	650.4	649.6
177.5°	653.5	654.1	654.6	654.6	654.0	653.4	652.6	652.0
180°	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7

(END OF REPORT)