

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333566-940

Luminaire Tested: **S125RDIP-S850D810U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333566-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D810U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5398.9 lumens
Efficiency: N/A
Efficacy: 117.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333566-940

CATALOG NUMBER: S125RDIP-S850D810U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

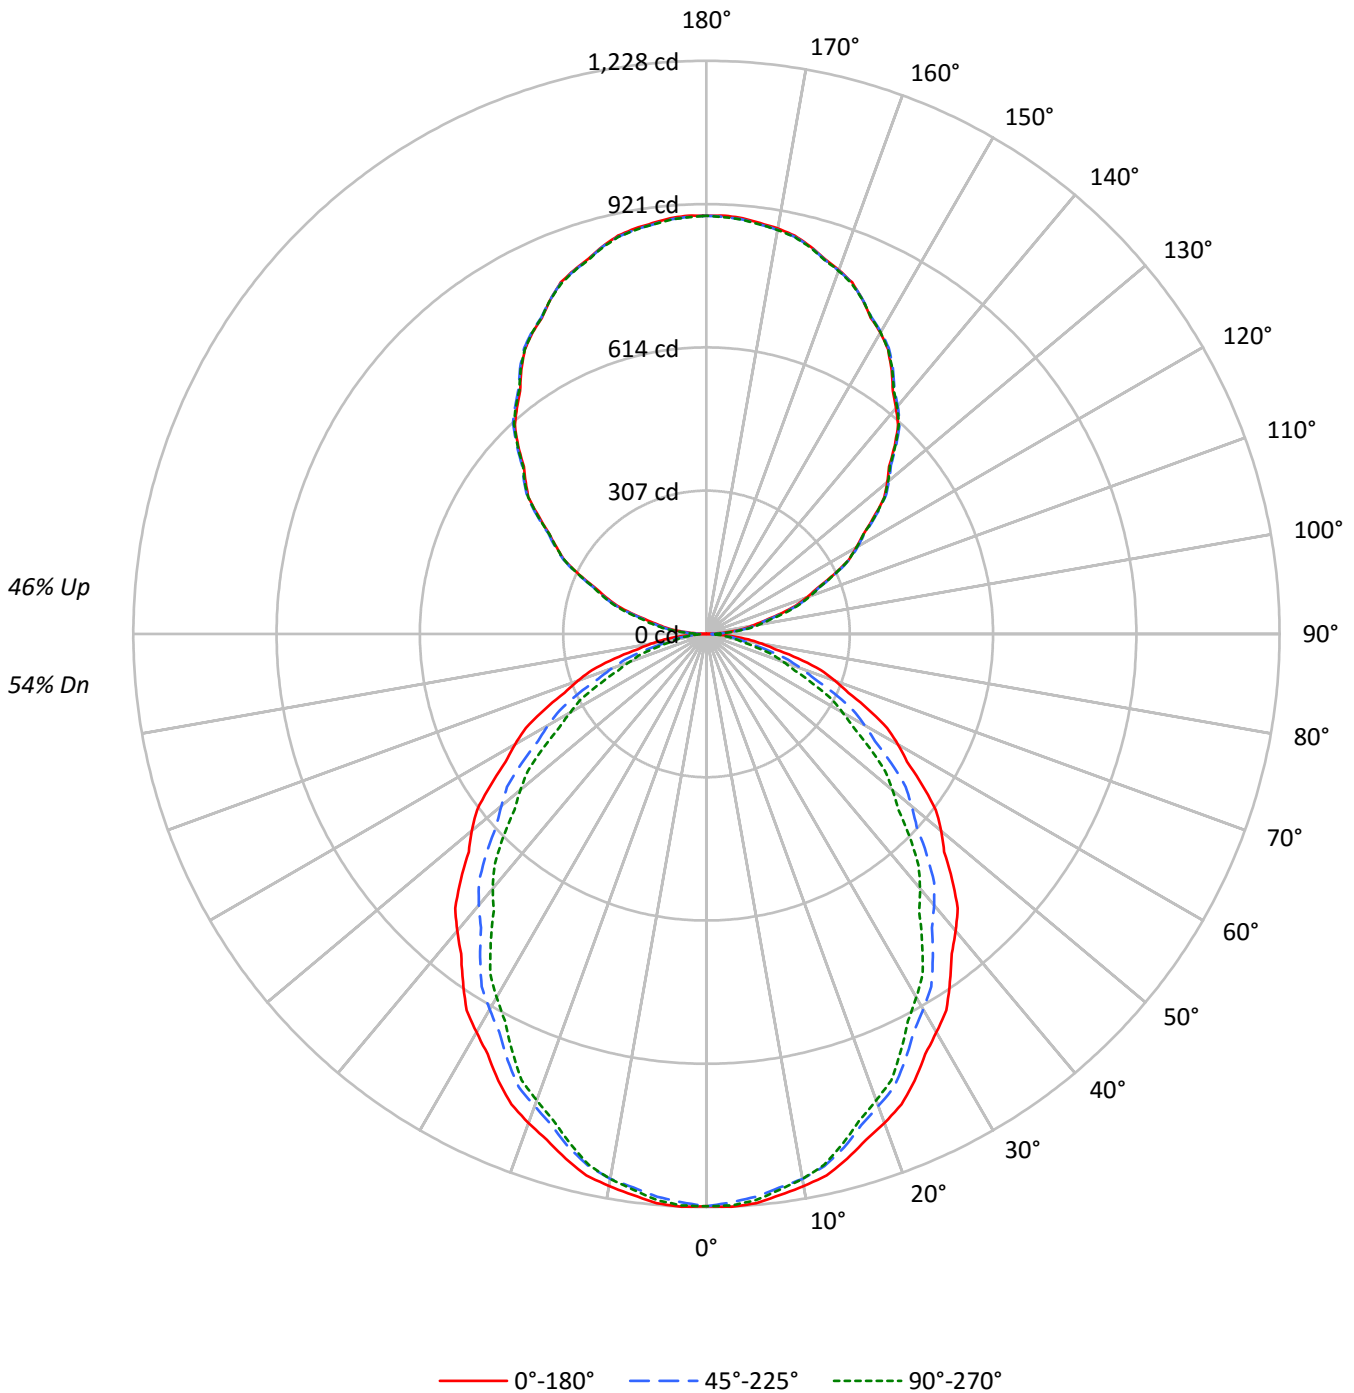



TEST NUMBER: P333566-940

CATALOG NUMBER: S125RDIP-S850D810U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60	54
1	99	95	91	87	92	88	85	82	75	73	71	64	62	60	53	52	51	46
2	90	83	77	72	83	77	72	67	66	62	59	56	53	51	47	45	43	39
3	82	73	66	60	76	68	62	57	59	54	50	50	46	43	42	39	37	33
4	76	65	57	51	70	60	53	48	52	47	43	45	40	37	37	34	32	28
5	69	58	50	44	64	54	47	41	47	41	37	40	36	32	34	31	28	25
6	64	52	44	38	59	49	41	36	42	37	32	36	32	28	31	27	25	22
7	59	47	39	33	55	44	37	32	38	33	29	33	29	25	28	25	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	23	26	22	20	17
9	51	39	32	27	48	37	30	25	32	27	23	28	24	20	24	20	18	16
10	48	36	29	24	44	34	27	23	30	24	21	26	22	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7919	7919	7919
5°	7937	7847	7895
10°	7877	7774	7774
15°	7783	7616	7554
20°	7663	7396	7307
25°	7524	7180	7021
30°	7348	6927	6706
35°	7171	6666	6352
40°	7003	6395	6004
45°	6801	6090	5624
50°	6597	5760	5230
55°	6361	5443	4808
60°	6124	5059	4354
65°	5845	4614	3834
70°	5527	4056	3305
75°	5085	3421	2750
80°	4478	2685	2310
85°	3772	2193	2060



TEST NUMBER: P333566-940

CATALOG NUMBER: S125RDIP-S850D810U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.3	2.1
10°-20°	322.2	6.0
20°-30°	467.2	8.7
30°-40°	532.5	9.9
40°-50°	519.1	9.6
50°-60°	436.9	8.1
60°-70°	306.3	5.7
70°-80°	157.4	2.9
80°-90°	41.7	0.8
90°-100°	60.0	1.1
100°-110°	177.2	3.3
110°-120°	300.2	5.6
120°-130°	395.0	7.3
130°-140°	442.6	8.2
140°-150°	433.8	8.0
150°-160°	364.4	6.7
160°-170°	242.2	4.5
170°-180°	84.8	1.6
0°-30°	904.7	16.8
0°-40°	1437.3	26.6
0°-60°	2393.2	44.3
0°-90°	2898.7	53.7
90°-120°	537.4	10.0
90°-150°	1808.9	33.5
90°-180°	2500.0	46.3
0°-180°	5398.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1226	1226	1226	1226	1226	
5°	1224	1220	1210	1219	1218	116
15°	1164	1158	1139	1138	1130	328
25°	1056	1041	1008	996	985	486
35°	910	886	846	819	806	569
45°	745	716	667	631	616	574
55°	565	534	483	443	427	505
65°	382	350	302	266	251	379
75°	204	175	137	118	110	216
85°	51	35	30	29	28	57
90°	1	6	11	15	17	5
95°	45	47	54	58	60	48
105°	159	162	167	171	173	170
115°	300	303	305	304	303	297
125°	438	443	443	442	441	393
135°	570	574	575	575	572	439
145°	691	694	696	696	694	432
155°	791	791	791	794	791	364
165°	860	858	859	861	858	242
175°	894	891	891	895	890	85
180°	896	896	896	896	896	



TEST NUMBER: P333566-940

CATALOG NUMBER: S125RDIP-S850D810U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1228.3	1227.9	1227.4	1226.9	1226.4	1225.3	1223.7	1222.0	1220.4	1218.7	1220.4
5°	1224.3	1223.5	1222.6	1221.8	1221.0	1219.5	1217.2	1215.0	1212.6	1210.4	1212.5
7.5°	1212.3	1211.5	1210.7	1209.9	1209.2	1207.4	1204.7	1201.9	1199.3	1196.5	1197.9
10°	1201.1	1200.5	1199.9	1199.3	1198.6	1196.9	1194.1	1191.1	1188.3	1185.4	1186.0
12.5°	1188.6	1187.8	1187.0	1186.2	1185.4	1183.1	1179.2	1175.4	1171.5	1167.6	1168.1
15°	1164.1	1162.9	1161.6	1160.4	1159.1	1156.4	1152.1	1147.7	1143.4	1139.1	1138.9
17.5°	1136.5	1134.6	1132.7	1130.9	1128.9	1125.2	1119.8	1114.4	1108.9	1103.5	1102.5
20°	1115.0	1112.9	1110.9	1108.8	1106.8	1102.4	1095.9	1089.3	1082.7	1076.1	1075.1
22.5°	1091.3	1089.2	1087.2	1085.1	1083.1	1078.6	1071.7	1064.8	1057.8	1051.0	1048.9
25°	1055.8	1052.7	1049.5	1046.5	1043.4	1038.0	1030.5	1022.8	1015.2	1007.6	1005.0
27.5°	1015.0	1011.3	1007.5	1003.8	1000.1	994.1	986.0	977.8	969.6	961.4	957.7
30°	985.3	981.4	977.6	973.7	969.7	963.4	954.8	946.2	937.5	928.9	924.2
32.5°	956.4	951.9	947.4	942.8	938.2	931.5	922.7	913.9	905.1	896.3	891.1
35°	909.5	904.5	899.6	894.6	889.7	882.5	873.3	864.1	854.8	845.5	839.5
37.5°	863.3	857.3	851.3	845.3	839.3	831.5	822.0	812.3	802.8	793.3	786.1
40°	830.7	824.6	818.3	812.2	806.0	798.0	788.1	778.2	768.4	758.5	750.6
42.5°	796.7	790.3	784.0	777.6	771.2	763.0	752.8	742.6	732.4	722.2	714.7
45°	744.6	738.6	732.6	726.7	720.7	712.0	700.7	689.5	678.1	666.8	658.5
47.5°	690.7	684.4	678.1	671.8	665.5	656.7	645.2	633.8	622.4	611.0	602.5
50°	656.6	649.8	643.0	636.2	629.5	620.2	608.4	596.7	585.0	573.3	564.6
52.5°	619.6	612.6	605.6	598.7	591.7	582.7	571.7	560.6	549.5	538.4	529.1
55°	564.9	558.3	551.8	545.2	538.6	529.5	518.0	506.5	495.0	483.4	474.1
57.5°	509.7	502.7	495.6	488.6	481.6	472.5	461.4	450.2	439.2	428.0	419.0
60°	474.1	467.0	459.8	452.5	445.3	436.2	425.1	413.9	402.9	391.7	382.7
62.5°	436.4	429.5	422.7	415.7	408.8	399.8	388.5	377.3	366.0	354.7	346.3
65°	382.5	375.5	368.5	361.5	354.5	345.5	334.7	323.7	312.8	301.9	293.6
67.5°	329.0	321.9	315.0	308.0	301.0	292.2	281.8	271.3	260.9	250.4	242.9
70°	292.7	285.6	278.7	271.6	264.7	256.0	245.8	235.4	225.2	214.8	208.5
72.5°	257.1	250.2	243.4	236.6	229.8	221.5	211.9	202.2	192.6	183.0	177.1
75°	203.8	197.6	191.4	185.2	179.1	171.7	163.0	154.4	145.7	137.1	132.5
77.5°	150.8	145.8	140.9	136.0	131.0	125.1	118.2	111.3	104.3	97.5	94.3
80°	120.4	115.5	110.5	105.6	100.7	95.3	89.5	83.7	78.0	72.2	70.4
82.5°	90.8	86.3	81.9	77.4	72.9	68.8	64.8	60.9	56.9	53.0	52.1
85°	50.9	47.3	43.5	39.9	36.1	33.7	32.7	31.7	30.7	29.6	29.4
87.5°	17.2	16.3	15.3	14.4	13.6	13.1	13.2	13.2	13.3	13.4	13.5
90°	0.7	2.0	3.2	4.5	5.6	6.8	7.9	9.0	10.1	11.1	11.9
92.5°	16.9	17.7	18.6	19.4	20.3	21.4	22.7	24.1	25.4	26.8	27.8
95°	45.3	45.7	45.9	46.3	46.5	47.5	49.0	50.6	52.2	53.7	54.8
97.5°	75.3	75.4	75.5	75.7	75.8	77.0	79.1	81.2	83.4	85.5	86.5
100°	97.6	97.6	97.6	97.6	97.6	98.6	100.7	102.6	104.7	106.6	108.1
102.5°	121.6	122.3	122.9	123.5	124.1	124.9	125.9	127.0	128.0	129.0	130.5
105°	159.0	159.8	160.5	161.3	162.1	162.9	163.9	164.8	165.7	166.7	167.6
107.5°	200.3	201.0	201.8	202.6	203.4	204.1	204.8	205.5	206.3	207.0	207.4
110°	228.7	229.5	230.2	231.0	231.8	232.5	232.9	233.4	233.8	234.3	234.8



TEST NUMBER: P333566-940

CATALOG NUMBER: S125RDIP-S850D810U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	257.7	258.2	258.5	259.0	259.3	259.8	260.4	261.0	261.6	262.2	262.4
115°	300.5	301.1	301.8	302.4	303.0	303.4	303.8	304.1	304.4	304.7	304.5
117.5°	343.5	343.8	344.0	344.3	344.6	344.9	345.2	345.4	345.7	346.0	346.1
120°	370.2	371.0	371.8	372.6	373.4	373.8	374.0	374.2	374.3	374.4	374.4
122.5°	399.2	399.6	399.8	400.1	400.4	400.7	401.1	401.5	401.9	402.3	402.2
125°	438.5	439.5	440.4	441.4	442.3	442.8	443.0	443.2	443.3	443.4	443.2
127.5°	480.5	481.0	481.4	482.0	482.5	482.9	483.0	483.2	483.5	483.7	483.5
130°	505.5	506.3	507.1	507.8	508.6	509.2	509.4	509.8	510.1	510.4	510.2
132.5°	530.7	531.9	533.2	534.4	535.7	536.3	536.3	536.2	536.1	536.1	535.9
135°	570.3	571.3	572.2	573.2	574.1	574.6	574.8	575.0	575.1	575.2	575.2
137.5°	607.8	608.7	609.6	610.5	611.4	612.0	612.3	612.6	613.0	613.3	613.5
140°	631.8	632.5	633.3	634.1	634.8	635.4	635.9	636.4	636.9	637.3	637.7
142.5°	655.8	656.4	657.0	657.6	658.4	659.0	659.5	660.1	660.7	661.3	661.5
145°	691.0	691.6	692.2	692.9	693.5	694.0	694.5	694.9	695.4	695.9	695.9
147.5°	723.6	724.0	724.3	724.7	725.0	725.3	725.8	726.1	726.5	726.8	727.2
150°	745.4	745.2	745.1	744.9	744.8	745.0	745.6	746.3	746.9	747.5	747.5
152.5°	763.2	763.5	763.7	763.9	764.1	764.4	764.6	764.8	765.1	765.4	765.7
155°	790.7	790.7	790.7	790.7	790.7	790.8	790.9	791.1	791.2	791.4	792.0
157.5°	815.3	814.9	814.6	814.2	813.9	813.8	814.0	814.1	814.2	814.4	815.0
160°	829.7	829.3	828.8	828.4	827.9	827.8	827.9	828.0	828.2	828.4	829.0
162.5°	842.6	842.2	841.9	841.6	841.2	841.1	841.1	841.2	841.2	841.2	842.0
165°	859.8	859.4	859.2	858.8	858.5	858.4	858.5	858.7	858.9	859.1	859.7
167.5°	874.2	873.6	873.0	872.4	871.7	871.5	871.5	871.5	871.5	871.5	872.4
170°	882.1	881.5	880.8	880.2	879.6	879.2	879.2	879.2	879.2	879.2	880.2
172.5°	887.6	887.0	886.4	885.7	885.1	884.8	884.8	884.8	884.8	884.8	885.7
175°	893.9	893.3	892.7	892.1	891.4	891.1	891.1	891.1	891.1	891.1	892.1
177.5°	897.2	896.6	896.2	895.6	895.1	894.8	894.7	894.6	894.5	894.3	895.1
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0



TEST NUMBER: P333566-940

CATALOG NUMBER: S125RDIP-S850D810U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2	1226.2
2.5°	1222.0	1223.7	1225.3	1226.1	1225.9	1225.7	1225.6	1225.4
5°	1214.5	1216.6	1218.6	1219.5	1219.1	1218.6	1218.3	1217.8
7.5°	1199.4	1200.9	1202.3	1202.7	1202.3	1201.8	1201.4	1201.0
10°	1186.6	1187.2	1187.8	1187.8	1187.2	1186.6	1186.0	1185.4
12.5°	1168.5	1168.9	1169.4	1169.2	1168.2	1167.2	1166.4	1165.4
15°	1138.7	1138.4	1138.3	1137.3	1135.4	1133.5	1131.7	1129.8
17.5°	1101.4	1100.5	1099.4	1098.1	1096.6	1095.1	1093.6	1092.1
20°	1074.1	1073.0	1072.0	1070.6	1068.7	1066.8	1065.0	1063.2
22.5°	1046.9	1044.9	1042.9	1041.1	1039.6	1038.0	1036.5	1035.0
25°	1002.3	999.6	996.9	994.4	992.1	989.9	987.7	985.3
27.5°	954.0	950.2	946.5	943.5	941.4	939.1	937.0	934.8
30°	919.4	914.7	909.9	906.7	904.8	902.9	901.1	899.2
32.5°	885.8	880.6	875.4	871.6	869.2	866.9	864.5	862.2
35°	833.6	827.6	821.6	817.3	814.3	811.5	808.6	805.7
37.5°	779.0	771.8	764.6	759.6	756.9	754.0	751.3	748.5
40°	742.8	735.0	727.2	722.0	719.6	717.1	714.6	712.2
42.5°	707.2	699.7	692.2	686.6	683.1	679.4	675.7	672.2
45°	650.3	642.1	633.8	628.2	625.1	622.1	618.9	615.8
47.5°	594.1	585.6	577.1	571.1	567.8	564.4	560.9	557.5
50°	556.0	547.3	538.7	532.8	529.8	526.6	523.5	520.5
52.5°	519.9	510.5	501.2	495.0	492.0	488.8	485.8	482.7
55°	464.9	455.7	446.4	440.1	436.8	433.5	430.3	427.0
57.5°	409.9	400.9	391.8	385.8	382.9	380.0	377.1	374.2
60°	373.6	364.5	355.5	349.5	346.3	343.3	340.2	337.1
62.5°	337.9	329.5	321.1	315.4	312.3	309.2	306.1	303.0
65°	285.4	277.2	268.9	263.3	260.2	257.2	254.0	250.9
67.5°	235.3	227.8	220.3	215.3	212.9	210.4	207.9	205.5
70°	202.1	195.7	189.3	184.9	182.4	179.9	177.5	175.0
72.5°	171.2	165.3	159.4	155.7	154.0	152.4	150.8	149.1
75°	128.0	123.5	119.0	116.0	114.5	113.1	111.6	110.2
77.5°	91.0	87.9	84.7	82.7	81.6	80.5	79.5	78.4
80°	68.6	66.7	64.8	63.7	63.3	62.9	62.4	62.1
82.5°	51.3	50.4	49.5	49.0	48.7	48.5	48.2	48.0
85°	29.2	29.0	28.8	28.6	28.4	28.2	28.0	27.8
87.5°	13.6	13.8	14.0	14.0	13.9	13.8	13.8	13.7
90°	12.7	13.5	14.3	14.9	15.3	15.8	16.2	16.8
92.5°	28.8	29.9	30.9	31.6	31.9	32.2	32.5	32.9
95°	55.8	57.0	58.1	58.8	59.0	59.4	59.7	59.9
97.5°	87.6	88.5	89.6	90.2	90.3	90.5	90.8	91.0
100°	109.5	110.8	112.3	113.2	113.4	113.7	114.0	114.3
102.5°	132.1	133.6	135.1	136.1	136.5	136.9	137.3	137.8
105°	168.5	169.4	170.4	171.0	171.6	172.0	172.5	172.9
107.5°	207.9	208.3	208.8	209.0	209.0	208.9	208.9	208.9
110°	235.2	235.7	236.1	236.3	236.1	235.9	235.9	235.7



TEST NUMBER: P333566-940

CATALOG NUMBER: S125RDIP-S850D810U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	262.6	262.8	263.1	263.1	262.7	262.4	262.2	261.9
115°	304.4	304.3	304.1	303.9	303.8	303.6	303.4	303.4
117.5°	346.3	346.3	346.5	346.3	345.6	345.0	344.4	343.8
120°	374.4	374.4	374.4	374.2	373.5	372.9	372.3	371.7
122.5°	402.1	402.0	401.8	401.5	401.0	400.6	400.0	399.6
125°	442.8	442.6	442.2	442.0	441.8	441.7	441.6	441.4
127.5°	483.3	483.1	483.0	482.8	482.5	482.1	481.9	481.5
130°	510.1	510.0	509.8	509.5	509.3	508.9	508.6	508.3
132.5°	535.7	535.6	535.5	535.1	534.8	534.3	533.9	533.4
135°	575.2	575.2	575.2	575.0	574.4	573.7	573.1	572.5
137.5°	613.7	613.9	614.0	613.8	613.0	612.2	611.4	610.6
140°	637.9	638.2	638.6	638.3	637.6	636.8	636.0	635.3
142.5°	661.6	661.8	662.0	661.7	660.9	660.2	659.4	658.6
145°	695.9	695.9	695.9	695.6	695.2	694.7	694.3	693.8
147.5°	727.5	728.0	728.3	728.0	726.9	725.9	724.9	723.8
150°	747.5	747.5	747.5	747.3	747.0	746.7	746.4	746.1
152.5°	766.1	766.4	766.8	766.7	766.2	765.6	765.1	764.5
155°	792.6	793.3	793.9	793.8	793.0	792.3	791.5	790.7
157.5°	815.6	816.3	816.9	816.7	815.6	814.7	813.6	812.6
160°	829.6	830.2	830.8	830.8	830.0	829.2	828.4	827.7
162.5°	842.7	843.5	844.2	844.1	843.2	842.3	841.4	840.5
165°	860.3	860.9	861.5	861.4	860.4	859.5	858.5	857.6
167.5°	873.3	874.2	875.2	875.1	874.2	873.3	872.3	871.3
170°	881.1	882.1	883.0	882.9	881.8	880.7	879.7	878.6
172.5°	886.7	887.6	888.6	888.6	887.6	886.6	885.6	884.7
175°	893.0	893.9	894.8	894.7	893.7	892.6	891.5	890.5
177.5°	895.8	896.5	897.3	897.2	896.3	895.5	894.7	893.8
180°	896.0	896.0	896.0	896.0	896.0	896.0	896.0	896.0

(END OF REPORT)