

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331355-927

Luminaire Tested: **SA2XXDIP-C675D725U927-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331355-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C675D725U927-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4194.4 lumens
Efficiency: N/A
Efficacy: 91.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331355-927

CATALOG NUMBER: SA2XXDIP-C675D725U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

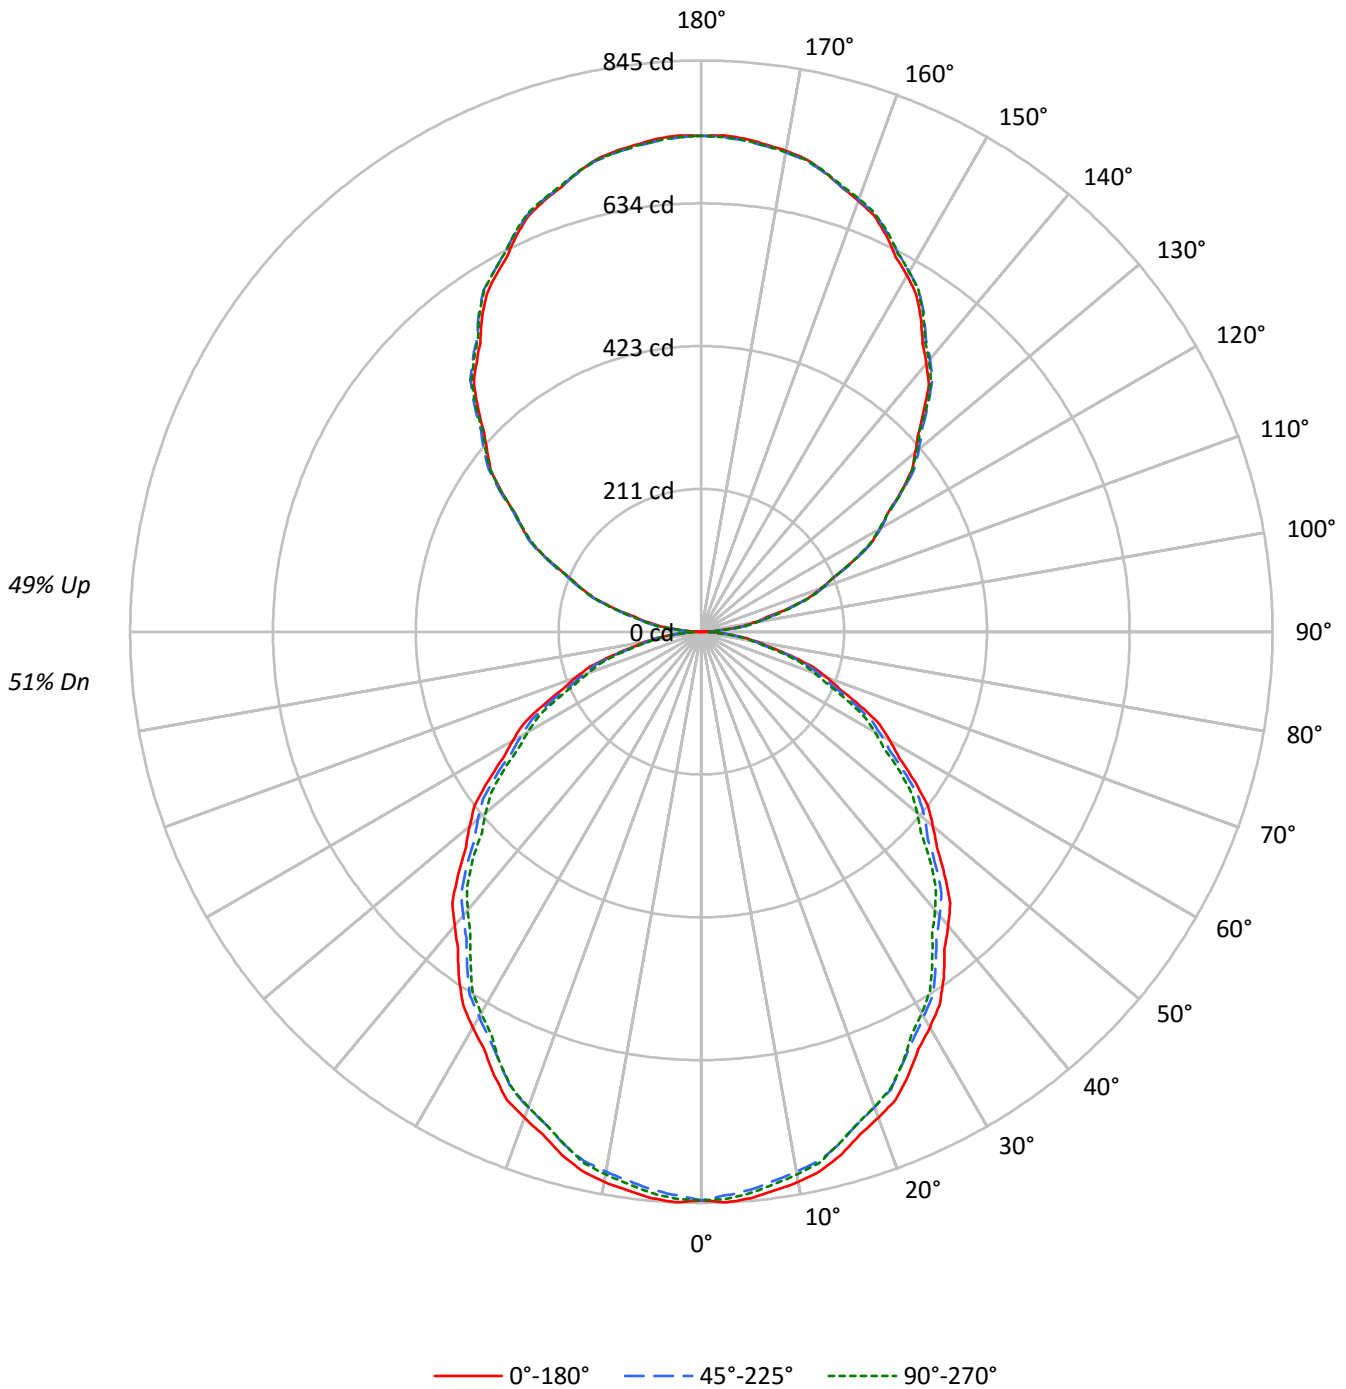



TEST NUMBER: P331355-927

CATALOG NUMBER: SA2XXDIP-C675D725U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51		
1	98	94	90	86	90	87	83	80	74	71	69	62	60	58	50	49	48	43		
2	89	82	76	70	82	76	70	66	64	60	57	54	51	49	44	42	41	36		
3	81	72	65	59	75	67	60	55	57	52	48	48	44	41	39	37	35	31		
4	74	64	56	50	69	59	52	47	51	45	41	43	39	35	35	32	30	26		
5	68	57	49	43	63	53	46	40	45	40	35	38	34	31	32	29	26	23		
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	25	23	20		
7	58	46	38	32	54	43	36	31	37	31	27	31	27	24	26	23	20	18		
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16		
9	50	38	31	26	46	36	29	24	31	25	22	26	22	19	22	19	16	14		
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	21	17	15	13		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13580	13580	13580
5°	13632	13434	13514
10°	13550	13298	13365
15°	13382	13125	13112
20°	13144	12866	12854
25°	12909	12549	12549
30°	12603	12258	12152
35°	12321	11907	11732
40°	11965	11556	11335
45°	11615	11209	10930
50°	11233	10846	10462
55°	10835	10427	10038
60°	10395	9923	9558
65°	9918	9425	8993
70°	9314	8818	8398
75°	8478	8122	7923
80°	7522	7290	6918
85°	6150	5835	5243



TEST NUMBER: P331355-927

CATALOG NUMBER: SA2XXDIP-C675D725U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.1	1.9
10°-20°	222.5	5.3
20°-30°	327.1	7.8
30°-40°	379.9	9.1
40°-50°	379.5	9.0
50°-60°	331.0	7.9
60°-70°	244.7	5.8
70°-80°	138.6	3.3
80°-90°	40.2	1.0
90°-100°	46.5	1.1
100°-110°	144.4	3.4
110°-120°	246.8	5.9
120°-130°	324.6	7.7
130°-140°	364.3	8.7
140°-150°	357.2	8.5
150°-160°	299.6	7.1
160°-170°	198.7	4.7
170°-180°	69.5	1.7
0°-30°	628.7	15.0
0°-40°	1008.6	24.0
0°-60°	1719.1	41.0
0°-90°	2142.7	51.1
90°-120°	437.7	10.4
90°-150°	1483.9	35.4
90°-180°	2052.0	48.9
0°-180°	4194.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	841	841	841	841	841	
5°	841	838	829	835	834	80
15°	801	795	785	788	784	225
25°	725	718	704	706	704	333
35°	625	617	604	599	595	390
45°	509	503	491	482	479	392
55°	385	380	370	361	357	344
65°	260	254	247	240	235	257
75°	136	134	130	126	127	145
85°	33	32	32	29	28	38
90°	1	8	22	21	21	3
95°	32	38	40	40	38	37
105°	133	135	136	137	137	141
115°	248	251	250	249	248	245
125°	360	366	364	362	362	322
135°	466	473	474	474	472	360
145°	566	570	574	574	572	353
155°	647	649	651	654	652	298
165°	704	703	703	707	705	198
175°	732	731	729	733	730	70
180°	734	734	734	734	734	



TEST NUMBER: P331355-927

CATALOG NUMBER: SA2XXDIP-C675D725U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1
2.5°	844.9	844.2	843.5	842.8	842.1	840.9	839.3	837.7	836.1	834.6	836.0
5°	841.1	840.3	839.6	838.9	838.2	836.9	834.9	832.9	830.9	828.9	830.4
7.5°	833.6	832.5	831.4	830.3	829.2	827.6	825.6	823.6	821.6	819.5	820.9
10°	826.5	825.2	823.9	822.7	821.5	819.8	817.6	815.5	813.3	811.1	812.5
12.5°	816.8	815.7	814.5	813.4	812.3	810.7	808.5	806.4	804.2	802.1	803.1
15°	800.6	799.5	798.4	797.4	796.3	794.6	792.3	789.9	787.6	785.2	786.0
17.5°	779.9	778.8	777.8	776.7	775.6	773.9	771.5	769.1	766.8	764.4	765.2
20°	765.0	764.0	762.9	761.8	760.7	758.9	756.4	753.9	751.4	748.8	749.4
22.5°	750.1	748.6	747.1	745.6	744.1	742.2	739.8	737.4	735.1	732.7	732.8
25°	724.6	723.2	721.8	720.3	718.8	716.6	713.5	710.5	707.4	704.4	704.7
27.5°	695.5	694.2	692.9	691.6	690.3	688.5	686.0	683.7	681.2	678.8	678.3
30°	676.0	674.6	673.2	671.8	670.3	668.3	665.6	662.9	660.2	657.5	657.0
32.5°	655.4	654.2	653.1	651.9	650.8	648.8	645.9	643.1	640.2	637.4	636.4
35°	625.1	623.4	621.5	619.7	617.9	615.6	612.8	609.8	607.0	604.1	603.0
37.5°	591.0	589.4	587.8	586.2	584.7	582.4	579.6	576.7	573.9	570.9	569.6
40°	567.7	566.3	564.8	563.4	562.0	559.8	556.9	554.1	551.2	548.3	546.7
42.5°	545.1	543.6	542.2	540.7	539.3	537.2	534.2	531.4	528.5	525.7	523.9
45°	508.7	507.4	506.1	504.9	503.7	501.7	499.0	496.3	493.6	490.9	488.9
47.5°	472.5	471.3	470.1	468.9	467.7	465.7	462.9	460.1	457.3	454.5	452.4
50°	447.2	446.3	445.4	444.5	443.6	441.9	439.4	436.9	434.4	431.8	429.4
52.5°	422.6	421.4	420.3	419.1	417.9	416.1	413.8	411.4	409.0	406.6	404.6
55°	384.9	383.9	382.8	381.7	380.6	379.0	376.8	374.7	372.6	370.4	368.2
57.5°	347.1	346.3	345.4	344.5	343.6	342.1	339.7	337.3	334.9	332.6	330.4
60°	321.9	321.2	320.4	319.7	319.0	317.3	314.9	312.4	309.8	307.3	305.3
62.5°	297.3	296.1	295.0	293.8	292.7	291.1	289.2	287.2	285.3	283.4	281.5
65°	259.6	258.5	257.5	256.4	255.2	253.8	252.1	250.3	248.4	246.7	245.0
67.5°	221.3	220.4	219.5	218.6	217.8	216.6	214.9	213.3	211.8	210.1	208.8
70°	197.3	196.6	195.9	195.2	194.5	193.3	191.6	190.0	188.5	186.8	185.5
72.5°	172.8	172.0	171.3	170.6	169.8	169.0	167.9	166.9	165.9	164.8	163.6
75°	135.9	135.5	135.1	134.8	134.4	133.8	132.9	132.0	131.1	130.2	129.1
77.5°	102.9	102.3	101.6	101.0	100.4	100.0	99.6	99.2	98.9	98.5	98.0
80°	80.9	80.7	80.5	80.3	80.2	79.9	79.5	79.1	78.8	78.4	77.9
82.5°	60.2	60.1	60.1	60.0	60.0	59.9	59.7	59.5	59.3	59.0	58.4
85°	33.2	33.0	32.8	32.6	32.4	32.2	32.1	31.9	31.7	31.5	31.0
87.5°	11.8	11.8	11.9	11.9	12.0	12.1	12.4	12.8	13.1	13.4	12.9
90°	0.6	2.3	4.0	5.5	7.2	9.6	12.6	15.6	18.6	21.7	21.4
92.5°	11.0	12.2	13.5	14.7	15.8	16.8	17.5	18.2	19.0	19.7	19.7
95°	32.2	33.6	34.9	36.4	37.7	38.5	38.8	39.1	39.4	39.6	39.6
97.5°	58.9	60.0	61.2	62.4	63.7	64.6	65.0	65.6	66.1	66.6	66.6
100°	78.7	79.8	80.8	81.9	83.0	83.8	84.2	84.6	85.0	85.5	85.5
102.5°	99.4	100.3	101.2	102.1	103.0	103.7	104.2	104.7	105.2	105.8	105.8
105°	133.2	133.6	134.0	134.4	134.8	135.1	135.4	135.7	135.9	136.3	136.5
107.5°	167.1	167.7	168.3	168.9	169.4	169.8	169.8	169.8	169.8	169.8	169.9
110°	188.9	189.6	190.5	191.3	192.2	192.6	192.6	192.6	192.6	192.6	192.6



TEST NUMBER: P331355-927

CATALOG NUMBER: SA2XXDIP-C675D725U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	212.6	213.5	214.3	215.1	215.9	216.3	216.2	216.1	215.9	215.9	215.6
115°	247.7	248.5	249.3	250.2	251.0	251.3	251.0	250.7	250.4	250.2	250.0
117.5°	282.6	283.7	284.8	285.9	287.0	287.2	286.4	285.7	284.9	284.1	283.8
120°	305.9	307.0	308.1	309.2	310.3	310.3	309.2	308.1	307.0	305.9	305.9
122.5°	327.2	328.5	329.9	331.1	332.5	332.7	332.0	331.2	330.4	329.6	329.3
125°	360.4	361.6	362.8	364.1	365.4	365.8	365.4	364.9	364.5	364.1	363.7
127.5°	392.7	394.3	395.9	397.4	398.9	399.5	399.0	398.5	398.0	397.5	397.0
130°	413.0	414.8	416.6	418.4	420.2	420.9	420.6	420.3	420.1	419.9	419.5
132.5°	435.8	437.3	438.7	440.1	441.6	442.4	442.4	442.5	442.5	442.6	442.0
135°	466.3	467.8	469.3	470.8	472.3	473.2	473.5	473.7	474.0	474.3	474.2
137.5°	498.4	499.6	500.8	502.1	503.3	504.1	504.5	504.8	505.2	505.5	505.4
140°	517.7	518.9	520.1	521.3	522.6	523.6	524.3	525.0	525.6	526.3	526.3
142.5°	537.5	538.7	540.0	541.2	542.4	543.3	543.8	544.2	544.7	545.2	545.3
145°	565.9	566.9	567.9	568.9	569.8	570.7	571.6	572.4	573.1	574.0	574.2
147.5°	591.4	592.5	593.7	594.8	596.0	596.8	597.4	597.9	598.5	599.0	599.3
150°	608.7	609.5	610.3	611.2	612.0	612.7	613.2	613.8	614.3	614.9	615.3
152.5°	624.0	624.9	625.7	626.5	627.3	628.0	628.8	629.4	630.0	630.7	631.2
155°	647.1	647.5	647.9	648.3	648.7	649.1	649.5	650.0	650.4	650.8	651.5
157.5°	666.8	667.0	667.3	667.6	667.9	668.1	668.4	668.6	668.8	669.1	670.0
160°	678.7	678.9	679.2	679.5	679.8	679.9	680.1	680.2	680.4	680.5	681.4
162.5°	689.5	689.6	689.7	689.7	689.8	689.8	690.0	690.1	690.3	690.4	691.3
165°	704.0	703.9	703.8	703.6	703.5	703.4	703.4	703.4	703.4	703.4	704.4
167.5°	716.1	715.7	715.3	714.9	714.5	714.3	714.3	714.2	714.2	714.2	715.2
170°	722.6	722.2	721.8	721.4	721.0	720.6	720.6	720.4	720.3	720.1	721.1
172.5°	727.1	726.7	726.3	725.8	725.4	725.2	725.0	724.8	724.8	724.6	725.6
175°	732.5	732.1	731.7	731.3	730.9	730.6	730.2	730.0	729.7	729.4	730.4
177.5°	734.7	734.4	734.1	733.7	733.4	733.2	732.9	732.7	732.5	732.3	732.9
180°	733.7	733.7	733.7	733.7	733.7	733.7	733.7	733.7	733.7	733.7	733.7



TEST NUMBER: P331355-927

CATALOG NUMBER: SA2XXDIP-C675D725U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	841.1	841.1	841.1	841.1	841.1	841.1	841.1	841.1
2.5°	837.4	838.9	840.3	840.9	840.6	840.3	840.0	839.8
5°	831.8	833.2	834.6	835.2	834.9	834.5	834.2	833.8
7.5°	822.4	823.9	825.3	825.8	825.4	825.1	824.7	824.3
10°	814.0	815.5	816.9	817.3	816.8	816.3	815.7	815.2
12.5°	804.1	805.1	806.1	806.4	806.0	805.6	805.3	804.9
15°	786.7	787.4	788.1	788.1	787.1	786.2	785.4	784.4
17.5°	766.0	766.8	767.7	767.7	766.8	766.0	765.1	764.2
20°	750.0	750.5	751.0	750.9	750.2	749.5	748.8	748.1
22.5°	732.9	733.0	733.1	732.9	732.5	732.1	731.7	731.3
25°	705.1	705.4	705.8	705.8	705.4	705.1	704.7	704.4
27.5°	677.7	677.2	676.7	676.0	675.1	674.2	673.4	672.5
30°	656.4	655.8	655.3	654.7	653.9	653.2	652.5	651.8
32.5°	635.5	634.5	633.5	632.7	632.0	631.3	630.5	629.8
35°	602.0	600.9	599.8	598.8	597.9	597.0	596.1	595.2
37.5°	568.3	567.0	565.6	564.5	563.6	562.8	562.0	561.1
40°	545.1	543.4	541.9	540.7	540.0	539.2	538.5	537.8
42.5°	522.1	520.4	518.6	517.2	516.2	515.2	514.2	513.2
45°	487.0	485.0	483.0	481.6	480.9	480.2	479.5	478.7
47.5°	450.4	448.2	446.2	444.6	443.5	442.5	441.5	440.5
50°	426.8	424.3	421.8	420.1	419.1	418.3	417.4	416.5
52.5°	402.4	400.4	398.3	396.6	395.5	394.3	393.1	391.9
55°	366.1	363.9	361.8	360.2	359.3	358.5	357.5	356.6
57.5°	328.3	326.1	324.1	322.7	321.9	321.3	320.6	319.9
60°	303.3	301.3	299.4	298.2	297.6	297.1	296.5	296.0
62.5°	279.7	277.9	276.1	274.8	274.1	273.4	272.7	272.0
65°	243.4	241.8	240.2	238.9	238.1	237.1	236.2	235.4
67.5°	207.6	206.4	205.1	204.1	203.4	202.6	201.9	201.2
70°	184.3	183.1	181.8	180.8	180.1	179.4	178.6	177.9
72.5°	162.3	161.1	159.8	158.8	158.3	157.7	157.2	156.5
75°	128.0	127.0	125.9	125.6	125.9	126.3	126.6	127.0
77.5°	97.4	96.9	96.3	95.9	95.3	94.8	94.3	93.8
80°	77.4	76.8	76.3	75.8	75.5	75.1	74.8	74.4
82.5°	57.7	57.0	56.3	55.9	55.8	55.8	55.7	55.6
85°	30.5	29.9	29.4	29.0	28.8	28.7	28.5	28.3
87.5°	12.4	12.0	11.4	11.2	11.0	10.9	10.8	10.7
90°	21.2	20.8	20.6	20.5	20.7	20.8	20.9	21.1
92.5°	19.8	19.9	19.9	20.0	20.0	20.0	20.0	20.0
95°	39.6	39.6	39.6	39.5	39.2	39.0	38.7	38.4
97.5°	66.6	66.6	66.6	66.6	66.6	66.5	66.5	66.5
100°	85.5	85.5	85.5	85.4	85.2	85.1	85.0	84.8
102.5°	106.0	106.1	106.2	106.2	106.1	105.9	105.8	105.6
105°	136.8	137.0	137.4	137.4	137.4	137.4	137.4	137.4
107.5°	170.0	170.1	170.2	170.0	169.4	168.7	168.1	167.5
110°	192.6	192.6	192.6	192.3	191.9	191.5	191.2	190.7



TEST NUMBER: P331355-927

CATALOG NUMBER: SA2XXDIP-C675D725U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	215.2	214.8	214.5	214.2	213.9	213.6	213.3	213.0
115°	249.9	249.8	249.6	249.3	248.9	248.5	248.1	247.7
117.5°	283.4	283.1	282.7	282.4	282.0	281.5	281.1	280.7
120°	305.9	305.9	305.9	305.7	305.2	304.8	304.4	304.0
122.5°	329.0	328.7	328.4	328.0	327.7	327.4	327.1	326.9
125°	363.3	362.8	362.4	362.2	362.0	361.9	361.8	361.6
127.5°	396.6	396.0	395.5	395.1	394.7	394.2	393.8	393.3
130°	419.3	419.0	418.7	418.3	417.7	417.2	416.7	416.1
132.5°	441.4	440.8	440.2	439.7	439.2	438.8	438.3	437.9
135°	474.0	473.9	473.7	473.5	473.1	472.7	472.2	471.8
137.5°	505.3	505.2	505.1	504.8	504.2	503.7	503.1	502.6
140°	526.3	526.3	526.3	526.0	525.5	525.0	524.4	523.9
142.5°	545.3	545.5	545.6	545.3	544.8	544.2	543.8	543.2
145°	574.3	574.4	574.6	574.3	573.8	573.2	572.7	572.1
147.5°	599.6	599.9	600.2	600.2	599.6	599.0	598.6	598.0
150°	615.7	616.1	616.6	616.6	616.1	615.7	615.3	614.9
152.5°	631.8	632.3	632.8	632.8	632.3	631.8	631.2	630.7
155°	652.1	652.8	653.6	653.7	653.2	652.8	652.4	652.0
157.5°	671.0	671.9	672.9	673.0	672.3	671.7	671.0	670.3
160°	682.1	683.0	683.8	684.0	683.4	682.9	682.3	681.8
162.5°	692.3	693.2	694.2	694.3	693.6	693.0	692.3	691.7
165°	705.4	706.3	707.3	707.4	706.7	706.0	705.4	704.6
167.5°	716.1	717.1	718.0	718.2	717.5	716.8	716.1	715.3
170°	722.1	723.0	724.0	724.1	723.3	722.4	721.6	720.7
172.5°	726.5	727.5	728.4	728.5	727.7	726.8	726.0	725.2
175°	731.3	732.3	733.2	733.3	732.5	731.7	730.9	730.1
177.5°	733.6	734.3	734.9	734.9	734.3	733.6	732.9	732.3
180°	733.7	733.7	733.7	733.7	733.7	733.7	733.7	733.7

(END OF REPORT)