

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331411-927

Luminaire Tested: **SA2XXDIP-C865D1080U927-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331411-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6431.0 lumens
Efficiency: N/A
Efficacy: 98.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

Luminous Intensity Polar Plot

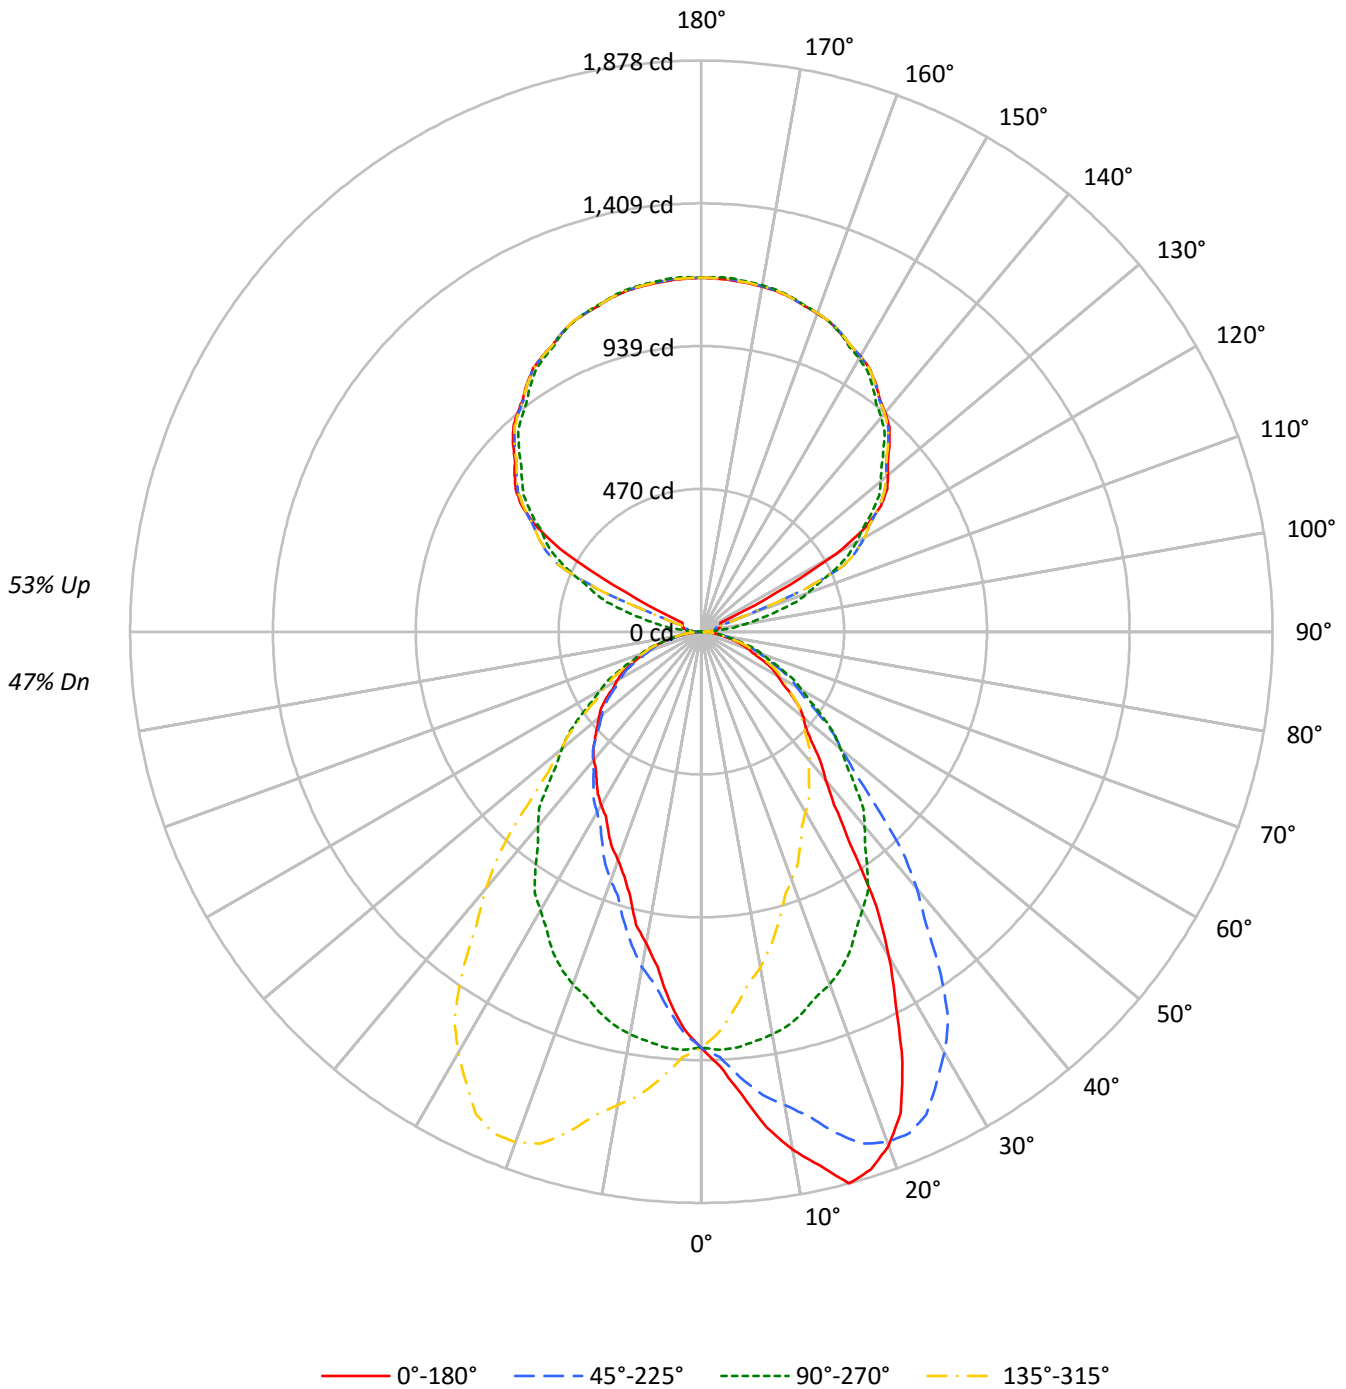



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53	47
1	98	93	90	86	90	86	83	80	72	70	68	60	58	57	48	47	46	40
2	89	82	76	71	82	76	71	66	64	60	57	53	50	48	43	41	39	35
3	82	73	66	60	75	67	61	56	57	52	48	47	44	41	38	36	34	30
4	75	64	57	51	69	60	53	48	51	46	42	42	39	36	34	32	30	26
5	69	58	50	44	63	53	47	41	46	40	36	38	34	31	31	28	26	23
6	64	52	44	38	58	48	41	36	41	36	32	35	31	27	28	26	23	20
7	59	47	39	34	54	44	37	32	37	32	28	32	28	24	26	23	21	18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16
9	51	39	32	27	47	36	30	25	31	26	23	27	23	20	22	19	17	15
10	48	36	29	24	44	34	27	23	29	24	20	25	21	18	21	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	22083	22083	22083	22083
5°	24759	22227	19697	22227
10°	28370	22046	17046	22046
15°	31385	21641	15059	21641
20°	30907	21206	13728	21206
25°	27868	20630	12886	20630
30°	23029	19708	12269	19708
35°	16783	18743	11832	18743
40°	13405	17606	11590	17606
45°	11714	16287	11259	16287
50°	11012	15013	11037	15013
55°	10151	13717	10742	13717
60°	9300	12339	10285	12339
65°	8474	11106	9838	11106
70°	7695	9904	9182	9904
75°	6818	8559	8135	8559
80°	5867	7085	6546	7085
85°	5261	5261	3890	5261



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	130.3	2.0
10°-20°	378.7	5.9
20°-30°	549.6	8.5
30°-40°	579.9	9.0
40°-50°	513.5	8.0
50°-60°	409.8	6.4
60°-70°	278.5	4.3
70°-80°	142.8	2.2
80°-90°	37.3	0.6
90°-100°	38.8	0.6
100°-110°	142.4	2.2
110°-120°	380.6	5.9
120°-130°	628.2	9.8
130°-140°	668.1	10.4
140°-150°	620.9	9.7
150°-160°	499.2	7.8
160°-170°	321.7	5.0
170°-180°	110.7	1.7
0°-30°	1058.5	16.5
0°-40°	1638.5	25.5
0°-60°	2561.8	39.8
0°-90°	3020.4	47.0
90°-120°	561.7	8.7
90°-150°	2478.9	38.5
90°-180°	3411.0	53.0
0°-180°	6431.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1368	1368	1368	1368	1368	
5°	1528	1371	1215	1371	1528	153
15°	1878	1295	901	1295	1878	518
25°	1564	1158	723	1158	1564	707
35°	852	951	600	951	852	554
45°	513	713	493	713	513	403
55°	361	487	382	487	361	323
65°	222	291	258	291	222	221
75°	109	137	130	137	109	117
85°	28	28	21	28	28	32
90°	23	1	23	1	23	11
95°	36	55	36	55	36	34
105°	64	256	64	256	64	67
115°	69	484	69	484	69	173
125°	720	685	720	685	720	623
135°	875	847	875	847	875	674
145°	998	983	998	983	998	624
155°	1083	1082	1083	1082	1083	500
165°	1138	1140	1138	1140	1138	321
175°	1160	1166	1160	1166	1160	110
180°	1164	1164	1164	1164	1164	



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1430.8	1431.2	1432.1	1425.4	1424.5	1424.5	1418.6	1413.6	1407.7	1399.7	1400.6
5°	1527.6	1533.3	1535.4	1529.1	1519.6	1518.6	1509.7	1494.9	1481.3	1470.2	1462.4
7.5°	1643.0	1645.3	1640.1	1631.8	1624.8	1612.2	1595.5	1579.3	1556.5	1535.6	1520.0
10°	1730.4	1733.6	1724.7	1712.5	1702.6	1687.8	1663.7	1638.9	1609.0	1580.1	1557.0
12.5°	1796.9	1804.7	1793.2	1791.6	1774.5	1754.3	1725.5	1713.0	1670.9	1630.5	1605.8
15°	1877.6	1877.1	1878.2	1868.1	1855.5	1852.4	1821.9	1788.8	1729.4	1705.7	1664.8
17.5°	1854.3	1862.3	1866.0	1865.8	1865.5	1863.5	1853.8	1832.9	1803.1	1764.7	1717.4
20°	1798.8	1809.3	1810.8	1823.0	1829.8	1838.7	1842.4	1836.6	1818.2	1786.1	1745.2
22.5°	1713.0	1715.9	1720.9	1739.7	1754.5	1776.9	1788.6	1808.0	1800.9	1785.3	1751.0
25°	1564.3	1559.1	1577.5	1586.9	1621.1	1656.8	1682.6	1711.0	1736.2	1751.4	1741.5
27.5°	1385.8	1377.9	1405.5	1430.6	1458.3	1497.1	1537.2	1584.6	1624.1	1673.3	1690.3
30°	1235.2	1240.0	1266.3	1293.1	1335.1	1389.8	1435.0	1487.1	1543.3	1598.5	1636.9
32.5°	1072.9	1091.2	1107.8	1148.8	1185.9	1246.8	1313.0	1378.2	1448.3	1511.0	1570.4
35°	851.5	872.6	895.7	925.7	977.7	1038.2	1102.8	1190.6	1286.3	1372.0	1442.4
37.5°	716.8	713.4	726.7	748.3	790.4	839.2	913.7	1000.4	1113.0	1213.7	1313.0
40°	636.0	633.9	643.4	663.4	695.5	731.2	796.4	872.6	977.2	1100.2	1218.5
42.5°	580.5	581.8	587.0	601.1	623.1	652.5	701.3	766.2	862.0	977.8	1104.9
45°	513.0	516.7	522.5	529.3	541.9	566.1	593.4	639.7	715.4	812.1	937.2
47.5°	464.5	464.5	470.5	476.4	483.9	497.6	519.8	548.9	602.3	681.0	788.6
50°	438.4	434.7	438.9	443.6	451.5	461.0	475.7	503.0	538.8	602.4	692.3
52.5°	406.5	406.5	410.4	412.1	419.1	428.6	442.0	461.0	493.4	543.1	617.0
55°	360.6	363.2	365.4	368.4	374.8	381.6	392.1	404.7	430.0	467.3	522.0
57.5°	317.5	318.3	320.4	326.5	330.4	336.8	346.7	358.1	374.5	402.2	443.3
60°	288.0	288.0	292.2	294.9	300.2	306.4	314.3	325.3	340.1	362.7	395.9
62.5°	261.2	260.7	262.4	266.7	270.7	276.6	284.5	293.8	307.7	327.8	355.1
65°	221.8	220.8	223.9	225.0	229.2	235.0	241.3	251.3	262.3	277.0	301.2
67.5°	183.9	185.2	187.0	188.9	191.2	197.3	201.5	208.6	217.9	230.1	246.5
70°	163.0	163.0	163.0	164.5	167.7	170.9	175.1	180.9	189.7	200.3	215.0
72.5°	139.4	141.1	142.8	141.8	145.8	147.7	152.7	156.0	164.5	171.3	184.3
75°	109.3	109.3	109.3	111.9	113.5	115.1	118.3	121.4	125.6	134.0	140.9
77.5°	81.6	81.4	81.9	82.5	84.2	86.1	87.1	89.9	93.8	97.7	103.5
80°	63.1	64.2	64.6	65.7	65.7	66.8	67.3	71.0	73.6	76.2	79.9
82.5°	48.8	49.0	49.1	49.3	49.7	50.4	51.7	52.9	53.8	56.0	58.9
85°	28.4	27.9	27.9	28.9	28.4	28.4	29.5	30.5	30.5	31.0	32.6
87.5°	15.4	15.4	15.8	15.3	15.2	15.4	15.3	14.7	14.9	15.1	15.3
90°	22.7	22.3	22.0	21.6	21.2	20.6	19.6	18.7	17.7	16.9	15.4
92.5°	22.7	22.5	22.3	22.1	21.9	21.5	21.0	20.5	20.0	19.6	18.8
95°	36.2	36.4	36.6	36.8	37.0	36.6	35.6	34.7	33.7	32.9	31.5
97.5°	48.3	48.1	47.9	47.7	47.5	47.0	46.2	45.5	44.7	44.0	41.0
100°	56.4	56.1	55.7	55.3	54.9	54.0	52.5	51.0	49.5	48.0	44.8
102.5°	60.4	60.0	59.4	58.9	58.4	57.1	55.2	53.2	51.3	49.4	46.0
105°	64.0	63.2	62.5	61.8	61.0	59.6	57.5	55.5	53.4	51.3	48.4
107.5°	65.8	65.1	64.3	63.6	62.9	63.5	65.6	67.7	69.8	71.9	73.2
110°	66.5	65.8	65.0	64.2	63.5	72.5	91.3	110.0	128.7	147.3	201.5



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	67.2	66.6	66.0	65.4	64.8	98.6	166.9	235.2	303.5	371.7	385.1
115°	69.1	82.5	96.0	109.5	122.9	173.0	259.7	346.3	432.9	519.6	514.9
117.5°	281.9	326.2	370.5	414.8	459.1	491.7	512.6	533.6	554.5	575.5	572.3
120°	513.7	538.9	564.2	589.5	614.7	626.3	624.0	621.8	619.5	617.3	613.9
122.5°	641.0	645.9	650.9	655.8	660.6	662.4	661.1	659.7	658.4	657.0	653.4
125°	720.0	719.5	718.9	718.4	717.8	716.8	715.5	714.2	712.9	711.6	708.1
127.5°	769.8	769.8	769.7	769.5	769.4	768.4	766.5	764.6	762.7	760.8	758.1
130°	800.9	801.1	801.2	801.5	801.6	800.7	798.6	796.5	794.5	792.4	790.4
132.5°	831.2	831.4	831.6	831.7	831.9	831.2	829.4	827.6	825.9	824.1	822.0
135°	875.0	875.4	875.7	876.1	876.5	875.7	873.9	872.0	870.1	868.2	866.6
137.5°	914.9	915.5	916.2	916.8	917.4	916.8	915.0	913.1	911.3	909.5	907.6
140°	939.8	940.7	941.7	942.6	943.6	943.2	941.5	939.8	938.1	936.4	934.4
142.5°	964.1	965.0	965.9	966.9	967.8	967.5	966.0	964.4	962.9	961.4	959.0
145°	997.9	998.9	999.8	1000.8	1001.6	1001.5	1000.1	998.9	997.5	996.2	993.1
147.5°	1027.7	1028.5	1029.3	1030.1	1030.9	1030.8	1029.8	1028.8	1027.9	1026.9	1023.7
150°	1045.9	1046.9	1047.8	1048.7	1049.6	1049.6	1048.5	1047.3	1046.2	1045.0	1042.1
152.5°	1061.4	1062.6	1063.9	1065.1	1066.4	1066.4	1065.3	1064.1	1063.0	1061.9	1059.1
155°	1083.0	1084.5	1086.0	1087.4	1088.9	1089.2	1088.1	1086.9	1085.8	1084.7	1082.4
157.5°	1102.6	1104.1	1105.6	1107.1	1108.5	1108.6	1107.3	1106.0	1104.8	1103.5	1101.9
160°	1114.1	1115.5	1116.7	1118.1	1119.4	1119.4	1118.3	1117.2	1116.1	1115.0	1113.9
162.5°	1123.6	1125.1	1126.8	1128.4	1130.0	1130.2	1128.9	1127.6	1126.3	1125.1	1124.1
165°	1137.7	1139.0	1140.3	1141.6	1143.0	1143.0	1141.6	1140.3	1139.0	1137.7	1137.2
167.5°	1146.6	1148.3	1150.0	1151.7	1153.3	1153.6	1152.2	1151.0	1149.6	1148.3	1147.8
170°	1152.0	1153.7	1155.4	1157.1	1158.7	1159.0	1157.6	1156.3	1155.0	1153.7	1153.3
172.5°	1156.0	1157.8	1159.4	1161.1	1162.8	1163.0	1161.7	1160.4	1159.0	1157.8	1157.4
175°	1159.6	1161.5	1163.3	1165.2	1167.1	1167.4	1166.1	1164.7	1163.5	1162.1	1161.7
177.5°	1161.8	1163.2	1164.5	1165.9	1167.2	1167.4	1166.3	1165.2	1164.2	1163.2	1163.0
180°	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1403.5	1400.1	1398.0	1390.4	1383.7	1377.0	1374.9	1375.7	1366.5	1357.6	1353.8
5°	1458.2	1447.6	1437.7	1423.5	1406.7	1388.2	1378.8	1371.4	1353.0	1333.1	1321.5
7.5°	1507.1	1492.1	1472.9	1446.2	1421.7	1392.7	1374.4	1358.0	1331.2	1303.0	1285.7
10°	1537.0	1516.5	1491.8	1459.2	1429.3	1394.0	1369.3	1344.7	1313.0	1279.5	1258.4
12.5°	1562.7	1535.0	1510.7	1468.9	1433.5	1389.4	1360.1	1325.2	1292.0	1252.1	1231.5
15°	1623.7	1572.7	1526.5	1479.2	1435.5	1374.0	1341.5	1294.7	1251.0	1201.7	1178.0
17.5°	1671.0	1613.7	1540.8	1480.7	1429.7	1361.7	1313.8	1257.7	1206.2	1149.7	1117.5
20°	1697.9	1632.1	1553.8	1482.3	1421.3	1343.5	1291.5	1234.2	1173.8	1110.2	1075.5
22.5°	1713.8	1644.7	1567.3	1476.0	1404.5	1328.8	1263.4	1200.6	1139.3	1070.6	1034.3
25°	1718.9	1655.8	1573.8	1470.8	1383.5	1297.8	1219.0	1158.0	1083.9	1019.8	966.7
27.5°	1693.8	1648.6	1569.8	1460.9	1359.2	1259.0	1171.2	1102.1	1023.9	954.3	900.9
30°	1663.2	1636.9	1560.1	1450.8	1339.9	1232.2	1135.4	1057.1	979.3	908.9	854.2
32.5°	1615.7	1610.0	1542.5	1436.5	1319.3	1198.1	1098.0	1018.8	932.6	863.4	811.3
35°	1522.3	1547.5	1504.9	1404.5	1280.5	1149.6	1041.3	950.9	861.6	795.3	746.4
37.5°	1397.2	1459.8	1448.7	1357.7	1228.1	1096.9	977.3	882.8	797.6	730.8	682.8
40°	1311.0	1390.8	1402.4	1322.0	1191.1	1056.1	929.4	835.3	752.2	691.3	642.9
42.5°	1218.5	1311.8	1343.5	1279.1	1150.7	1013.1	886.5	789.0	706.8	647.5	604.6
45°	1063.4	1186.9	1244.2	1207.4	1083.4	942.5	812.1	713.3	638.7	583.0	549.9
47.5°	918.4	1053.4	1130.4	1117.5	1008.4	868.9	740.0	645.2	572.5	528.1	498.4
50°	815.8	954.6	1047.6	1051.9	954.6	816.3	687.1	597.7	530.9	489.4	465.2
52.5°	726.7	859.1	960.6	982.9	894.5	761.7	639.5	550.6	491.8	453.6	432.0
55°	610.3	722.2	834.7	875.8	804.8	678.6	565.6	487.3	432.1	405.8	386.9
57.5°	507.4	600.7	704.6	749.9	706.2	598.2	492.2	424.2	379.4	356.4	341.9
60°	453.1	526.7	619.2	673.4	635.5	539.3	446.8	382.1	345.4	324.9	311.2
62.5°	402.7	467.9	546.1	595.6	575.0	484.3	401.4	344.3	312.5	293.3	283.4
65°	332.2	383.7	444.2	489.9	476.3	407.3	339.6	290.7	265.5	250.2	242.3
67.5°	273.5	310.8	352.7	392.8	381.8	333.0	278.5	240.4	221.7	208.5	203.7
70°	236.5	264.9	302.2	334.3	325.3	285.4	242.3	209.8	193.5	182.4	177.7
72.5°	201.2	224.6	253.0	279.2	273.2	240.0	204.1	179.4	166.9	156.8	152.9
75°	151.9	169.8	187.1	204.5	202.9	177.1	156.1	137.2	127.2	119.3	117.7
77.5°	112.2	122.2	134.0	144.3	141.4	126.7	110.2	99.3	92.0	86.7	85.9
80°	85.7	91.5	99.9	107.3	103.5	97.3	84.1	76.2	71.0	65.7	63.6
82.5°	62.1	67.9	73.0	76.9	74.1	68.2	60.1	54.7	51.7	48.0	47.2
85°	32.6	35.7	37.9	38.9	37.9	34.1	30.5	28.4	25.7	24.2	23.7
87.5°	15.4	15.1	14.8	15.3	13.6	13.2	11.1	9.4	9.4	9.4	9.0
90°	13.9	12.4	10.9	9.1	7.1	5.0	2.9	0.9	2.9	5.0	7.1
92.5°	18.1	17.3	16.6	16.2	16.5	16.6	16.8	17.0	16.8	16.6	16.5
95°	30.3	28.9	27.6	30.0	36.2	42.4	48.6	54.7	48.6	42.4	36.2
97.5°	37.9	34.9	31.8	39.1	56.4	73.8	91.3	108.6	91.3	73.8	56.4
100°	41.7	38.4	35.3	46.5	72.2	97.8	123.4	149.1	123.4	97.8	72.2
102.5°	102.6	129.2	155.8	171.8	177.2	182.7	188.1	193.5	188.1	182.7	177.2
105°	153.5	204.6	255.7	278.5	272.8	267.2	261.7	256.0	261.7	267.2	272.8
107.5°	194.5	255.7	317.0	345.4	340.8	336.3	331.8	327.3	331.8	336.3	340.8
110°	255.6	309.6	363.7	388.8	384.8	381.0	377.0	373.0	377.0	381.0	384.8



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	398.5	411.8	425.2	430.1	426.6	423.1	419.7	416.2	419.7	423.1	426.6
115°	510.2	505.6	500.9	496.9	493.8	490.6	487.4	484.3	487.4	490.6	493.8
117.5°	569.1	565.9	562.6	559.3	555.7	552.2	548.6	545.0	548.6	552.2	555.7
120°	610.5	607.2	603.8	600.7	597.9	595.1	592.3	589.5	592.3	595.1	597.9
122.5°	649.7	646.0	642.4	639.1	636.1	633.1	630.2	627.2	630.2	633.1	636.1
125°	704.5	700.9	697.4	694.3	692.0	689.5	687.1	684.7	687.1	689.5	692.0
127.5°	755.4	752.8	750.1	747.5	744.8	742.1	739.4	736.7	739.4	742.1	744.8
130°	788.3	786.2	784.2	781.6	778.7	775.7	772.7	769.7	772.7	775.7	778.7
132.5°	820.0	817.9	815.9	813.6	811.0	808.5	806.0	803.4	806.0	808.5	811.0
135°	864.8	863.2	861.5	859.1	856.2	853.2	850.2	847.2	850.2	853.2	856.2
137.5°	905.7	903.8	901.8	899.8	897.8	895.6	893.6	891.4	893.6	895.6	897.8
140°	932.3	930.3	928.2	926.5	925.0	923.4	921.9	920.4	921.9	923.4	925.0
142.5°	956.6	954.3	952.0	950.1	948.7	947.4	946.0	944.7	946.0	947.4	948.7
145°	989.8	986.7	983.5	982.0	982.2	982.4	982.5	982.8	982.5	982.4	982.2
147.5°	1020.6	1017.5	1014.3	1013.1	1013.8	1014.5	1015.3	1016.0	1015.3	1014.5	1013.8
150°	1039.1	1036.1	1033.1	1032.3	1033.6	1034.9	1036.2	1037.5	1036.2	1034.9	1033.6
152.5°	1056.2	1053.4	1050.5	1049.9	1051.3	1052.7	1054.2	1055.7	1054.2	1052.7	1051.3
155°	1080.1	1077.9	1075.7	1075.4	1077.1	1078.8	1080.5	1082.1	1080.5	1078.8	1077.1
157.5°	1100.3	1098.8	1097.3	1097.2	1098.6	1100.0	1101.5	1102.9	1101.5	1100.0	1098.6
160°	1112.7	1111.6	1110.5	1110.5	1111.6	1112.7	1113.9	1115.0	1113.9	1112.7	1111.6
162.5°	1123.2	1122.1	1121.2	1121.3	1122.4	1123.5	1124.7	1125.8	1124.7	1123.5	1122.4
165°	1136.6	1136.0	1135.4	1135.8	1136.9	1138.0	1139.1	1140.3	1139.1	1138.0	1136.9
167.5°	1147.2	1146.8	1146.2	1146.5	1147.6	1148.7	1149.9	1151.0	1149.9	1148.7	1147.6
170°	1152.9	1152.6	1152.2	1152.6	1153.7	1154.8	1156.0	1157.1	1156.0	1154.8	1153.7
172.5°	1157.0	1156.7	1156.3	1156.7	1157.8	1158.9	1160.0	1161.1	1160.0	1158.9	1157.8
175°	1161.4	1161.0	1160.6	1161.1	1162.4	1163.7	1165.1	1166.3	1165.1	1163.7	1162.4
177.5°	1162.8	1162.7	1162.5	1163.0	1164.0	1165.1	1166.2	1167.2	1166.2	1165.1	1164.0
180°	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1349.6	1347.1	1338.3	1333.7	1326.1	1319.0	1314.3	1316.4	1318.1	1317.2	1316.1
5°	1311.0	1301.0	1285.7	1272.6	1263.1	1245.8	1238.4	1234.8	1231.6	1227.9	1224.2
7.5°	1265.0	1249.2	1227.2	1208.6	1190.9	1169.3	1157.1	1149.7	1142.2	1133.9	1126.5
10°	1232.2	1210.1	1186.9	1160.6	1139.6	1120.1	1102.8	1091.2	1080.8	1070.7	1063.4
12.5°	1197.6	1172.2	1143.6	1107.6	1084.5	1056.7	1054.0	1033.6	1017.2	1011.1	1002.4
15°	1142.8	1107.0	1070.7	1028.2	1009.8	984.5	968.8	953.0	938.8	928.8	926.2
17.5°	1080.5	1034.2	998.1	967.5	937.3	911.5	897.0	884.4	872.7	859.4	857.5
20°	1032.9	992.9	953.5	926.7	895.7	869.4	851.5	838.9	828.9	821.1	814.2
22.5°	987.9	944.2	908.1	878.8	848.2	827.0	812.9	800.7	792.3	783.6	777.2
25°	915.7	881.5	842.1	809.0	783.7	770.1	758.5	748.0	742.8	737.0	729.6
27.5°	852.5	814.5	777.7	752.0	729.8	717.7	709.6	702.3	697.4	694.0	689.8
30°	807.9	769.5	740.6	715.4	697.0	684.9	679.7	675.5	669.7	667.6	665.5
32.5°	765.0	730.5	705.8	683.9	666.3	658.5	653.6	649.8	645.3	643.2	639.0
35°	704.4	675.5	651.3	639.2	625.0	618.1	614.5	609.3	605.0	602.9	602.4
37.5°	647.3	622.2	606.3	590.7	584.7	580.5	575.5	571.9	570.6	570.3	569.8
40°	610.3	589.8	575.6	563.0	560.3	554.1	549.9	546.7	546.7	547.2	546.7
42.5°	576.6	558.3	545.7	534.8	531.7	528.0	523.8	523.6	524.4	526.2	524.4
45°	525.6	512.5	503.6	498.3	492.5	488.9	488.3	489.9	490.4	491.0	492.5
47.5°	478.8	470.0	461.9	456.1	453.6	453.0	452.3	455.1	457.6	458.6	461.0
50°	451.0	441.0	434.2	430.5	428.4	427.4	428.4	431.6	433.6	436.3	437.8
52.5°	419.9	412.8	408.1	405.3	404.4	405.0	405.3	408.8	412.3	413.1	413.9
55°	376.9	371.6	370.6	365.8	368.0	367.4	370.0	372.2	375.3	378.5	379.0
57.5°	334.0	329.8	326.9	327.4	328.0	330.3	332.6	336.2	339.6	342.9	343.3
60°	305.4	303.3	301.7	301.7	302.8	305.9	308.6	312.2	314.3	316.5	318.0
62.5°	279.3	277.3	275.7	276.5	279.2	281.1	284.2	286.1	288.3	290.3	291.1
65°	238.1	237.1	238.7	239.7	240.2	242.9	246.5	248.1	250.2	251.3	254.9
67.5°	200.2	200.3	200.2	201.6	204.7	205.3	208.8	212.5	212.9	214.9	217.3
70°	174.5	175.5	176.7	177.7	180.3	181.3	183.9	185.5	187.7	189.3	190.8
72.5°	151.0	151.1	152.3	152.0	154.2	156.5	158.8	160.3	162.4	164.5	166.0
75°	116.1	116.1	117.2	117.7	120.4	123.0	122.5	123.5	125.6	127.7	128.8
77.5°	84.8	83.7	84.8	85.4	86.2	88.4	88.8	90.3	92.7	92.0	93.2
80°	64.6	63.1	64.6	65.2	65.2	67.8	67.8	68.8	70.4	68.8	70.4
82.5°	46.2	45.4	46.6	46.7	47.5	47.6	48.5	48.6	50.2	49.5	50.2
85°	23.1	22.6	23.1	22.6	23.1	23.7	23.7	23.1	23.1	24.2	22.6
87.5°	9.0	8.9	8.8	9.1	9.0	8.9	8.6	8.8	9.0	8.3	8.5
90°	9.1	10.9	12.4	13.9	15.4	16.9	17.7	18.7	19.6	20.6	21.2
92.5°	16.2	16.6	17.3	18.1	18.8	19.6	20.0	20.5	21.0	21.5	21.9
95°	30.0	27.6	28.9	30.3	31.5	32.9	33.7	34.7	35.6	36.6	37.0
97.5°	39.1	31.8	34.9	37.9	41.0	44.0	44.7	45.5	46.2	47.0	47.5
100°	46.5	35.3	38.4	41.7	44.8	48.0	49.5	51.0	52.5	54.0	54.9
102.5°	171.8	155.8	129.2	102.6	76.0	49.4	51.3	53.2	55.2	57.1	58.4
105°	278.5	255.7	204.6	153.5	102.4	51.3	53.4	55.5	57.5	59.6	61.0
107.5°	345.4	317.0	255.7	194.5	133.2	71.9	69.8	67.7	65.6	63.5	62.9
110°	388.8	363.7	309.6	255.6	201.5	147.3	128.7	110.0	91.3	72.5	63.5



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	430.1	425.2	411.8	398.5	385.1	371.7	303.5	235.2	166.9	98.6	64.8
115°	496.9	500.9	505.6	510.2	514.9	519.6	432.9	346.3	259.7	173.0	122.9
117.5°	559.3	562.6	565.9	569.1	572.3	575.5	554.5	533.6	512.6	491.7	459.1
120°	600.7	603.8	607.2	610.5	613.9	617.3	619.5	621.8	624.0	626.3	614.7
122.5°	639.1	642.4	646.0	649.7	653.4	657.0	658.4	659.7	661.1	662.4	660.6
125°	694.3	697.4	700.9	704.5	708.1	711.6	712.9	714.2	715.5	716.8	717.8
127.5°	747.5	750.1	752.8	755.4	758.1	760.8	762.7	764.6	766.5	768.4	769.4
130°	781.6	784.2	786.2	788.3	790.4	792.4	794.5	796.5	798.6	800.7	801.6
132.5°	813.6	815.9	817.9	820.0	822.0	824.1	825.9	827.6	829.4	831.2	831.9
135°	859.1	861.5	863.2	864.8	866.6	868.2	870.1	872.0	873.9	875.7	876.5
137.5°	899.8	901.8	903.8	905.7	907.6	909.5	911.3	913.1	915.0	916.8	917.4
140°	926.5	928.2	930.3	932.3	934.4	936.4	938.1	939.8	941.5	943.2	943.6
142.5°	950.1	952.0	954.3	956.6	959.0	961.4	962.9	964.4	966.0	967.5	967.8
145°	982.0	983.5	986.7	989.8	993.1	996.2	997.5	998.9	1000.1	1001.5	1001.6
147.5°	1013.1	1014.3	1017.5	1020.6	1023.7	1026.9	1027.9	1028.8	1029.8	1030.8	1030.9
150°	1032.3	1033.1	1036.1	1039.1	1042.1	1045.0	1046.2	1047.3	1048.5	1049.6	1049.6
152.5°	1049.9	1050.5	1053.4	1056.2	1059.1	1061.9	1063.0	1064.1	1065.3	1066.4	1066.4
155°	1075.4	1075.7	1077.9	1080.1	1082.4	1084.7	1085.8	1086.9	1088.1	1089.2	1088.9
157.5°	1097.2	1097.3	1098.8	1100.3	1101.9	1103.5	1104.8	1106.0	1107.3	1108.6	1108.5
160°	1110.5	1110.5	1111.6	1112.7	1113.9	1115.0	1116.1	1117.2	1118.3	1119.4	1119.4
162.5°	1121.3	1121.2	1122.1	1123.2	1124.1	1125.1	1126.3	1127.6	1128.9	1130.2	1130.0
165°	1135.8	1135.4	1136.0	1136.6	1137.2	1137.7	1139.0	1140.3	1141.6	1143.0	1143.0
167.5°	1146.5	1146.2	1146.8	1147.2	1147.8	1148.3	1149.6	1151.0	1152.2	1153.6	1153.3
170°	1152.6	1152.2	1152.6	1152.9	1153.3	1153.7	1155.0	1156.3	1157.6	1159.0	1158.7
172.5°	1156.7	1156.3	1156.7	1157.0	1157.4	1157.8	1159.0	1160.4	1161.7	1163.0	1162.8
175°	1161.1	1160.6	1161.0	1161.4	1161.7	1162.1	1163.5	1164.7	1166.1	1167.4	1167.1
177.5°	1163.0	1162.5	1162.7	1162.8	1163.0	1163.2	1164.2	1165.2	1166.3	1167.4	1167.2
180°	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1311.8	1311.0	1311.0	1307.2	1311.0	1311.0	1311.8	1316.1	1317.2	1318.1	1316.4
5°	1216.9	1215.3	1212.7	1215.3	1212.7	1215.3	1216.9	1224.2	1227.9	1231.6	1234.8
7.5°	1123.0	1116.7	1115.7	1109.5	1115.7	1116.7	1123.0	1126.5	1133.9	1142.2	1149.7
10°	1054.5	1050.3	1049.7	1039.7	1049.7	1050.3	1054.5	1063.4	1070.7	1080.8	1091.2
12.5°	1002.3	992.2	994.2	988.4	994.2	992.2	1002.3	1002.4	1011.1	1017.2	1033.6
15°	912.0	912.0	909.9	900.9	909.9	912.0	912.0	926.2	928.8	938.8	953.0
17.5°	847.2	846.1	841.1	843.6	841.1	846.1	847.2	857.5	859.4	872.7	884.4
20°	808.4	805.3	799.0	799.0	799.0	805.3	808.4	814.2	821.1	828.9	838.9
22.5°	771.9	771.7	764.9	767.0	764.9	771.7	771.9	777.2	783.6	792.3	800.7
25°	729.0	724.8	721.8	723.3	721.8	724.8	729.0	729.6	737.0	742.8	748.0
27.5°	688.5	686.2	686.0	681.7	686.0	686.2	688.5	689.8	694.0	697.4	702.3
30°	665.0	659.7	660.8	658.1	660.8	659.7	665.0	665.5	667.6	669.7	675.5
32.5°	638.0	636.1	635.1	632.9	635.1	636.1	638.0	639.0	643.2	645.3	649.8
35°	601.3	601.9	599.2	600.3	599.2	601.9	601.3	602.4	602.9	605.0	609.3
37.5°	569.3	570.9	569.7	570.1	569.7	570.9	569.3	569.8	570.3	570.6	571.9
40°	548.3	548.3	548.3	549.9	548.3	548.3	548.3	546.7	547.2	546.7	546.7
42.5°	528.1	527.2	526.4	526.2	526.4	527.2	528.1	524.4	526.2	524.4	523.6
45°	493.6	495.2	495.7	493.1	495.7	495.2	493.6	492.5	491.0	490.4	489.9
47.5°	462.4	462.6	462.4	464.7	462.4	462.6	462.4	461.0	458.6	457.6	455.1
50°	440.5	439.4	440.5	439.4	440.5	439.4	440.5	437.8	436.3	433.6	431.6
52.5°	417.4	417.6	416.9	416.8	416.9	417.6	417.4	413.9	413.1	412.3	408.8
55°	381.1	382.1	381.6	381.6	381.6	382.1	381.1	379.0	378.5	375.3	372.2
57.5°	343.6	344.5	345.2	342.9	345.2	344.5	343.6	343.3	342.9	339.6	336.2
60°	317.5	320.1	319.6	318.5	319.6	320.1	317.5	318.0	316.5	314.3	312.2
62.5°	293.5	294.5	294.4	294.1	294.4	294.5	293.5	291.1	290.3	288.3	286.1
65°	256.5	257.5	256.0	257.5	256.0	257.5	256.5	254.9	251.3	250.2	248.1
67.5°	216.7	217.0	218.2	218.9	218.2	217.0	216.7	217.3	214.9	212.9	212.5
70°	191.9	191.3	192.9	194.5	192.9	191.3	191.9	190.8	189.3	187.7	185.5
72.5°	165.8	166.9	166.4	167.5	166.4	166.9	165.8	166.0	164.5	162.4	160.3
75°	127.7	129.3	128.8	130.4	128.8	129.3	127.7	128.8	127.7	125.6	123.5
77.5°	92.3	92.5	92.3	93.2	92.3	92.5	92.3	93.2	92.0	92.7	90.3
80°	70.4	69.4	68.4	70.4	68.4	69.4	70.4	70.4	68.8	70.4	68.8
82.5°	49.0	49.6	48.6	48.6	48.6	49.6	49.0	50.2	49.5	50.2	48.6
85°	22.6	22.1	21.0	21.0	21.0	22.1	22.6	22.6	24.2	23.1	23.1
87.5°	8.6	8.2	8.2	7.9	8.2	8.2	8.6	8.5	8.3	9.0	8.8
90°	21.6	22.0	22.3	22.7	22.3	22.0	21.6	21.2	20.6	19.6	18.7
92.5°	22.1	22.3	22.5	22.7	22.5	22.3	22.1	21.9	21.5	21.0	20.5
95°	36.8	36.6	36.4	36.2	36.4	36.6	36.8	37.0	36.6	35.6	34.7
97.5°	47.7	47.9	48.1	48.3	48.1	47.9	47.7	47.5	47.0	46.2	45.5
100°	55.3	55.7	56.1	56.4	56.1	55.7	55.3	54.9	54.0	52.5	51.0
102.5°	58.9	59.4	60.0	60.4	60.0	59.4	58.9	58.4	57.1	55.2	53.2
105°	61.8	62.5	63.2	64.0	63.2	62.5	61.8	61.0	59.6	57.5	55.5
107.5°	63.6	64.3	65.1	65.8	65.1	64.3	63.6	62.9	63.5	65.6	67.7
110°	64.2	65.0	65.8	66.5	65.8	65.0	64.2	63.5	72.5	91.3	110.0



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	65.4	66.0	66.6	67.2	66.6	66.0	65.4	64.8	98.6	166.9	235.2
115°	109.5	96.0	82.5	69.1	82.5	96.0	109.5	122.9	173.0	259.7	346.3
117.5°	414.8	370.5	326.2	281.9	326.2	370.5	414.8	459.1	491.7	512.6	533.6
120°	589.5	564.2	538.9	513.7	538.9	564.2	589.5	614.7	626.3	624.0	621.8
122.5°	655.8	650.9	645.9	641.0	645.9	650.9	655.8	660.6	662.4	661.1	659.7
125°	718.4	718.9	719.5	720.0	719.5	718.9	718.4	717.8	716.8	715.5	714.2
127.5°	769.5	769.7	769.8	769.8	769.8	769.7	769.5	769.4	768.4	766.5	764.6
130°	801.5	801.2	801.1	800.9	801.1	801.2	801.5	801.6	800.7	798.6	796.5
132.5°	831.7	831.6	831.4	831.2	831.4	831.6	831.7	831.9	831.2	829.4	827.6
135°	876.1	875.7	875.4	875.0	875.4	875.7	876.1	876.5	875.7	873.9	872.0
137.5°	916.8	916.2	915.5	914.9	915.5	916.2	916.8	917.4	916.8	915.0	913.1
140°	942.6	941.7	940.7	939.8	940.7	941.7	942.6	943.6	943.2	941.5	939.8
142.5°	966.9	965.9	965.0	964.1	965.0	965.9	966.9	967.8	967.5	966.0	964.4
145°	1000.8	999.8	998.9	997.9	998.9	999.8	1000.8	1001.6	1001.5	1000.1	998.9
147.5°	1030.1	1029.3	1028.5	1027.7	1028.5	1029.3	1030.1	1030.9	1030.8	1029.8	1028.8
150°	1048.7	1047.8	1046.9	1045.9	1046.9	1047.8	1048.7	1049.6	1049.6	1048.5	1047.3
152.5°	1065.1	1063.9	1062.6	1061.4	1062.6	1063.9	1065.1	1066.4	1066.4	1065.3	1064.1
155°	1087.4	1086.0	1084.5	1083.0	1084.5	1086.0	1087.4	1088.9	1089.2	1088.1	1086.9
157.5°	1107.1	1105.6	1104.1	1102.6	1104.1	1105.6	1107.1	1108.5	1108.6	1107.3	1106.0
160°	1118.1	1116.7	1115.5	1114.1	1115.5	1116.7	1118.1	1119.4	1119.4	1118.3	1117.2
162.5°	1128.4	1126.8	1125.1	1123.6	1125.1	1126.8	1128.4	1130.0	1130.2	1128.9	1127.6
165°	1141.6	1140.3	1139.0	1137.7	1139.0	1140.3	1141.6	1143.0	1143.0	1141.6	1140.3
167.5°	1151.7	1150.0	1148.3	1146.6	1148.3	1150.0	1151.7	1153.3	1153.6	1152.2	1151.0
170°	1157.1	1155.4	1153.7	1152.0	1153.7	1155.4	1157.1	1158.7	1159.0	1157.6	1156.3
172.5°	1161.1	1159.4	1157.8	1156.0	1157.8	1159.4	1161.1	1162.8	1163.0	1161.7	1160.4
175°	1165.2	1163.3	1161.5	1159.6	1161.5	1163.3	1165.2	1167.1	1167.4	1166.1	1164.7
177.5°	1165.9	1164.5	1163.2	1161.8	1163.2	1164.5	1165.9	1167.2	1167.4	1166.3	1165.2
180°	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1314.3	1319.0	1326.1	1333.7	1338.3	1347.1	1349.6	1353.8	1357.6	1366.5	1375.7
5°	1238.4	1245.8	1263.1	1272.6	1285.7	1301.0	1311.0	1321.5	1333.1	1353.0	1371.4
7.5°	1157.1	1169.3	1190.9	1208.6	1227.2	1249.2	1265.0	1285.7	1303.0	1331.2	1358.0
10°	1102.8	1120.1	1139.6	1160.6	1186.9	1210.1	1232.2	1258.4	1279.5	1313.0	1344.7
12.5°	1054.0	1056.7	1084.5	1107.6	1143.6	1172.2	1197.6	1231.5	1252.1	1292.0	1325.2
15°	968.8	984.5	1009.8	1028.2	1070.7	1107.0	1142.8	1178.0	1201.7	1251.0	1294.7
17.5°	897.0	911.5	937.3	967.5	998.1	1034.2	1080.5	1117.5	1149.7	1206.2	1257.7
20°	851.5	869.4	895.7	926.7	953.5	992.9	1032.9	1075.5	1110.2	1173.8	1234.2
22.5°	812.9	827.0	848.2	878.8	908.1	944.2	987.9	1034.3	1070.6	1139.3	1200.6
25°	758.5	770.1	783.7	809.0	842.1	881.5	915.7	966.7	1019.8	1083.9	1158.0
27.5°	709.6	717.7	729.8	752.0	777.7	814.5	852.5	900.9	954.3	1023.9	1102.1
30°	679.7	684.9	697.0	715.4	740.6	769.5	807.9	854.2	908.9	979.3	1057.1
32.5°	653.6	658.5	666.3	683.9	705.8	730.5	765.0	811.3	863.4	932.6	1018.8
35°	614.5	618.1	625.0	639.2	651.3	675.5	704.4	746.4	795.3	861.6	950.9
37.5°	575.5	580.5	584.7	590.7	606.3	622.2	647.3	682.8	730.8	797.6	882.8
40°	549.9	554.1	560.3	563.0	575.6	589.8	610.3	642.9	691.3	752.2	835.3
42.5°	523.8	528.0	531.7	534.8	545.7	558.3	576.6	604.6	647.5	706.8	789.0
45°	488.3	488.9	492.5	498.3	503.6	512.5	525.6	549.9	583.0	638.7	713.3
47.5°	452.3	453.0	453.6	456.1	461.9	470.0	478.8	498.4	528.1	572.5	645.2
50°	428.4	427.4	428.4	430.5	434.2	441.0	451.0	465.2	489.4	530.9	597.7
52.5°	405.3	405.0	404.4	405.3	408.1	412.8	419.9	432.0	453.6	491.8	550.6
55°	370.0	367.4	368.0	365.8	370.6	371.6	376.9	386.9	405.8	432.1	487.3
57.5°	332.6	330.3	328.0	327.4	326.9	329.8	334.0	341.9	356.4	379.4	424.2
60°	308.6	305.9	302.8	301.7	301.7	303.3	305.4	311.2	324.9	345.4	382.1
62.5°	284.2	281.1	279.2	276.5	275.7	277.3	279.3	283.4	293.3	312.5	344.3
65°	246.5	242.9	240.2	239.7	238.7	237.1	238.1	242.3	250.2	265.5	290.7
67.5°	208.8	205.3	204.7	201.6	200.2	200.3	200.2	203.7	208.5	221.7	240.4
70°	183.9	181.3	180.3	177.7	176.7	175.5	174.5	177.7	182.4	193.5	209.8
72.5°	158.8	156.5	154.2	152.0	152.3	151.1	151.0	152.9	156.8	166.9	179.4
75°	122.5	123.0	120.4	117.7	117.2	116.1	116.1	117.7	119.3	127.2	137.2
77.5°	88.8	88.4	86.2	85.4	84.8	83.7	84.8	85.9	86.7	92.0	99.3
80°	67.8	67.8	65.2	65.2	64.6	63.1	64.6	63.6	65.7	71.0	76.2
82.5°	48.5	47.6	47.5	46.7	46.6	45.4	46.2	47.2	48.0	51.7	54.7
85°	23.7	23.7	23.1	22.6	23.1	22.6	23.1	23.7	24.2	25.7	28.4
87.5°	8.6	8.9	9.0	9.1	8.8	8.9	9.0	9.0	9.4	9.4	9.4
90°	17.7	16.9	15.4	13.9	12.4	10.9	9.1	7.1	5.0	2.9	0.9
92.5°	20.0	19.6	18.8	18.1	17.3	16.6	16.2	16.5	16.6	16.8	17.0
95°	33.7	32.9	31.5	30.3	28.9	27.6	30.0	36.2	42.4	48.6	54.7
97.5°	44.7	44.0	41.0	37.9	34.9	31.8	39.1	56.4	73.8	91.3	108.6
100°	49.5	48.0	44.8	41.7	38.4	35.3	46.5	72.2	97.8	123.4	149.1
102.5°	51.3	49.4	76.0	102.6	129.2	155.8	171.8	177.2	182.7	188.1	193.5
105°	53.4	51.3	102.4	153.5	204.6	255.7	278.5	272.8	267.2	261.7	256.0
107.5°	69.8	71.9	133.2	194.5	255.7	317.0	345.4	340.8	336.3	331.8	327.3
110°	128.7	147.3	201.5	255.6	309.6	363.7	388.8	384.8	381.0	377.0	373.0



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	303.5	371.7	385.1	398.5	411.8	425.2	430.1	426.6	423.1	419.7	416.2
115°	432.9	519.6	514.9	510.2	505.6	500.9	496.9	493.8	490.6	487.4	484.3
117.5°	554.5	575.5	572.3	569.1	565.9	562.6	559.3	555.7	552.2	548.6	545.0
120°	619.5	617.3	613.9	610.5	607.2	603.8	600.7	597.9	595.1	592.3	589.5
122.5°	658.4	657.0	653.4	649.7	646.0	642.4	639.1	636.1	633.1	630.2	627.2
125°	712.9	711.6	708.1	704.5	700.9	697.4	694.3	692.0	689.5	687.1	684.7
127.5°	762.7	760.8	758.1	755.4	752.8	750.1	747.5	744.8	742.1	739.4	736.7
130°	794.5	792.4	790.4	788.3	786.2	784.2	781.6	778.7	775.7	772.7	769.7
132.5°	825.9	824.1	822.0	820.0	817.9	815.9	813.6	811.0	808.5	806.0	803.4
135°	870.1	868.2	866.6	864.8	863.2	861.5	859.1	856.2	853.2	850.2	847.2
137.5°	911.3	909.5	907.6	905.7	903.8	901.8	899.8	897.8	895.6	893.6	891.4
140°	938.1	936.4	934.4	932.3	930.3	928.2	926.5	925.0	923.4	921.9	920.4
142.5°	962.9	961.4	959.0	956.6	954.3	952.0	950.1	948.7	947.4	946.0	944.7
145°	997.5	996.2	993.1	989.8	986.7	983.5	982.0	982.2	982.4	982.5	982.8
147.5°	1027.9	1026.9	1023.7	1020.6	1017.5	1014.3	1013.1	1013.8	1014.5	1015.3	1016.0
150°	1046.2	1045.0	1042.1	1039.1	1036.1	1033.1	1032.3	1033.6	1034.9	1036.2	1037.5
152.5°	1063.0	1061.9	1059.1	1056.2	1053.4	1050.5	1049.9	1051.3	1052.7	1054.2	1055.7
155°	1085.8	1084.7	1082.4	1080.1	1077.9	1075.7	1075.4	1077.1	1078.8	1080.5	1082.1
157.5°	1104.8	1103.5	1101.9	1100.3	1098.8	1097.3	1097.2	1098.6	1100.0	1101.5	1102.9
160°	1116.1	1115.0	1113.9	1112.7	1111.6	1110.5	1110.5	1111.6	1112.7	1113.9	1115.0
162.5°	1126.3	1125.1	1124.1	1123.2	1122.1	1121.2	1121.3	1122.4	1123.5	1124.7	1125.8
165°	1139.0	1137.7	1137.2	1136.6	1136.0	1135.4	1135.8	1136.9	1138.0	1139.1	1140.3
167.5°	1149.6	1148.3	1147.8	1147.2	1146.8	1146.2	1146.5	1147.6	1148.7	1149.9	1151.0
170°	1155.0	1153.7	1153.3	1152.9	1152.6	1152.2	1152.6	1153.7	1154.8	1156.0	1157.1
172.5°	1159.0	1157.8	1157.4	1157.0	1156.7	1156.3	1156.7	1157.8	1158.9	1160.0	1161.1
175°	1163.5	1162.1	1161.7	1161.4	1161.0	1160.6	1161.1	1162.4	1163.7	1165.1	1166.3
177.5°	1164.2	1163.2	1163.0	1162.8	1162.7	1162.5	1163.0	1164.0	1165.1	1166.2	1167.2
180°	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1374.9	1377.0	1383.7	1390.4	1398.0	1400.1	1403.5	1400.6	1399.7	1407.7	1413.6
5°	1378.8	1388.2	1406.7	1423.5	1437.7	1447.6	1458.2	1462.4	1470.2	1481.3	1494.9
7.5°	1374.4	1392.7	1421.7	1446.2	1472.9	1492.1	1507.1	1520.0	1535.6	1556.5	1579.3
10°	1369.3	1394.0	1429.3	1459.2	1491.8	1516.5	1537.0	1557.0	1580.1	1609.0	1638.9
12.5°	1360.1	1389.4	1433.5	1468.9	1510.7	1535.0	1562.7	1605.8	1630.5	1670.9	1713.0
15°	1341.5	1374.0	1435.5	1479.2	1526.5	1572.7	1623.7	1664.8	1705.7	1729.4	1788.8
17.5°	1313.8	1361.7	1429.7	1480.7	1540.8	1613.7	1671.0	1717.4	1764.7	1803.1	1832.9
20°	1291.5	1343.5	1421.3	1482.3	1553.8	1632.1	1697.9	1745.2	1786.1	1818.2	1836.6
22.5°	1263.4	1328.8	1404.5	1476.0	1567.3	1644.7	1713.8	1751.0	1785.3	1800.9	1808.0
25°	1219.0	1297.8	1383.5	1470.8	1573.8	1655.8	1718.9	1741.5	1751.4	1736.2	1711.0
27.5°	1171.2	1259.0	1359.2	1460.9	1569.8	1648.6	1693.8	1690.3	1673.3	1624.1	1584.6
30°	1135.4	1232.2	1339.9	1450.8	1560.1	1636.9	1663.2	1636.9	1598.5	1543.3	1487.1
32.5°	1098.0	1198.1	1319.3	1436.5	1542.5	1610.0	1615.7	1570.4	1511.0	1448.3	1378.2
35°	1041.3	1149.6	1280.5	1404.5	1504.9	1547.5	1522.3	1442.4	1372.0	1286.3	1190.6
37.5°	977.3	1096.9	1228.1	1357.7	1448.7	1459.8	1397.2	1313.0	1213.7	1113.0	1000.4
40°	929.4	1056.1	1191.1	1322.0	1402.4	1390.8	1311.0	1218.5	1100.2	977.2	872.6
42.5°	886.5	1013.1	1150.7	1279.1	1343.5	1311.8	1218.5	1104.9	977.8	862.0	766.2
45°	812.1	942.5	1083.4	1207.4	1244.2	1186.9	1063.4	937.2	812.1	715.4	639.7
47.5°	740.0	868.9	1008.4	1117.5	1130.4	1053.4	918.4	788.6	681.0	602.3	548.9
50°	687.1	816.3	954.6	1051.9	1047.6	954.6	815.8	692.3	602.4	538.8	503.0
52.5°	639.5	761.7	894.5	982.9	960.6	859.1	726.7	617.0	543.1	493.4	461.0
55°	565.6	678.6	804.8	875.8	834.7	722.2	610.3	522.0	467.3	430.0	404.7
57.5°	492.2	598.2	706.2	749.9	704.6	600.7	507.4	443.3	402.2	374.5	358.1
60°	446.8	539.3	635.5	673.4	619.2	526.7	453.1	395.9	362.7	340.1	325.3
62.5°	401.4	484.3	575.0	595.6	546.1	467.9	402.7	355.1	327.8	307.7	293.8
65°	339.6	407.3	476.3	489.9	444.2	383.7	332.2	301.2	277.0	262.3	251.3
67.5°	278.5	333.0	381.8	392.8	352.7	310.8	273.5	246.5	230.1	217.9	208.6
70°	242.3	285.4	325.3	334.3	302.2	264.9	236.5	215.0	200.3	189.7	180.9
72.5°	204.1	240.0	273.2	279.2	253.0	224.6	201.2	184.3	171.3	164.5	156.0
75°	156.1	177.1	202.9	204.5	187.1	169.8	151.9	140.9	134.0	125.6	121.4
77.5°	110.2	126.7	141.4	144.3	134.0	122.2	112.2	103.5	97.7	93.8	89.9
80°	84.1	97.3	103.5	107.3	99.9	91.5	85.7	79.9	76.2	73.6	71.0
82.5°	60.1	68.2	74.1	76.9	73.0	67.9	62.1	58.9	56.0	53.8	52.9
85°	30.5	34.1	37.9	38.9	37.9	35.7	32.6	32.6	31.0	30.5	30.5
87.5°	11.1	13.2	13.6	15.3	14.8	15.1	15.4	15.3	15.1	14.9	14.7
90°	2.9	5.0	7.1	9.1	10.9	12.4	13.9	15.4	16.9	17.7	18.7
92.5°	16.8	16.6	16.5	16.2	16.6	17.3	18.1	18.8	19.6	20.0	20.5
95°	48.6	42.4	36.2	30.0	27.6	28.9	30.3	31.5	32.9	33.7	34.7
97.5°	91.3	73.8	56.4	39.1	31.8	34.9	37.9	41.0	44.0	44.7	45.5
100°	123.4	97.8	72.2	46.5	35.3	38.4	41.7	44.8	48.0	49.5	51.0
102.5°	188.1	182.7	177.2	171.8	155.8	129.2	102.6	76.0	49.4	51.3	53.2
105°	261.7	267.2	272.8	278.5	255.7	204.6	153.5	102.4	51.3	53.4	55.5
107.5°	331.8	336.3	340.8	345.4	317.0	255.7	194.5	133.2	71.9	69.8	67.7
110°	377.0	381.0	384.8	388.8	363.7	309.6	255.6	201.5	147.3	128.7	110.0



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	419.7	423.1	426.6	430.1	425.2	411.8	398.5	385.1	371.7	303.5	235.2
115°	487.4	490.6	493.8	496.9	500.9	505.6	510.2	514.9	519.6	432.9	346.3
117.5°	548.6	552.2	555.7	559.3	562.6	565.9	569.1	572.3	575.5	554.5	533.6
120°	592.3	595.1	597.9	600.7	603.8	607.2	610.5	613.9	617.3	619.5	621.8
122.5°	630.2	633.1	636.1	639.1	642.4	646.0	649.7	653.4	657.0	658.4	659.7
125°	687.1	689.5	692.0	694.3	697.4	700.9	704.5	708.1	711.6	712.9	714.2
127.5°	739.4	742.1	744.8	747.5	750.1	752.8	755.4	758.1	760.8	762.7	764.6
130°	772.7	775.7	778.7	781.6	784.2	786.2	788.3	790.4	792.4	794.5	796.5
132.5°	806.0	808.5	811.0	813.6	815.9	817.9	820.0	822.0	824.1	825.9	827.6
135°	850.2	853.2	856.2	859.1	861.5	863.2	864.8	866.6	868.2	870.1	872.0
137.5°	893.6	895.6	897.8	899.8	901.8	903.8	905.7	907.6	909.5	911.3	913.1
140°	921.9	923.4	925.0	926.5	928.2	930.3	932.3	934.4	936.4	938.1	939.8
142.5°	946.0	947.4	948.7	950.1	952.0	954.3	956.6	959.0	961.4	962.9	964.4
145°	982.5	982.4	982.2	982.0	983.5	986.7	989.8	993.1	996.2	997.5	998.9
147.5°	1015.3	1014.5	1013.8	1013.1	1014.3	1017.5	1020.6	1023.7	1026.9	1027.9	1028.8
150°	1036.2	1034.9	1033.6	1032.3	1033.1	1036.1	1039.1	1042.1	1045.0	1046.2	1047.3
152.5°	1054.2	1052.7	1051.3	1049.9	1050.5	1053.4	1056.2	1059.1	1061.9	1063.0	1064.1
155°	1080.5	1078.8	1077.1	1075.4	1075.7	1077.9	1080.1	1082.4	1084.7	1085.8	1086.9
157.5°	1101.5	1100.0	1098.6	1097.2	1097.3	1098.8	1100.3	1101.9	1103.5	1104.8	1106.0
160°	1113.9	1112.7	1111.6	1110.5	1110.5	1111.6	1112.7	1113.9	1115.0	1116.1	1117.2
162.5°	1124.7	1123.5	1122.4	1121.3	1121.2	1122.1	1123.2	1124.1	1125.1	1126.3	1127.6
165°	1139.1	1138.0	1136.9	1135.8	1135.4	1136.0	1136.6	1137.2	1137.7	1139.0	1140.3
167.5°	1149.9	1148.7	1147.6	1146.5	1146.2	1146.8	1147.2	1147.8	1148.3	1149.6	1151.0
170°	1156.0	1154.8	1153.7	1152.6	1152.2	1152.6	1152.9	1153.3	1153.7	1155.0	1156.3
172.5°	1160.0	1158.9	1157.8	1156.7	1156.3	1156.7	1157.0	1157.4	1157.8	1159.0	1160.4
175°	1165.1	1163.7	1162.4	1161.1	1160.6	1161.0	1161.4	1161.7	1162.1	1163.5	1164.7
177.5°	1166.2	1165.1	1164.0	1163.0	1162.5	1162.7	1162.8	1163.0	1163.2	1164.2	1165.2
180°	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7	1367.7
2.5°	1418.6	1424.5	1424.5	1425.4	1432.1	1431.2	1430.8
5°	1509.7	1518.6	1519.6	1529.1	1535.4	1533.3	1527.6
7.5°	1595.5	1612.2	1624.8	1631.8	1640.1	1645.3	1643.0
10°	1663.7	1687.8	1702.6	1712.5	1724.7	1733.6	1730.4
12.5°	1725.5	1754.3	1774.5	1791.6	1793.2	1804.7	1796.9
15°	1821.9	1852.4	1855.5	1868.1	1878.2	1877.1	1877.6
17.5°	1853.8	1863.5	1865.5	1865.8	1866.0	1862.3	1854.3
20°	1842.4	1838.7	1829.8	1823.0	1810.8	1809.3	1798.8
22.5°	1788.6	1776.9	1754.5	1739.7	1720.9	1715.9	1713.0
25°	1682.6	1656.8	1621.1	1586.9	1577.5	1559.1	1564.3
27.5°	1537.2	1497.1	1458.3	1430.6	1405.5	1377.9	1385.8
30°	1435.0	1389.8	1335.1	1293.1	1266.3	1240.0	1235.2
32.5°	1313.0	1246.8	1185.9	1148.8	1107.8	1091.2	1072.9
35°	1102.8	1038.2	977.7	925.7	895.7	872.6	851.5
37.5°	913.7	839.2	790.4	748.3	726.7	713.4	716.8
40°	796.4	731.2	695.5	663.4	643.4	633.9	636.0
42.5°	701.3	652.5	623.1	601.1	587.0	581.8	580.5
45°	593.4	566.1	541.9	529.3	522.5	516.7	513.0
47.5°	519.8	497.6	483.9	476.4	470.5	464.5	464.5
50°	475.7	461.0	451.5	443.6	438.9	434.7	438.4
52.5°	442.0	428.6	419.1	412.1	410.4	406.5	406.5
55°	392.1	381.6	374.8	368.4	365.4	363.2	360.6
57.5°	346.7	336.8	330.4	326.5	320.4	318.3	317.5
60°	314.3	306.4	300.2	294.9	292.2	288.0	288.0
62.5°	284.5	276.6	270.7	266.7	262.4	260.7	261.2
65°	241.3	235.0	229.2	225.0	223.9	220.8	221.8
67.5°	201.5	197.3	191.2	188.9	187.0	185.2	183.9
70°	175.1	170.9	167.7	164.5	163.0	163.0	163.0
72.5°	152.7	147.7	145.8	141.8	142.8	141.1	139.4
75°	118.3	115.1	113.5	111.9	109.3	109.3	109.3
77.5°	87.1	86.1	84.2	82.5	81.9	81.4	81.6
80°	67.3	66.8	65.7	65.7	64.6	64.2	63.1
82.5°	51.7	50.4	49.7	49.3	49.1	49.0	48.8
85°	29.5	28.4	28.4	28.9	27.9	27.9	28.4
87.5°	15.3	15.4	15.2	15.3	15.8	15.4	15.4
90°	19.6	20.6	21.2	21.6	22.0	22.3	22.7
92.5°	21.0	21.5	21.9	22.1	22.3	22.5	22.7
95°	35.6	36.6	37.0	36.8	36.6	36.4	36.2
97.5°	46.2	47.0	47.5	47.7	47.9	48.1	48.3
100°	52.5	54.0	54.9	55.3	55.7	56.1	56.4
102.5°	55.2	57.1	58.4	58.9	59.4	60.0	60.4
105°	57.5	59.6	61.0	61.8	62.5	63.2	64.0
107.5°	65.6	63.5	62.9	63.6	64.3	65.1	65.8
110°	91.3	72.5	63.5	64.2	65.0	65.8	66.5



TEST NUMBER: P331411-927

CATALOG NUMBER: SA2XXDIP-C865D1080U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	166.9	98.6	64.8	65.4	66.0	66.6	67.2
115°	259.7	173.0	122.9	109.5	96.0	82.5	69.1
117.5°	512.6	491.7	459.1	414.8	370.5	326.2	281.9
120°	624.0	626.3	614.7	589.5	564.2	538.9	513.7
122.5°	661.1	662.4	660.6	655.8	650.9	645.9	641.0
125°	715.5	716.8	717.8	718.4	718.9	719.5	720.0
127.5°	766.5	768.4	769.4	769.5	769.7	769.8	769.8
130°	798.6	800.7	801.6	801.5	801.2	801.1	800.9
132.5°	829.4	831.2	831.9	831.7	831.6	831.4	831.2
135°	873.9	875.7	876.5	876.1	875.7	875.4	875.0
137.5°	915.0	916.8	917.4	916.8	916.2	915.5	914.9
140°	941.5	943.2	943.6	942.6	941.7	940.7	939.8
142.5°	966.0	967.5	967.8	966.9	965.9	965.0	964.1
145°	1000.1	1001.5	1001.6	1000.8	999.8	998.9	997.9
147.5°	1029.8	1030.8	1030.9	1030.1	1029.3	1028.5	1027.7
150°	1048.5	1049.6	1049.6	1048.7	1047.8	1046.9	1045.9
152.5°	1065.3	1066.4	1066.4	1065.1	1063.9	1062.6	1061.4
155°	1088.1	1089.2	1088.9	1087.4	1086.0	1084.5	1083.0
157.5°	1107.3	1108.6	1108.5	1107.1	1105.6	1104.1	1102.6
160°	1118.3	1119.4	1119.4	1118.1	1116.7	1115.5	1114.1
162.5°	1128.9	1130.2	1130.0	1128.4	1126.8	1125.1	1123.6
165°	1141.6	1143.0	1143.0	1141.6	1140.3	1139.0	1137.7
167.5°	1152.2	1153.6	1153.3	1151.7	1150.0	1148.3	1146.6
170°	1157.6	1159.0	1158.7	1157.1	1155.4	1153.7	1152.0
172.5°	1161.7	1163.0	1162.8	1161.1	1159.4	1157.8	1156.0
175°	1166.1	1167.4	1167.1	1165.2	1163.3	1161.5	1159.6
177.5°	1166.3	1167.4	1167.2	1165.9	1164.5	1163.2	1161.8
180°	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8	1163.8

(END OF REPORT)