

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331644-927

Luminaire Tested: **SA2XXRDIP-C290D1080U927-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331644-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C290D1080U927-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1080 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4152.1 lumens
Efficiency: N/A
Efficacy: 98.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331644-927

CATALOG NUMBER: SA2XXRDIP-C290D1080U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

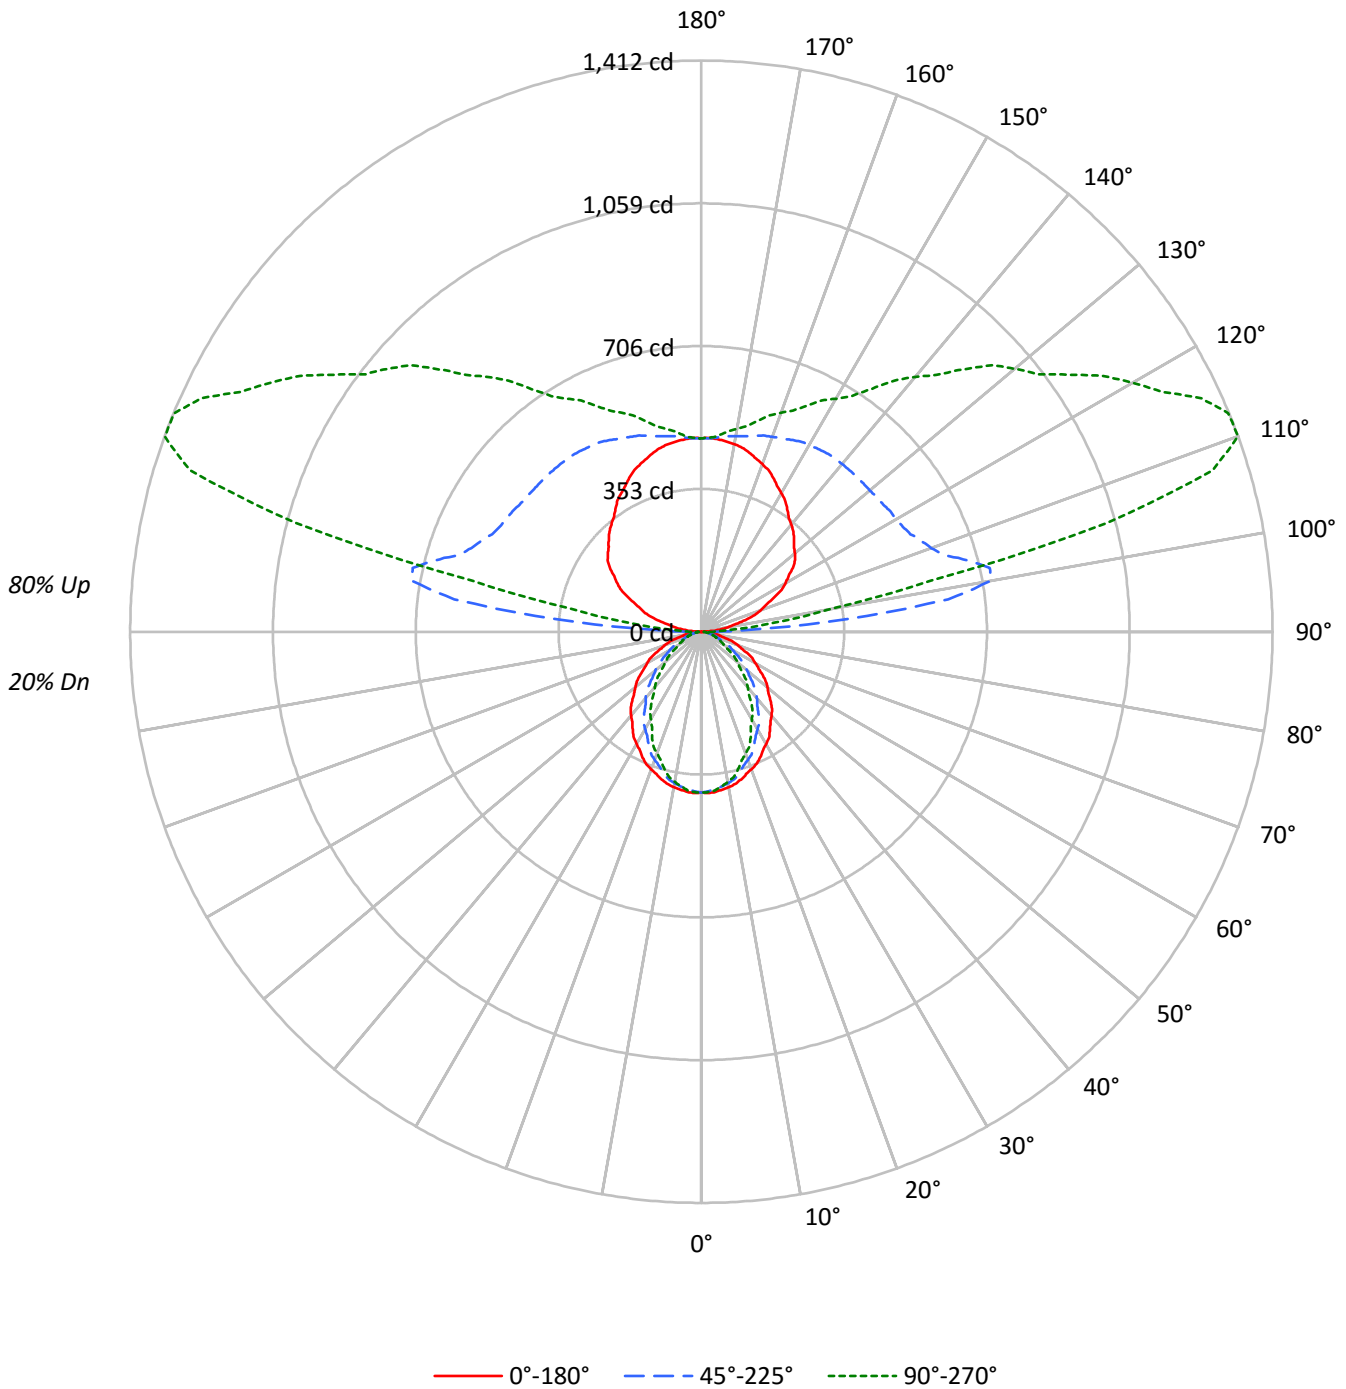



TEST NUMBER: P331644-927

CATALOG NUMBER: SA2XXRDIP-C290D1080U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	88	88	88	88	67	67	67	47	47	47	28	28	28	20
1	91	87	83	80	80	77	74	71	58	56	55	41	40	39	25	25	24	17
2	83	76	70	66	73	68	63	59	51	48	45	36	34	33	22	21	21	15
3	76	67	60	55	67	60	54	49	45	42	38	32	30	28	20	19	18	13
4	69	59	52	46	61	53	47	42	40	36	33	29	26	24	18	17	15	11
5	64	53	45	40	56	47	41	36	36	32	28	26	23	21	16	15	14	10
6	58	47	40	34	52	42	36	31	32	28	24	23	20	18	15	13	12	9
7	54	42	35	30	48	38	32	27	29	25	21	21	18	16	14	12	11	8
8	50	38	31	26	44	34	28	24	27	22	19	19	16	14	12	11	10	7
9	46	35	28	23	41	31	25	21	24	20	17	18	15	13	11	10	9	6
10	43	32	25	21	38	29	23	19	22	18	15	16	13	11	11	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6421	6421	6421
5°	6446	6340	6374
10°	6396	6237	6184
15°	6322	6051	5877
20°	6220	5787	5498
25°	6116	5489	5129
30°	5972	5179	4657
35°	5830	4845	4242
40°	5689	4498	3762
45°	5523	4108	3329
50°	5350	3715	2901
55°	5177	3291	2494
60°	4973	2848	2070
65°	4741	2392	1883
70°	4471	1969	1733
75°	4130	1797	1616
80°	3645	1609	1469
85°	2853	1260	1260



TEST NUMBER: P331644-927

CATALOG NUMBER: SA2XXRDIP-C290D1080U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.2	0.9
10°-20°	102.2	2.5
20°-30°	143.5	3.5
30°-40°	156.5	3.8
40°-50°	143.9	3.5
50°-60°	113.0	2.7
60°-70°	73.7	1.8
70°-80°	38.0	0.9
80°-90°	14.2	0.3
90°-100°	191.3	4.6
100°-110°	649.3	15.6
110°-120°	689.8	16.6
120°-130°	567.8	13.7
130°-140°	456.0	11.0
140°-150°	344.6	8.3
150°-160°	242.2	5.8
160°-170°	142.6	3.4
170°-180°	46.4	1.1
0°-30°	282.9	6.8
0°-40°	439.4	10.6
0°-60°	696.4	16.8
0°-90°	822.2	19.8
90°-120°	1530.4	36.9
90°-150°	2898.8	69.8
90°-180°	3330.0	80.2
0°-180°	4152.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	398	398	398	398	398	
5°	398	396	391	394	393	38
15°	378	374	362	355	352	106
25°	343	331	308	294	288	158
35°	296	277	246	224	215	185
45°	242	217	180	155	146	187
55°	184	155	117	96	89	164
65°	124	95	63	51	49	123
75°	66	42	29	26	26	70
85°	15	8	7	7	7	18
90°	1	12	31	30	30	2
95°	32	79	361	136	105	34
105°	112	169	682	1219	1037	119
115°	198	250	570	1177	1365	196
125°	276	327	548	954	1107	245
135°	324	386	542	802	918	250
145°	370	425	539	670	732	232
155°	421	454	524	592	616	193
165°	458	472	502	532	540	129
175°	478	478	482	488	487	45
180°	479	479	479	479	479	



TEST NUMBER: P331644-927

CATALOG NUMBER: SA2XXRDIP-C290D1080U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7
2.5°	399.1	398.8	398.5	398.2	397.8	397.3	396.6	395.9	395.2	394.5	395.1
5°	397.7	397.3	396.9	396.5	396.1	395.3	394.3	393.2	392.2	391.2	391.9
7.5°	393.6	393.1	392.5	392.1	391.6	390.7	389.5	388.2	387.1	385.9	386.0
10°	390.1	389.5	389.0	388.4	387.9	386.7	385.2	383.6	382.0	380.4	380.2
12.5°	385.8	385.1	384.4	383.7	383.0	381.7	379.6	377.6	375.5	373.4	373.0
15°	378.2	377.3	376.4	375.6	374.7	372.9	370.2	367.5	364.7	362.0	360.5
17.5°	368.9	367.6	366.2	364.9	363.5	361.2	357.7	354.2	350.7	347.2	345.4
20°	362.0	360.4	358.9	357.2	355.6	352.8	348.8	344.8	340.9	336.8	334.9
22.5°	354.6	352.8	350.9	349.2	347.4	344.2	339.7	335.2	330.7	326.2	323.6
25°	343.3	340.7	338.2	335.6	333.1	329.2	323.8	318.6	313.3	308.1	304.8
27.5°	329.8	327.0	324.2	321.5	318.6	314.3	308.3	302.4	296.4	290.5	286.7
30°	320.3	317.3	314.2	311.2	308.2	303.4	297.0	290.7	284.2	277.8	273.8
32.5°	311.1	307.5	304.0	300.4	296.8	291.8	285.3	278.8	272.3	265.7	261.1
35°	295.8	291.8	287.6	283.6	279.5	273.9	266.9	259.8	252.9	245.8	240.7
37.5°	280.6	276.1	271.6	267.1	262.6	256.7	249.1	241.6	234.2	226.6	221.1
40°	269.9	265.1	260.3	255.5	250.7	244.5	236.7	228.9	221.2	213.4	207.7
42.5°	259.0	253.9	248.8	243.8	238.8	232.2	224.2	216.2	208.2	200.2	194.3
45°	241.9	236.5	231.1	225.8	220.4	213.5	205.1	196.7	188.3	179.9	174.3
47.5°	225.1	219.4	213.8	208.1	202.4	195.3	186.6	177.9	169.2	160.6	155.0
50°	213.0	207.4	201.7	196.0	190.4	183.1	174.3	165.5	156.7	147.9	142.4
52.5°	201.2	195.3	189.4	183.5	177.5	170.2	161.6	153.0	144.4	135.8	130.5
55°	183.9	177.7	171.4	165.2	158.9	151.5	142.8	134.2	125.6	116.9	112.2
57.5°	166.1	159.7	153.3	146.9	140.5	133.2	124.8	116.6	108.3	100.0	95.5
60°	154.0	147.7	141.2	134.8	128.4	121.1	112.9	104.6	96.4	88.2	84.1
62.5°	142.2	135.9	129.4	123.0	116.6	109.5	101.6	93.8	86.0	78.1	74.2
65°	124.1	117.6	111.2	104.7	98.2	91.4	84.2	77.0	69.8	62.6	59.9
67.5°	106.7	100.3	93.9	87.5	81.0	74.5	68.0	61.6	55.1	48.6	47.4
70°	94.7	88.4	82.1	76.0	69.7	63.8	58.3	52.8	47.3	41.7	41.0
72.5°	83.1	77.2	71.1	65.2	59.2	54.0	49.6	45.2	40.7	36.3	35.6
75°	66.2	60.6	55.1	49.4	43.8	39.7	36.9	34.2	31.5	28.8	28.2
77.5°	49.6	44.7	39.8	34.9	29.9	26.9	25.5	24.2	22.9	21.6	21.3
80°	39.2	35.2	31.1	27.0	22.9	20.4	19.6	18.9	18.1	17.3	17.0
82.5°	29.7	26.5	23.4	20.2	17.0	15.1	14.6	14.0	13.5	13.0	12.8
85°	15.4	13.8	12.1	10.5	8.8	7.8	7.5	7.3	7.1	6.8	6.8
87.5°	4.8	4.8	5.1	4.9	4.8	5.1	6.0	7.3	8.4	8.6	8.3
90°	1.0	3.6	7.4	9.2	11.0	13.8	18.4	24.9	30.3	31.3	30.3
92.5°	11.2	16.2	22.8	26.9	33.1	41.7	62.6	91.8	118.0	119.6	101.1
95°	32.2	35.9	45.1	53.4	68.1	90.2	132.5	212.5	319.3	360.8	315.7
97.5°	52.4	57.4	67.2	79.7	96.6	121.7	174.8	286.4	463.8	615.8	646.0
100°	70.8	73.6	81.9	96.6	115.0	140.8	189.6	301.8	500.6	727.0	859.5
102.5°	87.8	89.8	98.1	112.8	132.0	157.7	202.8	302.6	486.6	730.7	939.1
105°	112.3	116.0	122.4	136.2	156.5	182.2	225.5	307.4	459.2	681.9	926.7
107.5°	138.8	141.7	148.0	160.7	180.8	206.7	248.7	320.0	445.6	629.6	845.9
110°	156.5	160.1	165.6	177.6	196.9	223.6	264.1	330.3	442.7	604.6	795.1



TEST NUMBER: P331644-927

CATALOG NUMBER: SA2XXRDIP-C290D1080U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	172.6	176.3	182.6	193.8	212.4	239.8	278.8	341.4	443.4	588.4	759.8
115°	197.9	202.5	207.9	219.0	237.4	262.3	301.8	358.0	447.3	570.5	716.0
117.5°	224.0	227.7	233.2	243.0	260.6	286.4	323.0	375.7	453.8	561.9	688.3
120°	240.2	243.8	249.4	257.7	276.1	301.8	337.7	387.5	458.3	556.7	673.6
122.5°	255.6	258.6	264.1	273.1	291.5	318.1	351.7	397.8	463.4	553.8	661.1
125°	276.1	278.8	284.4	295.4	313.8	339.6	372.7	414.2	471.2	548.5	643.3
127.5°	292.2	296.0	303.7	315.8	333.5	360.0	392.2	429.4	479.1	545.3	626.7
130°	301.8	305.5	314.7	327.6	346.0	371.8	404.0	438.9	485.0	543.8	615.7
132.5°	310.7	315.1	325.0	338.7	357.8	383.6	414.3	448.5	490.8	543.1	606.8
135°	323.9	327.6	338.7	352.4	373.6	399.4	428.8	461.1	497.9	542.0	594.5
137.5°	336.4	340.9	351.9	366.6	387.6	411.5	440.6	470.6	504.1	541.9	585.8
140°	346.0	349.7	360.8	375.5	395.7	419.6	447.3	475.8	507.1	541.1	580.7
142.5°	355.6	358.5	368.8	383.6	403.1	425.6	452.4	480.2	509.3	541.1	575.5
145°	369.9	373.6	382.9	396.6	415.0	435.3	460.1	485.9	511.7	539.2	568.7
147.5°	385.4	388.2	397.0	409.7	425.0	443.0	466.4	489.0	512.4	536.0	561.7
150°	395.7	398.5	405.8	417.8	431.6	448.1	469.4	490.5	511.7	533.8	555.8
152.5°	406.0	407.3	414.6	425.2	438.2	453.3	472.3	491.2	510.2	530.0	550.6
155°	420.6	421.4	427.0	437.1	447.3	461.1	476.7	492.3	507.9	523.6	541.1
157.5°	432.7	433.6	438.1	446.9	455.0	466.6	479.8	492.3	503.7	517.0	532.1
160°	440.8	441.7	445.4	452.7	460.1	470.2	481.3	492.3	501.5	512.6	525.5
162.5°	448.9	448.4	452.0	457.9	464.5	472.5	482.0	491.6	499.3	508.9	519.6
165°	458.3	457.4	459.2	464.7	469.4	474.8	483.2	489.6	495.1	501.5	509.8
167.5°	466.0	464.9	466.6	470.1	473.4	476.9	482.9	488.3	490.8	495.1	500.3
170°	471.2	469.4	470.2	473.0	474.8	477.6	482.2	486.8	488.6	491.4	495.1
172.5°	474.1	473.0	472.5	475.2	476.3	478.3	481.5	484.6	485.7	487.0	490.0
175°	477.6	476.7	475.8	477.6	477.6	478.6	480.4	482.2	481.3	482.2	483.2
177.5°	479.3	477.8	477.1	478.6	478.6	478.6	479.3	480.8	479.3	478.6	479.3
180°	478.6	478.6	478.6	478.6	478.6	478.6	478.6	478.6	478.6	478.6	478.6



TEST NUMBER: P331644-927

CATALOG NUMBER: SA2XXRDIP-C290D1080U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	397.7	397.7	397.7	397.7	397.7	397.7	397.7	397.7
2.5°	395.8	396.4	397.0	397.3	397.2	397.0	396.9	396.8
5°	392.6	393.3	394.0	394.3	394.0	393.8	393.6	393.3
7.5°	386.3	386.5	386.7	386.6	386.2	385.7	385.3	384.9
10°	379.9	379.7	379.5	379.1	378.6	378.1	377.6	377.2
12.5°	372.6	372.2	371.8	371.1	370.3	369.6	368.8	368.0
15°	359.0	357.4	355.9	354.8	354.0	353.2	352.4	351.6
17.5°	343.6	341.7	340.0	338.4	337.0	335.6	334.2	332.9
20°	332.9	330.8	328.8	326.9	325.2	323.4	321.7	320.0
22.5°	321.1	318.5	315.9	313.9	312.6	311.3	310.0	308.7
25°	301.5	298.2	294.9	292.7	291.5	290.3	289.1	287.9
27.5°	282.8	279.0	275.2	272.4	270.5	268.5	266.6	264.7
30°	269.7	265.6	261.5	258.4	256.2	254.1	251.9	249.8
32.5°	256.4	251.8	247.1	243.8	241.8	239.7	237.7	235.7
35°	235.8	230.7	225.6	222.2	220.5	218.7	217.0	215.2
37.5°	215.6	210.0	204.5	200.7	198.7	196.6	194.6	192.6
40°	202.1	196.4	190.7	186.8	184.7	182.7	180.5	178.5
42.5°	188.4	182.5	176.7	172.8	170.7	168.7	166.7	164.7
45°	168.6	162.9	157.2	153.4	151.5	149.6	147.7	145.8
47.5°	149.2	143.6	138.0	134.3	132.5	130.8	129.0	127.3
50°	136.9	131.3	125.8	122.2	120.6	118.9	117.2	115.5
52.5°	125.2	119.9	114.5	111.1	109.6	108.0	106.4	104.9
55°	107.3	102.6	97.8	94.6	93.1	91.6	90.1	88.6
57.5°	91.2	86.7	82.4	79.5	78.3	77.0	75.7	74.4
60°	80.0	76.0	71.9	69.2	67.9	66.6	65.4	64.1
62.5°	70.3	66.5	62.6	60.2	59.4	58.7	57.9	57.1
65°	57.2	54.4	51.7	50.2	50.0	49.7	49.5	49.3
67.5°	46.2	44.9	43.6	42.9	42.6	42.4	42.1	41.9
70°	40.2	39.4	38.6	38.0	37.6	37.3	37.0	36.7
72.5°	34.9	34.2	33.6	33.2	33.0	32.8	32.6	32.4
75°	27.6	27.1	26.5	26.2	26.1	26.1	26.0	25.9
77.5°	20.9	20.6	20.3	20.1	20.0	19.8	19.7	19.6
80°	16.6	16.3	16.0	15.8	15.8	15.8	15.8	15.8
82.5°	12.6	12.4	12.2	12.1	12.1	12.1	12.1	12.1
85°	6.8	6.8	6.8	6.8	6.8	6.8	6.8	6.8
87.5°	8.1	7.6	7.9	8.1	8.1	8.1	8.1	8.1
90°	29.5	27.6	29.5	30.3	30.3	30.3	30.3	30.3
92.5°	80.2	68.8	61.1	55.4	54.7	51.7	52.4	51.0
95°	241.1	185.0	146.3	126.0	114.1	106.8	104.0	104.9
97.5°	562.6	460.3	360.8	294.3	250.3	227.7	214.2	206.5
100°	840.2	726.1	600.0	488.6	412.3	372.7	346.0	329.5
102.5°	1022.1	996.2	904.0	786.1	703.1	635.6	602.2	579.8
105°	1118.1	1222.1	1234.1	1203.7	1146.6	1089.6	1050.0	1037.1
107.5°	1048.9	1205.5	1301.2	1345.8	1353.0	1349.8	1341.9	1324.8
110°	989.3	1154.0	1271.8	1347.3	1386.8	1404.3	1412.6	1411.7



TEST NUMBER: P331644-927

CATALOG NUMBER: SA2XXRDIP-C290D1080U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	934.8	1092.9	1218.8	1305.3	1360.3	1389.6	1405.3	1410.2
115°	867.8	1009.6	1130.0	1224.9	1290.2	1332.5	1356.5	1364.8
117.5°	817.4	941.8	1051.1	1140.0	1206.7	1251.3	1276.6	1283.6
120°	792.3	906.4	1004.0	1087.7	1152.1	1195.4	1222.1	1231.3
122.5°	772.5	877.0	969.4	1045.0	1102.8	1145.3	1169.1	1176.8
125°	743.5	838.4	919.3	988.3	1041.7	1076.7	1099.7	1107.1
127.5°	715.0	800.8	877.2	940.9	987.5	1020.2	1040.1	1046.0
130°	696.6	775.8	848.5	909.2	954.3	985.6	1004.0	1011.4
132.5°	679.0	752.3	819.0	876.1	920.4	951.7	968.7	975.3
135°	654.3	715.0	775.8	827.3	866.9	897.2	913.8	917.5
137.5°	634.6	685.4	733.6	778.6	814.6	840.7	855.3	860.8
140°	622.1	666.3	708.6	749.1	778.6	802.5	816.3	821.8
142.5°	611.8	649.4	685.8	719.6	747.6	769.4	781.6	782.8
145°	597.2	627.6	656.2	682.9	704.9	720.6	729.8	732.5
147.5°	586.1	610.0	632.2	651.7	669.9	682.5	688.7	690.4
150°	577.9	598.2	617.5	634.1	647.8	658.9	664.4	665.4
152.5°	569.8	588.6	605.0	619.3	630.2	639.8	643.8	644.0
155°	558.6	573.3	587.1	597.2	607.4	613.8	617.5	615.7
157.5°	545.5	557.9	569.4	577.3	584.6	589.9	591.5	591.5
160°	537.4	547.6	557.7	564.1	570.5	575.1	576.1	576.1
162.5°	529.3	538.0	546.6	551.6	558.0	561.2	562.1	561.3
165°	517.2	523.6	530.0	533.8	537.4	541.1	541.1	540.2
167.5°	505.6	510.6	515.0	518.3	519.9	522.0	521.8	520.7
170°	499.7	502.5	506.1	507.9	508.9	511.7	510.7	508.9
172.5°	493.1	495.1	498.0	499.2	500.1	501.4	500.4	499.3
175°	485.9	486.8	487.7	488.6	488.6	489.6	488.6	486.8
177.5°	480.8	480.8	481.5	481.5	481.5	481.5	480.8	479.3
180°	478.6	478.6	478.6	478.6	478.6	478.6	478.6	478.6

(END OF REPORT)