

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331668-927

Luminaire Tested: **SA2XXRDIP-C485D925U927-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331668-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXRDIP-C485D925U927-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 925 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4209.2 lumens  
Efficiency: N/A  
Efficacy: 94.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331668-927

CATALOG NUMBER: SA2XXRDIP-C485D925U927-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

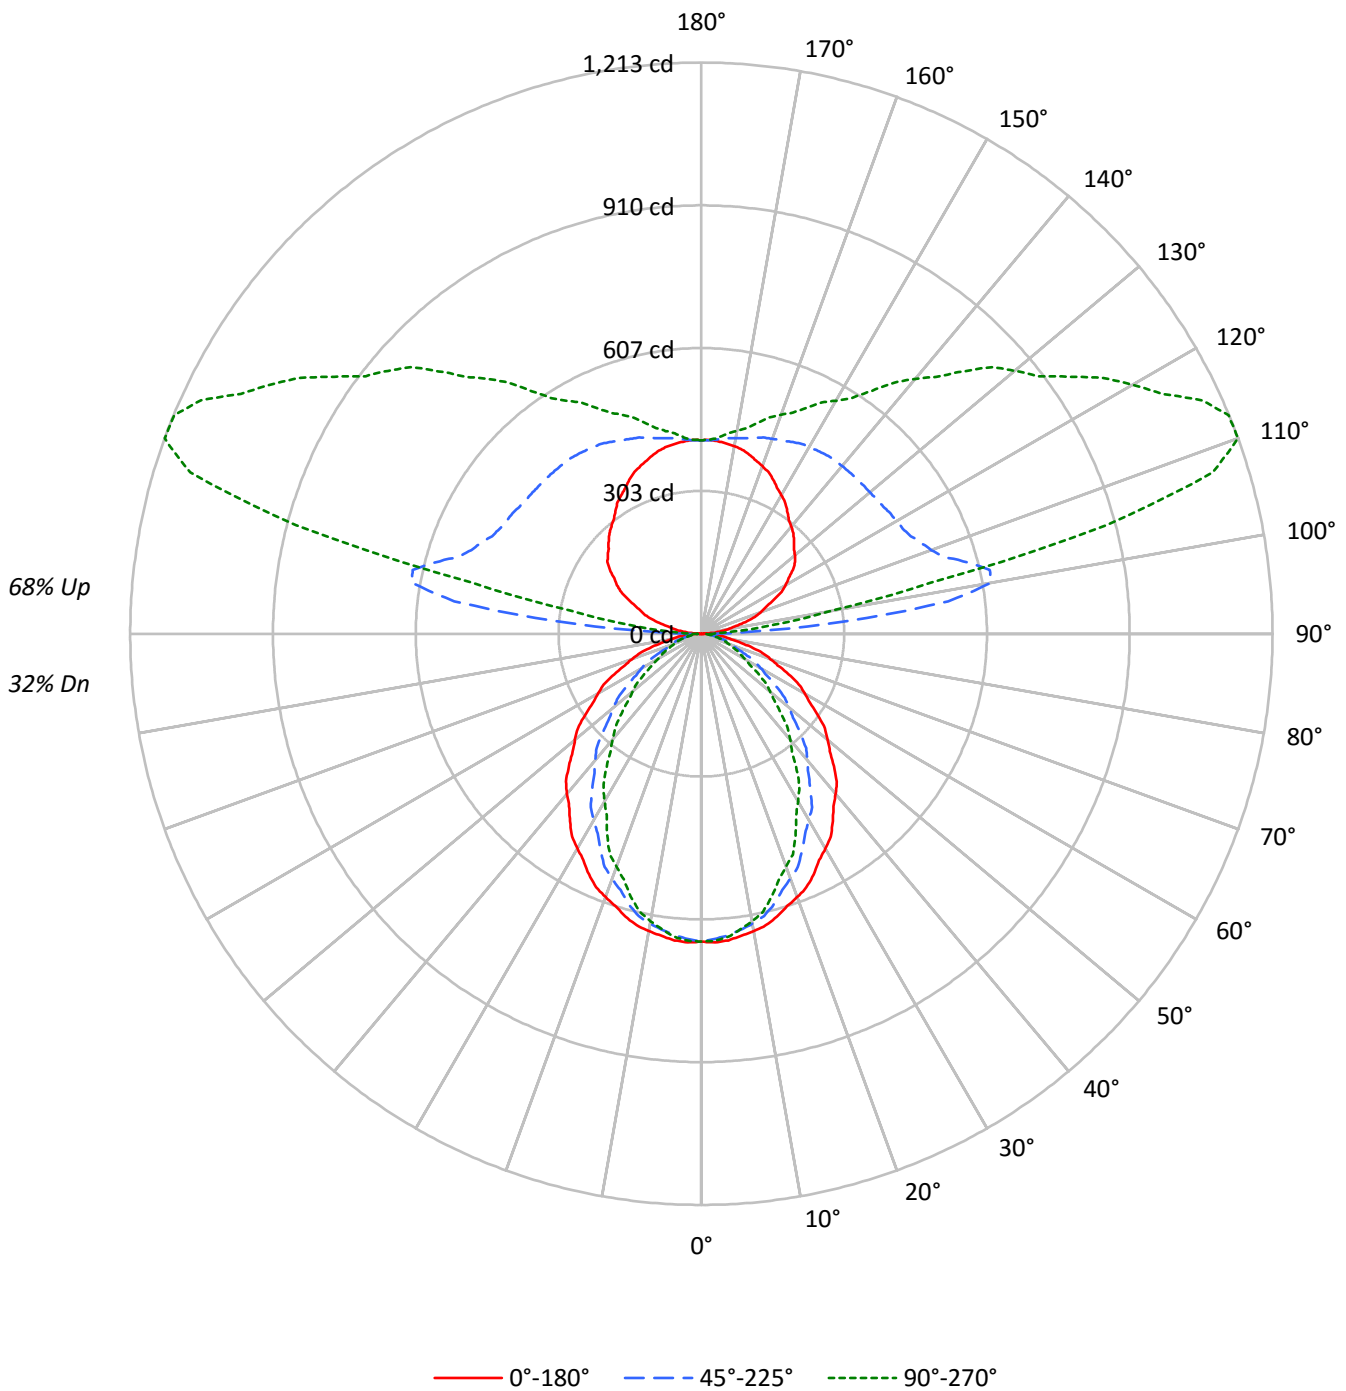



TEST NUMBER: P331668-927

CATALOG NUMBER: SA2XXRDIP-C485D925U927-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	73	73	73	56	56	56	40	40	40	32				
1	94	90	86	83	85	81	78	75	65	63	61	49	48	47	35	35	34	28				
2	86	79	73	68	77	71	66	62	57	54	51	44	42	40	32	30	29	24				
3	78	70	63	57	70	63	57	52	50	46	43	39	36	34	28	27	25	20				
4	72	62	54	48	64	56	49	44	45	40	37	35	32	29	25	23	22	18				
5	66	55	47	42	59	50	43	38	40	35	32	31	28	25	23	21	19	16				
6	61	49	42	36	55	45	38	33	36	31	28	28	25	22	21	19	17	14				
7	56	44	37	32	51	40	34	29	33	28	24	26	22	20	19	17	15	12				
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	15	14	11				
9	48	37	30	25	44	34	27	23	27	23	19	22	18	16	16	14	12	10				
10	45	34	27	22	41	31	25	21	25	21	17	20	17	14	15	13	11	9				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10555	10555	10555
5°	10595	10423	10481
10°	10516	10252	10165
15°	10394	9949	9663
20°	10227	9514	9036
25°	10055	9021	8432
30°	9818	8516	7655
35°	9585	7965	6974
40°	9352	7396	6184
45°	9079	6754	5471
50°	8796	6106	4770
55°	8510	5413	4096
60°	8176	4682	3400
65°	7798	3931	3095
70°	7345	3238	2851
75°	6787	2951	2658
80°	5997	2641	2427
85°	4705	2075	2075



TEST NUMBER: P331668-927

CATALOG NUMBER: SA2XXRDIP-C485D925U927-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	61.2	1.5
10°-20°	168.0	4.0
20°-30°	235.9	5.6
30°-40°	257.3	6.1
40°-50°	236.6	5.6
50°-60°	185.8	4.4
60°-70°	121.1	2.9
70°-80°	62.5	1.5
80°-90°	19.9	0.5
90°-100°	164.4	3.9
100°-110°	557.8	13.3
110°-120°	592.6	14.1
120°-130°	487.8	11.6
130°-140°	391.8	9.3
140°-150°	296.0	7.0
150°-160°	208.1	4.9
160°-170°	122.5	2.9
170°-180°	39.9	0.9
0°-30°	465.2	11.1
0°-40°	722.4	17.2
0°-60°	1144.8	27.2
0°-90°	1348.3	32.0
90°-120°	1314.8	31.2
90°-150°	2490.5	59.2
90°-180°	2861.0	68.0
0°-180°	4209.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	654	654	654	654	654	
5°	654	650	643	648	647	62
15°	622	615	595	584	578	175
25°	564	544	506	483	473	259
35°	486	455	404	368	354	304
45°	398	357	296	255	240	307
55°	302	255	192	158	146	270
65°	204	156	103	84	81	202
75°	109	69	47	43	43	115
85°	25	14	11	11	11	30
90°	1	11	27	26	26	3
95°	28	68	310	117	90	29
105°	96	145	586	1047	891	102
115°	170	215	490	1012	1172	169
125°	237	281	471	819	951	211
135°	278	332	466	689	788	215
145°	318	365	463	575	629	199
155°	361	390	450	509	529	166
165°	394	406	431	457	464	111
175°	410	411	414	420	418	39
180°	411	411	411	411	411	



TEST NUMBER: P331668-927

CATALOG NUMBER: SA2XXRDIP-C485D925U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7
2.5°	656.1	655.6	655.1	654.5	654.0	653.2	652.0	650.9	649.7	648.6	649.6
5°	653.7	653.1	652.4	651.8	651.1	649.9	648.2	646.5	644.8	643.1	644.3
7.5°	647.0	646.2	645.4	644.5	643.7	642.3	640.3	638.3	636.4	634.4	634.7
10°	641.4	640.4	639.4	638.6	637.6	635.9	633.3	630.6	628.0	625.3	625.0
12.5°	634.2	633.1	631.9	630.8	629.7	627.5	624.1	620.8	617.3	614.0	613.3
15°	621.8	620.4	618.9	617.4	616.0	613.1	608.6	604.1	599.7	595.2	592.7
17.5°	606.6	604.4	602.1	599.9	597.7	593.7	588.0	582.3	576.6	570.8	567.8
20°	595.2	592.6	589.9	587.3	584.6	580.0	573.5	566.9	560.3	553.7	550.5
22.5°	582.9	580.0	576.9	574.0	571.1	565.9	558.5	551.0	543.7	536.2	532.0
25°	564.4	560.2	556.0	551.8	547.6	541.1	532.4	523.8	515.1	506.4	501.1
27.5°	542.2	537.6	533.0	528.5	523.9	516.7	506.9	497.1	487.4	477.5	471.3
30°	526.6	521.6	516.6	511.6	506.6	498.8	488.3	477.8	467.2	456.8	450.0
32.5°	511.4	505.6	499.7	493.9	488.1	479.7	469.1	458.3	447.6	436.9	429.2
35°	486.3	479.6	472.9	466.2	459.5	450.4	438.8	427.2	415.7	404.1	395.8
37.5°	461.2	453.8	446.5	439.1	431.8	421.9	409.6	397.3	384.9	372.6	363.5
40°	443.7	435.9	427.9	420.1	412.2	401.9	389.1	376.4	363.6	350.9	341.5
42.5°	425.7	417.4	409.1	400.8	392.5	381.8	368.6	355.4	342.2	329.1	319.4
45°	397.6	388.8	379.9	371.1	362.3	351.0	337.2	323.4	309.6	295.8	286.5
47.5°	370.1	360.8	351.5	342.1	332.8	321.0	306.7	292.5	278.2	264.0	254.7
50°	350.2	340.9	331.6	322.3	312.9	301.0	286.5	272.1	257.6	243.1	234.1
52.5°	330.8	321.1	311.3	301.6	291.8	279.9	265.7	251.6	237.4	223.3	214.5
55°	302.3	292.1	281.8	271.6	261.3	249.1	234.9	220.7	206.4	192.3	184.4
57.5°	273.1	262.6	252.1	241.5	231.0	219.0	205.3	191.6	178.0	164.4	157.1
60°	253.2	242.7	232.2	221.7	211.1	199.2	185.6	172.1	158.5	145.0	138.2
62.5°	233.8	223.3	212.8	202.2	191.7	180.1	167.2	154.2	141.3	128.4	122.0
65°	204.1	193.5	182.8	172.1	161.5	150.3	138.5	126.6	114.8	102.9	98.5
67.5°	175.5	164.9	154.3	143.8	133.2	122.6	111.9	101.3	90.6	80.0	78.0
70°	155.6	145.4	135.1	124.8	114.5	104.9	95.9	86.7	77.7	68.6	67.3
72.5°	136.7	126.8	117.0	107.2	97.4	88.8	81.5	74.2	66.9	59.7	58.5
75°	108.8	99.7	90.5	81.3	72.0	65.2	60.8	56.2	51.8	47.3	46.4
77.5°	81.5	73.4	65.4	57.3	49.3	44.1	42.0	39.8	37.6	35.5	34.9
80°	64.5	57.8	51.1	44.4	37.6	33.7	32.3	31.1	29.7	28.4	27.9
82.5°	48.9	43.6	38.4	33.2	28.0	24.9	24.0	23.1	22.2	21.3	21.0
85°	25.4	22.7	19.9	17.2	14.4	12.8	12.4	12.0	11.6	11.2	11.2
87.5°	7.8	7.4	7.1	6.7	6.1	6.2	7.0	8.1	9.0	9.2	8.9
90°	0.8	3.2	6.3	7.9	9.5	11.9	15.8	21.3	26.1	26.9	26.1
92.5°	9.7	13.9	19.6	23.1	28.4	35.9	53.8	78.9	101.3	102.7	86.8
95°	27.6	30.8	38.7	45.9	58.5	77.5	113.8	182.6	274.3	309.9	271.2
97.5°	45.1	49.4	57.8	68.4	83.0	104.5	150.2	246.1	398.5	529.1	555.0
100°	60.8	63.2	70.3	83.0	98.9	121.0	162.9	259.4	430.1	624.6	738.5
102.5°	75.4	77.2	84.3	97.0	113.4	135.5	174.3	260.0	418.1	627.7	806.8
105°	96.5	99.7	105.1	117.0	134.4	156.5	193.7	264.0	394.5	585.8	796.1
107.5°	119.2	121.8	127.1	138.1	155.3	177.6	213.7	275.0	382.8	541.0	726.7
110°	134.4	137.6	142.3	152.6	169.2	192.1	226.9	283.8	380.3	519.4	683.1



TEST NUMBER: P331668-927

CATALOG NUMBER: SA2XXRDIP-C485D925U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	148.3	151.5	156.9	166.5	182.4	206.0	239.6	293.3	380.9	505.5	652.8
115°	170.0	174.0	178.7	188.1	204.0	225.3	259.4	307.5	384.2	490.2	615.1
117.5°	192.4	195.6	200.3	208.7	223.9	246.1	277.5	322.7	389.9	482.8	591.4
120°	206.4	209.5	214.3	221.3	237.2	259.4	290.2	332.9	393.7	478.3	578.8
122.5°	219.7	222.1	226.9	234.6	250.5	273.2	302.1	341.7	398.2	475.8	568.0
125°	237.2	239.6	244.3	253.8	269.6	291.8	320.2	355.8	404.8	471.2	552.6
127.5°	251.1	254.3	260.9	271.3	286.5	309.3	337.0	368.9	411.6	468.5	538.4
130°	259.4	262.4	270.4	281.5	297.3	319.4	347.1	377.2	416.7	467.2	528.9
132.5°	266.9	270.7	279.2	291.0	307.4	329.5	355.9	385.3	421.7	466.6	521.3
135°	278.3	281.5	291.0	302.8	321.0	343.1	368.4	396.1	427.7	465.6	510.7
137.5°	289.1	292.9	302.3	315.0	333.0	353.6	378.6	404.3	433.1	465.5	503.3
140°	297.3	300.5	309.9	322.6	340.0	360.5	384.2	408.8	435.6	464.9	498.9
142.5°	305.5	308.0	316.9	329.5	346.3	365.6	388.6	412.6	437.5	464.9	494.5
145°	317.8	321.0	328.9	340.8	356.6	374.0	395.3	417.5	439.6	463.3	488.6
147.5°	331.1	333.5	341.0	352.0	365.1	380.6	400.7	420.2	440.2	460.5	482.6
150°	340.0	342.3	348.6	358.9	370.8	385.0	403.2	421.4	439.6	458.6	477.5
152.5°	348.8	349.9	356.2	365.3	376.5	389.4	405.8	422.0	438.3	455.4	473.1
155°	361.3	362.1	366.9	375.6	384.2	396.1	409.6	422.9	436.4	449.9	464.9
157.5°	371.8	372.6	376.4	383.9	390.9	400.8	412.3	422.9	432.8	444.2	457.2
160°	378.7	379.5	382.6	389.0	395.3	404.0	413.5	422.9	430.9	440.4	451.5
162.5°	385.6	385.2	388.3	393.4	399.1	405.9	414.2	422.3	429.0	437.2	446.4
165°	393.7	392.9	394.5	399.3	403.2	408.0	415.1	420.6	425.3	430.9	438.0
167.5°	400.4	399.4	400.8	403.9	406.7	409.7	414.9	419.5	421.7	425.3	429.8
170°	404.8	403.2	404.0	406.4	408.0	410.4	414.3	418.3	419.9	422.2	425.3
172.5°	407.3	406.4	405.9	408.3	409.2	411.0	413.7	416.4	417.3	418.4	421.0
175°	410.4	409.6	408.8	410.4	410.4	411.1	412.7	414.3	413.5	414.3	415.1
177.5°	411.8	410.5	409.9	411.1	411.1	411.1	411.8	413.0	411.8	411.1	411.8
180°	411.1	411.1	411.1	411.1	411.1	411.1	411.1	411.1	411.1	411.1	411.1



TEST NUMBER: P331668-927

CATALOG NUMBER: SA2XXRDIP-C485D925U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	653.7	653.7	653.7	653.7	653.7	653.7	653.7	653.7
2.5°	650.6	651.7	652.8	653.2	653.0	652.8	652.5	652.4
5°	645.5	646.7	647.8	648.2	647.8	647.5	647.1	646.7
7.5°	635.0	635.3	635.7	635.6	634.9	634.1	633.5	632.8
10°	624.6	624.2	623.8	623.2	622.4	621.6	620.8	620.0
12.5°	612.6	611.9	611.2	610.1	608.8	607.5	606.2	604.9
15°	590.2	587.7	585.2	583.3	581.9	580.7	579.3	578.1
17.5°	564.8	561.9	558.9	556.3	554.1	551.8	549.5	547.2
20°	547.2	543.9	540.6	537.5	534.6	531.7	528.9	525.9
22.5°	527.8	523.6	519.4	516.1	514.0	511.8	509.7	507.5
25°	495.7	490.3	484.9	481.2	479.2	477.2	475.3	473.3
27.5°	465.0	458.7	452.4	447.7	444.6	441.5	438.3	435.2
30°	443.3	436.7	429.9	424.8	421.2	417.7	414.2	410.6
32.5°	421.5	413.9	406.2	400.8	397.4	394.1	390.7	387.4
35°	387.5	379.2	371.0	365.4	362.5	359.6	356.7	353.8
37.5°	354.3	345.2	336.1	329.9	326.6	323.3	320.0	316.6
40°	332.2	322.8	313.5	307.1	303.7	300.3	296.8	293.4
42.5°	309.7	300.1	290.5	284.0	280.7	277.3	274.0	270.7
45°	277.1	267.8	258.5	252.2	249.1	245.9	242.7	239.6
47.5°	245.4	236.1	226.9	220.8	217.9	215.1	212.1	209.3
50°	225.0	215.9	206.8	201.0	198.2	195.4	192.7	189.9
52.5°	205.7	197.0	188.2	182.6	180.1	177.5	174.9	172.4
55°	176.5	168.6	160.7	155.5	153.0	150.5	148.1	145.5
57.5°	149.9	142.7	135.5	130.8	128.7	126.6	124.5	122.3
60°	131.5	124.8	118.1	113.8	111.6	109.5	107.4	105.3
62.5°	115.6	109.2	102.8	99.0	97.8	96.5	95.2	94.0
65°	94.0	89.5	85.1	82.6	82.2	81.8	81.4	81.0
67.5°	75.9	73.8	71.8	70.6	70.1	69.7	69.3	68.8
70°	66.0	64.7	63.4	62.4	61.9	61.4	60.8	60.4
72.5°	57.4	56.3	55.2	54.5	54.2	53.9	53.6	53.2
75°	45.5	44.6	43.6	43.1	43.0	42.9	42.7	42.6
77.5°	34.5	33.9	33.4	33.0	32.8	32.6	32.4	32.2
80°	27.3	26.9	26.3	26.1	26.1	26.1	26.1	26.1
82.5°	20.7	20.4	20.0	19.9	19.9	19.9	19.9	19.9
85°	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2
87.5°	8.6	8.2	8.4	8.6	8.6	8.6	8.6	8.6
90°	25.3	23.7	25.3	26.1	26.1	26.1	26.1	26.1
92.5°	68.9	59.2	52.5	47.6	47.0	44.4	45.1	43.8
95°	207.2	158.9	125.7	108.3	98.1	91.7	89.4	90.2
97.5°	483.4	395.5	309.9	252.9	215.1	195.6	184.0	177.4
100°	721.8	623.8	515.5	419.9	354.2	320.2	297.3	283.0
102.5°	878.1	856.0	776.7	675.3	604.0	546.0	517.4	498.1
105°	960.6	1050.0	1060.3	1034.1	985.1	936.1	902.1	891.0
107.5°	901.2	1035.7	1117.9	1156.2	1162.4	1159.7	1152.9	1138.2
110°	849.9	991.4	1092.7	1157.5	1191.4	1206.5	1213.6	1212.8





TEST NUMBER: P331668-927

CATALOG NUMBER: SA2XXRDIP-C485D925U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	803.1	939.0	1047.1	1121.4	1168.7	1193.8	1207.3	1211.6
115°	745.5	867.3	970.9	1052.3	1108.4	1144.8	1165.4	1172.5
117.5°	702.2	809.1	903.0	979.5	1036.6	1075.1	1096.8	1102.7
120°	680.7	778.8	862.5	934.5	989.8	1027.0	1050.0	1057.9
122.5°	663.6	753.4	832.8	897.9	947.5	984.0	1004.4	1011.1
125°	638.8	720.3	789.8	849.1	895.0	925.0	944.8	951.1
127.5°	614.3	688.0	753.6	808.3	848.3	876.5	893.6	898.7
130°	598.5	666.5	729.0	781.2	819.9	846.8	862.5	868.9
132.5°	583.3	646.3	703.6	752.7	790.8	817.7	832.2	837.9
135°	562.1	614.3	666.5	710.7	744.7	770.9	785.1	788.2
137.5°	545.2	588.8	630.3	668.8	699.9	722.3	734.8	739.6
140°	534.5	572.4	608.8	643.6	668.8	689.4	701.3	706.0
142.5°	525.6	557.9	589.1	618.3	642.3	661.0	671.5	672.5
145°	513.1	539.2	563.7	586.6	605.6	619.1	626.9	629.3
147.5°	503.4	524.0	543.1	559.9	575.6	586.3	591.7	593.1
150°	496.5	513.9	530.5	544.7	556.6	566.1	570.8	571.6
152.5°	489.6	505.6	519.8	532.1	541.4	549.6	553.1	553.3
155°	479.9	492.6	504.4	513.1	521.8	527.4	530.5	528.9
157.5°	468.7	479.3	489.3	496.1	502.2	506.8	508.2	508.2
160°	461.7	470.4	479.1	484.7	490.2	494.2	495.0	495.0
162.5°	454.8	462.2	469.6	473.9	479.4	482.1	482.9	482.3
165°	444.3	449.9	455.4	458.6	461.7	464.9	464.9	464.1
167.5°	434.4	438.6	442.4	445.3	446.7	448.5	448.3	447.3
170°	429.3	431.7	434.8	436.4	437.2	439.6	438.8	437.2
172.5°	423.6	425.3	427.9	428.8	429.6	430.7	429.9	429.0
175°	417.5	418.3	419.1	419.9	419.9	420.6	419.9	418.3
177.5°	413.0	413.0	413.7	413.7	413.7	413.7	413.0	411.8
180°	411.1	411.1	411.1	411.1	411.1	411.1	411.1	411.1

(END OF REPORT)