

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331346-830

Luminaire Tested: **SA2XXDIP-C675D530U830-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331346-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C675D530U830-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 530 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4329.3 lumens
Efficiency: N/A
Efficacy: 107.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331346-830
CATALOG NUMBER: SA2XXDIP-C675D530U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

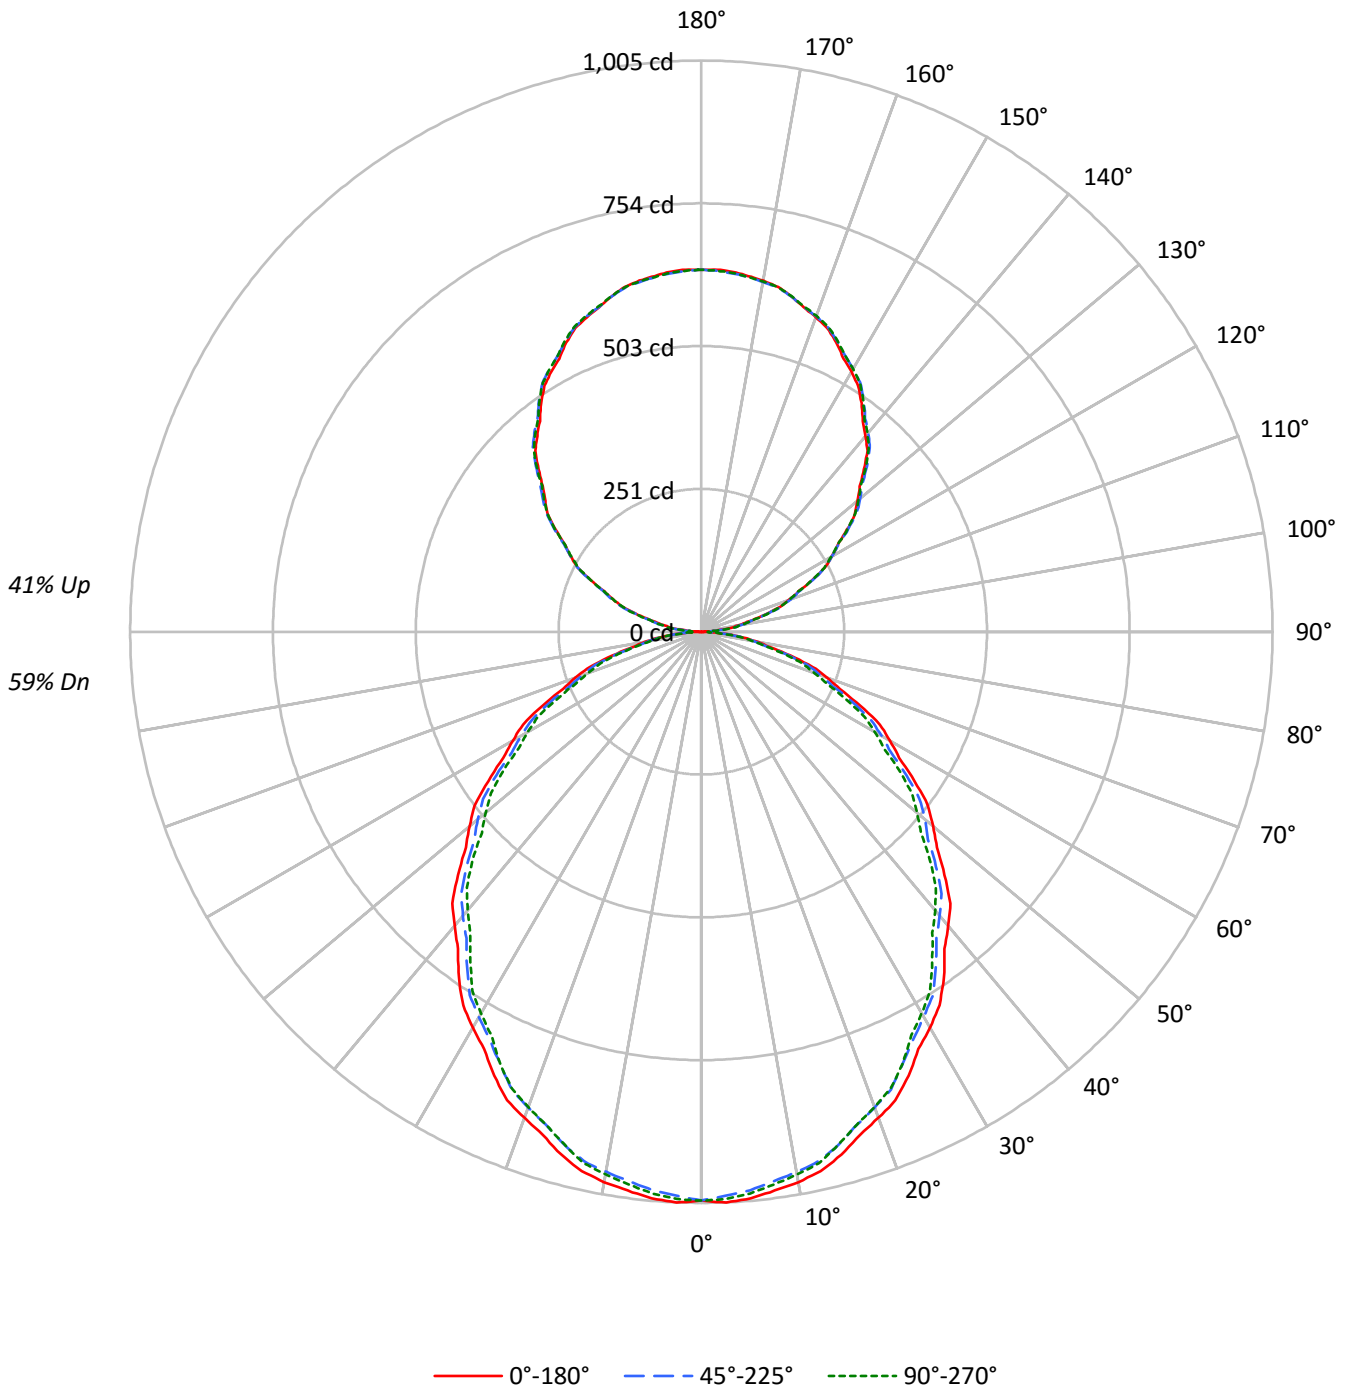



TEST NUMBER: P331346-830

CATALOG NUMBER: SA2XXDIP-C675D530U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59
1	100	95	91	88	93	89	86	83	77	75	73	67	65	63	57	55	54	50
2	91	83	77	72	84	78	72	68	68	64	60	59	55	53	50	48	46	42
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	44	41	39	35
4	76	65	57	51	70	61	54	48	53	48	43	46	42	38	40	36	34	30
5	70	58	50	44	65	54	47	41	48	42	37	41	37	33	36	32	29	26
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	32	29	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	30	26	23	20
8	55	43	35	29	51	40	33	28	36	30	26	31	27	23	27	23	21	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	19	17
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16157	16157	16157
5°	16219	15985	16078
10°	16123	15823	15901
15°	15921	15616	15600
20°	15639	15309	15292
25°	15358	14931	14931
30°	14997	14585	14458
35°	14661	14168	13957
40°	14235	13748	13487
45°	13819	13337	13006
50°	13366	12906	12446
55°	12892	12405	11944
60°	12368	11806	11370
65°	11801	11213	10697
70°	11084	10494	9994
75°	10081	9669	9426
80°	8945	8675	8229
85°	7317	6947	6224



TEST NUMBER: P331346-830

CATALOG NUMBER: SA2XXDIP-C675D530U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.1	2.2
10°-20°	264.8	6.1
20°-30°	389.2	9.0
30°-40°	452.1	10.4
40°-50°	451.6	10.4
50°-60°	393.8	9.1
60°-70°	291.2	6.7
70°-80°	164.9	3.8
80°-90°	46.9	1.1
90°-100°	40.4	0.9
100°-110°	125.3	2.9
110°-120°	214.3	4.9
120°-130°	281.8	6.5
130°-140°	316.2	7.3
140°-150°	310.1	7.2
150°-160°	260.1	6.0
160°-170°	172.5	4.0
170°-180°	60.3	1.4
0°-30°	748.0	17.3
0°-40°	1200.1	27.7
0°-60°	2045.4	47.2
0°-90°	2548.4	58.9
90°-120°	380.0	8.8
90°-150°	1288.0	29.8
90°-180°	1781.0	41.1
0°-180°	4329.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1001	1001	1001	1001	1001	
5°	1001	996	986	993	992	95
15°	952	946	934	938	933	268
25°	862	854	838	840	838	396
35°	744	734	719	713	708	464
45°	605	598	584	574	570	467
55°	458	452	441	430	424	409
65°	309	303	294	285	280	305
75°	162	160	155	150	151	173
85°	40	38	38	35	34	45
90°	1	7	19	18	18	3
95°	28	33	34	34	33	32
105°	116	117	118	119	119	122
115°	215	218	217	217	215	213
125°	313	317	316	314	314	279
135°	405	410	412	411	410	312
145°	491	495	498	499	497	307
155°	562	563	565	567	566	258
165°	611	611	611	614	612	172
175°	636	634	633	637	634	60
180°	637	637	637	637	637	



TEST NUMBER: P331346-830

CATALOG NUMBER: SA2XXDIP-C675D530U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7
2.5°	1005.3	1004.5	1003.6	1002.8	1001.9	1000.5	998.6	996.7	994.9	993.0	994.7
5°	1000.7	999.8	999.0	998.2	997.3	995.7	993.3	991.0	988.6	986.3	988.0
7.5°	991.8	990.5	989.2	987.9	986.6	984.7	982.3	979.9	977.5	975.1	976.8
10°	983.4	981.8	980.3	978.8	977.4	975.3	972.8	970.3	967.6	965.1	966.8
12.5°	971.9	970.5	969.1	967.8	966.5	964.6	962.0	959.4	956.9	954.3	955.5
15°	952.5	951.3	950.0	948.8	947.4	945.4	942.6	939.8	937.1	934.2	935.2
17.5°	927.9	926.6	925.4	924.1	922.8	920.8	917.9	915.1	912.3	909.5	910.5
20°	910.2	909.0	907.7	906.3	905.1	903.0	899.9	897.0	894.0	891.0	891.6
22.5°	892.5	890.7	888.9	887.1	885.3	883.1	880.2	877.4	874.6	871.8	871.9
25°	862.1	860.4	858.8	857.0	855.3	852.6	848.9	845.4	841.7	838.1	838.5
27.5°	827.5	826.0	824.4	822.8	821.3	819.2	816.2	813.4	810.5	807.7	807.0
30°	804.4	802.7	801.0	799.3	797.6	795.1	791.9	788.7	785.5	782.3	781.7
32.5°	779.8	778.4	777.0	775.6	774.3	771.9	768.5	765.2	761.8	758.4	757.2
35°	743.8	741.7	739.5	737.4	735.2	732.4	729.1	725.6	722.2	718.8	717.5
37.5°	703.1	701.3	699.4	697.5	695.7	693.0	689.6	686.2	682.8	679.3	677.7
40°	675.4	673.7	672.0	670.3	668.6	666.1	662.6	659.2	655.8	652.3	650.4
42.5°	648.6	646.8	645.1	643.4	641.7	639.1	635.7	632.3	628.9	625.5	623.3
45°	605.2	603.7	602.2	600.8	599.3	596.9	593.7	590.5	587.3	584.1	581.7
47.5°	562.1	560.7	559.3	557.9	556.5	554.1	550.7	547.4	544.1	540.7	538.3
50°	532.1	531.0	530.0	528.9	527.8	525.8	522.8	519.8	516.8	513.8	510.9
52.5°	502.8	501.4	500.0	498.6	497.2	495.1	492.3	489.5	486.6	483.8	481.4
55°	458.0	456.8	455.4	454.1	452.9	450.9	448.4	445.8	443.3	440.7	438.1
57.5°	412.9	412.0	410.9	409.9	408.9	407.0	404.2	401.3	398.5	395.7	393.1
60°	383.0	382.1	381.3	380.4	379.6	377.6	374.7	371.6	368.6	365.6	363.3
62.5°	353.7	352.3	351.0	349.6	348.3	346.4	344.1	341.8	339.5	337.1	335.0
65°	308.9	307.6	306.3	305.0	303.7	302.0	299.9	297.7	295.6	293.5	291.5
67.5°	263.3	262.2	261.2	260.1	259.1	257.7	255.7	253.8	251.9	250.0	248.5
70°	234.8	233.9	233.1	232.2	231.4	230.0	228.0	226.1	224.2	222.3	220.7
72.5°	205.6	204.6	203.8	202.9	202.1	201.0	199.8	198.6	197.4	196.0	194.6
75°	161.6	161.2	160.8	160.3	159.9	159.2	158.2	157.0	156.0	155.0	153.6
77.5°	122.4	121.7	120.9	120.2	119.5	118.9	118.5	118.0	117.6	117.2	116.6
80°	96.2	96.0	95.8	95.6	95.4	95.0	94.6	94.2	93.8	93.3	92.7
82.5°	71.6	71.5	71.5	71.4	71.4	71.3	71.0	70.8	70.5	70.2	69.5
85°	39.5	39.2	39.0	38.8	38.5	38.4	38.2	38.0	37.7	37.5	36.9
87.5°	13.9	13.9	13.9	13.8	13.8	13.8	13.9	14.1	14.3	14.5	13.9
90°	0.6	2.0	3.4	4.8	6.3	8.3	10.9	13.6	16.2	18.9	18.6
92.5°	9.6	10.7	11.7	12.7	13.8	14.6	15.3	15.8	16.5	17.1	17.2
95°	28.0	29.1	30.3	31.6	32.7	33.5	33.6	33.9	34.1	34.4	34.4
97.5°	51.1	52.1	53.2	54.2	55.2	56.0	56.5	56.9	57.4	57.9	57.9
100°	68.2	69.2	70.1	71.2	72.1	72.8	73.1	73.4	73.8	74.2	74.2
102.5°	86.3	87.1	87.8	88.6	89.4	90.0	90.5	90.9	91.3	91.8	91.9
105°	115.6	115.9	116.3	116.6	117.0	117.3	117.5	117.7	118.0	118.3	118.5
107.5°	145.1	145.5	146.1	146.6	147.1	147.4	147.4	147.4	147.4	147.4	147.5
110°	163.9	164.7	165.3	166.1	166.8	167.1	167.1	167.1	167.1	167.1	167.1



TEST NUMBER: P331346-830

CATALOG NUMBER: SA2XXDIP-C675D530U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	184.5	185.3	186.0	186.7	187.5	187.8	187.7	187.6	187.5	187.4	187.1
115°	215.0	215.7	216.4	217.2	217.8	218.1	217.8	217.6	217.4	217.2	217.1
117.5°	245.3	246.3	247.2	248.2	249.1	249.3	248.6	247.9	247.2	246.6	246.3
120°	265.5	266.5	267.4	268.3	269.4	269.4	268.3	267.4	266.5	265.5	265.5
122.5°	284.0	285.1	286.3	287.5	288.6	288.8	288.1	287.5	286.8	286.2	285.9
125°	312.8	313.9	315.0	316.0	317.1	317.4	317.1	316.8	316.4	316.0	315.7
127.5°	340.8	342.2	343.6	345.0	346.3	346.8	346.4	345.9	345.5	345.1	344.6
130°	358.5	360.1	361.6	363.2	364.7	365.3	365.1	364.9	364.7	364.4	364.2
132.5°	378.2	379.6	380.8	382.1	383.3	384.0	384.1	384.1	384.2	384.2	383.7
135°	404.7	406.0	407.4	408.7	410.0	410.8	410.9	411.2	411.5	411.7	411.6
137.5°	432.5	433.7	434.7	435.8	436.9	437.5	437.9	438.2	438.5	438.8	438.7
140°	449.3	450.4	451.5	452.5	453.6	454.5	455.1	455.6	456.3	456.9	456.9
142.5°	466.6	467.6	468.7	469.8	470.8	471.6	472.0	472.4	472.8	473.2	473.3
145°	491.3	492.1	492.9	493.8	494.6	495.4	496.1	496.8	497.6	498.2	498.3
147.5°	513.3	514.3	515.3	516.3	517.3	518.0	518.5	519.0	519.4	520.0	520.2
150°	528.4	529.0	529.8	530.5	531.2	531.8	532.3	532.7	533.2	533.8	534.0
152.5°	541.7	542.4	543.1	543.8	544.5	545.2	545.7	546.3	546.9	547.5	547.9
155°	561.7	562.0	562.4	562.7	563.1	563.5	563.8	564.2	564.5	564.9	565.5
157.5°	578.7	579.0	579.2	579.5	579.8	579.9	580.1	580.4	580.6	580.8	581.6
160°	589.1	589.3	589.6	589.7	590.0	590.2	590.3	590.4	590.6	590.7	591.4
162.5°	598.5	598.6	598.6	598.7	598.7	598.8	598.9	599.1	599.2	599.3	600.1
165°	611.1	611.0	610.9	610.8	610.7	610.6	610.6	610.6	610.6	610.6	611.4
167.5°	621.6	621.3	620.9	620.6	620.2	620.0	620.0	620.0	619.9	619.9	620.8
170°	627.3	626.9	626.5	626.1	625.8	625.6	625.5	625.3	625.2	625.1	625.9
172.5°	631.1	630.7	630.4	630.0	629.7	629.4	629.3	629.2	629.1	629.0	629.8
175°	635.8	635.5	635.1	634.8	634.4	634.1	633.9	633.7	633.4	633.1	634.0
177.5°	637.8	637.4	637.2	636.9	636.6	636.4	636.2	636.0	635.8	635.7	636.2
180°	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9



TEST NUMBER: P331346-830

CATALOG NUMBER: SA2XXDIP-C675D530U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7	1000.7
2.5°	996.4	998.2	999.8	1000.5	1000.1	999.8	999.5	999.2
5°	989.7	991.4	993.1	993.7	993.3	992.9	992.5	992.0
7.5°	978.5	980.2	981.9	982.5	982.0	981.7	981.2	980.7
10°	968.5	970.3	971.9	972.4	971.9	971.2	970.5	969.9
12.5°	956.7	957.9	959.1	959.4	958.9	958.6	958.1	957.6
15°	936.0	936.9	937.7	937.6	936.5	935.5	934.4	933.3
17.5°	911.4	912.4	913.4	913.4	912.4	911.3	910.3	909.3
20°	892.3	893.0	893.5	893.4	892.6	891.7	890.9	890.0
22.5°	872.0	872.1	872.2	872.0	871.6	871.0	870.5	870.1
25°	839.0	839.3	839.8	839.8	839.3	839.0	838.5	838.1
27.5°	806.3	805.8	805.1	804.3	803.2	802.2	801.2	800.1
30°	781.0	780.3	779.7	778.9	778.1	777.2	776.4	775.5
32.5°	756.1	755.0	753.8	752.8	752.0	751.1	750.2	749.3
35°	716.2	714.9	713.6	712.5	711.4	710.3	709.3	708.1
37.5°	676.2	674.6	673.0	671.7	670.6	669.6	668.6	667.6
40°	648.6	646.6	644.7	643.3	642.4	641.6	640.7	639.9
42.5°	621.2	619.2	617.1	615.4	614.2	613.0	611.8	610.6
45°	579.4	577.0	574.7	573.1	572.2	571.4	570.5	569.6
47.5°	535.8	533.3	530.8	529.0	527.7	526.5	525.3	524.1
50°	507.8	504.8	501.8	499.8	498.7	497.7	496.6	495.5
52.5°	478.8	476.4	473.9	471.9	470.5	469.1	467.7	466.3
55°	435.5	433.0	430.5	428.6	427.5	426.5	425.4	424.3
57.5°	390.6	388.0	385.6	383.9	383.0	382.3	381.4	380.6
60°	360.9	358.5	356.2	354.8	354.1	353.5	352.8	352.1
62.5°	332.8	330.6	328.5	327.0	326.1	325.3	324.5	323.7
65°	289.6	287.7	285.8	284.3	283.2	282.1	281.1	280.0
67.5°	246.9	245.5	244.0	242.8	242.0	241.1	240.3	239.4
70°	219.2	217.8	216.3	215.1	214.2	213.4	212.5	211.7
72.5°	193.1	191.6	190.1	189.0	188.3	187.7	187.0	186.2
75°	152.3	151.1	149.8	149.4	149.8	150.2	150.6	151.1
77.5°	115.9	115.3	114.6	114.0	113.4	112.8	112.3	111.6
80°	92.1	91.4	90.8	90.2	89.8	89.4	89.0	88.5
82.5°	68.6	67.8	67.0	66.5	66.4	66.4	66.3	66.2
85°	36.3	35.6	35.0	34.5	34.3	34.1	33.9	33.6
87.5°	13.4	12.8	12.3	12.0	11.8	11.7	11.5	11.3
90°	18.4	18.1	17.8	17.8	17.9	18.0	18.2	18.3
92.5°	17.2	17.2	17.2	17.3	17.3	17.3	17.4	17.4
95°	34.4	34.4	34.4	34.3	34.0	33.8	33.6	33.4
97.5°	57.9	57.9	57.9	57.8	57.8	57.8	57.8	57.7
100°	74.2	74.2	74.2	74.1	74.0	73.9	73.8	73.6
102.5°	92.0	92.1	92.2	92.2	92.1	91.9	91.8	91.7
105°	118.8	118.9	119.2	119.3	119.3	119.3	119.3	119.3
107.5°	147.6	147.7	147.8	147.5	146.9	146.5	145.9	145.3
110°	167.1	167.1	167.1	167.0	166.6	166.3	165.9	165.5



TEST NUMBER: P331346-830

CATALOG NUMBER: SA2XXDIP-C675D530U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	186.8	186.5	186.2	186.0	185.7	185.4	185.1	184.9
115°	216.9	216.8	216.7	216.4	216.0	215.7	215.4	215.0
117.5°	246.0	245.7	245.4	245.2	244.8	244.4	244.0	243.6
120°	265.5	265.5	265.5	265.3	264.9	264.7	264.3	263.9
122.5°	285.6	285.3	285.0	284.7	284.5	284.2	284.0	283.7
125°	315.3	315.0	314.6	314.3	314.2	314.1	314.0	313.9
127.5°	344.2	343.7	343.4	342.9	342.5	342.1	341.8	341.4
130°	363.9	363.7	363.4	363.1	362.6	362.1	361.7	361.2
132.5°	383.1	382.6	382.1	381.6	381.3	380.9	380.5	380.1
135°	411.5	411.3	411.2	410.9	410.7	410.3	409.9	409.5
137.5°	438.6	438.5	438.4	438.1	437.6	437.2	436.7	436.2
140°	456.9	456.9	456.9	456.7	456.1	455.6	455.2	454.7
142.5°	473.3	473.4	473.5	473.3	472.9	472.4	471.9	471.5
145°	498.5	498.6	498.7	498.5	498.0	497.6	497.1	496.6
147.5°	520.5	520.8	521.0	520.9	520.5	520.0	519.5	519.1
150°	534.4	534.8	535.2	535.2	534.8	534.4	534.0	533.8
152.5°	548.4	548.8	549.3	549.3	548.8	548.4	547.9	547.5
155°	566.1	566.7	567.3	567.4	567.0	566.7	566.3	566.0
157.5°	582.4	583.2	584.1	584.2	583.6	583.1	582.5	581.8
160°	592.1	592.9	593.5	593.7	593.2	592.8	592.2	591.7
162.5°	600.9	601.7	602.6	602.7	602.1	601.5	601.0	600.4
165°	612.3	613.1	613.9	614.1	613.4	612.8	612.3	611.6
167.5°	621.6	622.5	623.3	623.4	622.7	622.2	621.5	620.9
170°	626.8	627.6	628.4	628.5	627.7	627.1	626.3	625.7
172.5°	630.7	631.5	632.3	632.4	631.7	630.9	630.2	629.5
175°	634.8	635.7	636.5	636.6	635.8	635.1	634.4	633.7
177.5°	636.8	637.3	637.9	637.9	637.3	636.8	636.2	635.7
180°	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9

(END OF REPORT)