

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331417-830

Luminaire Tested: **SA2XXDIP-C865D1080U830-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331417-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C865D1080U830-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7370.6 lumens
Efficiency: N/A
Efficacy: 112.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331417-830

CATALOG NUMBER: SA2XXDIP-C865D1080U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

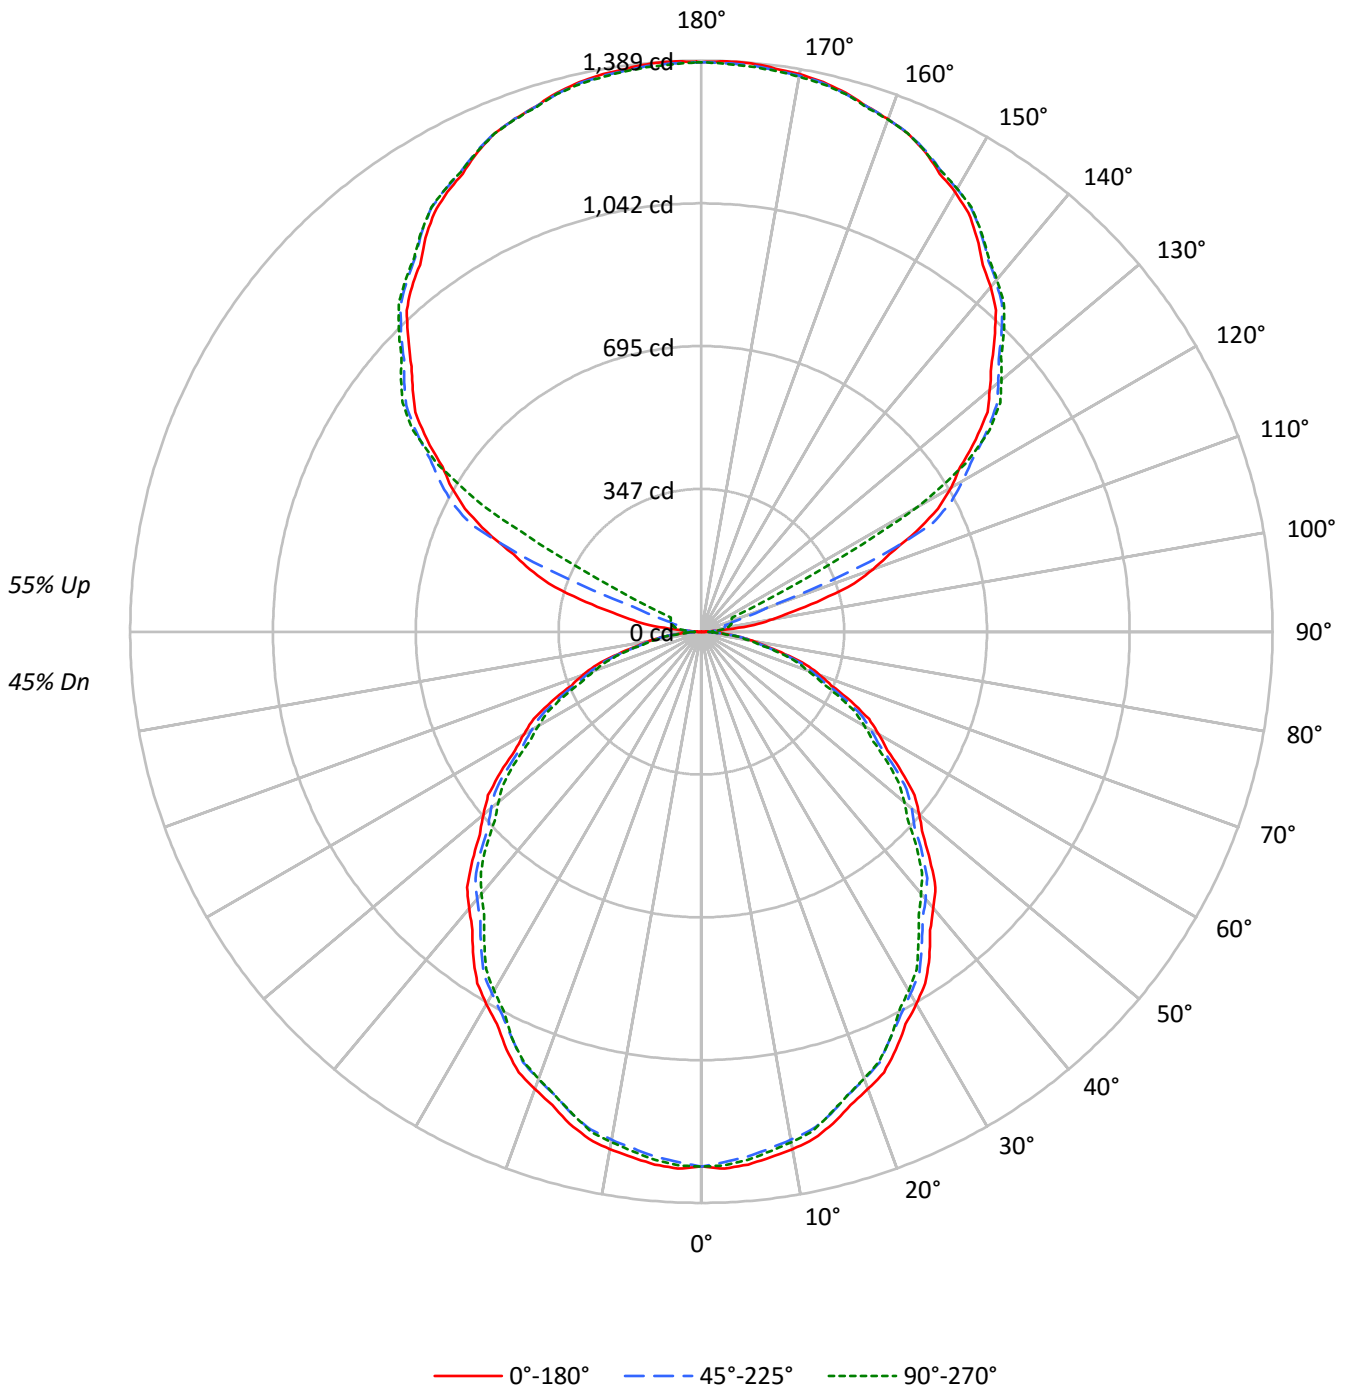



TEST NUMBER: P331417-830

CATALOG NUMBER: SA2XXDIP-C865D1080U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	51	51	51	45
1	97	92	88	85	88	85	81	78	71	68	66	57	56	54	45	44	43	38
2	88	81	75	69	80	74	69	64	62	58	55	50	48	45	40	38	37	32
3	80	71	64	58	73	65	59	54	55	50	46	45	41	38	35	33	31	27
4	73	63	55	49	67	58	51	46	48	43	39	40	36	33	32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	29	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	21	18
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	21	25	21	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	21001	21001	21001
5°	21081	20778	20900
10°	20956	20566	20669
15°	20697	20301	20277
20°	20330	19900	19878
25°	19963	19408	19408
30°	19494	18957	18793
35°	19056	18413	18143
40°	18506	17873	17530
45°	17961	17335	16908
50°	17372	16777	16179
55°	16757	16124	15527
60°	16075	15345	14783
65°	15339	14571	13903
70°	14408	13638	12987
75°	13107	12558	12246
80°	11632	11278	10702
85°	9503	9040	8096



TEST NUMBER: P331417-830

CATALOG NUMBER: SA2XXDIP-C865D1080U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.3	1.7
10°-20°	344.2	4.7
20°-30°	505.9	6.9
30°-40°	587.6	8.0
40°-50°	587.0	8.0
50°-60°	511.9	6.9
60°-70°	378.5	5.1
70°-80°	214.4	2.9
80°-90°	61.1	0.8
90°-100°	46.2	0.6
100°-110°	169.4	2.3
110°-120°	452.8	6.1
120°-130°	747.4	10.1
130°-140°	794.9	10.8
140°-150°	738.8	10.0
150°-160°	594.0	8.1
160°-170°	382.8	5.2
170°-180°	131.8	1.8
0°-30°	972.3	13.2
0°-40°	1559.9	21.2
0°-60°	2658.7	36.1
0°-90°	3312.6	44.9
90°-120°	668.4	9.1
90°-150°	2949.4	40.0
90°-180°	4058.0	55.1
0°-180°	7370.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1301	1301	1301	1301	1301	
5°	1301	1295	1282	1291	1290	123
15°	1238	1230	1214	1219	1213	348
25°	1121	1110	1089	1092	1089	515
35°	967	954	934	927	920	603
45°	787	777	759	746	740	607
55°	595	587	573	558	552	532
65°	402	394	381	370	364	397
75°	210	207	201	194	196	224
85°	51	50	49	45	44	59
90°	1	12	20	25	27	6
95°	65	34	39	44	43	80
105°	305	318	61	72	76	325
115°	576	594	618	176	82	567
125°	815	828	847	853	857	726
135°	1008	1024	1033	1042	1041	778
145°	1169	1169	1185	1192	1187	731
155°	1288	1280	1290	1296	1288	593
165°	1357	1351	1354	1360	1354	383
175°	1388	1381	1383	1389	1380	132
180°	1385	1385	1385	1385	1385	



TEST NUMBER: P331417-830

CATALOG NUMBER: SA2XXDIP-C865D1080U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1300.7	1300.7	1300.7	1300.7	1300.7	1300.7	1300.7	1300.7	1300.7	1300.7	1300.7
2.5°	1306.7	1305.6	1304.5	1303.4	1302.3	1300.5	1298.1	1295.6	1293.2	1290.7	1293.0
5°	1300.7	1299.6	1298.5	1297.4	1296.3	1294.2	1291.2	1288.1	1285.1	1282.0	1284.2
7.5°	1289.2	1287.5	1285.8	1284.0	1282.3	1279.9	1276.8	1273.7	1270.5	1267.4	1269.7
10°	1278.2	1276.3	1274.3	1272.3	1270.5	1267.8	1264.4	1261.1	1257.8	1254.4	1256.7
12.5°	1263.2	1261.5	1259.8	1258.0	1256.3	1253.8	1250.5	1247.1	1243.8	1240.5	1242.0
15°	1238.2	1236.5	1234.8	1233.2	1231.5	1228.9	1225.3	1221.6	1218.0	1214.5	1215.5
17.5°	1206.2	1204.5	1202.9	1201.2	1199.5	1196.8	1193.2	1189.5	1185.8	1182.1	1183.5
20°	1183.2	1181.5	1179.9	1178.2	1176.5	1173.7	1169.8	1165.9	1162.1	1158.2	1159.0
22.5°	1160.2	1157.8	1155.5	1153.1	1150.8	1147.8	1144.2	1140.5	1136.8	1133.1	1133.3
25°	1120.6	1118.4	1116.2	1114.0	1111.7	1108.2	1103.5	1098.8	1094.1	1089.4	1090.0
27.5°	1075.6	1073.7	1071.6	1069.6	1067.6	1064.7	1061.0	1057.2	1053.6	1049.8	1049.0
30°	1045.6	1043.4	1041.1	1039.0	1036.7	1033.5	1029.4	1025.2	1021.0	1016.8	1016.0
32.5°	1013.6	1011.8	1010.0	1008.2	1006.4	1003.3	999.0	994.6	990.2	985.8	984.3
35°	966.8	964.0	961.2	958.5	955.6	952.1	947.6	943.2	938.7	934.2	932.6
37.5°	914.0	911.5	909.1	906.6	904.3	900.8	896.4	891.9	887.4	883.0	880.9
40°	878.0	875.8	873.5	871.3	869.1	865.7	861.3	856.9	852.4	848.0	845.5
42.5°	843.0	840.7	838.5	836.3	834.1	830.8	826.3	821.9	817.4	812.9	810.2
45°	786.6	784.8	782.8	780.9	778.9	775.8	771.7	767.5	763.4	759.2	756.1
47.5°	730.7	728.9	727.0	725.2	723.3	720.2	715.9	711.5	707.2	702.9	699.6
50°	691.6	690.2	688.9	687.5	686.1	683.4	679.6	675.6	671.8	667.9	664.0
52.5°	653.7	651.8	650.0	648.1	646.3	643.6	639.9	636.2	632.5	628.9	625.7
55°	595.3	593.7	592.0	590.3	588.6	586.2	582.9	579.5	576.2	572.8	569.5
57.5°	536.8	535.5	534.1	532.8	531.5	529.0	525.3	521.6	517.9	514.3	511.0
60°	497.8	496.6	495.6	494.5	493.3	490.9	486.9	483.1	479.2	475.2	472.2
62.5°	459.8	458.0	456.2	454.4	452.6	450.3	447.2	444.2	441.2	438.3	435.5
65°	401.5	399.8	398.1	396.4	394.8	392.6	389.8	387.0	384.3	381.4	379.0
67.5°	342.2	340.8	339.5	338.2	336.9	335.0	332.4	329.9	327.4	324.9	323.0
70°	305.2	304.1	302.9	301.8	300.8	298.9	296.4	293.9	291.4	288.9	287.0
72.5°	267.1	266.1	264.9	263.8	262.7	261.4	259.8	258.2	256.5	254.9	253.0
75°	210.1	209.5	209.0	208.5	207.9	206.9	205.6	204.2	202.7	201.3	199.7
77.5°	159.1	158.2	157.2	156.3	155.3	154.6	154.0	153.4	152.9	152.3	151.5
80°	125.1	124.8	124.5	124.2	123.9	123.6	123.0	122.4	121.9	121.3	120.5
82.5°	93.0	93.0	92.9	92.8	92.8	92.7	92.3	92.0	91.6	91.3	90.2
85°	51.3	51.0	50.7	50.4	50.1	49.9	49.6	49.3	49.0	48.8	48.0
87.5°	18.2	18.3	18.3	18.4	18.4	18.4	18.3	18.2	18.1	18.0	17.5
90°	1.0	3.5	5.9	8.4	10.8	12.9	14.7	16.5	18.3	20.1	21.1
92.5°	20.3	20.0	19.8	19.6	19.3	19.7	20.5	21.5	22.3	23.3	23.8
95°	65.1	57.8	50.4	43.1	35.7	32.8	34.4	36.0	37.5	39.1	40.2
97.5°	129.2	108.6	87.8	67.1	46.5	37.9	41.5	45.1	48.7	52.3	53.2
100°	177.4	146.8	116.3	85.9	55.3	41.9	45.7	49.6	53.3	57.1	58.9
102.5°	230.3	223.8	217.4	210.8	204.4	185.4	153.7	122.1	90.4	58.7	61.1
105°	304.6	311.3	317.9	324.6	331.3	304.3	243.5	182.7	121.9	61.1	63.5
107.5°	389.4	394.7	400.1	405.5	410.9	377.2	304.3	231.4	158.4	85.6	83.0
110°	443.8	448.6	453.3	457.9	462.6	432.7	368.3	304.1	239.7	175.3	153.1



TEST NUMBER: P331417-830

CATALOG NUMBER: SA2XXDIP-C865D1080U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	495.2	499.4	503.4	507.6	511.7	505.9	489.9	474.1	458.2	442.2	361.1
115°	576.2	579.9	583.7	587.5	591.3	596.0	601.5	607.1	612.7	618.2	515.1
117.5°	648.5	652.7	657.0	661.2	665.4	669.4	673.3	677.1	680.9	684.8	659.8
120°	701.3	704.7	708.0	711.4	714.7	718.4	722.5	726.4	730.5	734.4	737.1
122.5°	746.3	749.8	753.3	756.9	760.3	764.3	768.6	773.0	777.4	781.7	783.3
125°	814.6	817.5	820.4	823.3	826.1	829.7	834.0	838.2	842.4	846.7	848.2
127.5°	876.6	879.8	883.0	886.2	889.4	892.5	895.7	898.8	902.0	905.2	907.5
130°	915.8	919.4	922.9	926.5	930.0	933.0	935.5	937.9	940.4	942.8	945.3
132.5°	955.8	958.9	962.0	965.0	968.0	970.7	973.2	975.6	978.1	980.5	982.6
135°	1008.0	1011.5	1015.1	1018.7	1022.2	1025.0	1027.0	1029.0	1031.0	1033.0	1035.3
137.5°	1060.6	1063.2	1065.6	1068.2	1070.6	1073.0	1075.3	1077.6	1079.9	1082.1	1084.3
140°	1095.1	1096.9	1098.7	1100.5	1102.3	1104.4	1106.8	1109.3	1111.7	1114.2	1116.2
142.5°	1124.0	1125.6	1127.2	1128.8	1130.4	1132.7	1135.4	1138.2	1141.0	1143.9	1145.7
145°	1169.3	1169.0	1168.8	1168.7	1168.4	1170.2	1173.9	1177.7	1181.6	1185.3	1186.8
147.5°	1208.8	1208.0	1207.1	1206.3	1205.4	1206.8	1210.6	1214.3	1218.0	1221.8	1222.9
150°	1234.4	1232.8	1231.3	1229.7	1228.2	1229.2	1232.8	1236.3	1239.9	1243.4	1244.8
152.5°	1256.0	1254.3	1252.5	1250.8	1249.2	1249.9	1253.3	1256.7	1260.1	1263.5	1264.8
155°	1287.5	1285.5	1283.6	1281.5	1279.5	1279.9	1282.5	1285.2	1287.9	1290.5	1291.8
157.5°	1312.2	1310.5	1308.8	1307.1	1305.4	1305.5	1307.4	1309.2	1311.1	1313.0	1314.5
160°	1326.6	1325.3	1323.9	1322.6	1321.3	1321.3	1322.6	1323.9	1325.3	1326.6	1327.9
162.5°	1339.4	1338.1	1336.7	1335.4	1334.1	1334.0	1335.1	1336.3	1337.5	1338.6	1340.1
165°	1356.7	1355.3	1354.0	1352.6	1351.3	1350.9	1351.6	1352.4	1353.0	1353.7	1355.2
167.5°	1369.5	1368.2	1366.8	1365.5	1364.1	1363.8	1364.4	1365.0	1365.6	1366.3	1367.8
170°	1376.7	1375.4	1374.0	1372.7	1371.4	1370.9	1371.4	1371.8	1372.2	1372.7	1374.2
172.5°	1381.5	1380.2	1378.8	1377.5	1376.2	1375.7	1376.2	1376.6	1377.1	1377.5	1379.0
175°	1387.7	1386.2	1384.6	1383.1	1381.5	1380.9	1381.4	1381.9	1382.2	1382.7	1384.3
177.5°	1388.7	1387.5	1386.2	1385.0	1383.7	1383.2	1383.4	1383.6	1383.7	1383.9	1385.2
180°	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7



TEST NUMBER: P331417-830

CATALOG NUMBER: SA2XXDIP-C865D1080U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1300.7	1300.7	1300.7	1300.7	1300.7	1300.7	1300.7	1300.7
2.5°	1295.1	1297.4	1299.6	1300.5	1300.0	1299.6	1299.2	1298.7
5°	1286.4	1288.6	1290.9	1291.7	1291.2	1290.6	1290.1	1289.5
7.5°	1271.9	1274.1	1276.4	1277.1	1276.6	1275.9	1275.4	1274.7
10°	1258.9	1261.1	1263.4	1264.0	1263.2	1262.3	1261.5	1260.7
12.5°	1243.6	1245.1	1246.7	1247.2	1246.5	1245.9	1245.3	1244.7
15°	1216.6	1217.8	1218.9	1218.7	1217.4	1216.0	1214.6	1213.1
17.5°	1184.7	1186.0	1187.3	1187.2	1185.9	1184.6	1183.3	1181.9
20°	1159.8	1160.6	1161.5	1161.3	1160.3	1159.1	1158.0	1156.9
22.5°	1133.5	1133.6	1133.8	1133.6	1132.8	1132.2	1131.5	1130.9
25°	1090.5	1091.0	1091.6	1091.6	1091.0	1090.5	1090.0	1089.4
27.5°	1048.2	1047.4	1046.5	1045.5	1044.1	1042.7	1041.4	1040.1
30°	1015.1	1014.4	1013.5	1012.5	1011.4	1010.3	1009.2	1008.0
32.5°	982.8	981.3	979.8	978.5	977.4	976.3	975.2	974.0
35°	930.9	929.3	927.7	926.0	924.7	923.3	921.9	920.5
37.5°	878.9	876.8	874.8	873.1	871.8	870.4	869.1	867.7
40°	843.0	840.5	838.0	836.1	835.1	834.0	832.8	831.7
42.5°	807.5	804.7	802.1	799.9	798.3	796.8	795.2	793.7
45°	753.1	750.0	747.0	744.9	743.8	742.6	741.5	740.5
47.5°	696.4	693.2	690.0	687.6	686.0	684.4	682.8	681.2
50°	660.1	656.2	652.3	649.7	648.3	646.9	645.5	644.1
52.5°	622.4	619.2	616.0	613.4	611.6	609.7	607.9	606.1
55°	566.2	562.8	559.5	557.1	555.7	554.3	553.0	551.6
57.5°	507.7	504.4	501.1	499.0	497.9	496.9	495.9	494.7
60°	469.2	466.1	463.1	461.1	460.2	459.4	458.5	457.8
62.5°	432.5	429.7	426.9	425.0	423.9	422.8	421.8	420.8
65°	376.5	374.0	371.5	369.5	368.2	366.7	365.3	363.9
67.5°	321.0	319.1	317.2	315.7	314.5	313.4	312.3	311.1
70°	285.0	283.0	281.2	279.6	278.5	277.4	276.3	275.1
72.5°	251.0	249.0	247.1	245.7	244.8	243.9	243.0	242.1
75°	198.0	196.3	194.7	194.2	194.7	195.3	195.8	196.3
77.5°	150.7	149.9	149.0	148.2	147.4	146.7	145.9	145.1
80°	119.6	118.9	118.0	117.3	116.7	116.2	115.6	115.1
82.5°	89.2	88.1	87.1	86.5	86.3	86.2	86.1	86.1
85°	47.1	46.3	45.4	44.9	44.6	44.3	44.0	43.7
87.5°	17.2	16.7	16.2	15.9	15.8	15.6	15.6	15.5
90°	22.2	23.4	24.5	25.3	25.7	26.2	26.6	27.1
92.5°	24.4	25.0	25.5	26.0	26.3	26.5	26.8	27.1
95°	41.3	42.4	43.5	44.0	43.7	43.5	43.3	43.1
97.5°	54.1	55.0	55.9	56.5	56.7	57.0	57.2	57.5
100°	60.7	62.5	64.3	65.3	65.8	66.3	66.7	67.1
102.5°	63.3	65.7	68.0	69.5	70.0	70.7	71.4	71.9
105°	66.0	68.4	70.9	72.6	73.5	74.4	75.2	76.2
107.5°	80.6	78.0	75.6	74.8	75.7	76.5	77.5	78.3
110°	130.8	108.6	86.2	75.6	76.4	77.4	78.2	79.2



TEST NUMBER: P331417-830

CATALOG NUMBER: SA2XXDIP-C865D1080U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	279.8	198.6	117.3	77.1	77.9	78.5	79.3	79.9
115°	412.0	309.0	205.9	146.3	130.3	114.2	98.2	82.2
117.5°	634.9	609.9	585.0	546.2	493.5	440.8	388.1	335.5
120°	739.8	742.4	745.2	731.4	701.3	671.3	641.2	611.2
122.5°	784.9	786.6	788.2	786.0	780.2	774.4	768.5	762.7
125°	849.8	851.3	852.9	854.0	854.7	855.4	856.0	856.7
127.5°	909.7	912.0	914.3	915.5	915.6	915.8	915.9	916.0
130°	947.7	950.2	952.6	953.8	953.6	953.3	953.1	952.9
132.5°	984.7	986.8	988.9	989.9	989.6	989.4	989.2	988.9
135°	1037.5	1039.7	1041.9	1042.8	1042.4	1041.9	1041.5	1041.0
137.5°	1086.5	1088.6	1090.8	1091.6	1090.8	1090.1	1089.3	1088.5
140°	1118.2	1120.2	1122.2	1122.7	1121.5	1120.4	1119.3	1118.2
142.5°	1147.5	1149.3	1151.1	1151.5	1150.4	1149.2	1148.2	1147.1
145°	1188.5	1190.0	1191.6	1191.8	1190.7	1189.6	1188.5	1187.3
147.5°	1224.1	1225.3	1226.4	1226.5	1225.6	1224.6	1223.7	1222.8
150°	1246.1	1247.5	1248.8	1248.9	1247.7	1246.7	1245.6	1244.4
152.5°	1266.1	1267.5	1268.9	1268.8	1267.2	1265.8	1264.3	1262.9
155°	1293.2	1294.6	1295.9	1295.6	1293.8	1292.1	1290.3	1288.5
157.5°	1316.0	1317.5	1319.0	1318.9	1317.2	1315.4	1313.7	1311.9
160°	1329.3	1330.6	1331.9	1331.8	1330.3	1328.7	1327.2	1325.6
162.5°	1341.6	1343.1	1344.7	1344.4	1342.6	1340.7	1338.7	1336.8
165°	1356.8	1358.3	1359.9	1359.9	1358.3	1356.8	1355.2	1353.7
167.5°	1369.4	1370.9	1372.5	1372.2	1370.3	1368.3	1366.3	1364.2
170°	1375.8	1377.3	1378.9	1378.7	1376.7	1374.7	1372.7	1370.6
172.5°	1380.6	1382.1	1383.7	1383.6	1381.5	1379.5	1377.5	1375.5
175°	1385.8	1387.4	1388.9	1388.6	1386.4	1384.1	1382.0	1379.7
177.5°	1386.4	1387.6	1388.9	1388.7	1387.1	1385.5	1383.9	1382.3
180°	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7	1384.7

(END OF REPORT)