

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331385-830

Luminaire Tested: **SA2XXDIP-C865D530U830-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331385-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 530 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5373.7 lumens  
Efficiency: N/A  
Efficacy: 110.1 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 48.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331385-830  
CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

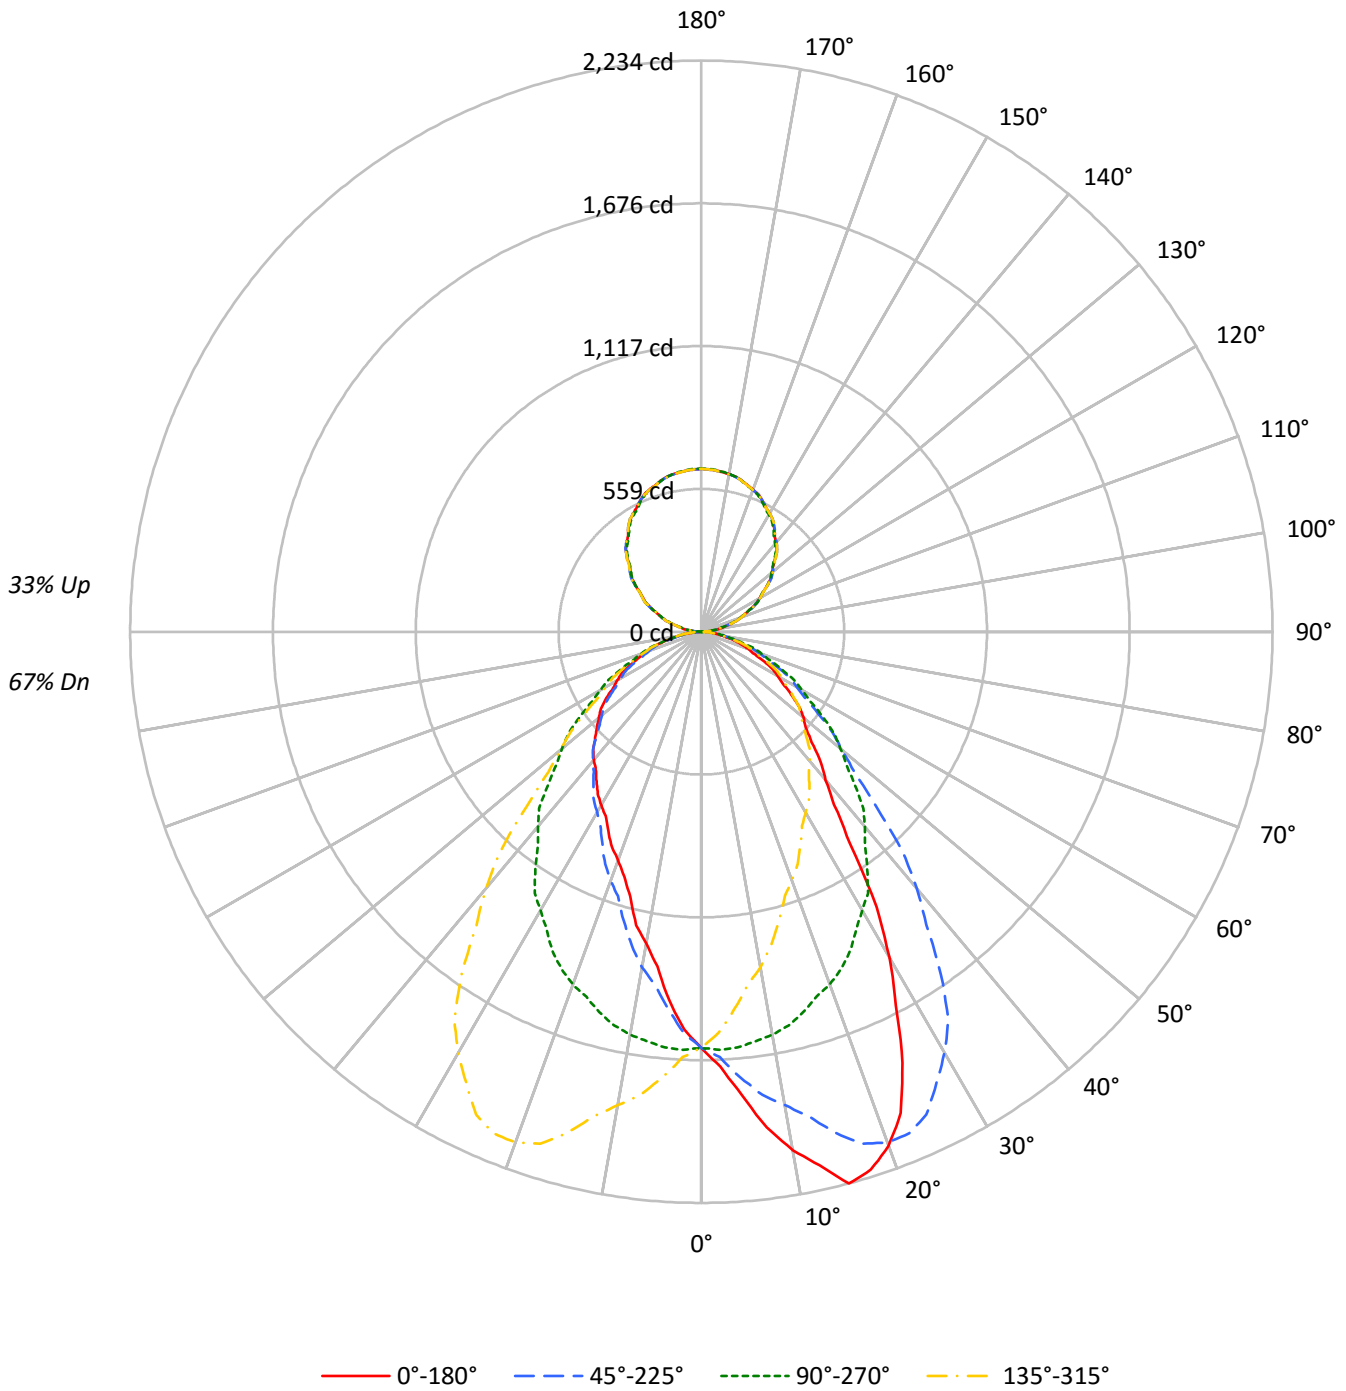



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67				
1	102	98	94	91	96	93	89	86	82	80	78	73	71	69	64	63	62	58				
2	94	86	80	75	88	82	76	72	73	69	65	65	62	59	57	55	53	49				
3	86	77	69	64	81	73	66	61	65	60	56	58	54	51	51	48	46	42				
4	79	68	60	54	74	65	58	52	58	53	48	52	48	44	46	43	40	37				
5	73	61	53	47	68	58	51	46	52	47	42	47	42	39	42	38	35	33				
6	67	55	47	41	63	53	45	40	48	42	37	43	38	34	39	35	32	29				
7	62	50	42	37	59	48	41	36	43	37	33	39	34	31	35	31	28	26				
8	58	46	38	33	55	44	37	32	40	34	30	36	31	28	33	29	26	23				
9	54	42	35	30	51	40	33	29	37	31	27	33	29	25	30	26	23	21				
10	51	39	32	27	48	37	31	26	34	28	24	31	26	23	28	24	21	19				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	26274	26274	26274	26274
5°	29457	26446	23436	26446
10°	33755	26230	20282	26230
15°	37342	25748	17919	25748
20°	36773	25232	16333	25232
25°	33157	24545	15330	24545
30°	27401	23448	14600	23448
35°	19969	22300	14079	22300
40°	15951	20946	13789	20946
45°	13938	19379	13394	19379
50°	13102	17862	13132	17862
55°	12076	16321	12780	16321
60°	11066	14683	12239	14683
65°	10082	13211	11706	13211
70°	9153	11783	10924	11783
75°	8116	10181	9676	10181
80°	6974	8433	7792	8433
85°	6243	6243	4631	6243



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	155.0	2.9
10°-20°	450.6	8.4
20°-30°	653.9	12.2
30°-40°	690.0	12.8
40°-50°	611.0	11.4
50°-60°	487.6	9.1
60°-70°	331.4	6.2
70°-80°	169.9	3.2
80°-90°	43.5	0.8
90°-100°	40.4	0.8
100°-110°	125.3	2.3
110°-120°	214.3	4.0
120°-130°	281.8	5.2
130°-140°	316.2	5.9
140°-150°	310.1	5.8
150°-160°	260.1	4.8
160°-170°	172.5	3.2
170°-180°	60.3	1.1
0°-30°	1259.4	23.4
0°-40°	1949.5	36.3
0°-60°	3048.0	56.7
0°-90°	3592.8	66.9
90°-120°	380.0	7.1
90°-150°	1288.0	24.0
90°-180°	1781.0	33.1
0°-180°	5373.7	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1627	1627	1627	1627	1627	
5°	1818	1632	1446	1632	1818	181
15°	2234	1540	1072	1540	2234	616
25°	1861	1378	860	1378	1861	841
35°	1013	1131	714	1131	1013	659
45°	610	849	587	849	610	480
55°	429	580	454	580	429	385
65°	264	346	306	346	264	262
75°	130	163	155	163	130	139
85°	34	34	25	34	34	37
90°	18	1	18	1	18	10
95°	33	28	33	28	33	37
105°	119	116	119	116	119	125
115°	215	215	215	215	215	212
125°	314	313	314	313	314	280
135°	410	405	410	405	410	315
145°	497	491	497	491	497	310
155°	566	562	566	562	566	260
165°	612	611	612	611	612	172
175°	634	636	634	636	634	60
180°	637	637	637	637	637	



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3
2.5°	1702.4	1702.9	1703.9	1695.9	1694.9	1694.9	1687.9	1681.9	1674.9	1665.4	1666.4
5°	1817.5	1824.4	1826.8	1819.4	1808.1	1806.9	1796.2	1778.7	1762.5	1749.3	1739.9
7.5°	1954.8	1957.6	1951.4	1941.5	1933.2	1918.2	1898.4	1879.1	1851.9	1827.0	1808.5
10°	2058.9	2062.7	2052.0	2037.6	2025.7	2008.2	1979.4	1950.0	1914.4	1880.0	1852.5
12.5°	2138.0	2147.2	2133.5	2131.7	2111.3	2087.3	2053.0	2038.2	1988.0	1940.0	1910.5
15°	2234.0	2233.4	2234.7	2222.7	2207.7	2203.9	2167.8	2128.4	2057.7	2029.5	1980.8
17.5°	2206.2	2215.7	2220.2	2220.0	2219.6	2217.2	2205.6	2180.8	2145.3	2099.7	2043.3
20°	2140.2	2152.7	2154.6	2169.0	2177.1	2187.7	2192.1	2185.2	2163.3	2125.2	2076.4
22.5°	2038.2	2041.6	2047.5	2069.9	2087.5	2114.2	2128.1	2151.2	2142.8	2124.2	2083.4
25°	1861.2	1855.0	1876.9	1888.1	1928.8	1971.3	2002.0	2035.7	2065.8	2083.9	2072.0
27.5°	1648.9	1639.5	1672.3	1702.1	1735.1	1781.2	1829.0	1885.4	1932.3	1990.9	2011.1
30°	1469.7	1475.4	1506.7	1538.5	1588.6	1653.6	1707.4	1769.3	1836.3	1901.9	1947.6
32.5°	1276.6	1298.3	1318.1	1366.9	1411.0	1483.5	1562.3	1639.7	1723.2	1797.8	1868.5
35°	1013.1	1038.2	1065.7	1101.4	1163.3	1235.2	1312.1	1416.5	1530.4	1632.4	1716.2
37.5°	852.8	848.9	864.6	890.3	940.5	998.5	1087.1	1190.3	1324.3	1444.1	1562.3
40°	756.8	754.2	765.5	789.3	827.5	870.0	947.5	1038.2	1162.6	1309.0	1449.7
42.5°	690.7	692.2	698.4	715.2	741.4	776.4	834.4	911.6	1025.6	1163.4	1314.7
45°	610.4	614.8	621.7	629.8	644.8	673.5	706.1	761.1	851.2	966.3	1115.1
47.5°	552.6	552.7	559.8	566.8	575.8	592.0	618.5	653.1	716.6	810.3	938.3
50°	521.6	517.3	522.3	527.8	537.2	548.5	566.0	598.5	641.0	716.7	823.7
52.5°	483.6	483.7	488.2	490.3	498.7	510.0	525.9	548.5	587.0	646.2	734.1
55°	429.0	432.2	434.7	438.4	445.9	454.0	466.6	481.5	511.6	556.0	621.0
57.5°	377.8	378.7	381.3	388.4	393.1	400.7	412.6	426.1	445.6	478.5	527.4
60°	342.7	342.7	347.7	350.8	357.1	364.6	374.0	387.1	404.6	431.5	471.0
62.5°	310.8	310.2	312.2	317.4	322.1	329.1	338.5	349.6	366.1	390.0	422.4
65°	263.9	262.7	266.5	267.7	272.7	279.6	287.1	299.0	312.1	329.6	358.4
67.5°	218.9	220.4	222.4	224.8	227.5	234.8	239.8	248.2	259.3	273.8	293.3
70°	193.9	193.9	193.9	195.8	199.5	203.3	208.3	215.2	225.7	238.3	255.8
72.5°	165.9	167.9	169.8	168.7	173.5	175.8	181.7	185.6	195.8	203.8	219.2
75°	130.1	130.1	130.1	133.2	135.1	137.0	140.7	144.5	149.5	159.5	167.6
77.5°	97.1	96.8	97.5	98.2	100.2	102.5	103.6	107.0	111.6	116.2	123.1
80°	75.0	76.3	76.9	78.1	78.1	79.5	80.0	84.5	87.6	90.7	95.1
82.5°	58.1	58.2	58.4	58.6	59.2	59.9	61.5	63.0	64.0	66.6	70.0
85°	33.7	33.2	33.2	34.4	33.7	33.7	35.1	36.3	36.3	36.9	38.7
87.5°	16.7	16.7	17.2	16.6	16.6	17.1	17.2	16.7	17.2	17.8	17.7
90°	18.3	18.2	18.0	17.9	17.8	17.8	18.1	18.4	18.6	18.9	16.2
92.5°	17.4	17.4	17.3	17.3	17.3	17.2	17.2	17.2	17.2	17.1	16.5
95°	33.4	33.6	33.8	34.0	34.3	34.4	34.4	34.4	34.4	34.4	34.1
97.5°	57.7	57.8	57.8	57.8	57.8	57.9	57.9	57.9	57.9	57.9	57.4
100°	73.6	73.8	73.9	74.0	74.1	74.2	74.2	74.2	74.2	74.2	73.8
102.5°	91.7	91.8	91.9	92.1	92.2	92.2	92.1	92.0	91.9	91.8	91.3
105°	119.3	119.3	119.3	119.3	119.3	119.2	118.9	118.8	118.5	118.3	118.0
107.5°	145.3	145.9	146.5	146.9	147.5	147.8	147.7	147.6	147.5	147.4	147.4
110°	165.5	165.9	166.3	166.6	167.0	167.1	167.1	167.1	167.1	167.1	167.1



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	184.9	185.1	185.4	185.7	186.0	186.2	186.5	186.8	187.1	187.4	187.5
115°	215.0	215.4	215.7	216.0	216.4	216.7	216.8	216.9	217.1	217.2	217.4
117.5°	243.6	244.0	244.4	244.8	245.2	245.4	245.7	246.0	246.3	246.6	247.2
120°	263.9	264.3	264.7	264.9	265.3	265.5	265.5	265.5	265.5	265.5	266.5
122.5°	283.7	284.0	284.2	284.5	284.7	285.0	285.3	285.6	285.9	286.2	286.8
125°	313.9	314.0	314.1	314.2	314.3	314.6	315.0	315.3	315.7	316.0	316.4
127.5°	341.4	341.8	342.1	342.5	342.9	343.4	343.7	344.2	344.6	345.1	345.5
130°	361.2	361.7	362.1	362.6	363.1	363.4	363.7	363.9	364.2	364.4	364.7
132.5°	380.1	380.5	380.9	381.3	381.6	382.1	382.6	383.1	383.7	384.2	384.2
135°	409.5	409.9	410.3	410.7	410.9	411.2	411.3	411.5	411.6	411.7	411.5
137.5°	436.2	436.7	437.2	437.6	438.1	438.4	438.5	438.6	438.7	438.8	438.5
140°	454.7	455.2	455.6	456.1	456.7	456.9	456.9	456.9	456.9	456.9	456.3
142.5°	471.5	471.9	472.4	472.9	473.3	473.5	473.4	473.3	473.3	473.2	472.8
145°	496.6	497.1	497.6	498.0	498.5	498.7	498.6	498.5	498.3	498.2	497.6
147.5°	519.1	519.5	520.0	520.5	520.9	521.0	520.8	520.5	520.2	520.0	519.4
150°	533.8	534.0	534.4	534.8	535.2	535.2	534.8	534.4	534.0	533.8	533.2
152.5°	547.5	547.9	548.4	548.8	549.3	549.3	548.8	548.4	547.9	547.5	546.9
155°	566.0	566.3	566.7	567.0	567.4	567.3	566.7	566.1	565.5	564.9	564.5
157.5°	581.8	582.5	583.1	583.6	584.2	584.1	583.2	582.4	581.6	580.8	580.6
160°	591.7	592.2	592.8	593.2	593.7	593.5	592.9	592.1	591.4	590.7	590.6
162.5°	600.4	601.0	601.5	602.1	602.7	602.6	601.7	600.9	600.1	599.3	599.2
165°	611.6	612.3	612.8	613.4	614.1	613.9	613.1	612.3	611.4	610.6	610.6
167.5°	620.9	621.5	622.2	622.7	623.4	623.3	622.5	621.6	620.8	619.9	619.9
170°	625.7	626.3	627.1	627.7	628.5	628.4	627.6	626.8	625.9	625.1	625.2
172.5°	629.5	630.2	630.9	631.7	632.4	632.3	631.5	630.7	629.8	629.0	629.1
175°	633.7	634.4	635.1	635.8	636.6	636.5	635.7	634.8	634.0	633.1	633.4
177.5°	635.7	636.2	636.8	637.3	637.9	637.9	637.3	636.8	636.2	635.7	635.8
180°	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9



TEST NUMBER: P331385-830  
 CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3
2.5°	1669.9	1665.8	1663.4	1654.4	1646.3	1638.3	1635.9	1636.8	1625.9	1615.3	1610.8
5°	1734.9	1722.4	1710.5	1693.7	1673.7	1651.7	1640.5	1631.7	1609.9	1586.1	1572.3
7.5°	1793.2	1775.3	1752.5	1720.7	1691.5	1657.1	1635.2	1615.8	1583.8	1550.3	1529.7
10°	1828.7	1804.3	1774.9	1736.2	1700.5	1658.6	1629.2	1599.9	1562.3	1522.3	1497.2
12.5°	1859.3	1826.4	1797.4	1747.7	1705.5	1653.1	1618.3	1576.8	1537.3	1489.8	1465.3
15°	1931.9	1871.2	1816.2	1759.9	1708.0	1634.8	1596.1	1540.4	1488.5	1429.7	1401.6
17.5°	1988.1	1920.0	1833.2	1761.7	1701.1	1620.1	1563.2	1496.5	1435.1	1367.9	1329.6
20°	2020.2	1941.9	1848.7	1763.7	1691.1	1598.6	1536.6	1468.5	1396.6	1320.9	1279.6
22.5°	2039.1	1956.9	1864.7	1756.1	1671.1	1581.0	1503.2	1428.4	1355.6	1273.8	1230.6
25°	2045.1	1970.1	1872.5	1749.9	1646.2	1544.2	1450.4	1377.8	1289.6	1213.3	1150.2
27.5°	2015.3	1961.5	1867.7	1738.1	1617.2	1498.0	1393.5	1311.3	1218.2	1135.4	1071.9
30°	1978.9	1947.6	1856.2	1726.2	1594.2	1466.0	1350.9	1257.7	1165.2	1081.4	1016.3
32.5°	1922.3	1915.5	1835.2	1709.1	1569.7	1425.5	1306.4	1212.2	1109.7	1027.3	965.3
35°	1811.2	1841.3	1790.5	1671.1	1523.5	1367.8	1239.0	1131.4	1025.1	946.2	888.1
37.5°	1662.4	1736.9	1723.6	1615.4	1461.2	1305.0	1162.8	1050.4	949.0	869.5	812.4
40°	1559.8	1654.8	1668.6	1572.9	1417.2	1256.5	1105.8	993.8	894.9	822.5	764.9
42.5°	1449.7	1560.8	1598.6	1521.9	1369.1	1205.4	1054.7	938.8	840.9	770.4	719.3
45°	1265.3	1412.2	1480.4	1436.6	1289.0	1121.3	966.3	848.7	759.9	693.6	654.2
47.5°	1092.7	1253.3	1345.0	1329.6	1199.8	1033.8	880.4	767.6	681.2	628.3	593.0
50°	970.6	1135.8	1246.4	1251.5	1135.8	971.3	817.5	711.1	631.7	582.3	553.5
52.5°	864.6	1022.2	1142.9	1169.4	1064.2	906.3	760.9	655.1	585.1	539.7	514.0
55°	726.1	859.3	993.2	1042.0	957.5	807.4	673.0	579.8	514.1	482.9	460.3
57.5°	603.7	714.7	838.3	892.2	840.2	711.7	585.6	504.7	451.4	424.0	406.8
60°	539.1	626.7	736.8	801.2	756.1	641.7	531.6	454.7	410.9	386.5	370.2
62.5°	479.1	556.7	649.7	708.6	684.1	576.2	477.6	409.6	371.8	349.0	337.2
65°	395.3	456.6	528.5	582.9	566.7	484.7	404.1	345.8	315.8	297.7	288.3
67.5°	325.5	369.8	419.6	467.3	454.2	396.2	331.3	286.1	263.7	248.1	242.4
70°	281.4	315.2	359.6	397.8	387.1	339.6	288.3	249.6	230.2	217.1	211.4
72.5°	239.4	267.2	301.0	332.2	325.1	285.6	242.8	213.5	198.6	186.5	181.9
75°	180.8	202.0	222.6	243.3	241.4	210.8	185.8	163.2	151.4	141.9	140.1
77.5°	133.5	145.3	159.4	171.6	168.2	150.7	131.1	118.2	109.4	103.2	102.2
80°	102.0	108.9	118.9	127.6	123.2	115.7	100.1	90.7	84.5	78.1	75.7
82.5°	73.9	80.8	86.8	91.5	88.2	81.2	71.5	65.1	61.5	57.1	56.2
85°	38.7	42.5	45.1	46.3	45.1	40.6	36.3	33.7	30.6	28.7	28.2
87.5°	17.7	17.2	16.7	17.2	15.5	15.2	12.9	11.1	10.9	10.7	10.0
90°	13.6	10.9	8.3	6.3	4.8	3.4	2.0	0.6	2.0	3.4	4.8
92.5°	15.8	15.3	14.6	13.8	12.7	11.7	10.7	9.6	10.7	11.7	12.7
95°	33.9	33.6	33.5	32.7	31.6	30.3	29.1	28.0	29.1	30.3	31.6
97.5°	56.9	56.5	56.0	55.2	54.2	53.2	52.1	51.1	52.1	53.2	54.2
100°	73.4	73.1	72.8	72.1	71.2	70.1	69.2	68.2	69.2	70.1	71.2
102.5°	90.9	90.5	90.0	89.4	88.6	87.8	87.1	86.3	87.1	87.8	88.6
105°	117.7	117.5	117.3	117.0	116.6	116.3	115.9	115.6	115.9	116.3	116.6
107.5°	147.4	147.4	147.4	147.1	146.6	146.1	145.5	145.1	145.5	146.1	146.6
110°	167.1	167.1	167.1	166.8	166.1	165.3	164.7	163.9	164.7	165.3	166.1





TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	187.6	187.7	187.8	187.5	186.7	186.0	185.3	184.5	185.3	186.0	186.7
115°	217.6	217.8	218.1	217.8	217.2	216.4	215.7	215.0	215.7	216.4	217.2
117.5°	247.9	248.6	249.3	249.1	248.2	247.2	246.3	245.3	246.3	247.2	248.2
120°	267.4	268.3	269.4	269.4	268.3	267.4	266.5	265.5	266.5	267.4	268.3
122.5°	287.5	288.1	288.8	288.6	287.5	286.3	285.1	284.0	285.1	286.3	287.5
125°	316.8	317.1	317.4	317.1	316.0	315.0	313.9	312.8	313.9	315.0	316.0
127.5°	345.9	346.4	346.8	346.3	345.0	343.6	342.2	340.8	342.2	343.6	345.0
130°	364.9	365.1	365.3	364.7	363.2	361.6	360.1	358.5	360.1	361.6	363.2
132.5°	384.1	384.1	384.0	383.3	382.1	380.8	379.6	378.2	379.6	380.8	382.1
135°	411.2	410.9	410.8	410.0	408.7	407.4	406.0	404.7	406.0	407.4	408.7
137.5°	438.2	437.9	437.5	436.9	435.8	434.7	433.7	432.5	433.7	434.7	435.8
140°	455.6	455.1	454.5	453.6	452.5	451.5	450.4	449.3	450.4	451.5	452.5
142.5°	472.4	472.0	471.6	470.8	469.8	468.7	467.6	466.6	467.6	468.7	469.8
145°	496.8	496.1	495.4	494.6	493.8	492.9	492.1	491.3	492.1	492.9	493.8
147.5°	519.0	518.5	518.0	517.3	516.3	515.3	514.3	513.3	514.3	515.3	516.3
150°	532.7	532.3	531.8	531.2	530.5	529.8	529.0	528.4	529.0	529.8	530.5
152.5°	546.3	545.7	545.2	544.5	543.8	543.1	542.4	541.7	542.4	543.1	543.8
155°	564.2	563.8	563.5	563.1	562.7	562.4	562.0	561.7	562.0	562.4	562.7
157.5°	580.4	580.1	579.9	579.8	579.5	579.2	579.0	578.7	579.0	579.2	579.5
160°	590.4	590.3	590.2	590.0	589.7	589.6	589.3	589.1	589.3	589.6	589.7
162.5°	599.1	598.9	598.8	598.7	598.7	598.6	598.6	598.5	598.6	598.6	598.7
165°	610.6	610.6	610.6	610.7	610.8	610.9	611.0	611.1	611.0	610.9	610.8
167.5°	620.0	620.0	620.0	620.2	620.6	620.9	621.3	621.6	621.3	620.9	620.6
170°	625.3	625.5	625.6	625.8	626.1	626.5	626.9	627.3	626.9	626.5	626.1
172.5°	629.2	629.3	629.4	629.7	630.0	630.4	630.7	631.1	630.7	630.4	630.0
175°	633.7	633.9	634.1	634.4	634.8	635.1	635.5	635.8	635.5	635.1	634.8
177.5°	636.0	636.2	636.4	636.6	636.9	637.2	637.4	637.8	637.4	637.2	636.9
180°	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3
2.5°	1605.8	1602.8	1592.3	1586.9	1577.8	1569.3	1563.8	1566.3	1568.3	1567.3	1565.8
5°	1559.8	1547.9	1529.7	1514.1	1502.9	1482.2	1473.5	1469.1	1465.4	1460.9	1456.6
7.5°	1505.1	1486.3	1460.2	1437.9	1416.9	1391.3	1376.7	1367.9	1359.0	1349.1	1340.3
10°	1466.0	1439.7	1412.2	1380.9	1355.9	1332.8	1312.1	1298.4	1285.9	1273.9	1265.3
12.5°	1424.9	1394.7	1360.7	1317.9	1290.3	1257.3	1254.1	1229.8	1210.3	1203.0	1192.7
15°	1359.7	1317.1	1273.9	1223.3	1201.5	1171.4	1152.6	1133.9	1117.0	1105.1	1102.0
17.5°	1285.5	1230.5	1187.5	1151.1	1115.2	1084.5	1067.2	1052.3	1038.3	1022.5	1020.3
20°	1229.0	1181.4	1134.5	1102.6	1065.7	1034.4	1013.1	998.2	986.3	976.9	968.7
22.5°	1175.4	1123.4	1080.4	1045.6	1009.2	983.9	967.1	952.6	942.7	932.4	924.7
25°	1089.5	1048.9	1001.9	962.5	932.5	916.2	902.5	889.9	883.7	876.8	868.1
27.5°	1014.3	969.1	925.3	894.8	868.4	853.9	844.2	835.7	829.8	825.8	820.8
30°	961.3	915.6	881.2	851.2	829.3	814.9	808.7	803.7	796.8	794.3	791.8
32.5°	910.2	869.1	839.7	813.7	792.8	783.4	777.7	773.2	767.8	765.3	760.3
35°	838.1	803.7	774.9	760.5	743.7	735.5	731.1	724.9	719.8	717.4	716.7
37.5°	770.2	740.3	721.3	702.9	695.7	690.7	684.8	680.4	678.9	678.5	678.0
40°	726.1	701.7	684.9	669.9	666.7	659.2	654.2	650.4	650.4	651.1	650.4
42.5°	686.1	664.2	649.3	636.3	632.6	628.2	623.2	622.9	624.0	626.0	624.0
45°	625.4	609.8	599.2	592.9	586.0	581.6	581.0	582.9	583.5	584.2	586.0
47.5°	569.7	559.2	549.6	542.7	539.7	538.9	538.2	541.5	544.5	545.6	548.5
50°	536.6	524.7	516.6	512.2	509.7	508.5	509.7	513.5	515.9	519.1	520.9
52.5°	499.5	491.2	485.6	482.2	481.2	481.9	482.2	486.4	490.5	491.5	492.5
55°	448.5	442.1	440.9	435.3	437.8	437.2	440.3	442.8	446.6	450.3	450.9
57.5°	397.4	392.4	389.0	389.6	390.3	393.0	395.7	400.0	404.1	408.0	408.4
60°	363.4	360.9	359.0	359.0	360.2	364.0	367.1	371.5	374.0	376.5	378.3
62.5°	332.3	329.9	328.0	328.9	332.2	334.5	338.1	340.4	343.0	345.4	346.4
65°	283.3	282.1	284.0	285.2	285.8	289.0	293.3	295.2	297.7	299.0	303.3
67.5°	238.2	238.4	238.2	239.9	243.6	244.3	248.5	252.8	253.3	255.7	258.5
70°	207.6	208.9	210.2	211.4	214.5	215.7	218.9	220.7	223.3	225.2	227.1
72.5°	179.6	179.8	181.2	180.9	183.5	186.2	188.9	190.8	193.2	195.7	197.5
75°	138.2	138.2	139.5	140.1	143.3	146.4	145.7	146.9	149.5	151.9	153.3
77.5°	100.9	99.5	100.9	101.6	102.5	105.2	105.7	107.4	110.3	109.4	110.8
80°	76.9	75.0	76.9	77.6	77.6	80.7	80.7	81.9	83.8	81.9	83.8
82.5°	55.0	54.0	55.4	55.5	56.6	56.6	57.7	57.9	59.8	58.9	59.8
85°	27.5	26.9	27.5	26.9	27.5	28.2	28.2	27.5	27.5	28.7	26.9
87.5°	9.8	9.7	9.7	10.2	10.3	10.3	9.7	9.7	9.6	8.6	8.6
90°	6.3	8.3	10.9	13.6	16.2	18.9	18.6	18.4	18.1	17.8	17.8
92.5°	13.8	14.6	15.3	15.8	16.5	17.1	17.2	17.2	17.2	17.2	17.3
95°	32.7	33.5	33.6	33.9	34.1	34.4	34.4	34.4	34.4	34.4	34.3
97.5°	55.2	56.0	56.5	56.9	57.4	57.9	57.9	57.9	57.9	57.9	57.8
100°	72.1	72.8	73.1	73.4	73.8	74.2	74.2	74.2	74.2	74.2	74.1
102.5°	89.4	90.0	90.5	90.9	91.3	91.8	91.9	92.0	92.1	92.2	92.2
105°	117.0	117.3	117.5	117.7	118.0	118.3	118.5	118.8	118.9	119.2	119.3
107.5°	147.1	147.4	147.4	147.4	147.4	147.4	147.5	147.6	147.7	147.8	147.5
110°	166.8	167.1	167.1	167.1	167.1	167.1	167.1	167.1	167.1	167.1	167.0



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	187.5	187.8	187.7	187.6	187.5	187.4	187.1	186.8	186.5	186.2	186.0
115°	217.8	218.1	217.8	217.6	217.4	217.2	217.1	216.9	216.8	216.7	216.4
117.5°	249.1	249.3	248.6	247.9	247.2	246.6	246.3	246.0	245.7	245.4	245.2
120°	269.4	269.4	268.3	267.4	266.5	265.5	265.5	265.5	265.5	265.5	265.3
122.5°	288.6	288.8	288.1	287.5	286.8	286.2	285.9	285.6	285.3	285.0	284.7
125°	317.1	317.4	317.1	316.8	316.4	316.0	315.7	315.3	315.0	314.6	314.3
127.5°	346.3	346.8	346.4	345.9	345.5	345.1	344.6	344.2	343.7	343.4	342.9
130°	364.7	365.3	365.1	364.9	364.7	364.4	364.2	363.9	363.7	363.4	363.1
132.5°	383.3	384.0	384.1	384.1	384.2	384.2	383.7	383.1	382.6	382.1	381.6
135°	410.0	410.8	410.9	411.2	411.5	411.7	411.6	411.5	411.3	411.2	410.9
137.5°	436.9	437.5	437.9	438.2	438.5	438.8	438.7	438.6	438.5	438.4	438.1
140°	453.6	454.5	455.1	455.6	456.3	456.9	456.9	456.9	456.9	456.9	456.7
142.5°	470.8	471.6	472.0	472.4	472.8	473.2	473.3	473.3	473.4	473.5	473.3
145°	494.6	495.4	496.1	496.8	497.6	498.2	498.3	498.5	498.6	498.7	498.5
147.5°	517.3	518.0	518.5	519.0	519.4	520.0	520.2	520.5	520.8	521.0	520.9
150°	531.2	531.8	532.3	532.7	533.2	533.8	534.0	534.4	534.8	535.2	535.2
152.5°	544.5	545.2	545.7	546.3	546.9	547.5	547.9	548.4	548.8	549.3	549.3
155°	563.1	563.5	563.8	564.2	564.5	564.9	565.5	566.1	566.7	567.3	567.4
157.5°	579.8	579.9	580.1	580.4	580.6	580.8	581.6	582.4	583.2	584.1	584.2
160°	590.0	590.2	590.3	590.4	590.6	590.7	591.4	592.1	592.9	593.5	593.7
162.5°	598.7	598.8	598.9	599.1	599.2	599.3	600.1	600.9	601.7	602.6	602.7
165°	610.7	610.6	610.6	610.6	610.6	610.6	611.4	612.3	613.1	613.9	614.1
167.5°	620.2	620.0	620.0	620.0	619.9	619.9	620.8	621.6	622.5	623.3	623.4
170°	625.8	625.6	625.5	625.3	625.2	625.1	625.9	626.8	627.6	628.4	628.5
172.5°	629.7	629.4	629.3	629.2	629.1	629.0	629.8	630.7	631.5	632.3	632.4
175°	634.4	634.1	633.9	633.7	633.4	633.1	634.0	634.8	635.7	636.5	636.6
177.5°	636.6	636.4	636.2	636.0	635.8	635.7	636.2	636.8	637.3	637.9	637.9
180°	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3
2.5°	1560.8	1559.8	1559.8	1555.3	1559.8	1559.8	1560.8	1565.8	1567.3	1568.3	1566.3
5°	1447.8	1446.0	1442.8	1446.0	1442.8	1446.0	1447.8	1456.6	1460.9	1465.4	1469.1
7.5°	1336.1	1328.6	1327.5	1320.1	1327.5	1328.6	1336.1	1340.3	1349.1	1359.0	1367.9
10°	1254.6	1249.6	1249.0	1237.1	1249.0	1249.6	1254.6	1265.3	1273.9	1285.9	1298.4
12.5°	1192.6	1180.5	1182.9	1176.0	1182.9	1180.5	1192.6	1192.7	1203.0	1210.3	1229.8
15°	1085.1	1085.1	1082.6	1072.0	1082.6	1085.1	1085.1	1102.0	1105.1	1117.0	1133.9
17.5°	1008.0	1006.6	1000.7	1003.7	1000.7	1006.6	1008.0	1020.3	1022.5	1038.3	1052.3
20°	961.9	958.2	950.6	950.6	950.6	958.2	961.9	968.7	976.9	986.3	998.2
22.5°	918.4	918.1	910.1	912.6	910.1	918.1	918.4	924.7	932.4	942.7	952.6
25°	867.4	862.4	858.8	860.5	858.8	862.4	867.4	868.1	876.8	883.7	889.9
27.5°	819.2	816.4	816.1	811.1	816.1	816.4	819.2	820.8	825.8	829.8	835.7
30°	791.2	784.9	786.2	783.1	786.2	784.9	791.2	791.8	794.3	796.8	803.7
32.5°	759.1	756.9	755.6	753.0	755.6	756.9	759.1	760.3	765.3	767.8	773.2
35°	715.5	716.1	712.9	714.3	712.9	716.1	715.5	716.7	717.4	719.8	724.9
37.5°	677.3	679.3	677.9	678.3	677.9	679.3	677.3	678.0	678.5	678.9	680.4
40°	652.3	652.3	652.3	654.2	652.3	652.3	652.3	650.4	651.1	650.4	650.4
42.5°	628.3	627.3	626.3	626.1	626.3	627.3	628.3	624.0	626.0	624.0	622.9
45°	587.3	589.2	589.7	586.6	589.7	589.2	587.3	586.0	584.2	583.5	582.9
47.5°	550.2	550.4	550.2	552.9	550.2	550.4	550.2	548.5	545.6	544.5	541.5
50°	524.1	522.8	524.1	522.8	524.1	522.8	524.1	520.9	519.1	515.9	513.5
52.5°	496.6	496.8	496.1	495.9	496.1	496.8	496.6	492.5	491.5	490.5	486.4
55°	453.5	454.7	454.0	454.0	454.0	454.7	453.5	450.9	450.3	446.6	442.8
57.5°	408.8	409.9	410.8	408.0	410.8	409.9	408.8	408.4	408.0	404.1	400.0
60°	377.8	380.9	380.2	379.0	380.2	380.9	377.8	378.3	376.5	374.0	371.5
62.5°	349.2	350.3	350.2	350.0	350.2	350.3	349.2	346.4	345.4	343.0	340.4
65°	305.2	306.4	304.5	306.4	304.5	306.4	305.2	303.3	299.0	297.7	295.2
67.5°	257.8	258.2	259.6	260.4	259.6	258.2	257.8	258.5	255.7	253.3	252.8
70°	228.3	227.6	229.5	231.4	229.5	227.6	228.3	227.1	225.2	223.3	220.7
72.5°	197.3	198.6	198.0	199.3	198.0	198.6	197.3	197.5	195.7	193.2	190.8
75°	151.9	153.8	153.3	155.1	153.3	153.8	151.9	153.3	151.9	149.5	146.9
77.5°	109.8	110.1	109.8	110.8	109.8	110.1	109.8	110.8	109.4	110.3	107.4
80°	83.8	82.6	81.3	83.8	81.3	82.6	83.8	83.8	81.9	83.8	81.9
82.5°	58.2	59.0	57.8	57.8	57.8	59.0	58.2	59.8	58.9	59.8	57.9
85°	26.9	26.3	25.0	25.0	25.0	26.3	26.9	26.9	28.7	27.5	27.5
87.5°	8.6	8.1	8.1	7.6	8.1	8.1	8.6	8.6	8.6	9.6	9.7
90°	17.9	18.0	18.2	18.3	18.2	18.0	17.9	17.8	17.8	18.1	18.4
92.5°	17.3	17.3	17.4	17.4	17.4	17.3	17.3	17.3	17.2	17.2	17.2
95°	34.0	33.8	33.6	33.4	33.6	33.8	34.0	34.3	34.4	34.4	34.4
97.5°	57.8	57.8	57.8	57.7	57.8	57.8	57.8	57.8	57.9	57.9	57.9
100°	74.0	73.9	73.8	73.6	73.8	73.9	74.0	74.1	74.2	74.2	74.2
102.5°	92.1	91.9	91.8	91.7	91.8	91.9	92.1	92.2	92.2	92.1	92.0
105°	119.3	119.3	119.3	119.3	119.3	119.3	119.3	119.3	119.2	118.9	118.8
107.5°	146.9	146.5	145.9	145.3	145.9	146.5	146.9	147.5	147.8	147.7	147.6
110°	166.6	166.3	165.9	165.5	165.9	166.3	166.6	167.0	167.1	167.1	167.1



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	185.7	185.4	185.1	184.9	185.1	185.4	185.7	186.0	186.2	186.5	186.8
115°	216.0	215.7	215.4	215.0	215.4	215.7	216.0	216.4	216.7	216.8	216.9
117.5°	244.8	244.4	244.0	243.6	244.0	244.4	244.8	245.2	245.4	245.7	246.0
120°	264.9	264.7	264.3	263.9	264.3	264.7	264.9	265.3	265.5	265.5	265.5
122.5°	284.5	284.2	284.0	283.7	284.0	284.2	284.5	284.7	285.0	285.3	285.6
125°	314.2	314.1	314.0	313.9	314.0	314.1	314.2	314.3	314.6	315.0	315.3
127.5°	342.5	342.1	341.8	341.4	341.8	342.1	342.5	342.9	343.4	343.7	344.2
130°	362.6	362.1	361.7	361.2	361.7	362.1	362.6	363.1	363.4	363.7	363.9
132.5°	381.3	380.9	380.5	380.1	380.5	380.9	381.3	381.6	382.1	382.6	383.1
135°	410.7	410.3	409.9	409.5	409.9	410.3	410.7	410.9	411.2	411.3	411.5
137.5°	437.6	437.2	436.7	436.2	436.7	437.2	437.6	438.1	438.4	438.5	438.6
140°	456.1	455.6	455.2	454.7	455.2	455.6	456.1	456.7	456.9	456.9	456.9
142.5°	472.9	472.4	471.9	471.5	471.9	472.4	472.9	473.3	473.5	473.4	473.3
145°	498.0	497.6	497.1	496.6	497.1	497.6	498.0	498.5	498.7	498.6	498.5
147.5°	520.5	520.0	519.5	519.1	519.5	520.0	520.5	520.9	521.0	520.8	520.5
150°	534.8	534.4	534.0	533.8	534.0	534.4	534.8	535.2	535.2	534.8	534.4
152.5°	548.8	548.4	547.9	547.5	547.9	548.4	548.8	549.3	549.3	548.8	548.4
155°	567.0	566.7	566.3	566.0	566.3	566.7	567.0	567.4	567.3	566.7	566.1
157.5°	583.6	583.1	582.5	581.8	582.5	583.1	583.6	584.2	584.1	583.2	582.4
160°	593.2	592.8	592.2	591.7	592.2	592.8	593.2	593.7	593.5	592.9	592.1
162.5°	602.1	601.5	601.0	600.4	601.0	601.5	602.1	602.7	602.6	601.7	600.9
165°	613.4	612.8	612.3	611.6	612.3	612.8	613.4	614.1	613.9	613.1	612.3
167.5°	622.7	622.2	621.5	620.9	621.5	622.2	622.7	623.4	623.3	622.5	621.6
170°	627.7	627.1	626.3	625.7	626.3	627.1	627.7	628.5	628.4	627.6	626.8
172.5°	631.7	630.9	630.2	629.5	630.2	630.9	631.7	632.4	632.3	631.5	630.7
175°	635.8	635.1	634.4	633.7	634.4	635.1	635.8	636.6	636.5	635.7	634.8
177.5°	637.3	636.8	636.2	635.7	636.2	636.8	637.3	637.9	637.9	637.3	636.8
180°	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3
2.5°	1563.8	1569.3	1577.8	1586.9	1592.3	1602.8	1605.8	1610.8	1615.3	1625.9	1636.8
5°	1473.5	1482.2	1502.9	1514.1	1529.7	1547.9	1559.8	1572.3	1586.1	1609.9	1631.7
7.5°	1376.7	1391.3	1416.9	1437.9	1460.2	1486.3	1505.1	1529.7	1550.3	1583.8	1615.8
10°	1312.1	1332.8	1355.9	1380.9	1412.2	1439.7	1466.0	1497.2	1522.3	1562.3	1599.9
12.5°	1254.1	1257.3	1290.3	1317.9	1360.7	1394.7	1424.9	1465.3	1489.8	1537.3	1576.8
15°	1152.6	1171.4	1201.5	1223.3	1273.9	1317.1	1359.7	1401.6	1429.7	1488.5	1540.4
17.5°	1067.2	1084.5	1115.2	1151.1	1187.5	1230.5	1285.5	1329.6	1367.9	1435.1	1496.5
20°	1013.1	1034.4	1065.7	1102.6	1134.5	1181.4	1229.0	1279.6	1320.9	1396.6	1468.5
22.5°	967.1	983.9	1009.2	1045.6	1080.4	1123.4	1175.4	1230.6	1273.8	1355.6	1428.4
25°	902.5	916.2	932.5	962.5	1001.9	1048.9	1089.5	1150.2	1213.3	1289.6	1377.8
27.5°	844.2	853.9	868.4	894.8	925.3	969.1	1014.3	1071.9	1135.4	1218.2	1311.3
30°	808.7	814.9	829.3	851.2	881.2	915.6	961.3	1016.3	1081.4	1165.2	1257.7
32.5°	777.7	783.4	792.8	813.7	839.7	869.1	910.2	965.3	1027.3	1109.7	1212.2
35°	731.1	735.5	743.7	760.5	774.9	803.7	838.1	888.1	946.2	1025.1	1131.4
37.5°	684.8	690.7	695.7	702.9	721.3	740.3	770.2	812.4	869.5	949.0	1050.4
40°	654.2	659.2	666.7	669.9	684.9	701.7	726.1	764.9	822.5	894.9	993.8
42.5°	623.2	628.2	632.6	636.3	649.3	664.2	686.1	719.3	770.4	840.9	938.8
45°	581.0	581.6	586.0	592.9	599.2	609.8	625.4	654.2	693.6	759.9	848.7
47.5°	538.2	538.9	539.7	542.7	549.6	559.2	569.7	593.0	628.3	681.2	767.6
50°	509.7	508.5	509.7	512.2	516.6	524.7	536.6	553.5	582.3	631.7	711.1
52.5°	482.2	481.9	481.2	482.2	485.6	491.2	499.5	514.0	539.7	585.1	655.1
55°	440.3	437.2	437.8	435.3	440.9	442.1	448.5	460.3	482.9	514.1	579.8
57.5°	395.7	393.0	390.3	389.6	389.0	392.4	397.4	406.8	424.0	451.4	504.7
60°	367.1	364.0	360.2	359.0	359.0	360.9	363.4	370.2	386.5	410.9	454.7
62.5°	338.1	334.5	332.2	328.9	328.0	329.9	332.3	337.2	349.0	371.8	409.6
65°	293.3	289.0	285.8	285.2	284.0	282.1	283.3	288.3	297.7	315.8	345.8
67.5°	248.5	244.3	243.6	239.9	238.2	238.4	238.2	242.4	248.1	263.7	286.1
70°	218.9	215.7	214.5	211.4	210.2	208.9	207.6	211.4	217.1	230.2	249.6
72.5°	188.9	186.2	183.5	180.9	181.2	179.8	179.6	181.9	186.5	198.6	213.5
75°	145.7	146.4	143.3	140.1	139.5	138.2	138.2	140.1	141.9	151.4	163.2
77.5°	105.7	105.2	102.5	101.6	100.9	99.5	100.9	102.2	103.2	109.4	118.2
80°	80.7	80.7	77.6	77.6	76.9	75.0	76.9	75.7	78.1	84.5	90.7
82.5°	57.7	56.6	56.6	55.5	55.4	54.0	55.0	56.2	57.1	61.5	65.1
85°	28.2	28.2	27.5	26.9	27.5	26.9	27.5	28.2	28.7	30.6	33.7
87.5°	9.7	10.3	10.3	10.2	9.7	9.7	9.8	10.0	10.7	10.9	11.1
90°	18.6	18.9	16.2	13.6	10.9	8.3	6.3	4.8	3.4	2.0	0.6
92.5°	17.2	17.1	16.5	15.8	15.3	14.6	13.8	12.7	11.7	10.7	9.6
95°	34.4	34.4	34.1	33.9	33.6	33.5	32.7	31.6	30.3	29.1	28.0
97.5°	57.9	57.9	57.4	56.9	56.5	56.0	55.2	54.2	53.2	52.1	51.1
100°	74.2	74.2	73.8	73.4	73.1	72.8	72.1	71.2	70.1	69.2	68.2
102.5°	91.9	91.8	91.3	90.9	90.5	90.0	89.4	88.6	87.8	87.1	86.3
105°	118.5	118.3	118.0	117.7	117.5	117.3	117.0	116.6	116.3	115.9	115.6
107.5°	147.5	147.4	147.4	147.4	147.4	147.4	147.1	146.6	146.1	145.5	145.1
110°	167.1	167.1	167.1	167.1	167.1	167.1	166.8	166.1	165.3	164.7	163.9



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	187.1	187.4	187.5	187.6	187.7	187.8	187.5	186.7	186.0	185.3	184.5
115°	217.1	217.2	217.4	217.6	217.8	218.1	217.8	217.2	216.4	215.7	215.0
117.5°	246.3	246.6	247.2	247.9	248.6	249.3	249.1	248.2	247.2	246.3	245.3
120°	265.5	265.5	266.5	267.4	268.3	269.4	269.4	268.3	267.4	266.5	265.5
122.5°	285.9	286.2	286.8	287.5	288.1	288.8	288.6	287.5	286.3	285.1	284.0
125°	315.7	316.0	316.4	316.8	317.1	317.4	317.1	316.0	315.0	313.9	312.8
127.5°	344.6	345.1	345.5	345.9	346.4	346.8	346.3	345.0	343.6	342.2	340.8
130°	364.2	364.4	364.7	364.9	365.1	365.3	364.7	363.2	361.6	360.1	358.5
132.5°	383.7	384.2	384.2	384.1	384.1	384.0	383.3	382.1	380.8	379.6	378.2
135°	411.6	411.7	411.5	411.2	410.9	410.8	410.0	408.7	407.4	406.0	404.7
137.5°	438.7	438.8	438.5	438.2	437.9	437.5	436.9	435.8	434.7	433.7	432.5
140°	456.9	456.9	456.3	455.6	455.1	454.5	453.6	452.5	451.5	450.4	449.3
142.5°	473.3	473.2	472.8	472.4	472.0	471.6	470.8	469.8	468.7	467.6	466.6
145°	498.3	498.2	497.6	496.8	496.1	495.4	494.6	493.8	492.9	492.1	491.3
147.5°	520.2	520.0	519.4	519.0	518.5	518.0	517.3	516.3	515.3	514.3	513.3
150°	534.0	533.8	533.2	532.7	532.3	531.8	531.2	530.5	529.8	529.0	528.4
152.5°	547.9	547.5	546.9	546.3	545.7	545.2	544.5	543.8	543.1	542.4	541.7
155°	565.5	564.9	564.5	564.2	563.8	563.5	563.1	562.7	562.4	562.0	561.7
157.5°	581.6	580.8	580.6	580.4	580.1	579.9	579.8	579.5	579.2	579.0	578.7
160°	591.4	590.7	590.6	590.4	590.3	590.2	590.0	589.7	589.6	589.3	589.1
162.5°	600.1	599.3	599.2	599.1	598.9	598.8	598.7	598.7	598.6	598.6	598.5
165°	611.4	610.6	610.6	610.6	610.6	610.6	610.7	610.8	610.9	611.0	611.1
167.5°	620.8	619.9	619.9	620.0	620.0	620.0	620.2	620.6	620.9	621.3	621.6
170°	625.9	625.1	625.2	625.3	625.5	625.6	625.8	626.1	626.5	626.9	627.3
172.5°	629.8	629.0	629.1	629.2	629.3	629.4	629.7	630.0	630.4	630.7	631.1
175°	634.0	633.1	633.4	633.7	633.9	634.1	634.4	634.8	635.1	635.5	635.8
177.5°	636.2	635.7	635.8	636.0	636.2	636.4	636.6	636.9	637.2	637.4	637.8
180°	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3
2.5°	1635.9	1638.3	1646.3	1654.4	1663.4	1665.8	1669.9	1666.4	1665.4	1674.9	1681.9
5°	1640.5	1651.7	1673.7	1693.7	1710.5	1722.4	1734.9	1739.9	1749.3	1762.5	1778.7
7.5°	1635.2	1657.1	1691.5	1720.7	1752.5	1775.3	1793.2	1808.5	1827.0	1851.9	1879.1
10°	1629.2	1658.6	1700.5	1736.2	1774.9	1804.3	1828.7	1852.5	1880.0	1914.4	1950.0
12.5°	1618.3	1653.1	1705.5	1747.7	1797.4	1826.4	1859.3	1910.5	1940.0	1988.0	2038.2
15°	1596.1	1634.8	1708.0	1759.9	1816.2	1871.2	1931.9	1980.8	2029.5	2057.7	2128.4
17.5°	1563.2	1620.1	1701.1	1761.7	1833.2	1920.0	1988.1	2043.3	2099.7	2145.3	2180.8
20°	1536.6	1598.6	1691.1	1763.7	1848.7	1941.9	2020.2	2076.4	2125.2	2163.3	2185.2
22.5°	1503.2	1581.0	1671.1	1756.1	1864.7	1956.9	2039.1	2083.4	2124.2	2142.8	2151.2
25°	1450.4	1544.2	1646.2	1749.9	1872.5	1970.1	2045.1	2072.0	2083.9	2065.8	2035.7
27.5°	1393.5	1498.0	1617.2	1738.1	1867.7	1961.5	2015.3	2011.1	1990.9	1932.3	1885.4
30°	1350.9	1466.0	1594.2	1726.2	1856.2	1947.6	1978.9	1947.6	1901.9	1836.3	1769.3
32.5°	1306.4	1425.5	1569.7	1709.1	1835.2	1915.5	1922.3	1868.5	1797.8	1723.2	1639.7
35°	1239.0	1367.8	1523.5	1671.1	1790.5	1841.3	1811.2	1716.2	1632.4	1530.4	1416.5
37.5°	1162.8	1305.0	1461.2	1615.4	1723.6	1736.9	1662.4	1562.3	1444.1	1324.3	1190.3
40°	1105.8	1256.5	1417.2	1572.9	1668.6	1654.8	1559.8	1449.7	1309.0	1162.6	1038.2
42.5°	1054.7	1205.4	1369.1	1521.9	1598.6	1560.8	1449.7	1314.7	1163.4	1025.6	911.6
45°	966.3	1121.3	1289.0	1436.6	1480.4	1412.2	1265.3	1115.1	966.3	851.2	761.1
47.5°	880.4	1033.8	1199.8	1329.6	1345.0	1253.3	1092.7	938.3	810.3	716.6	653.1
50°	817.5	971.3	1135.8	1251.5	1246.4	1135.8	970.6	823.7	716.7	641.0	598.5
52.5°	760.9	906.3	1064.2	1169.4	1142.9	1022.2	864.6	734.1	646.2	587.0	548.5
55°	673.0	807.4	957.5	1042.0	993.2	859.3	726.1	621.0	556.0	511.6	481.5
57.5°	585.6	711.7	840.2	892.2	838.3	714.7	603.7	527.4	478.5	445.6	426.1
60°	531.6	641.7	756.1	801.2	736.8	626.7	539.1	471.0	431.5	404.6	387.1
62.5°	477.6	576.2	684.1	708.6	649.7	556.7	479.1	422.4	390.0	366.1	349.6
65°	404.1	484.7	566.7	582.9	528.5	456.6	395.3	358.4	329.6	312.1	299.0
67.5°	331.3	396.2	454.2	467.3	419.6	369.8	325.5	293.3	273.8	259.3	248.2
70°	288.3	339.6	387.1	397.8	359.6	315.2	281.4	255.8	238.3	225.7	215.2
72.5°	242.8	285.6	325.1	332.2	301.0	267.2	239.4	219.2	203.8	195.8	185.6
75°	185.8	210.8	241.4	243.3	222.6	202.0	180.8	167.6	159.5	149.5	144.5
77.5°	131.1	150.7	168.2	171.6	159.4	145.3	133.5	123.1	116.2	111.6	107.0
80°	100.1	115.7	123.2	127.6	118.9	108.9	102.0	95.1	90.7	87.6	84.5
82.5°	71.5	81.2	88.2	91.5	86.8	80.8	73.9	70.0	66.6	64.0	63.0
85°	36.3	40.6	45.1	46.3	45.1	42.5	38.7	38.7	36.9	36.3	36.3
87.5°	12.9	15.2	15.5	17.2	16.7	17.2	17.7	17.7	17.8	17.2	16.7
90°	2.0	3.4	4.8	6.3	8.3	10.9	13.6	16.2	18.9	18.6	18.4
92.5°	10.7	11.7	12.7	13.8	14.6	15.3	15.8	16.5	17.1	17.2	17.2
95°	29.1	30.3	31.6	32.7	33.5	33.6	33.9	34.1	34.4	34.4	34.4
97.5°	52.1	53.2	54.2	55.2	56.0	56.5	56.9	57.4	57.9	57.9	57.9
100°	69.2	70.1	71.2	72.1	72.8	73.1	73.4	73.8	74.2	74.2	74.2
102.5°	87.1	87.8	88.6	89.4	90.0	90.5	90.9	91.3	91.8	91.9	92.0
105°	115.9	116.3	116.6	117.0	117.3	117.5	117.7	118.0	118.3	118.5	118.8
107.5°	145.5	146.1	146.6	147.1	147.4	147.4	147.4	147.4	147.4	147.5	147.6
110°	164.7	165.3	166.1	166.8	167.1	167.1	167.1	167.1	167.1	167.1	167.1





TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	185.3	186.0	186.7	187.5	187.8	187.7	187.6	187.5	187.4	187.1	186.8
115°	215.7	216.4	217.2	217.8	218.1	217.8	217.6	217.4	217.2	217.1	216.9
117.5°	246.3	247.2	248.2	249.1	249.3	248.6	247.9	247.2	246.6	246.3	246.0
120°	266.5	267.4	268.3	269.4	269.4	268.3	267.4	266.5	265.5	265.5	265.5
122.5°	285.1	286.3	287.5	288.6	288.8	288.1	287.5	286.8	286.2	285.9	285.6
125°	313.9	315.0	316.0	317.1	317.4	317.1	316.8	316.4	316.0	315.7	315.3
127.5°	342.2	343.6	345.0	346.3	346.8	346.4	345.9	345.5	345.1	344.6	344.2
130°	360.1	361.6	363.2	364.7	365.3	365.1	364.9	364.7	364.4	364.2	363.9
132.5°	379.6	380.8	382.1	383.3	384.0	384.1	384.1	384.2	384.2	383.7	383.1
135°	406.0	407.4	408.7	410.0	410.8	410.9	411.2	411.5	411.7	411.6	411.5
137.5°	433.7	434.7	435.8	436.9	437.5	437.9	438.2	438.5	438.8	438.7	438.6
140°	450.4	451.5	452.5	453.6	454.5	455.1	455.6	456.3	456.9	456.9	456.9
142.5°	467.6	468.7	469.8	470.8	471.6	472.0	472.4	472.8	473.2	473.3	473.3
145°	492.1	492.9	493.8	494.6	495.4	496.1	496.8	497.6	498.2	498.3	498.5
147.5°	514.3	515.3	516.3	517.3	518.0	518.5	519.0	519.4	520.0	520.2	520.5
150°	529.0	529.8	530.5	531.2	531.8	532.3	532.7	533.2	533.8	534.0	534.4
152.5°	542.4	543.1	543.8	544.5	545.2	545.7	546.3	546.9	547.5	547.9	548.4
155°	562.0	562.4	562.7	563.1	563.5	563.8	564.2	564.5	564.9	565.5	566.1
157.5°	579.0	579.2	579.5	579.8	579.9	580.1	580.4	580.6	580.8	581.6	582.4
160°	589.3	589.6	589.7	590.0	590.2	590.3	590.4	590.6	590.7	591.4	592.1
162.5°	598.6	598.6	598.7	598.7	598.8	598.9	599.1	599.2	599.3	600.1	600.9
165°	611.0	610.9	610.8	610.7	610.6	610.6	610.6	610.6	610.6	611.4	612.3
167.5°	621.3	620.9	620.6	620.2	620.0	620.0	620.0	619.9	619.9	620.8	621.6
170°	626.9	626.5	626.1	625.8	625.6	625.5	625.3	625.2	625.1	625.9	626.8
172.5°	630.7	630.4	630.0	629.7	629.4	629.3	629.2	629.1	629.0	629.8	630.7
175°	635.5	635.1	634.8	634.4	634.1	633.9	633.7	633.4	633.1	634.0	634.8
177.5°	637.4	637.2	636.9	636.6	636.4	636.2	636.0	635.8	635.7	636.2	636.8
180°	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9	636.9



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3	1627.3
2.5°	1687.9	1694.9	1694.9	1695.9	1703.9	1702.9	1702.4
5°	1796.2	1806.9	1808.1	1819.4	1826.8	1824.4	1817.5
7.5°	1898.4	1918.2	1933.2	1941.5	1951.4	1957.6	1954.8
10°	1979.4	2008.2	2025.7	2037.6	2052.0	2062.7	2058.9
12.5°	2053.0	2087.3	2111.3	2131.7	2133.5	2147.2	2138.0
15°	2167.8	2203.9	2207.7	2222.7	2234.7	2233.4	2234.0
17.5°	2205.6	2217.2	2219.6	2220.0	2220.2	2215.7	2206.2
20°	2192.1	2187.7	2177.1	2169.0	2154.6	2152.7	2140.2
22.5°	2128.1	2114.2	2087.5	2069.9	2047.5	2041.6	2038.2
25°	2002.0	1971.3	1928.8	1888.1	1876.9	1855.0	1861.2
27.5°	1829.0	1781.2	1735.1	1702.1	1672.3	1639.5	1648.9
30°	1707.4	1653.6	1588.6	1538.5	1506.7	1475.4	1469.7
32.5°	1562.3	1483.5	1411.0	1366.9	1318.1	1298.3	1276.6
35°	1312.1	1235.2	1163.3	1101.4	1065.7	1038.2	1013.1
37.5°	1087.1	998.5	940.5	890.3	864.6	848.9	852.8
40°	947.5	870.0	827.5	789.3	765.5	754.2	756.8
42.5°	834.4	776.4	741.4	715.2	698.4	692.2	690.7
45°	706.1	673.5	644.8	629.8	621.7	614.8	610.4
47.5°	618.5	592.0	575.8	566.8	559.8	552.7	552.6
50°	566.0	548.5	537.2	527.8	522.3	517.3	521.6
52.5°	525.9	510.0	498.7	490.3	488.2	483.7	483.6
55°	466.6	454.0	445.9	438.4	434.7	432.2	429.0
57.5°	412.6	400.7	393.1	388.4	381.3	378.7	377.8
60°	374.0	364.6	357.1	350.8	347.7	342.7	342.7
62.5°	338.5	329.1	322.1	317.4	312.2	310.2	310.8
65°	287.1	279.6	272.7	267.7	266.5	262.7	263.9
67.5°	239.8	234.8	227.5	224.8	222.4	220.4	218.9
70°	208.3	203.3	199.5	195.8	193.9	193.9	193.9
72.5°	181.7	175.8	173.5	168.7	169.8	167.9	165.9
75°	140.7	137.0	135.1	133.2	130.1	130.1	130.1
77.5°	103.6	102.5	100.2	98.2	97.5	96.8	97.1
80°	80.0	79.5	78.1	78.1	76.9	76.3	75.0
82.5°	61.5	59.9	59.2	58.6	58.4	58.2	58.1
85°	35.1	33.7	33.7	34.4	33.2	33.2	33.7
87.5°	17.2	17.1	16.6	16.6	17.2	16.7	16.7
90°	18.1	17.8	17.8	17.9	18.0	18.2	18.3
92.5°	17.2	17.2	17.3	17.3	17.3	17.4	17.4
95°	34.4	34.4	34.3	34.0	33.8	33.6	33.4
97.5°	57.9	57.9	57.8	57.8	57.8	57.8	57.7
100°	74.2	74.2	74.1	74.0	73.9	73.8	73.6
102.5°	92.1	92.2	92.2	92.1	91.9	91.8	91.7
105°	118.9	119.2	119.3	119.3	119.3	119.3	119.3
107.5°	147.7	147.8	147.5	146.9	146.5	145.9	145.3
110°	167.1	167.1	167.0	166.6	166.3	165.9	165.5



TEST NUMBER: P331385-830

CATALOG NUMBER: SA2XXDIP-C865D530U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	186.5	186.2	186.0	185.7	185.4	185.1	184.9
115°	216.8	216.7	216.4	216.0	215.7	215.4	215.0
117.5°	245.7	245.4	245.2	244.8	244.4	244.0	243.6
120°	265.5	265.5	265.3	264.9	264.7	264.3	263.9
122.5°	285.3	285.0	284.7	284.5	284.2	284.0	283.7
125°	315.0	314.6	314.3	314.2	314.1	314.0	313.9
127.5°	343.7	343.4	342.9	342.5	342.1	341.8	341.4
130°	363.7	363.4	363.1	362.6	362.1	361.7	361.2
132.5°	382.6	382.1	381.6	381.3	380.9	380.5	380.1
135°	411.3	411.2	410.9	410.7	410.3	409.9	409.5
137.5°	438.5	438.4	438.1	437.6	437.2	436.7	436.2
140°	456.9	456.9	456.7	456.1	455.6	455.2	454.7
142.5°	473.4	473.5	473.3	472.9	472.4	471.9	471.5
145°	498.6	498.7	498.5	498.0	497.6	497.1	496.6
147.5°	520.8	521.0	520.9	520.5	520.0	519.5	519.1
150°	534.8	535.2	535.2	534.8	534.4	534.0	533.8
152.5°	548.8	549.3	549.3	548.8	548.4	547.9	547.5
155°	566.7	567.3	567.4	567.0	566.7	566.3	566.0
157.5°	583.2	584.1	584.2	583.6	583.1	582.5	581.8
160°	592.9	593.5	593.7	593.2	592.8	592.2	591.7
162.5°	601.7	602.6	602.7	602.1	601.5	601.0	600.4
165°	613.1	613.9	614.1	613.4	612.8	612.3	611.6
167.5°	622.5	623.3	623.4	622.7	622.2	621.5	620.9
170°	627.6	628.4	628.5	627.7	627.1	626.3	625.7
172.5°	631.5	632.3	632.4	631.7	630.9	630.2	629.5
175°	635.7	636.5	636.6	635.8	635.1	634.4	633.7
177.5°	637.3	637.9	637.9	637.3	636.8	636.2	635.7
180°	636.9	636.9	636.9	636.9	636.9	636.9	636.9

(END OF REPORT)