

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331750-830

Luminaire Tested: **SA2XXRDIP-C1005D725U830-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331750-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C1005D725U830-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 725 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6015.8 lumens
Efficiency: N/A
Efficacy: 99.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331750-830
CATALOG NUMBER: SA2XXRDIP-C1005D725U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

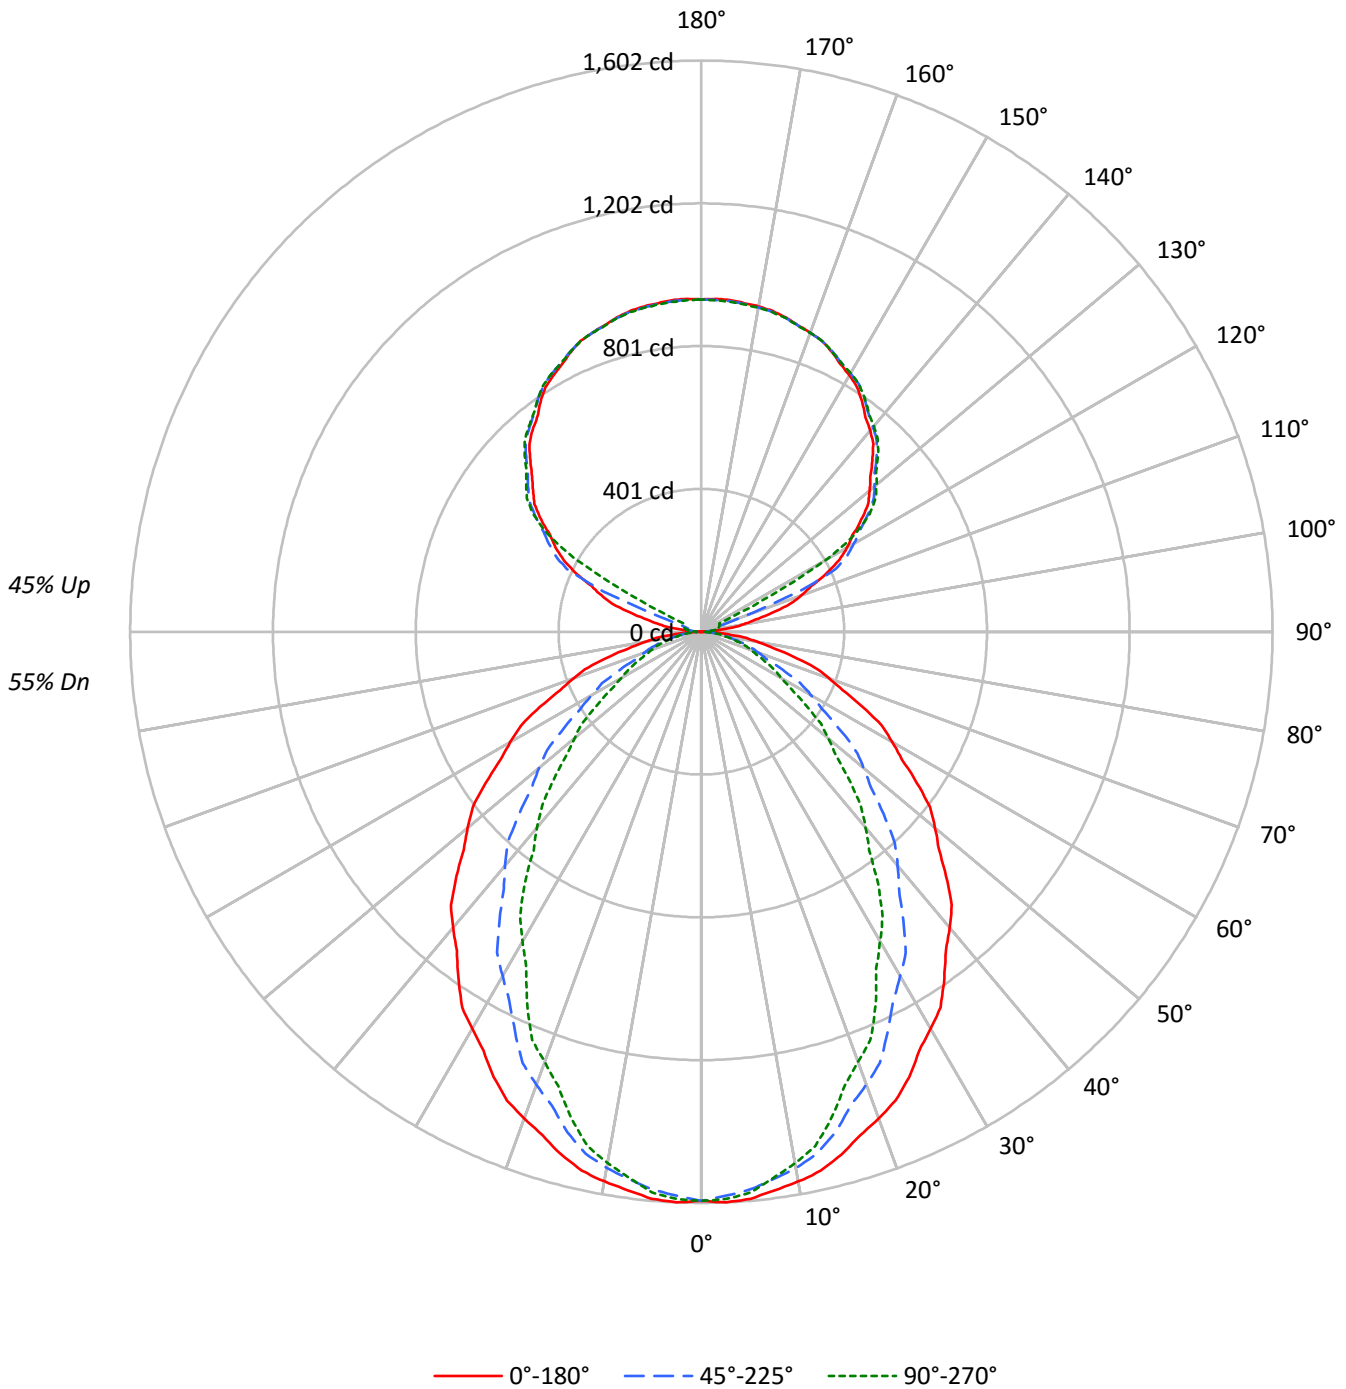



TEST NUMBER: P331750-830

CATALOG NUMBER: SA2XXRDIP-C1005D725U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52	47
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45	40
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39	35
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	30
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21	19
9	52	40	33	28	49	38	31	27	33	28	24	29	25	22	25	22	19	17
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	25770	25770	25770
5°	25869	25449	25590
10°	25671	25032	24819
15°	25377	24289	23590
20°	24967	23230	22063
25°	24549	22026	20587
30°	23968	20789	18690
35°	23402	19446	17026
40°	22835	18054	15099
45°	22165	16493	13358
50°	21481	14913	11645
55°	20777	13216	10001
60°	19963	11428	8302
65°	19037	9605	7561
70°	17934	7912	6954
75°	16581	7211	6488
80°	14635	6453	5904
85°	11504	5076	5076



TEST NUMBER: P331750-830

CATALOG NUMBER: SA2XXRDIP-C1005D725U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.4	2.5
10°-20°	410.2	6.8
20°-30°	576.1	9.6
30°-40°	628.2	10.4
40°-50°	577.6	9.6
50°-60°	453.6	7.5
60°-70°	295.8	4.9
70°-80°	152.5	2.5
80°-90°	41.9	0.7
90°-100°	31.1	0.5
100°-110°	114.0	1.9
110°-120°	304.7	5.1
120°-130°	502.9	8.4
130°-140°	534.9	8.9
140°-150°	497.1	8.3
150°-160°	399.7	6.6
160°-170°	257.6	4.3
170°-180°	88.7	1.5
0°-30°	1135.7	18.9
0°-40°	1763.9	29.3
0°-60°	2795.1	46.5
0°-90°	3285.2	54.6
90°-120°	449.7	7.5
90°-150°	1984.7	33.0
90°-180°	2731.0	45.4
0°-180°	6015.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1596	1596	1596	1596	1596	
5°	1596	1588	1570	1582	1579	151
15°	1518	1500	1453	1426	1411	427
25°	1378	1329	1236	1179	1156	633
35°	1187	1111	987	899	864	743
45°	971	871	722	623	585	749
55°	738	623	470	386	355	659
65°	498	381	251	205	198	494
75°	266	168	116	106	104	281
85°	62	33	27	27	27	73
90°	1	8	14	17	18	5
95°	44	23	26	29	29	54
105°	205	214	41	48	51	219
115°	388	399	416	118	55	382
125°	548	557	570	574	576	489
135°	678	689	695	701	700	524
145°	787	787	798	802	799	492
155°	866	861	868	872	867	399
165°	913	909	911	915	911	258
175°	934	929	930	934	928	89
180°	932	932	932	932	932	



TEST NUMBER: P331750-830

CATALOG NUMBER: SA2XXRDIP-C1005D725U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1
2.5°	1601.9	1600.6	1599.3	1598.1	1596.8	1594.7	1591.9	1589.1	1586.3	1583.5	1586.0
5°	1596.1	1594.5	1592.9	1591.3	1589.7	1586.9	1582.6	1578.5	1574.3	1570.2	1573.0
7.5°	1579.7	1577.7	1575.7	1573.7	1571.7	1568.3	1563.4	1558.5	1553.7	1548.8	1549.6
10°	1565.8	1563.6	1561.3	1559.1	1556.8	1552.5	1546.1	1539.6	1533.2	1526.8	1525.9
12.5°	1548.5	1545.7	1542.9	1540.2	1537.5	1531.9	1523.7	1515.5	1507.3	1499.1	1497.3
15°	1518.2	1514.6	1511.1	1507.5	1504.0	1496.8	1485.9	1475.0	1464.1	1453.1	1447.1
17.5°	1480.8	1475.5	1470.1	1464.7	1459.3	1449.6	1435.6	1421.6	1407.6	1393.6	1386.4
20°	1453.1	1446.7	1440.3	1433.9	1427.5	1416.3	1400.1	1384.1	1368.1	1352.0	1344.0
22.5°	1423.1	1415.9	1408.7	1401.6	1394.3	1381.7	1363.6	1345.5	1327.4	1309.3	1298.9
25°	1378.0	1367.7	1357.4	1347.2	1336.9	1321.3	1300.0	1278.8	1257.6	1236.4	1223.3
27.5°	1323.7	1312.6	1301.4	1290.2	1279.0	1261.5	1237.7	1213.7	1189.9	1166.0	1150.7
30°	1285.6	1273.4	1261.2	1249.0	1236.8	1217.9	1192.1	1166.5	1140.9	1115.1	1098.7
32.5°	1248.6	1234.4	1220.1	1205.9	1191.6	1171.4	1145.2	1119.0	1092.8	1066.6	1047.9
35°	1187.3	1171.0	1154.6	1138.2	1121.9	1099.6	1071.3	1043.1	1014.8	986.6	966.4
37.5°	1126.1	1108.1	1090.1	1072.1	1054.2	1030.2	1000.0	970.0	939.8	909.7	887.5
40°	1083.4	1064.1	1044.8	1025.6	1006.4	981.1	950.0	918.9	887.7	856.6	833.8
42.5°	1039.4	1019.2	998.9	978.5	958.3	932.1	899.9	867.7	835.6	803.4	779.9
45°	970.7	949.1	927.7	906.2	884.7	857.1	823.3	789.7	755.9	722.3	699.5
47.5°	903.6	880.9	858.1	835.3	812.5	783.7	748.9	714.1	679.3	644.5	621.9
50°	855.2	832.4	809.5	786.7	763.9	734.9	699.6	664.3	629.0	593.7	571.6
52.5°	807.8	783.9	760.2	736.3	712.5	683.3	648.8	614.3	579.7	545.2	523.8
55°	738.1	713.1	688.1	663.0	638.0	608.1	573.4	538.8	504.2	469.5	450.2
57.5°	666.8	641.1	615.4	589.7	564.0	534.5	501.2	467.9	434.6	401.2	383.6
60°	618.2	592.6	566.8	541.2	515.5	486.2	453.1	420.0	386.9	353.9	337.5
62.5°	570.9	545.2	519.5	493.8	468.2	439.5	408.0	376.5	345.0	313.5	297.8
65°	498.3	472.3	446.4	420.4	394.4	366.9	338.0	309.2	280.2	251.4	240.4
67.5°	428.4	402.7	376.8	351.0	325.2	299.3	273.3	247.3	221.3	195.3	190.3
70°	379.9	354.9	329.8	304.8	279.7	256.2	234.0	211.9	189.7	167.6	164.4
72.5°	333.7	309.6	285.7	261.6	237.6	216.7	199.0	181.2	163.3	145.6	142.9
75°	265.8	243.3	220.8	198.4	175.9	159.2	148.3	137.4	126.5	115.6	113.3
77.5°	199.1	179.4	159.7	140.0	120.2	107.7	102.5	97.2	91.9	86.7	85.4
80°	157.4	141.1	124.7	108.3	92.0	82.2	79.0	75.8	72.6	69.4	68.1
82.5°	119.3	106.5	93.8	81.0	68.2	60.7	58.5	56.4	54.2	52.0	51.3
85°	62.1	55.3	48.6	41.8	35.2	31.3	30.3	29.4	28.4	27.4	27.4
87.5°	18.7	16.9	15.2	13.5	11.7	11.0	11.2	11.5	11.7	12.0	11.9
90°	0.7	2.4	4.0	5.7	7.3	8.7	9.9	11.1	12.3	13.5	14.2
92.5°	13.6	13.5	13.3	13.2	13.0	13.3	13.9	14.4	15.1	15.6	16.0
95°	43.8	38.9	33.9	29.0	24.0	22.1	23.2	24.2	25.3	26.3	27.1
97.5°	87.0	73.0	59.1	45.1	31.2	25.4	27.9	30.3	32.8	35.2	35.8
100°	119.3	98.8	78.3	57.8	37.2	28.3	30.8	33.4	35.9	38.5	39.6
102.5°	155.0	150.6	146.3	141.9	137.5	124.7	103.4	82.1	60.8	39.5	41.1
105°	205.0	209.4	214.0	218.5	222.9	204.7	163.8	122.9	82.0	41.1	42.8
107.5°	262.0	265.6	269.3	272.9	276.5	253.8	204.7	155.7	106.6	57.6	55.9
110°	298.7	301.8	305.0	308.1	311.2	291.2	247.9	204.6	161.3	118.0	103.0



TEST NUMBER: P331750-830

CATALOG NUMBER: SA2XXRDIP-C1005D725U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	333.2	336.0	338.7	341.6	344.3	340.4	329.7	319.0	308.3	297.6	243.0
115°	387.7	390.2	392.8	395.3	397.8	401.1	404.7	408.5	412.3	416.0	346.7
117.5°	436.4	439.2	442.1	444.9	447.7	450.4	453.1	455.6	458.2	460.8	444.0
120°	471.9	474.2	476.5	478.7	481.0	483.4	486.2	488.8	491.5	494.2	496.0
122.5°	502.2	504.5	506.9	509.3	511.6	514.3	517.3	520.2	523.1	526.0	527.1
125°	548.2	550.1	552.0	554.0	555.9	558.4	561.2	564.0	566.8	569.8	570.8
127.5°	589.8	592.0	594.2	596.3	598.4	600.6	602.8	604.8	607.0	609.1	610.7
130°	616.2	618.7	621.0	623.4	625.8	627.8	629.5	631.1	632.8	634.4	636.1
132.5°	643.2	645.3	647.3	649.3	651.4	653.2	654.9	656.5	658.2	659.8	661.2
135°	678.3	680.7	683.1	685.5	687.9	689.8	691.1	692.4	693.8	695.1	696.6
137.5°	713.8	715.4	717.1	718.8	720.5	722.1	723.6	725.1	726.6	728.2	729.6
140°	737.0	738.1	739.3	740.6	741.7	743.2	744.8	746.5	748.1	749.8	751.1
142.5°	756.4	757.4	758.6	759.6	760.6	762.1	764.0	765.9	767.8	769.7	770.9
145°	786.8	786.6	786.6	786.4	786.3	787.4	789.9	792.5	795.0	797.6	798.7
147.5°	813.4	812.8	812.3	811.7	811.2	812.1	814.6	817.1	819.6	822.2	822.9
150°	830.7	829.6	828.6	827.6	826.4	827.2	829.5	831.9	834.3	836.7	837.6
152.5°	845.2	844.0	842.9	841.7	840.6	841.1	843.4	845.6	847.9	850.2	851.1
155°	866.4	865.1	863.7	862.3	861.0	861.2	863.0	864.8	866.6	868.4	869.3
157.5°	883.0	881.8	880.7	879.6	878.4	878.4	879.8	881.0	882.2	883.5	884.6
160°	892.7	891.7	890.9	889.9	889.1	889.1	889.9	890.9	891.7	892.7	893.6
162.5°	901.4	900.4	899.6	898.6	897.7	897.7	898.4	899.2	900.0	900.8	901.8
165°	912.9	912.0	911.2	910.2	909.3	909.1	909.6	910.0	910.4	910.9	911.9
167.5°	921.5	920.7	919.7	918.9	917.9	917.7	918.1	918.5	919.0	919.4	920.4
170°	926.4	925.5	924.6	923.7	922.8	922.5	922.8	923.1	923.4	923.7	924.7
172.5°	929.6	928.7	927.8	926.9	926.0	925.8	926.0	926.3	926.6	926.9	928.0
175°	933.8	932.7	931.7	930.7	929.6	929.3	929.5	929.8	930.1	930.5	931.5
177.5°	934.5	933.7	932.8	932.0	931.1	930.8	930.9	931.0	931.1	931.2	932.1
180°	931.8	931.8	931.8	931.8	931.8	931.8	931.8	931.8	931.8	931.8	931.8



TEST NUMBER: P331750-830

CATALOG NUMBER: SA2XXRDIP-C1005D725U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1	1596.1
2.5°	1588.6	1591.1	1593.7	1594.7	1594.2	1593.7	1593.2	1592.7
5°	1575.9	1578.9	1581.7	1582.6	1581.7	1580.7	1579.8	1578.9
7.5°	1550.4	1551.2	1552.1	1551.7	1550.0	1548.3	1546.7	1545.0
10°	1524.8	1523.9	1523.0	1521.5	1519.6	1517.7	1515.7	1513.8
12.5°	1495.6	1493.8	1492.1	1489.7	1486.5	1483.3	1480.1	1476.9
15°	1441.0	1434.8	1428.7	1424.1	1420.9	1417.7	1414.5	1411.3
17.5°	1379.1	1371.9	1364.6	1358.2	1352.7	1347.2	1341.6	1336.1
20°	1336.0	1327.9	1319.9	1312.4	1305.3	1298.3	1291.2	1284.1
22.5°	1288.6	1278.3	1267.9	1260.1	1254.9	1249.6	1244.3	1239.1
25°	1210.1	1197.0	1183.8	1174.9	1170.0	1165.2	1160.4	1155.6
27.5°	1135.3	1119.9	1104.6	1093.1	1085.4	1077.8	1070.2	1062.5
30°	1082.4	1066.0	1049.6	1037.2	1028.5	1019.8	1011.2	1002.5
32.5°	1029.3	1010.6	991.8	978.5	970.3	962.1	953.9	945.8
35°	946.1	926.0	905.7	892.0	885.0	877.9	870.8	863.8
37.5°	865.2	842.9	820.6	805.4	797.4	789.3	781.2	773.1
40°	811.0	788.2	765.4	749.9	741.5	733.1	724.8	716.4
42.5°	756.3	732.7	709.2	693.3	685.2	677.1	669.1	661.0
45°	676.7	653.8	631.0	615.9	608.1	600.4	592.7	585.0
47.5°	599.2	576.6	553.8	539.0	532.1	525.1	518.0	511.0
50°	549.4	527.3	505.1	490.6	483.9	477.1	470.4	463.6
52.5°	502.4	481.0	459.7	445.8	439.6	433.4	427.2	420.9
55°	430.9	411.7	392.4	379.8	373.6	367.5	361.5	355.3
57.5°	366.0	348.3	330.6	319.2	314.1	309.0	303.9	298.7
60°	321.1	304.8	288.4	277.7	272.5	267.4	262.2	257.1
62.5°	282.3	266.6	251.1	241.7	238.7	235.5	232.4	229.4
65°	229.5	218.6	207.6	201.7	200.8	199.8	198.9	197.9
67.5°	185.3	180.3	175.2	172.2	171.3	170.2	169.2	168.1
70°	161.2	158.0	154.8	152.5	151.2	149.9	148.6	147.3
72.5°	140.3	137.5	134.8	133.1	132.3	131.6	130.7	130.0
75°	111.0	108.9	106.6	105.3	105.0	104.6	104.3	104.0
77.5°	84.1	82.8	81.5	80.6	80.1	79.6	79.1	78.6
80°	66.7	65.5	64.2	63.5	63.5	63.5	63.5	63.5
82.5°	50.4	49.7	48.9	48.5	48.5	48.5	48.5	48.5
85°	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4
87.5°	11.7	11.6	11.5	11.5	11.6	11.6	11.7	11.7
90°	15.0	15.7	16.5	17.0	17.3	17.6	17.9	18.2
92.5°	16.4	16.8	17.2	17.5	17.6	17.8	18.0	18.2
95°	27.8	28.6	29.3	29.6	29.4	29.3	29.1	29.0
97.5°	36.4	36.9	37.6	38.0	38.2	38.4	38.5	38.7
100°	40.8	42.0	43.3	44.0	44.3	44.6	44.9	45.1
102.5°	42.6	44.2	45.7	46.8	47.1	47.6	48.0	48.4
105°	44.4	46.1	47.7	48.8	49.5	50.0	50.6	51.3
107.5°	54.2	52.5	50.9	50.3	50.9	51.6	52.1	52.7
110°	88.0	73.0	58.1	50.9	51.5	52.0	52.7	53.3



TEST NUMBER: P331750-830

CATALOG NUMBER: SA2XXRDIP-C1005D725U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	188.3	133.7	79.0	51.8	52.4	52.9	53.3	53.8
115°	277.3	207.9	138.6	98.4	87.7	76.8	66.1	55.3
117.5°	427.3	410.4	393.6	367.5	332.1	296.6	261.2	225.7
120°	497.9	499.6	501.4	492.2	471.9	451.8	431.5	411.3
122.5°	528.2	529.2	530.4	529.0	525.0	521.0	517.2	513.2
125°	571.8	572.9	573.9	574.7	575.1	575.6	576.0	576.5
127.5°	612.2	613.7	615.2	616.0	616.1	616.2	616.3	616.4
130°	637.7	639.4	641.0	641.8	641.7	641.5	641.3	641.2
132.5°	662.6	664.0	665.4	666.1	665.9	665.8	665.6	665.4
135°	698.1	699.6	701.2	701.7	701.4	701.2	700.8	700.5
137.5°	731.1	732.5	734.1	734.5	734.1	733.5	733.0	732.4
140°	752.4	753.8	755.2	755.4	754.7	753.9	753.2	752.4
142.5°	772.1	773.4	774.6	774.9	774.1	773.4	772.6	771.8
145°	799.7	800.8	801.8	801.9	801.3	800.5	799.7	799.0
147.5°	823.7	824.5	825.3	825.4	824.7	824.1	823.5	822.8
150°	838.5	839.4	840.3	840.4	839.6	838.9	838.1	837.4
152.5°	852.0	852.9	853.8	853.8	852.8	851.8	850.8	849.8
155°	870.2	871.1	872.0	871.9	870.6	869.5	868.3	867.0
157.5°	885.5	886.6	887.6	887.5	886.4	885.1	884.0	882.9
160°	894.5	895.4	896.3	896.2	895.1	894.1	893.1	892.0
162.5°	902.8	903.8	904.8	904.7	903.4	902.1	900.9	899.6
165°	912.9	914.1	915.1	915.1	914.1	912.9	911.9	910.9
167.5°	921.5	922.6	923.6	923.4	922.1	920.8	919.4	918.0
170°	925.8	926.8	927.9	927.7	926.4	925.0	923.7	922.4
172.5°	929.1	930.1	931.1	930.9	929.6	928.3	926.9	925.6
175°	932.6	933.6	934.6	934.4	932.9	931.4	929.9	928.4
177.5°	932.9	933.8	934.6	934.5	933.4	932.4	931.2	930.2
180°	931.8	931.8	931.8	931.8	931.8	931.8	931.8	931.8

(END OF REPORT)