

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331663-830

Luminaire Tested: **SA2XXRDIP-C485D925U830-4F0-1E-UDD-A**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331663-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 925 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5239.9 lumens  
Efficiency: N/A  
Efficacy: 117.8 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331663-830  
CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

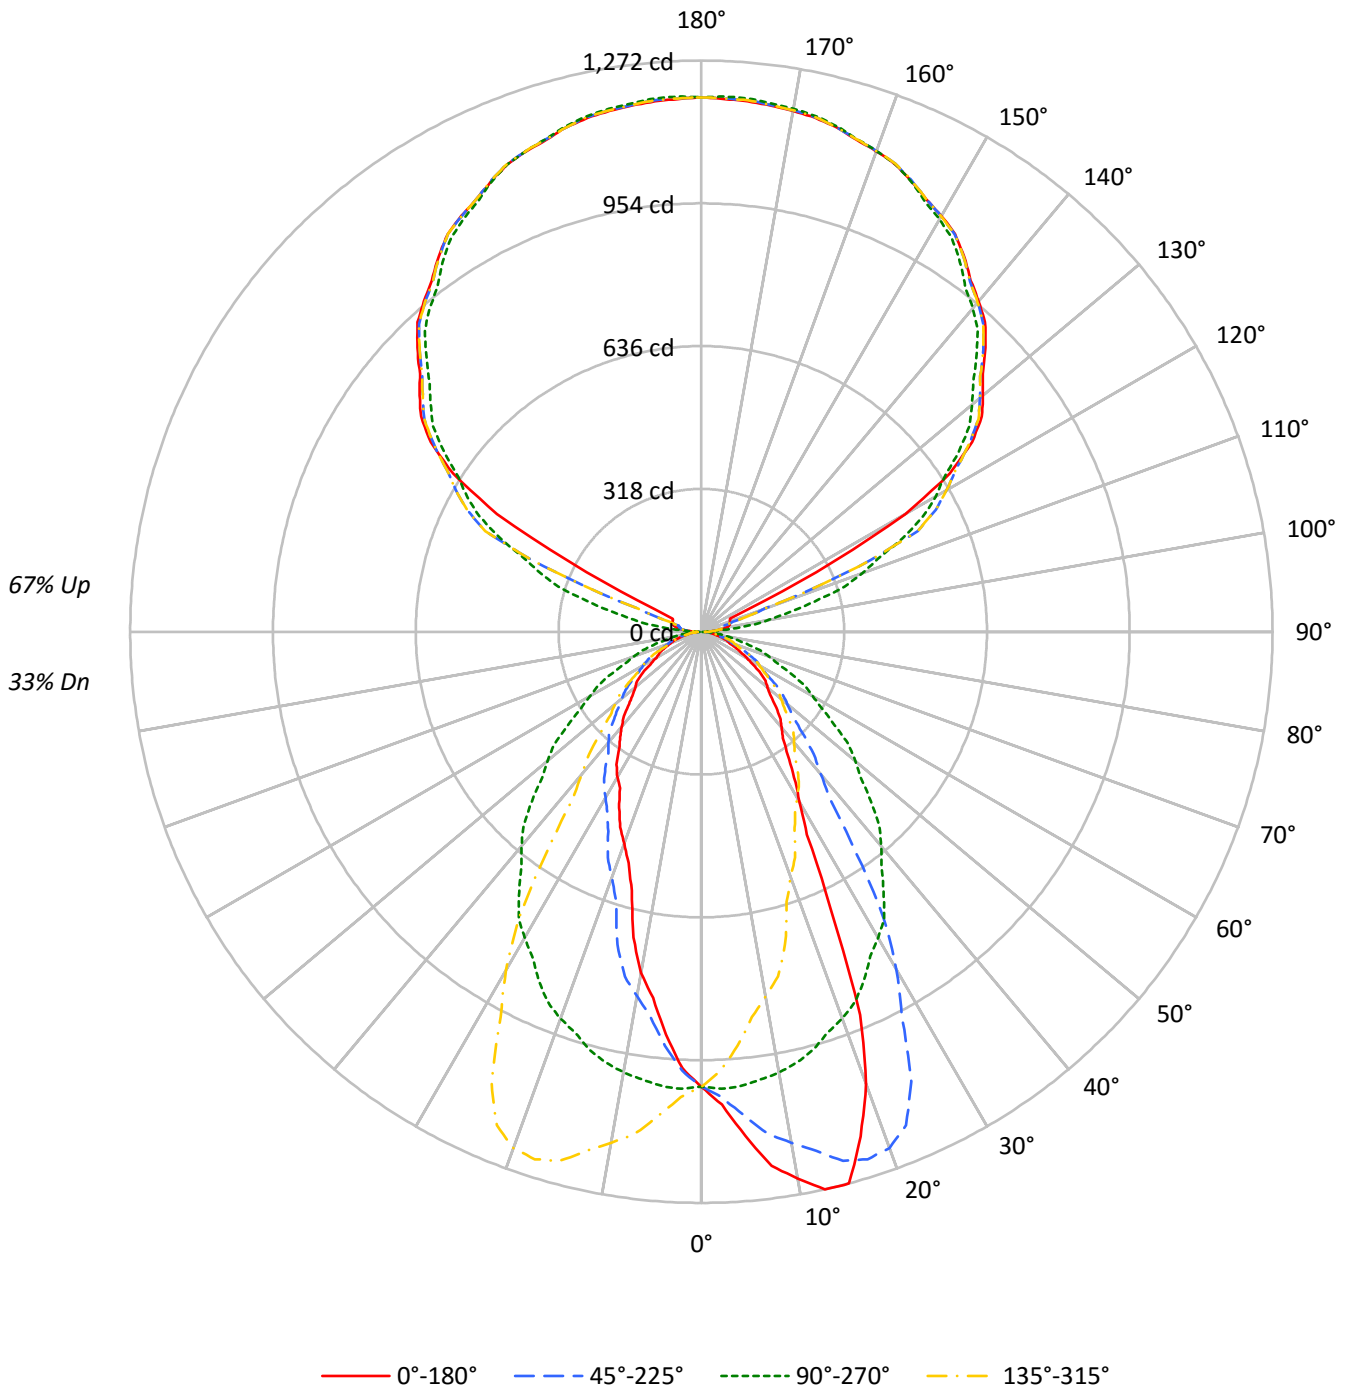



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33
1	95	91	87	84	85	82	79	76	66	64	62	51	49	48	37	36	35	29
2	87	80	74	69	78	72	67	63	58	55	52	45	43	41	33	32	31	25
3	79	70	64	58	71	64	58	54	52	48	44	40	38	35	30	28	27	22
4	73	63	55	50	66	57	51	46	46	42	38	36	33	31	27	25	24	20
5	67	56	48	43	60	51	45	40	42	37	33	33	30	27	25	23	21	17
6	62	50	43	37	56	46	39	35	38	33	29	30	27	24	23	20	19	16
7	57	46	38	33	52	42	35	31	34	29	26	27	24	21	21	19	17	14
8	53	42	34	29	48	38	32	27	31	27	23	25	22	19	19	17	15	13
9	50	38	31	26	45	35	29	24	29	24	21	23	20	17	18	16	14	12
10	46	35	28	23	42	32	26	22	27	22	19	22	18	16	17	14	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	16356	16356	16356	16356
5°	18266	16459	14593	16459
10°	20266	16342	12650	16342
15°	21264	16104	9967	16104
20°	18433	15747	8624	15747
25°	12089	15262	7701	15262
30°	8138	14673	6969	14673
35°	6591	13931	6286	13931
40°	5861	13122	5817	13122
45°	5304	12177	5190	12177
50°	4828	11235	4808	11235
55°	4538	10196	4479	10196
60°	3794	9242	3749	9242
65°	3202	8390	3629	8390
70°	2960	7492	3423	7492
75°	2770	6519	3163	6519
80°	2548	5365	2817	5365
85°	2334	4242	2482	4242



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	96.0	1.8
10°-20°	267.6	5.1
20°-30°	344.8	6.6
30°-40°	327.7	6.3
40°-50°	280.7	5.4
50°-60°	213.8	4.1
60°-70°	135.1	2.6
70°-80°	67.5	1.3
80°-90°	20.5	0.4
90°-100°	39.7	0.8
100°-110°	145.5	2.8
110°-120°	389.0	7.4
120°-130°	642.1	12.3
130°-140°	682.9	13.0
140°-150°	634.7	12.1
150°-160°	510.3	9.7
160°-170°	328.8	6.3
170°-180°	113.2	2.2
0°-30°	708.4	13.5
0°-40°	1036.1	19.8
0°-60°	1530.5	29.2
0°-90°	1753.6	33.5
90°-120°	574.2	11.0
90°-150°	2533.9	48.4
90°-180°	3486.0	66.5
0°-180°	5239.9	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1013	1013	1013	1013	1013	
5°	1127	1016	900	1016	1127	111
15°	1272	963	596	963	1272	343
25°	679	857	432	857	679	322
35°	334	707	319	707	334	214
45°	232	533	227	533	232	180
55°	161	362	159	362	161	141
65°	84	220	95	220	84	85
75°	44	104	51	104	44	47
85°	13	23	13	23	13	14
90°	23	1	23	1	23	11
95°	37	56	37	56	37	35
105°	65	262	65	262	65	68
115°	71	495	71	495	71	177
125°	736	700	736	700	736	637
135°	894	866	894	866	894	689
145°	1020	1005	1020	1005	1020	638
155°	1107	1106	1107	1106	1107	511
165°	1163	1166	1163	1166	1163	328
175°	1185	1192	1185	1192	1185	113
180°	1190	1190	1190	1190	1190	



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	1054.1	1055.0	1055.8	1053.9	1053.9	1052.2	1048.5	1045.7	1037.7	1036.6	1036.6
5°	1127.0	1126.3	1127.8	1123.1	1116.8	1115.4	1108.7	1099.9	1090.8	1080.5	1078.5
7.5°	1199.6	1198.5	1195.7	1194.9	1190.1	1179.4	1168.7	1157.2	1142.0	1127.1	1119.6
10°	1236.1	1247.7	1240.8	1228.4	1230.9	1214.4	1205.5	1190.4	1177.7	1155.6	1150.7
12.5°	1272.1	1276.8	1274.5	1267.5	1264.4	1252.9	1241.0	1227.9	1204.5	1184.6	1167.2
15°	1272.1	1278.7	1280.5	1278.4	1280.2	1279.4	1273.1	1262.2	1241.8	1219.9	1201.0
17.5°	1178.2	1182.8	1194.3	1202.1	1212.0	1232.8	1243.1	1247.2	1244.1	1231.6	1218.2
20°	1072.8	1065.1	1097.5	1114.0	1128.1	1163.3	1193.5	1205.1	1223.8	1223.5	1219.9
22.5°	923.6	925.4	956.1	975.7	1016.9	1052.1	1086.6	1130.3	1166.4	1190.2	1204.2
25°	678.6	692.0	722.6	749.3	795.1	860.6	920.1	989.1	1054.1	1105.6	1154.5
27.5°	509.6	510.7	534.9	559.7	586.8	640.5	715.4	797.8	890.6	967.1	1055.3
30°	436.5	434.3	444.6	459.7	483.0	524.4	580.8	661.8	754.3	869.8	972.5
32.5°	384.7	384.7	392.5	403.7	422.9	450.9	489.6	555.3	642.8	756.3	876.8
35°	334.4	334.0	339.7	347.8	355.8	373.8	400.2	434.7	494.9	600.9	724.1
37.5°	298.3	299.9	302.7	307.7	316.6	326.6	342.5	365.6	408.5	471.2	574.7
40°	278.1	278.8	282.7	286.9	292.2	299.9	312.9	331.6	362.9	412.8	488.5
42.5°	259.5	260.1	263.0	266.8	271.0	278.8	289.5	305.7	331.1	370.0	432.5
45°	232.3	232.3	234.8	236.5	241.1	248.2	256.9	270.3	287.9	316.8	358.4
47.5°	206.8	206.9	208.5	211.5	214.4	219.9	228.6	239.5	252.3	274.7	310.1
50°	192.2	192.6	193.6	196.0	197.8	202.7	209.4	219.0	232.3	249.6	279.1
52.5°	180.3	180.1	181.4	182.6	183.7	187.3	192.3	200.7	212.6	227.6	252.1
55°	161.2	159.8	161.9	163.6	164.8	166.2	168.9	174.3	184.5	197.1	215.4
57.5°	137.2	136.7	138.2	139.8	143.1	146.9	149.3	152.7	158.0	167.0	185.2
60°	117.5	117.5	120.7	121.8	125.6	130.5	135.5	138.4	143.6	149.6	163.0
62.5°	100.1	100.4	101.9	102.9	105.1	111.1	118.1	124.2	129.2	135.0	143.8
65°	83.8	84.5	84.5	85.2	86.6	88.0	90.8	95.8	104.5	112.6	119.3
67.5°	71.1	71.4	71.5	72.2	72.6	74.1	75.2	77.5	79.5	87.2	95.5
70°	62.7	63.7	63.3	64.1	64.4	65.1	66.5	67.6	70.8	72.5	77.5
72.5°	54.8	55.5	55.5	55.9	56.8	56.9	58.1	59.1	61.2	62.7	65.3
75°	44.4	44.0	44.4	45.1	45.4	45.7	45.7	47.1	48.3	49.7	51.4
77.5°	34.2	34.6	34.5	34.6	34.6	35.3	35.2	35.8	36.9	37.6	38.5
80°	27.4	27.8	27.4	27.8	28.2	28.5	28.2	28.5	29.6	30.3	30.3
82.5°	21.3	21.3	21.6	21.6	21.7	21.8	22.2	22.3	23.1	22.9	23.2
85°	12.6	12.3	12.3	12.3	12.6	13.0	12.6	12.6	13.0	13.0	13.0
87.5°	9.1	9.3	9.2	9.2	9.1	9.0	8.8	8.9	8.4	8.5	7.9
90°	23.3	22.9	22.4	22.1	21.7	21.0	20.1	19.1	18.2	17.2	15.6
92.5°	23.3	23.0	22.8	22.5	22.3	22.0	21.5	20.9	20.5	20.0	19.2
95°	37.0	37.2	37.4	37.6	37.8	37.4	36.5	35.4	34.5	33.6	32.2
97.5°	49.4	49.2	48.9	48.7	48.4	48.0	47.2	46.5	45.7	45.0	41.8
100°	57.7	57.3	56.9	56.6	56.2	55.2	53.6	52.1	50.6	49.1	45.8
102.5°	61.8	61.3	60.7	60.2	59.7	58.4	56.5	54.4	52.4	50.4	77.7
105°	65.4	64.7	63.9	63.2	62.4	60.9	58.8	56.7	54.6	52.5	104.7
107.5°	67.3	66.5	65.8	65.0	64.3	64.9	67.1	69.2	71.4	73.5	136.1
110°	68.1	67.2	66.4	65.7	64.9	74.1	93.2	112.4	131.5	150.6	205.9



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	68.7	68.1	67.5	66.8	66.3	100.9	170.6	240.4	310.2	379.9	393.6
115°	70.6	84.4	98.1	111.9	125.6	176.8	265.4	354.0	442.5	531.1	526.3
117.5°	288.2	333.5	378.7	424.0	469.2	502.6	524.1	545.4	566.8	588.2	585.0
120°	525.1	550.9	576.7	602.6	628.4	640.2	637.9	635.6	633.3	630.9	627.5
122.5°	655.3	660.3	665.2	670.3	675.3	677.1	675.7	674.4	673.0	671.7	667.9
125°	736.0	735.5	734.8	734.2	733.7	732.7	731.4	730.1	728.8	727.4	723.8
127.5°	786.9	786.8	786.7	786.6	786.5	785.5	783.5	781.6	779.6	777.7	775.0
130°	818.6	818.8	819.0	819.3	819.4	818.4	816.3	814.3	812.1	810.0	807.9
132.5°	849.6	849.8	850.0	850.2	850.4	849.6	847.8	846.0	844.2	842.4	840.3
135°	894.4	894.8	895.1	895.5	895.9	895.1	893.2	891.4	889.4	887.5	885.8
137.5°	935.2	935.9	936.5	937.2	937.8	937.2	935.3	933.4	931.5	929.7	927.7
140°	960.6	961.7	962.6	963.6	964.5	964.1	962.4	960.6	958.9	957.2	955.2
142.5°	985.4	986.5	987.4	988.4	989.3	989.0	987.4	985.8	984.3	982.7	980.3
145°	1020.1	1021.1	1022.0	1022.9	1023.9	1023.7	1022.4	1021.1	1019.6	1018.3	1015.1
147.5°	1050.6	1051.3	1052.2	1052.9	1053.8	1053.7	1052.6	1051.7	1050.7	1049.7	1046.5
150°	1069.1	1070.1	1071.0	1072.0	1073.0	1072.9	1071.8	1070.5	1069.4	1068.3	1065.3
152.5°	1085.0	1086.3	1087.5	1088.7	1090.1	1090.1	1088.9	1087.8	1086.7	1085.5	1082.6
155°	1107.0	1108.5	1110.0	1111.6	1113.1	1113.3	1112.2	1111.1	1109.8	1108.7	1106.5
157.5°	1127.2	1128.6	1130.1	1131.6	1133.1	1133.2	1131.9	1130.6	1129.4	1128.0	1126.4
160°	1138.9	1140.2	1141.5	1142.8	1144.2	1144.3	1143.2	1142.0	1140.9	1139.7	1138.6
162.5°	1148.5	1150.2	1151.8	1153.5	1155.1	1155.3	1154.0	1152.6	1151.3	1150.1	1149.1
165°	1163.0	1164.3	1165.6	1167.0	1168.3	1168.3	1167.0	1165.6	1164.3	1163.0	1162.4
167.5°	1172.1	1173.8	1175.5	1177.2	1178.9	1179.2	1177.8	1176.5	1175.2	1173.8	1173.3
170°	1177.6	1179.3	1181.0	1182.8	1184.5	1184.7	1183.4	1182.0	1180.6	1179.3	1178.9
172.5°	1181.8	1183.5	1185.2	1186.8	1188.6	1188.8	1187.5	1186.1	1184.8	1183.5	1183.1
175°	1185.3	1187.2	1189.2	1191.1	1193.0	1193.3	1191.9	1190.6	1189.3	1187.9	1187.5
177.5°	1187.6	1188.9	1190.3	1191.8	1193.1	1193.3	1192.2	1191.1	1190.1	1188.9	1188.8
180°	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	1037.2	1035.0	1033.0	1027.9	1025.4	1019.7	1018.9	1018.6	1011.3	1004.3	1002.3
5°	1072.8	1067.2	1058.8	1048.9	1038.7	1028.1	1021.1	1015.5	1001.4	988.0	980.2
7.5°	1108.7	1096.6	1082.0	1063.4	1047.8	1030.4	1017.5	1005.8	985.8	966.7	953.8
10°	1135.5	1115.8	1096.5	1070.7	1050.7	1031.0	1012.7	996.8	974.3	949.0	930.9
12.5°	1152.1	1130.4	1103.7	1078.6	1052.6	1027.6	1003.1	982.7	956.3	930.1	908.7
15°	1174.6	1151.3	1119.0	1083.1	1049.6	1016.9	988.7	963.4	928.9	897.6	871.5
17.5°	1193.0	1160.9	1126.1	1084.7	1045.9	1004.4	968.1	935.7	897.3	859.5	828.9
20°	1198.8	1167.2	1127.0	1085.5	1039.7	990.8	951.8	916.5	875.3	834.2	799.0
22.5°	1195.1	1170.5	1125.9	1076.2	1029.4	978.2	934.1	893.2	847.5	805.5	764.7
25°	1170.4	1161.9	1119.6	1065.5	1011.9	952.4	901.4	856.7	804.6	759.6	715.2
27.5°	1112.4	1130.7	1104.5	1046.7	987.2	923.4	866.1	815.2	761.1	710.4	666.2
30°	1056.7	1098.5	1087.2	1033.8	967.2	904.6	840.2	787.0	729.3	677.2	633.6
32.5°	980.3	1049.5	1060.5	1015.8	947.0	878.1	810.6	757.7	697.5	642.5	600.0
35°	858.8	962.3	1009.8	981.3	912.3	838.1	768.4	706.8	646.2	592.0	549.8
37.5°	713.9	854.8	934.1	936.0	872.7	795.5	719.6	658.5	596.4	543.3	497.6
40°	619.8	772.6	875.7	898.6	845.1	761.7	684.9	622.6	562.1	510.0	457.6
42.5°	535.4	687.6	814.4	854.1	811.6	728.8	651.8	586.6	527.7	478.4	424.9
45°	432.9	566.0	705.7	776.8	753.3	676.5	595.2	533.3	478.0	435.4	384.0
47.5°	365.2	459.0	594.2	690.4	689.9	619.9	540.0	480.6	429.3	389.5	347.8
50°	326.6	408.3	522.7	631.8	640.9	582.2	506.1	447.3	399.5	357.6	324.1
52.5°	292.0	359.3	462.1	566.8	592.8	541.9	468.2	413.9	367.4	328.9	300.2
55°	246.8	298.8	377.0	474.9	514.3	478.3	412.8	362.2	324.5	292.2	267.5
57.5°	208.7	247.8	310.5	389.3	435.2	412.6	358.6	317.4	285.2	255.9	236.5
60°	184.8	216.8	269.9	335.8	386.4	370.6	324.5	286.2	258.7	233.4	215.1
62.5°	162.3	189.8	235.4	288.8	335.3	328.7	291.1	258.8	234.8	211.7	196.2
65°	130.5	150.6	186.2	228.1	265.4	268.5	241.5	219.6	198.1	179.8	166.2
67.5°	104.0	117.1	142.1	177.4	205.4	215.4	198.8	182.1	165.0	150.9	139.0
70°	87.7	98.2	116.5	145.1	170.7	181.3	171.7	158.7	143.9	132.3	122.2
72.5°	71.1	81.3	94.8	115.7	137.8	149.2	145.9	136.5	124.5	114.9	105.3
75°	53.5	56.6	65.8	79.9	97.2	107.0	109.4	104.5	95.0	87.7	82.0
77.5°	39.6	41.5	45.8	53.3	64.5	73.2	76.9	76.3	69.7	65.5	60.2
80°	31.7	32.7	34.9	38.0	46.5	55.2	57.7	57.7	53.2	51.4	46.1
82.5°	24.0	24.9	26.1	27.9	31.9	39.5	42.2	42.8	39.9	37.6	33.5
85°	13.8	13.4	14.0	15.2	15.8	17.9	22.1	22.9	22.1	19.3	18.3
87.5°	7.6	7.6	7.3	6.6	6.5	6.4	7.4	8.3	7.6	7.2	7.1
90°	14.1	12.6	11.1	9.2	7.2	5.1	2.9	0.8	2.9	5.1	7.2
92.5°	18.5	17.7	16.9	16.6	16.8	17.0	17.2	17.3	17.2	17.0	16.8
95°	30.9	29.6	28.2	30.7	37.0	43.4	49.7	56.0	49.7	43.4	37.0
97.5°	38.7	35.6	32.5	39.9	57.7	75.5	93.2	111.0	93.2	75.5	57.7
100°	42.6	39.3	36.1	47.5	73.7	99.9	126.1	152.4	126.1	99.9	73.7
102.5°	104.8	132.1	159.3	175.6	181.2	186.7	192.3	197.8	192.3	186.7	181.2
105°	156.9	209.2	261.4	284.6	278.9	273.1	267.4	261.6	267.4	273.1	278.9
107.5°	198.8	261.4	324.0	353.1	348.4	343.7	339.1	334.5	339.1	343.7	348.4
110°	261.2	316.5	371.7	397.4	393.4	389.4	385.4	381.4	385.4	389.4	393.4





TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	407.3	420.9	434.6	439.6	436.1	432.5	429.0	425.4	429.0	432.5	436.1
115°	521.6	516.8	512.0	507.9	504.7	501.4	498.2	494.9	498.2	501.4	504.7
117.5°	581.7	578.4	575.1	571.7	568.1	564.4	560.7	557.1	560.7	564.4	568.1
120°	624.1	620.7	617.2	614.1	611.1	608.3	605.4	602.6	605.4	608.3	611.1
122.5°	664.1	660.3	656.6	653.2	650.2	647.1	644.1	641.1	644.1	647.1	650.2
125°	720.1	716.5	712.8	709.8	707.3	704.8	702.3	699.8	702.3	704.8	707.3
127.5°	772.2	769.5	766.8	764.0	761.3	758.6	755.8	753.0	755.8	758.6	761.3
130°	805.8	803.7	801.6	799.0	796.0	792.9	789.9	786.8	789.9	792.9	796.0
132.5°	838.2	836.1	834.0	831.6	829.1	826.4	823.8	821.2	823.8	826.4	829.1
135°	884.1	882.3	880.6	878.3	875.2	872.1	869.0	866.0	869.0	872.1	875.2
137.5°	925.8	923.8	921.9	919.8	917.7	915.6	913.4	911.3	913.4	915.6	917.7
140°	953.0	950.9	948.9	947.0	945.5	944.0	942.4	940.8	942.4	944.0	945.5
142.5°	977.9	975.4	973.1	971.2	969.8	968.5	967.0	965.6	967.0	968.5	969.8
145°	1011.8	1008.6	1005.3	1003.8	1004.0	1004.2	1004.4	1004.6	1004.4	1004.2	1004.0
147.5°	1043.3	1040.0	1036.8	1035.6	1036.3	1037.1	1037.7	1038.5	1037.7	1037.1	1036.3
150°	1062.2	1059.1	1056.0	1055.2	1056.5	1057.8	1059.2	1060.5	1059.2	1057.8	1056.5
152.5°	1079.7	1076.8	1073.8	1073.2	1074.7	1076.1	1077.6	1079.1	1077.6	1076.1	1074.7
155°	1104.2	1101.8	1099.6	1099.3	1101.0	1102.7	1104.5	1106.2	1104.5	1102.7	1101.0
157.5°	1124.8	1123.2	1121.6	1121.5	1122.9	1124.5	1125.9	1127.3	1125.9	1124.5	1122.9
160°	1137.5	1136.2	1135.1	1135.1	1136.2	1137.5	1138.6	1139.7	1138.6	1137.5	1136.2
162.5°	1148.0	1147.1	1146.0	1146.1	1147.3	1148.5	1149.6	1150.8	1149.6	1148.5	1147.3
165°	1161.8	1161.2	1160.6	1160.9	1162.1	1163.3	1164.4	1165.5	1164.4	1163.3	1162.1
167.5°	1172.7	1172.2	1171.7	1172.0	1173.1	1174.3	1175.4	1176.6	1175.4	1174.3	1173.1
170°	1178.6	1178.2	1177.8	1178.2	1179.3	1180.4	1181.6	1182.8	1181.6	1180.4	1179.3
172.5°	1182.7	1182.3	1181.9	1182.3	1183.5	1184.6	1185.7	1186.8	1185.7	1184.6	1183.5
175°	1187.1	1186.8	1186.4	1186.8	1188.2	1189.6	1190.9	1192.2	1190.9	1189.6	1188.2
177.5°	1188.6	1188.5	1188.4	1188.8	1189.9	1191.0	1192.0	1193.1	1192.0	1191.0	1189.9
180°	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	998.6	996.6	993.0	987.4	984.0	978.1	974.1	976.4	976.9	976.4	975.8
5°	971.9	964.4	954.2	944.3	935.2	925.4	919.7	917.3	912.3	909.6	908.1
7.5°	939.3	926.6	912.2	895.0	880.4	865.2	857.3	853.5	843.4	837.9	833.1
10°	915.1	895.0	880.6	858.1	844.4	824.3	810.6	811.0	797.2	789.5	783.8
12.5°	888.4	866.4	842.4	822.1	803.0	786.9	770.3	763.6	749.0	741.6	726.4
15°	844.0	818.3	793.1	765.5	746.2	721.2	697.3	668.1	644.5	624.1	618.4
17.5°	795.6	763.8	738.4	706.2	673.0	630.9	603.2	586.3	572.0	561.3	553.3
20°	762.4	730.0	702.9	654.3	609.6	581.1	560.7	547.7	532.9	521.3	514.9
22.5°	727.5	693.7	656.8	602.5	567.7	544.8	526.6	511.6	501.6	492.6	486.8
25°	677.9	640.9	580.0	542.7	514.6	490.7	478.0	468.8	458.3	445.9	440.4
27.5°	625.6	566.8	523.0	495.3	468.4	452.9	441.5	427.8	418.4	412.8	407.0
30°	586.4	527.6	493.5	463.2	444.2	427.0	413.6	405.9	396.7	387.2	383.3
32.5°	542.7	495.8	463.1	437.9	418.6	403.9	393.3	380.8	374.2	368.3	360.2
35°	488.5	453.0	423.1	402.7	384.4	372.4	360.1	352.7	340.7	335.8	332.6
37.5°	442.6	411.8	389.5	368.0	353.5	340.3	332.7	320.9	315.8	308.9	302.2
40°	416.7	386.4	365.0	347.4	331.2	321.3	311.9	302.4	294.6	291.4	283.3
42.5°	390.3	365.6	344.1	324.9	314.1	303.6	291.6	284.6	276.5	271.5	266.5
45°	353.7	332.0	313.6	297.7	285.8	274.9	267.1	255.5	251.0	240.7	236.5
47.5°	321.6	301.3	283.9	268.8	257.1	250.1	238.7	229.6	222.3	216.0	210.7
50°	298.8	281.9	265.0	251.7	241.1	230.9	219.3	214.7	203.4	200.3	197.1
52.5°	278.0	261.9	246.5	233.4	222.8	212.9	202.6	196.7	189.1	185.9	183.6
55°	248.8	233.4	218.6	207.0	196.4	186.2	179.8	172.5	168.9	166.5	163.6
57.5°	219.5	205.7	194.3	182.6	171.9	163.8	156.5	152.0	148.4	145.2	141.8
60°	201.0	187.6	177.4	166.5	155.6	148.9	143.3	138.0	133.7	128.8	127.4
62.5°	181.3	169.6	160.2	149.6	140.1	133.9	128.7	123.7	118.6	111.4	109.4
65°	154.2	145.1	135.2	126.4	117.9	112.0	104.2	98.6	96.4	95.8	95.4
67.5°	129.7	121.0	112.5	103.6	95.9	90.3	86.3	85.5	84.1	83.6	82.7
70°	113.3	105.3	96.8	88.3	81.0	79.9	78.5	77.1	75.3	74.6	73.9
72.5°	98.7	90.3	81.9	75.1	71.9	70.6	69.2	67.8	66.6	65.9	65.5
75°	75.7	68.0	62.3	59.9	58.1	57.0	55.0	53.8	53.2	52.1	51.7
77.5°	54.5	50.1	47.5	46.0	44.1	43.0	41.8	40.7	40.0	39.8	39.2
80°	41.6	39.4	37.7	35.5	34.9	33.5	33.1	32.0	32.4	31.3	31.3
82.5°	32.2	29.6	28.1	27.1	26.4	25.3	24.9	24.4	24.5	23.8	23.8
85°	16.6	15.8	15.2	14.4	14.4	13.4	13.8	13.4	13.4	12.6	12.3
87.5°	7.2	7.3	7.1	7.4	7.6	7.6	7.8	7.7	7.9	8.1	8.0
90°	9.2	11.1	12.6	14.1	15.6	17.2	18.2	19.1	20.1	21.0	21.7
92.5°	16.6	16.9	17.7	18.5	19.2	20.0	20.5	20.9	21.5	22.0	22.3
95°	30.7	28.2	29.6	30.9	32.2	33.6	34.5	35.4	36.5	37.4	37.8
97.5°	39.9	32.5	35.6	38.7	41.8	45.0	45.7	46.5	47.2	48.0	48.4
100°	47.5	36.1	39.3	42.6	45.8	49.1	50.6	52.1	53.6	55.2	56.2
102.5°	175.6	159.3	132.1	104.8	77.7	50.4	52.4	54.4	56.5	58.4	59.7
105°	284.6	261.4	209.2	156.9	104.7	52.5	54.6	56.7	58.8	60.9	62.4
107.5°	353.1	324.0	261.4	198.8	136.1	73.5	71.4	69.2	67.1	64.9	64.3
110°	397.4	371.7	316.5	261.2	205.9	150.6	131.5	112.4	93.2	74.1	64.9



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	439.6	434.6	420.9	407.3	393.6	379.9	310.2	240.4	170.6	100.9	66.3
115°	507.9	512.0	516.8	521.6	526.3	531.1	442.5	354.0	265.4	176.8	125.6
117.5°	571.7	575.1	578.4	581.7	585.0	588.2	566.8	545.4	524.1	502.6	469.2
120°	614.1	617.2	620.7	624.1	627.5	630.9	633.3	635.6	637.9	640.2	628.4
122.5°	653.2	656.6	660.3	664.1	667.9	671.7	673.0	674.4	675.7	677.1	675.3
125°	709.8	712.8	716.5	720.1	723.8	727.4	728.8	730.1	731.4	732.7	733.7
127.5°	764.0	766.8	769.5	772.2	775.0	777.7	779.6	781.6	783.5	785.5	786.5
130°	799.0	801.6	803.7	805.8	807.9	810.0	812.1	814.3	816.3	818.4	819.4
132.5°	831.6	834.0	836.1	838.2	840.3	842.4	844.2	846.0	847.8	849.6	850.4
135°	878.3	880.6	882.3	884.1	885.8	887.5	889.4	891.4	893.2	895.1	895.9
137.5°	919.8	921.9	923.8	925.8	927.7	929.7	931.5	933.4	935.3	937.2	937.8
140°	947.0	948.9	950.9	953.0	955.2	957.2	958.9	960.6	962.4	964.1	964.5
142.5°	971.2	973.1	975.4	977.9	980.3	982.7	984.3	985.8	987.4	989.0	989.3
145°	1003.8	1005.3	1008.6	1011.8	1015.1	1018.3	1019.6	1021.1	1022.4	1023.7	1023.9
147.5°	1035.6	1036.8	1040.0	1043.3	1046.5	1049.7	1050.7	1051.7	1052.6	1053.7	1053.8
150°	1055.2	1056.0	1059.1	1062.2	1065.3	1068.3	1069.4	1070.5	1071.8	1072.9	1073.0
152.5°	1073.2	1073.8	1076.8	1079.7	1082.6	1085.5	1086.7	1087.8	1088.9	1090.1	1090.1
155°	1099.3	1099.6	1101.8	1104.2	1106.5	1108.7	1109.8	1111.1	1112.2	1113.3	1113.1
157.5°	1121.5	1121.6	1123.2	1124.8	1126.4	1128.0	1129.4	1130.6	1131.9	1133.2	1133.1
160°	1135.1	1135.1	1136.2	1137.5	1138.6	1139.7	1140.9	1142.0	1143.2	1144.3	1144.2
162.5°	1146.1	1146.0	1147.1	1148.0	1149.1	1150.1	1151.3	1152.6	1154.0	1155.3	1155.1
165°	1160.9	1160.6	1161.2	1161.8	1162.4	1163.0	1164.3	1165.6	1167.0	1168.3	1168.3
167.5°	1172.0	1171.7	1172.2	1172.7	1173.3	1173.8	1175.2	1176.5	1177.8	1179.2	1178.9
170°	1178.2	1177.8	1178.2	1178.6	1178.9	1179.3	1180.6	1182.0	1183.4	1184.7	1184.5
172.5°	1182.3	1181.9	1182.3	1182.7	1183.1	1183.5	1184.8	1186.1	1187.5	1188.8	1188.6
175°	1186.8	1186.4	1186.8	1187.1	1187.5	1187.9	1189.3	1190.6	1191.9	1193.3	1193.0
177.5°	1188.8	1188.4	1188.5	1188.6	1188.8	1188.9	1190.1	1191.1	1192.2	1193.3	1193.1
180°	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	972.7	973.3	972.4	973.0	972.4	973.3	972.7	975.8	976.4	976.9	976.4
5°	906.3	902.1	901.4	900.4	901.4	902.1	906.3	908.1	909.6	912.3	917.3
7.5°	827.1	826.4	824.7	822.2	824.7	826.4	827.1	833.1	837.9	843.4	853.5
10°	776.1	774.4	774.0	771.6	774.0	774.4	776.1	783.8	789.5	797.2	811.0
12.5°	716.4	705.1	703.9	697.8	703.9	705.1	716.4	726.4	741.6	749.0	763.6
15°	610.0	607.8	600.9	596.3	600.9	607.8	610.0	618.4	624.1	644.5	668.1
17.5°	549.1	542.2	540.1	539.1	540.1	542.2	549.1	553.3	561.3	572.0	586.3
20°	510.0	503.7	502.7	501.9	502.7	503.7	510.0	514.9	521.3	532.9	547.7
22.5°	483.0	476.4	473.6	471.6	473.6	476.4	483.0	486.8	492.6	501.6	511.6
25°	436.8	434.3	432.9	432.3	432.9	434.3	436.8	440.4	445.9	458.3	468.8
27.5°	400.7	395.3	394.2	392.4	394.2	395.3	400.7	407.0	412.8	418.4	427.8
30°	380.1	378.3	375.9	373.8	375.9	378.3	380.1	383.3	387.2	396.7	405.9
32.5°	355.9	354.5	352.2	351.3	352.2	354.5	355.9	360.2	368.3	374.2	380.8
35°	329.1	324.1	322.1	318.9	322.1	324.1	329.1	332.6	335.8	340.7	352.7
37.5°	300.8	298.1	295.2	296.2	295.2	298.1	300.8	302.2	308.9	315.8	320.9
40°	278.8	277.0	276.3	276.0	276.3	277.0	278.8	283.3	291.4	294.6	302.4
42.5°	261.3	256.5	254.6	254.6	254.6	256.5	261.3	266.5	271.5	276.5	284.6
45°	234.8	230.2	227.1	227.3	227.1	230.2	234.8	236.5	240.7	251.0	255.5
47.5°	207.6	207.5	205.5	206.1	205.5	207.5	207.6	210.7	216.0	222.3	229.6
50°	194.6	192.6	191.1	191.4	191.1	192.6	194.6	197.1	200.3	203.4	214.7
52.5°	182.3	180.4	179.3	180.8	179.3	180.4	182.3	183.6	185.9	189.1	196.7
55°	161.9	159.8	159.5	159.1	159.5	159.8	161.9	163.6	166.5	168.9	172.5
57.5°	139.2	137.8	135.6	134.8	135.6	137.8	139.2	141.8	145.2	148.4	152.0
60°	122.8	120.0	116.5	116.1	116.5	120.0	122.8	127.4	128.8	133.7	138.0
62.5°	107.9	107.4	106.7	106.6	106.7	107.4	107.9	109.4	111.4	118.6	123.7
65°	94.7	94.3	94.7	95.0	94.7	94.3	94.7	95.4	95.8	96.4	98.6
67.5°	82.5	81.9	81.2	81.5	81.2	81.9	82.5	82.7	83.6	84.1	85.5
70°	73.2	72.9	72.5	72.5	72.5	72.9	73.2	73.9	74.6	75.3	77.1
72.5°	64.2	64.1	63.8	63.5	63.8	64.1	64.2	65.5	65.9	66.6	67.8
75°	51.4	50.7	50.7	50.7	50.7	50.7	51.4	51.7	52.1	53.2	53.8
77.5°	39.1	38.8	38.5	38.2	38.5	38.8	39.1	39.2	39.8	40.0	40.7
80°	31.0	30.6	30.3	30.3	30.3	30.6	31.0	31.3	31.3	32.4	32.0
82.5°	23.7	23.3	23.2	22.9	23.2	23.3	23.7	23.8	23.8	24.5	24.4
85°	12.6	13.0	12.6	13.4	12.6	13.0	12.6	12.3	12.6	13.4	13.4
87.5°	8.1	7.9	8.2	8.0	8.2	7.9	8.1	8.0	8.1	7.9	7.7
90°	22.1	22.4	22.9	23.3	22.9	22.4	22.1	21.7	21.0	20.1	19.1
92.5°	22.5	22.8	23.0	23.3	23.0	22.8	22.5	22.3	22.0	21.5	20.9
95°	37.6	37.4	37.2	37.0	37.2	37.4	37.6	37.8	37.4	36.5	35.4
97.5°	48.7	48.9	49.2	49.4	49.2	48.9	48.7	48.4	48.0	47.2	46.5
100°	56.6	56.9	57.3	57.7	57.3	56.9	56.6	56.2	55.2	53.6	52.1
102.5°	60.2	60.7	61.3	61.8	61.3	60.7	60.2	59.7	58.4	56.5	54.4
105°	63.2	63.9	64.7	65.4	64.7	63.9	63.2	62.4	60.9	58.8	56.7
107.5°	65.0	65.8	66.5	67.3	66.5	65.8	65.0	64.3	64.9	67.1	69.2
110°	65.7	66.4	67.2	68.1	67.2	66.4	65.7	64.9	74.1	93.2	112.4



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	66.8	67.5	68.1	68.7	68.1	67.5	66.8	66.3	100.9	170.6	240.4
115°	111.9	98.1	84.4	70.6	84.4	98.1	111.9	125.6	176.8	265.4	354.0
117.5°	424.0	378.7	333.5	288.2	333.5	378.7	424.0	469.2	502.6	524.1	545.4
120°	602.6	576.7	550.9	525.1	550.9	576.7	602.6	628.4	640.2	637.9	635.6
122.5°	670.3	665.2	660.3	655.3	660.3	665.2	670.3	675.3	677.1	675.7	674.4
125°	734.2	734.8	735.5	736.0	735.5	734.8	734.2	733.7	732.7	731.4	730.1
127.5°	786.6	786.7	786.8	786.9	786.8	786.7	786.6	786.5	785.5	783.5	781.6
130°	819.3	819.0	818.8	818.6	818.8	819.0	819.3	819.4	818.4	816.3	814.3
132.5°	850.2	850.0	849.8	849.6	849.8	850.0	850.2	850.4	849.6	847.8	846.0
135°	895.5	895.1	894.8	894.4	894.8	895.1	895.5	895.9	895.1	893.2	891.4
137.5°	937.2	936.5	935.9	935.2	935.9	936.5	937.2	937.8	937.2	935.3	933.4
140°	963.6	962.6	961.7	960.6	961.7	962.6	963.6	964.5	964.1	962.4	960.6
142.5°	988.4	987.4	986.5	985.4	986.5	987.4	988.4	989.3	989.0	987.4	985.8
145°	1022.9	1022.0	1021.1	1020.1	1021.1	1022.0	1022.9	1023.9	1023.7	1022.4	1021.1
147.5°	1052.9	1052.2	1051.3	1050.6	1051.3	1052.2	1052.9	1053.8	1053.7	1052.6	1051.7
150°	1072.0	1071.0	1070.1	1069.1	1070.1	1071.0	1072.0	1073.0	1072.9	1071.8	1070.5
152.5°	1088.7	1087.5	1086.3	1085.0	1086.3	1087.5	1088.7	1090.1	1090.1	1088.9	1087.8
155°	1111.6	1110.0	1108.5	1107.0	1108.5	1110.0	1111.6	1113.1	1113.3	1112.2	1111.1
157.5°	1131.6	1130.1	1128.6	1127.2	1128.6	1130.1	1131.6	1133.1	1133.2	1131.9	1130.6
160°	1142.8	1141.5	1140.2	1138.9	1140.2	1141.5	1142.8	1144.2	1144.3	1143.2	1142.0
162.5°	1153.5	1151.8	1150.2	1148.5	1150.2	1151.8	1153.5	1155.1	1155.3	1154.0	1152.6
165°	1167.0	1165.6	1164.3	1163.0	1164.3	1165.6	1167.0	1168.3	1168.3	1167.0	1165.6
167.5°	1177.2	1175.5	1173.8	1172.1	1173.8	1175.5	1177.2	1178.9	1179.2	1177.8	1176.5
170°	1182.8	1181.0	1179.3	1177.6	1179.3	1181.0	1182.8	1184.5	1184.7	1183.4	1182.0
172.5°	1186.8	1185.2	1183.5	1181.8	1183.5	1185.2	1186.8	1188.6	1188.8	1187.5	1186.1
175°	1191.1	1189.2	1187.2	1185.3	1187.2	1189.2	1191.1	1193.0	1193.3	1191.9	1190.6
177.5°	1191.8	1190.3	1188.9	1187.6	1188.9	1190.3	1191.8	1193.1	1193.3	1192.2	1191.1
180°	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7



TEST NUMBER: P331663-830  
 CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	974.1	978.1	984.0	987.4	993.0	996.6	998.6	1002.3	1004.3	1011.3	1018.6
5°	919.7	925.4	935.2	944.3	954.2	964.4	971.9	980.2	988.0	1001.4	1015.5
7.5°	857.3	865.2	880.4	895.0	912.2	926.6	939.3	953.8	966.7	985.8	1005.8
10°	810.6	824.3	844.4	858.1	880.6	895.0	915.1	930.9	949.0	974.3	996.8
12.5°	770.3	786.9	803.0	822.1	842.4	866.4	888.4	908.7	930.1	956.3	982.7
15°	697.3	721.2	746.2	765.5	793.1	818.3	844.0	871.5	897.6	928.9	963.4
17.5°	603.2	630.9	673.0	706.2	738.4	763.8	795.6	828.9	859.5	897.3	935.7
20°	560.7	581.1	609.6	654.3	702.9	730.0	762.4	799.0	834.2	875.3	916.5
22.5°	526.6	544.8	567.7	602.5	656.8	693.7	727.5	764.7	805.5	847.5	893.2
25°	478.0	490.7	514.6	542.7	580.0	640.9	677.9	715.2	759.6	804.6	856.7
27.5°	441.5	452.9	468.4	495.3	523.0	566.8	625.6	666.2	710.4	761.1	815.2
30°	413.6	427.0	444.2	463.2	493.5	527.6	586.4	633.6	677.2	729.3	787.0
32.5°	393.3	403.9	418.6	437.9	463.1	495.8	542.7	600.0	642.5	697.5	757.7
35°	360.1	372.4	384.4	402.7	423.1	453.0	488.5	549.8	592.0	646.2	706.8
37.5°	332.7	340.3	353.5	368.0	389.5	411.8	442.6	497.6	543.3	596.4	658.5
40°	311.9	321.3	331.2	347.4	365.0	386.4	416.7	457.6	510.0	562.1	622.6
42.5°	291.6	303.6	314.1	324.9	344.1	365.6	390.3	424.9	478.4	527.7	586.6
45°	267.1	274.9	285.8	297.7	313.6	332.0	353.7	384.0	435.4	478.0	533.3
47.5°	238.7	250.1	257.1	268.8	283.9	301.3	321.6	347.8	389.5	429.3	480.6
50°	219.3	230.9	241.1	251.7	265.0	281.9	298.8	324.1	357.6	399.5	447.3
52.5°	202.6	212.9	222.8	233.4	246.5	261.9	278.0	300.2	328.9	367.4	413.9
55°	179.8	186.2	196.4	207.0	218.6	233.4	248.8	267.5	292.2	324.5	362.2
57.5°	156.5	163.8	171.9	182.6	194.3	205.7	219.5	236.5	255.9	285.2	317.4
60°	143.3	148.9	155.6	166.5	177.4	187.6	201.0	215.1	233.4	258.7	286.2
62.5°	128.7	133.9	140.1	149.6	160.2	169.6	181.3	196.2	211.7	234.8	258.8
65°	104.2	112.0	117.9	126.4	135.2	145.1	154.2	166.2	179.8	198.1	219.6
67.5°	86.3	90.3	95.9	103.6	112.5	121.0	129.7	139.0	150.9	165.0	182.1
70°	78.5	79.9	81.0	88.3	96.8	105.3	113.3	122.2	132.3	143.9	158.7
72.5°	69.2	70.6	71.9	75.1	81.9	90.3	98.7	105.3	114.9	124.5	136.5
75°	55.0	57.0	58.1	59.9	62.3	68.0	75.7	82.0	87.7	95.0	104.5
77.5°	41.8	43.0	44.1	46.0	47.5	50.1	54.5	60.2	65.5	69.7	76.3
80°	33.1	33.5	34.9	35.5	37.7	39.4	41.6	46.1	51.4	53.2	57.7
82.5°	24.9	25.3	26.4	27.1	28.1	29.6	32.2	33.5	37.6	39.9	42.8
85°	13.8	13.4	14.4	14.4	15.2	15.8	16.6	18.3	19.3	22.1	22.9
87.5°	7.8	7.6	7.6	7.4	7.1	7.3	7.2	7.1	7.2	7.6	8.3
90°	18.2	17.2	15.6	14.1	12.6	11.1	9.2	7.2	5.1	2.9	0.8
92.5°	20.5	20.0	19.2	18.5	17.7	16.9	16.6	16.8	17.0	17.2	17.3
95°	34.5	33.6	32.2	30.9	29.6	28.2	30.7	37.0	43.4	49.7	56.0
97.5°	45.7	45.0	41.8	38.7	35.6	32.5	39.9	57.7	75.5	93.2	111.0
100°	50.6	49.1	45.8	42.6	39.3	36.1	47.5	73.7	99.9	126.1	152.4
102.5°	52.4	50.4	77.7	104.8	132.1	159.3	175.6	181.2	186.7	192.3	197.8
105°	54.6	52.5	104.7	156.9	209.2	261.4	284.6	278.9	273.1	267.4	261.6
107.5°	71.4	73.5	136.1	198.8	261.4	324.0	353.1	348.4	343.7	339.1	334.5
110°	131.5	150.6	205.9	261.2	316.5	371.7	397.4	393.4	389.4	385.4	381.4



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	310.2	379.9	393.6	407.3	420.9	434.6	439.6	436.1	432.5	429.0	425.4
115°	442.5	531.1	526.3	521.6	516.8	512.0	507.9	504.7	501.4	498.2	494.9
117.5°	566.8	588.2	585.0	581.7	578.4	575.1	571.7	568.1	564.4	560.7	557.1
120°	633.3	630.9	627.5	624.1	620.7	617.2	614.1	611.1	608.3	605.4	602.6
122.5°	673.0	671.7	667.9	664.1	660.3	656.6	653.2	650.2	647.1	644.1	641.1
125°	728.8	727.4	723.8	720.1	716.5	712.8	709.8	707.3	704.8	702.3	699.8
127.5°	779.6	777.7	775.0	772.2	769.5	766.8	764.0	761.3	758.6	755.8	753.0
130°	812.1	810.0	807.9	805.8	803.7	801.6	799.0	796.0	792.9	789.9	786.8
132.5°	844.2	842.4	840.3	838.2	836.1	834.0	831.6	829.1	826.4	823.8	821.2
135°	889.4	887.5	885.8	884.1	882.3	880.6	878.3	875.2	872.1	869.0	866.0
137.5°	931.5	929.7	927.7	925.8	923.8	921.9	919.8	917.7	915.6	913.4	911.3
140°	958.9	957.2	955.2	953.0	950.9	948.9	947.0	945.5	944.0	942.4	940.8
142.5°	984.3	982.7	980.3	977.9	975.4	973.1	971.2	969.8	968.5	967.0	965.6
145°	1019.6	1018.3	1015.1	1011.8	1008.6	1005.3	1003.8	1004.0	1004.2	1004.4	1004.6
147.5°	1050.7	1049.7	1046.5	1043.3	1040.0	1036.8	1035.6	1036.3	1037.1	1037.7	1038.5
150°	1069.4	1068.3	1065.3	1062.2	1059.1	1056.0	1055.2	1056.5	1057.8	1059.2	1060.5
152.5°	1086.7	1085.5	1082.6	1079.7	1076.8	1073.8	1073.2	1074.7	1076.1	1077.6	1079.1
155°	1109.8	1108.7	1106.5	1104.2	1101.8	1099.6	1099.3	1101.0	1102.7	1104.5	1106.2
157.5°	1129.4	1128.0	1126.4	1124.8	1123.2	1121.6	1121.5	1122.9	1124.5	1125.9	1127.3
160°	1140.9	1139.7	1138.6	1137.5	1136.2	1135.1	1135.1	1136.2	1137.5	1138.6	1139.7
162.5°	1151.3	1150.1	1149.1	1148.0	1147.1	1146.0	1146.1	1147.3	1148.5	1149.6	1150.8
165°	1164.3	1163.0	1162.4	1161.8	1161.2	1160.6	1160.9	1162.1	1163.3	1164.4	1165.5
167.5°	1175.2	1173.8	1173.3	1172.7	1172.2	1171.7	1172.0	1173.1	1174.3	1175.4	1176.6
170°	1180.6	1179.3	1178.9	1178.6	1178.2	1177.8	1178.2	1179.3	1180.4	1181.6	1182.8
172.5°	1184.8	1183.5	1183.1	1182.7	1182.3	1181.9	1182.3	1183.5	1184.6	1185.7	1186.8
175°	1189.3	1187.9	1187.5	1187.1	1186.8	1186.4	1186.8	1188.2	1189.6	1190.9	1192.2
177.5°	1190.1	1188.9	1188.8	1188.6	1188.5	1188.4	1188.8	1189.9	1191.0	1192.0	1193.1
180°	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	1018.9	1019.7	1025.4	1027.9	1033.0	1035.0	1037.2	1036.6	1036.6	1037.7	1045.7
5°	1021.1	1028.1	1038.7	1048.9	1058.8	1067.2	1072.8	1078.5	1080.5	1090.8	1099.9
7.5°	1017.5	1030.4	1047.8	1063.4	1082.0	1096.6	1108.7	1119.6	1127.1	1142.0	1157.2
10°	1012.7	1031.0	1050.7	1070.7	1096.5	1115.8	1135.5	1150.7	1155.6	1177.7	1190.4
12.5°	1003.1	1027.6	1052.6	1078.6	1103.7	1130.4	1152.1	1167.2	1184.6	1204.5	1227.9
15°	988.7	1016.9	1049.6	1083.1	1119.0	1151.3	1174.6	1201.0	1219.9	1241.8	1262.2
17.5°	968.1	1004.4	1045.9	1084.7	1126.1	1160.9	1193.0	1218.2	1231.6	1244.1	1247.2
20°	951.8	990.8	1039.7	1085.5	1127.0	1167.2	1198.8	1219.9	1223.5	1223.8	1205.1
22.5°	934.1	978.2	1029.4	1076.2	1125.9	1170.5	1195.1	1204.2	1190.2	1166.4	1130.3
25°	901.4	952.4	1011.9	1065.5	1119.6	1161.9	1170.4	1154.5	1105.6	1054.1	989.1
27.5°	866.1	923.4	987.2	1046.7	1104.5	1130.7	1112.4	1055.3	967.1	890.6	797.8
30°	840.2	904.6	967.2	1033.8	1087.2	1098.5	1056.7	972.5	869.8	754.3	661.8
32.5°	810.6	878.1	947.0	1015.8	1060.5	1049.5	980.3	876.8	756.3	642.8	555.3
35°	768.4	838.1	912.3	981.3	1009.8	962.3	858.8	724.1	600.9	494.9	434.7
37.5°	719.6	795.5	872.7	936.0	934.1	854.8	713.9	574.7	471.2	408.5	365.6
40°	684.9	761.7	845.1	898.6	875.7	772.6	619.8	488.5	412.8	362.9	331.6
42.5°	651.8	728.8	811.6	854.1	814.4	687.6	535.4	432.5	370.0	331.1	305.7
45°	595.2	676.5	753.3	776.8	705.7	566.0	432.9	358.4	316.8	287.9	270.3
47.5°	540.0	619.9	689.9	690.4	594.2	459.0	365.2	310.1	274.7	252.3	239.5
50°	506.1	582.2	640.9	631.8	522.7	408.3	326.6	279.1	249.6	232.3	219.0
52.5°	468.2	541.9	592.8	566.8	462.1	359.3	292.0	252.1	227.6	212.6	200.7
55°	412.8	478.3	514.3	474.9	377.0	298.8	246.8	215.4	197.1	184.5	174.3
57.5°	358.6	412.6	435.2	389.3	310.5	247.8	208.7	185.2	167.0	158.0	152.7
60°	324.5	370.6	386.4	335.8	269.9	216.8	184.8	163.0	149.6	143.6	138.4
62.5°	291.1	328.7	335.3	288.8	235.4	189.8	162.3	143.8	135.0	129.2	124.2
65°	241.5	268.5	265.4	228.1	186.2	150.6	130.5	119.3	112.6	104.5	95.8
67.5°	198.8	215.4	205.4	177.4	142.1	117.1	104.0	95.5	87.2	79.5	77.5
70°	171.7	181.3	170.7	145.1	116.5	98.2	87.7	77.5	72.5	70.8	67.6
72.5°	145.9	149.2	137.8	115.7	94.8	81.3	71.1	65.3	62.7	61.2	59.1
75°	109.4	107.0	97.2	79.9	65.8	56.6	53.5	51.4	49.7	48.3	47.1
77.5°	76.9	73.2	64.5	53.3	45.8	41.5	39.6	38.5	37.6	36.9	35.8
80°	57.7	55.2	46.5	38.0	34.9	32.7	31.7	30.3	30.3	29.6	28.5
82.5°	42.2	39.5	31.9	27.9	26.1	24.9	24.0	23.2	22.9	23.1	22.3
85°	22.1	17.9	15.8	15.2	14.0	13.4	13.8	13.0	13.0	13.0	12.6
87.5°	7.4	6.4	6.5	6.6	7.3	7.6	7.6	7.9	8.5	8.4	8.9
90°	2.9	5.1	7.2	9.2	11.1	12.6	14.1	15.6	17.2	18.2	19.1
92.5°	17.2	17.0	16.8	16.6	16.9	17.7	18.5	19.2	20.0	20.5	20.9
95°	49.7	43.4	37.0	30.7	28.2	29.6	30.9	32.2	33.6	34.5	35.4
97.5°	93.2	75.5	57.7	39.9	32.5	35.6	38.7	41.8	45.0	45.7	46.5
100°	126.1	99.9	73.7	47.5	36.1	39.3	42.6	45.8	49.1	50.6	52.1
102.5°	192.3	186.7	181.2	175.6	159.3	132.1	104.8	77.7	50.4	52.4	54.4
105°	267.4	273.1	278.9	284.6	261.4	209.2	156.9	104.7	52.5	54.6	56.7
107.5°	339.1	343.7	348.4	353.1	324.0	261.4	198.8	136.1	73.5	71.4	69.2
110°	385.4	389.4	393.4	397.4	371.7	316.5	261.2	205.9	150.6	131.5	112.4





TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	429.0	432.5	436.1	439.6	434.6	420.9	407.3	393.6	379.9	310.2	240.4
115°	498.2	501.4	504.7	507.9	512.0	516.8	521.6	526.3	531.1	442.5	354.0
117.5°	560.7	564.4	568.1	571.7	575.1	578.4	581.7	585.0	588.2	566.8	545.4
120°	605.4	608.3	611.1	614.1	617.2	620.7	624.1	627.5	630.9	633.3	635.6
122.5°	644.1	647.1	650.2	653.2	656.6	660.3	664.1	667.9	671.7	673.0	674.4
125°	702.3	704.8	707.3	709.8	712.8	716.5	720.1	723.8	727.4	728.8	730.1
127.5°	755.8	758.6	761.3	764.0	766.8	769.5	772.2	775.0	777.7	779.6	781.6
130°	789.9	792.9	796.0	799.0	801.6	803.7	805.8	807.9	810.0	812.1	814.3
132.5°	823.8	826.4	829.1	831.6	834.0	836.1	838.2	840.3	842.4	844.2	846.0
135°	869.0	872.1	875.2	878.3	880.6	882.3	884.1	885.8	887.5	889.4	891.4
137.5°	913.4	915.6	917.7	919.8	921.9	923.8	925.8	927.7	929.7	931.5	933.4
140°	942.4	944.0	945.5	947.0	948.9	950.9	953.0	955.2	957.2	958.9	960.6
142.5°	967.0	968.5	969.8	971.2	973.1	975.4	977.9	980.3	982.7	984.3	985.8
145°	1004.4	1004.2	1004.0	1003.8	1005.3	1008.6	1011.8	1015.1	1018.3	1019.6	1021.1
147.5°	1037.7	1037.1	1036.3	1035.6	1036.8	1040.0	1043.3	1046.5	1049.7	1050.7	1051.7
150°	1059.2	1057.8	1056.5	1055.2	1056.0	1059.1	1062.2	1065.3	1068.3	1069.4	1070.5
152.5°	1077.6	1076.1	1074.7	1073.2	1073.8	1076.8	1079.7	1082.6	1085.5	1086.7	1087.8
155°	1104.5	1102.7	1101.0	1099.3	1099.6	1101.8	1104.2	1106.5	1108.7	1109.8	1111.1
157.5°	1125.9	1124.5	1122.9	1121.5	1121.6	1123.2	1124.8	1126.4	1128.0	1129.4	1130.6
160°	1138.6	1137.5	1136.2	1135.1	1135.1	1136.2	1137.5	1138.6	1139.7	1140.9	1142.0
162.5°	1149.6	1148.5	1147.3	1146.1	1146.0	1147.1	1148.0	1149.1	1150.1	1151.3	1152.6
165°	1164.4	1163.3	1162.1	1160.9	1160.6	1161.2	1161.8	1162.4	1163.0	1164.3	1165.6
167.5°	1175.4	1174.3	1173.1	1172.0	1171.7	1172.2	1172.7	1173.3	1173.8	1175.2	1176.5
170°	1181.6	1180.4	1179.3	1178.2	1177.8	1178.2	1178.6	1178.9	1179.3	1180.6	1182.0
172.5°	1185.7	1184.6	1183.5	1182.3	1181.9	1182.3	1182.7	1183.1	1183.5	1184.8	1186.1
175°	1190.9	1189.6	1188.2	1186.8	1186.4	1186.8	1187.1	1187.5	1187.9	1189.3	1190.6
177.5°	1192.0	1191.0	1189.9	1188.8	1188.4	1188.5	1188.6	1188.8	1188.9	1190.1	1191.1
180°	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0	1013.0
2.5°	1048.5	1052.2	1053.9	1053.9	1055.8	1055.0	1054.1
5°	1108.7	1115.4	1116.8	1123.1	1127.8	1126.3	1127.0
7.5°	1168.7	1179.4	1190.1	1194.9	1195.7	1198.5	1199.6
10°	1205.5	1214.4	1230.9	1228.4	1240.8	1247.7	1236.1
12.5°	1241.0	1252.9	1264.4	1267.5	1274.5	1276.8	1272.1
15°	1273.1	1279.4	1280.2	1278.4	1280.5	1278.7	1272.1
17.5°	1243.1	1232.8	1212.0	1202.1	1194.3	1182.8	1178.2
20°	1193.5	1163.3	1128.1	1114.0	1097.5	1065.1	1072.8
22.5°	1086.6	1052.1	1016.9	975.7	956.1	925.4	923.6
25°	920.1	860.6	795.1	749.3	722.6	692.0	678.6
27.5°	715.4	640.5	586.8	559.7	534.9	510.7	509.6
30°	580.8	524.4	483.0	459.7	444.6	434.3	436.5
32.5°	489.6	450.9	422.9	403.7	392.5	384.7	384.7
35°	400.2	373.8	355.8	347.8	339.7	334.0	334.4
37.5°	342.5	326.6	316.6	307.7	302.7	299.9	298.3
40°	312.9	299.9	292.2	286.9	282.7	278.8	278.1
42.5°	289.5	278.8	271.0	266.8	263.0	260.1	259.5
45°	256.9	248.2	241.1	236.5	234.8	232.3	232.3
47.5°	228.6	219.9	214.4	211.5	208.5	206.9	206.8
50°	209.4	202.7	197.8	196.0	193.6	192.6	192.2
52.5°	192.3	187.3	183.7	182.6	181.4	180.1	180.3
55°	168.9	166.2	164.8	163.6	161.9	159.8	161.2
57.5°	149.3	146.9	143.1	139.8	138.2	136.7	137.2
60°	135.5	130.5	125.6	121.8	120.7	117.5	117.5
62.5°	118.1	111.1	105.1	102.9	101.9	100.4	100.1
65°	90.8	88.0	86.6	85.2	84.5	84.5	83.8
67.5°	75.2	74.1	72.6	72.2	71.5	71.4	71.1
70°	66.5	65.1	64.4	64.1	63.3	63.7	62.7
72.5°	58.1	56.9	56.8	55.9	55.5	55.5	54.8
75°	45.7	45.7	45.4	45.1	44.4	44.0	44.4
77.5°	35.2	35.3	34.6	34.6	34.5	34.6	34.2
80°	28.2	28.5	28.2	27.8	27.4	27.8	27.4
82.5°	22.2	21.8	21.7	21.6	21.6	21.3	21.3
85°	12.6	13.0	12.6	12.3	12.3	12.3	12.6
87.5°	8.8	9.0	9.1	9.2	9.2	9.3	9.1
90°	20.1	21.0	21.7	22.1	22.4	22.9	23.3
92.5°	21.5	22.0	22.3	22.5	22.8	23.0	23.3
95°	36.5	37.4	37.8	37.6	37.4	37.2	37.0
97.5°	47.2	48.0	48.4	48.7	48.9	49.2	49.4
100°	53.6	55.2	56.2	56.6	56.9	57.3	57.7
102.5°	56.5	58.4	59.7	60.2	60.7	61.3	61.8
105°	58.8	60.9	62.4	63.2	63.9	64.7	65.4
107.5°	67.1	64.9	64.3	65.0	65.8	66.5	67.3
110°	93.2	74.1	64.9	65.7	66.4	67.2	68.1



TEST NUMBER: P331663-830

CATALOG NUMBER: SA2XXRDIP-C485D925U830-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	170.6	100.9	66.3	66.8	67.5	68.1	68.7
115°	265.4	176.8	125.6	111.9	98.1	84.4	70.6
117.5°	524.1	502.6	469.2	424.0	378.7	333.5	288.2
120°	637.9	640.2	628.4	602.6	576.7	550.9	525.1
122.5°	675.7	677.1	675.3	670.3	665.2	660.3	655.3
125°	731.4	732.7	733.7	734.2	734.8	735.5	736.0
127.5°	783.5	785.5	786.5	786.6	786.7	786.8	786.9
130°	816.3	818.4	819.4	819.3	819.0	818.8	818.6
132.5°	847.8	849.6	850.4	850.2	850.0	849.8	849.6
135°	893.2	895.1	895.9	895.5	895.1	894.8	894.4
137.5°	935.3	937.2	937.8	937.2	936.5	935.9	935.2
140°	962.4	964.1	964.5	963.6	962.6	961.7	960.6
142.5°	987.4	989.0	989.3	988.4	987.4	986.5	985.4
145°	1022.4	1023.7	1023.9	1022.9	1022.0	1021.1	1020.1
147.5°	1052.6	1053.7	1053.8	1052.9	1052.2	1051.3	1050.6
150°	1071.8	1072.9	1073.0	1072.0	1071.0	1070.1	1069.1
152.5°	1088.9	1090.1	1090.1	1088.7	1087.5	1086.3	1085.0
155°	1112.2	1113.3	1113.1	1111.6	1110.0	1108.5	1107.0
157.5°	1131.9	1133.2	1133.1	1131.6	1130.1	1128.6	1127.2
160°	1143.2	1144.3	1144.2	1142.8	1141.5	1140.2	1138.9
162.5°	1154.0	1155.3	1155.1	1153.5	1151.8	1150.2	1148.5
165°	1167.0	1168.3	1168.3	1167.0	1165.6	1164.3	1163.0
167.5°	1177.8	1179.2	1178.9	1177.2	1175.5	1173.8	1172.1
170°	1183.4	1184.7	1184.5	1182.8	1181.0	1179.3	1177.6
172.5°	1187.5	1188.8	1188.6	1186.8	1185.2	1183.5	1181.8
175°	1191.9	1193.3	1193.0	1191.1	1189.2	1187.2	1185.3
177.5°	1192.2	1193.3	1193.1	1191.8	1190.3	1188.9	1187.6
180°	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7	1189.7

(END OF REPORT)