

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331706-830

Luminaire Tested: **SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331706-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 330 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4215.5 lumens
Efficiency: N/A
Efficacy: 96.9 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 43.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

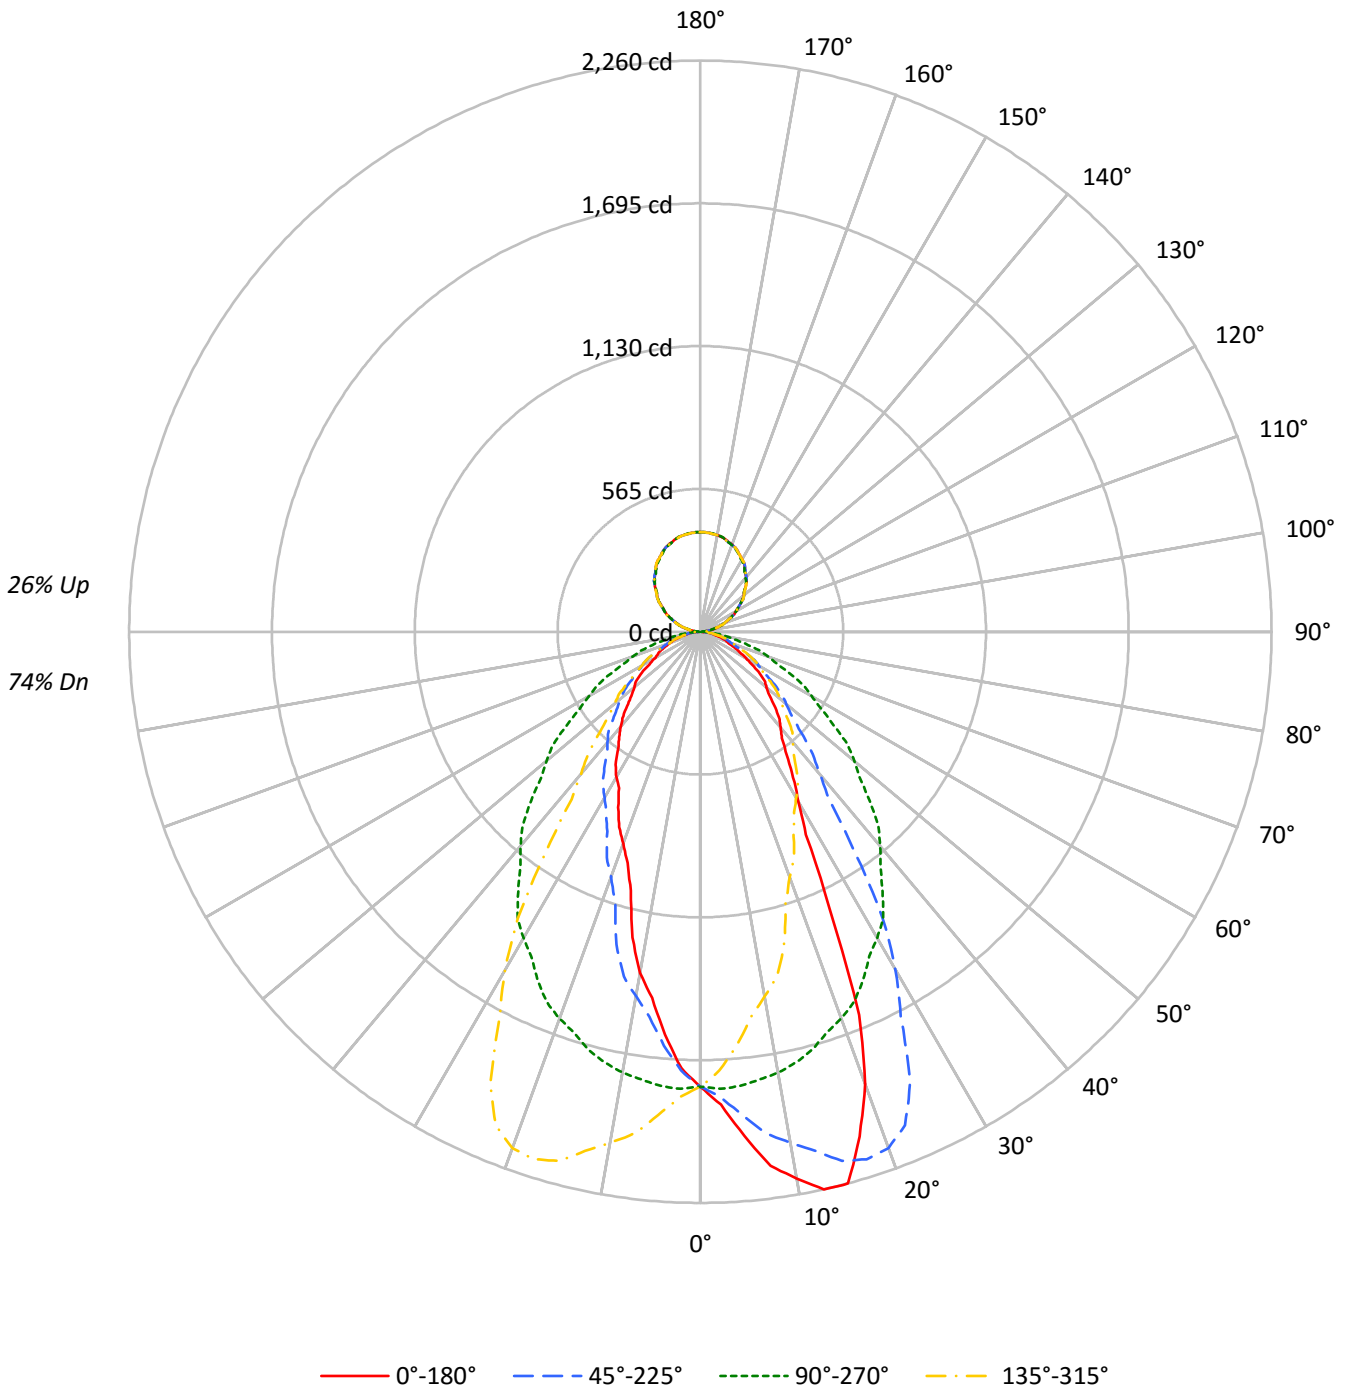



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	113	113	113	113	107	107	107	107	97	97	97	87	87	87	78	78	78	74				
1	104	100	97	93	99	95	92	89	86	84	82	78	76	75	71	69	68	64				
2	96	89	83	78	91	85	80	75	77	73	70	70	67	64	64	61	59	56				
3	88	79	72	67	84	76	70	65	69	64	60	63	59	56	58	55	52	49				
4	82	71	64	58	77	68	61	56	63	57	53	57	53	49	52	49	46	43				
5	76	64	57	51	72	62	55	49	57	51	46	52	47	44	48	44	41	38				
6	70	59	51	45	67	56	49	44	52	46	41	48	43	39	44	40	37	34				
7	65	53	46	40	62	51	44	39	48	42	37	44	39	35	41	37	33	31				
8	61	49	42	36	58	47	40	36	44	38	34	41	36	32	38	34	30	28				
9	57	45	38	33	55	44	37	32	41	35	31	38	33	29	35	31	28	26				
10	54	42	35	30	51	41	34	30	38	32	28	35	30	27	33	29	26	24				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	29061	29061	29061	29061
5°	32456	29242	25929	29242
10°	36008	29037	22474	29037
15°	37778	28612	17708	28612
20°	32752	27981	15323	27981
25°	21480	27118	13682	27118
30°	14458	26071	12381	26071
35°	11710	24750	11168	24750
40°	10414	23317	10334	23317
45°	9423	21633	9225	21633
50°	8578	19964	8545	19964
55°	8062	18117	7958	18117
60°	6746	16417	6665	16417
65°	5685	14907	6449	14907
70°	5254	13312	6080	13312
75°	4916	11591	5614	11591
80°	4537	9530	5002	9530
85°	4168	7521	4409	7521



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	170.6	4.0
10°-20°	475.4	11.3
20°-30°	612.6	14.5
30°-40°	582.2	13.8
40°-50°	498.7	11.8
50°-60°	379.8	9.0
60°-70°	240.1	5.7
70°-80°	119.9	2.8
80°-90°	32.8	0.8
90°-100°	25.0	0.6
100°-110°	77.7	1.8
110°-120°	132.8	3.1
120°-130°	174.6	4.1
130°-140°	195.9	4.6
140°-150°	192.1	4.6
150°-160°	161.1	3.8
160°-170°	106.9	2.5
170°-180°	37.4	0.9
0°-30°	1258.6	29.9
0°-40°	1840.8	43.7
0°-60°	2719.4	64.5
0°-90°	3112.1	73.8
90°-120°	235.4	5.6
90°-150°	798.0	18.9
90°-180°	1103.0	26.2
0°-180°	4215.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1800	1800	1800	1800	1800	
5°	2002	1804	1600	1804	2002	198
15°	2260	1712	1059	1712	2260	610
25°	1206	1522	768	1522	1206	572
35°	594	1256	567	1256	594	380
45°	413	947	404	947	413	319
55°	286	644	283	644	286	251
65°	149	390	169	390	149	152
75°	79	186	90	186	79	84
85°	22	41	24	41	22	24
90°	11	0	11	0	11	6
95°	21	17	21	17	21	23
105°	74	72	74	72	74	78
115°	133	133	133	133	133	132
125°	194	194	194	194	194	173
135°	254	251	254	251	254	195
145°	308	304	308	304	308	192
155°	351	348	351	348	351	161
165°	379	379	379	379	379	107
175°	393	394	393	394	393	37
180°	395	395	395	395	395	



TEST NUMBER: P331706-830
 CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9
2.5°	1872.9	1874.4	1875.9	1872.4	1872.4	1869.4	1862.9	1857.9	1843.9	1841.9	1841.9
5°	2002.5	2001.2	2003.8	1995.6	1984.3	1981.9	1970.0	1954.4	1938.1	1920.0	1916.2
7.5°	2131.3	2129.4	2124.4	2123.1	2114.4	2095.6	2076.4	2056.1	2029.0	2002.6	1989.3
10°	2196.3	2217.0	2204.5	2182.6	2187.0	2157.6	2141.9	2115.1	2092.5	2053.1	2044.4
12.5°	2260.4	2268.5	2264.6	2252.1	2246.6	2226.1	2205.0	2181.6	2140.0	2104.7	2073.9
15°	2260.1	2272.0	2275.1	2271.4	2274.5	2273.3	2262.0	2242.6	2206.4	2167.6	2133.8
17.5°	2093.3	2101.6	2122.0	2135.9	2153.4	2190.5	2208.8	2215.8	2210.5	2188.3	2164.5
20°	1906.2	1892.4	1949.9	1979.3	2004.3	2066.9	2120.7	2141.4	2174.4	2173.9	2167.6
22.5°	1641.0	1644.3	1698.8	1733.7	1806.8	1869.3	1930.6	2008.3	2072.4	2114.8	2139.6
25°	1205.7	1229.5	1283.9	1331.4	1412.8	1529.1	1634.7	1757.4	1873.0	1964.4	2051.3
27.5°	905.6	907.3	950.5	994.4	1042.6	1137.9	1271.0	1417.4	1582.3	1718.4	1875.0
30°	775.5	771.8	789.9	816.7	858.0	931.8	1031.9	1175.7	1340.2	1545.3	1728.0
32.5°	683.4	683.6	697.3	717.2	751.5	801.3	869.8	986.7	1142.1	1343.7	1557.8
35°	594.1	593.5	603.5	617.8	632.3	664.1	711.1	772.3	879.3	1067.5	1286.4
37.5°	530.1	532.8	537.7	546.7	562.6	580.3	608.5	649.7	725.9	837.2	1021.2
40°	494.1	495.3	502.2	509.7	519.1	532.8	556.0	589.1	644.8	733.6	868.0
42.5°	461.0	462.3	467.1	474.2	481.5	495.3	514.4	543.1	588.2	657.5	768.5
45°	412.7	412.7	417.2	420.3	428.4	440.9	456.6	480.3	511.5	562.9	636.7
47.5°	367.5	367.6	370.5	375.9	381.0	390.8	406.1	425.6	448.3	488.0	551.0
50°	341.5	342.0	343.9	348.4	351.5	360.2	372.1	389.0	412.7	443.4	496.0
52.5°	320.5	320.1	322.4	324.3	326.5	332.7	341.6	356.5	377.8	404.4	447.9
55°	286.4	283.9	287.7	290.8	292.7	295.2	300.2	309.5	327.7	350.2	382.8
57.5°	243.9	242.9	245.5	248.4	254.3	261.0	265.3	271.3	280.7	296.8	329.0
60°	208.9	208.9	214.5	216.4	223.3	232.1	240.8	245.8	255.1	265.8	289.5
62.5°	177.9	178.3	181.0	182.9	186.7	197.5	209.7	220.7	229.6	239.8	255.5
65°	148.8	150.1	150.1	151.4	153.8	156.4	161.4	170.1	185.8	200.1	212.0
67.5°	126.3	126.7	127.1	128.4	128.9	131.7	133.7	137.6	141.2	154.9	169.6
70°	111.3	113.2	112.5	113.9	114.4	115.6	118.2	120.1	125.7	128.8	137.6
72.5°	97.3	98.7	98.6	99.3	100.9	101.2	103.2	105.1	108.7	111.3	116.0
75°	78.8	78.1	78.8	80.0	80.7	81.3	81.3	83.8	85.7	88.2	91.3
77.5°	60.8	61.5	61.3	61.5	61.5	62.7	62.6	63.6	65.5	66.8	68.3
80°	48.8	49.4	48.8	49.4	50.0	50.6	50.0	50.6	52.5	53.8	53.8
82.5°	37.8	37.9	38.3	38.4	38.5	38.6	39.5	39.7	41.0	40.8	41.3
85°	22.5	21.9	21.9	21.9	22.5	23.1	22.5	22.5	23.1	23.1	23.1
87.5°	10.3	10.7	10.7	10.7	10.7	10.7	10.7	11.3	10.8	11.3	10.6
90°	11.3	11.2	11.2	11.1	11.0	11.0	11.2	11.4	11.5	11.7	10.0
92.5°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.6	10.2
95°	20.6	20.8	20.9	21.1	21.2	21.3	21.3	21.3	21.3	21.3	21.2
97.5°	35.7	35.8	35.8	35.8	35.8	35.8	35.8	35.8	35.8	35.8	35.5
100°	45.6	45.7	45.8	45.8	45.9	46.0	46.0	46.0	46.0	46.0	45.7
102.5°	56.8	56.9	56.9	57.0	57.1	57.1	57.0	57.0	56.9	56.8	56.6
105°	73.9	73.9	73.9	73.9	73.9	73.9	73.7	73.5	73.4	73.2	73.1
107.5°	90.0	90.4	90.8	91.0	91.4	91.5	91.5	91.4	91.3	91.3	91.3
110°	102.5	102.8	103.0	103.2	103.5	103.6	103.6	103.6	103.6	103.6	103.6



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	114.5	114.7	114.9	115.1	115.2	115.4	115.6	115.7	115.9	116.1	116.1
115°	133.2	133.5	133.7	133.8	134.1	134.2	134.3	134.4	134.5	134.5	134.7
117.5°	151.0	151.2	151.5	151.7	151.8	152.0	152.2	152.4	152.6	152.8	153.2
120°	163.5	163.7	163.9	164.2	164.4	164.5	164.5	164.5	164.5	164.5	165.1
122.5°	175.8	175.9	176.1	176.3	176.4	176.5	176.7	176.9	177.1	177.3	177.7
125°	194.4	194.5	194.6	194.7	194.7	194.9	195.1	195.4	195.6	195.8	196.0
127.5°	211.5	211.8	212.0	212.3	212.4	212.7	213.0	213.3	213.5	213.8	214.1
130°	223.8	224.0	224.3	224.7	225.0	225.2	225.4	225.5	225.6	225.7	225.9
132.5°	235.5	235.7	236.0	236.2	236.5	236.8	237.0	237.3	237.7	238.0	238.0
135°	253.7	254.0	254.2	254.4	254.7	254.8	254.9	255.0	255.0	255.1	255.0
137.5°	270.2	270.6	270.9	271.2	271.5	271.6	271.6	271.7	271.8	271.8	271.6
140°	281.7	282.0	282.3	282.6	282.9	283.0	283.0	283.0	283.0	283.0	282.7
142.5°	292.1	292.4	292.7	293.0	293.3	293.4	293.3	293.3	293.2	293.1	292.9
145°	307.6	308.0	308.3	308.6	308.9	309.0	308.9	308.9	308.8	308.7	308.2
147.5°	321.6	321.9	322.2	322.4	322.7	322.8	322.6	322.4	322.3	322.2	321.9
150°	330.6	330.9	331.1	331.3	331.6	331.6	331.3	331.1	330.9	330.6	330.4
152.5°	339.2	339.5	339.8	340.1	340.4	340.4	340.1	339.8	339.5	339.2	338.8
155°	350.6	350.9	351.1	351.3	351.6	351.5	351.1	350.7	350.3	350.0	349.8
157.5°	360.5	360.9	361.2	361.6	361.9	361.8	361.4	360.8	360.3	359.9	359.7
160°	366.6	366.9	367.2	367.5	367.8	367.8	367.3	366.8	366.4	366.0	365.9
162.5°	371.9	372.3	372.7	373.1	373.3	373.3	372.8	372.3	371.8	371.3	371.3
165°	379.0	379.3	379.7	380.0	380.4	380.3	379.8	379.3	378.8	378.2	378.2
167.5°	384.7	385.0	385.4	385.9	386.3	386.2	385.6	385.1	384.6	384.1	384.1
170°	387.6	388.0	388.5	389.0	389.4	389.4	388.8	388.3	387.8	387.3	387.4
172.5°	390.0	390.5	390.9	391.3	391.8	391.7	391.2	390.7	390.2	389.6	389.7
175°	392.6	393.0	393.5	394.0	394.4	394.4	393.8	393.3	392.8	392.3	392.4
177.5°	393.8	394.2	394.5	394.8	395.2	395.2	394.8	394.5	394.2	393.8	393.9
180°	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9
2.5°	1842.9	1838.9	1835.4	1826.4	1821.8	1811.8	1810.3	1809.9	1796.9	1784.3	1780.8
5°	1906.2	1896.2	1881.1	1863.7	1845.5	1826.7	1814.2	1804.2	1779.2	1755.5	1741.7
7.5°	1970.0	1948.4	1922.6	1889.4	1861.8	1830.8	1807.7	1787.1	1751.6	1717.6	1694.7
10°	2017.5	1982.4	1948.0	1902.4	1866.8	1831.7	1799.2	1771.1	1731.1	1686.0	1654.2
12.5°	2047.0	2008.5	1961.1	1916.5	1870.3	1825.7	1782.3	1746.1	1699.0	1652.6	1614.6
15°	2086.9	2045.6	1988.1	1924.3	1864.9	1806.8	1756.7	1711.7	1650.4	1594.7	1548.4
17.5°	2119.6	2062.8	2001.0	1927.2	1858.4	1784.5	1720.0	1662.6	1594.3	1527.2	1472.6
20°	2130.1	2073.8	2002.5	1928.7	1847.4	1760.5	1691.0	1628.5	1555.3	1482.1	1419.7
22.5°	2123.5	2079.8	2000.5	1912.1	1828.9	1738.0	1659.5	1587.0	1505.8	1431.2	1358.6
25°	2079.4	2064.4	1989.3	1893.0	1798.0	1692.3	1601.6	1522.2	1429.6	1349.6	1270.7
27.5°	1976.5	2008.8	1962.4	1859.7	1754.1	1640.8	1538.8	1448.4	1352.4	1262.3	1183.7
30°	1877.5	1951.8	1931.8	1836.7	1718.5	1607.2	1492.8	1398.4	1295.8	1203.2	1125.7
32.5°	1741.8	1864.7	1884.3	1804.8	1682.5	1560.2	1440.3	1346.3	1239.3	1141.7	1066.1
35°	1526.0	1709.8	1794.2	1743.6	1621.0	1489.0	1365.2	1255.7	1148.2	1051.9	976.9
37.5°	1268.4	1518.8	1659.5	1663.1	1550.6	1413.3	1278.6	1169.9	1059.8	965.3	884.0
40°	1101.3	1372.7	1555.9	1596.6	1501.6	1353.3	1217.0	1106.3	998.7	906.2	813.0
42.5°	951.2	1221.6	1446.9	1517.6	1442.0	1294.8	1158.0	1042.3	937.7	850.2	755.0
45°	769.2	1005.6	1253.9	1380.3	1338.3	1202.0	1057.5	947.4	849.2	773.6	682.3
47.5°	648.9	815.5	1055.7	1226.6	1225.9	1101.5	959.3	853.9	762.8	691.9	618.0
50°	580.3	725.5	928.7	1122.6	1138.8	1034.3	899.3	794.8	709.8	635.4	576.0
52.5°	518.8	638.4	821.1	1007.0	1053.3	962.8	831.8	735.4	652.8	584.4	533.5
55°	438.4	530.9	669.8	843.7	913.7	849.9	733.6	643.6	576.6	519.1	475.3
57.5°	370.9	440.3	551.7	691.6	773.3	733.1	637.2	564.0	506.7	454.7	420.1
60°	328.3	385.2	479.7	596.6	686.6	658.6	576.6	508.4	459.7	414.6	382.1
62.5°	288.3	337.2	418.1	513.0	595.6	584.0	517.1	459.9	417.2	376.1	348.6
65°	232.1	267.7	330.8	405.3	471.6	477.2	429.0	390.2	352.1	319.6	295.2
67.5°	184.7	208.0	252.5	315.2	364.9	382.6	353.2	323.6	293.3	268.2	247.0
70°	155.7	174.5	207.0	257.7	303.3	322.1	305.2	282.0	255.8	235.2	217.0
72.5°	126.2	144.5	168.4	205.7	244.8	265.0	259.2	242.5	221.2	204.2	187.0
75°	95.1	100.7	117.0	141.9	172.6	190.1	194.5	185.8	168.8	155.7	145.7
77.5°	70.3	73.7	81.4	94.5	114.6	130.2	136.6	135.5	123.9	116.3	107.0
80°	56.3	58.2	61.9	67.6	82.6	98.2	102.5	102.5	94.4	91.3	81.9
82.5°	42.8	44.1	46.4	49.5	56.6	70.1	75.0	76.1	70.9	66.8	59.4
85°	24.4	23.8	25.0	26.9	28.2	31.9	39.4	40.6	39.4	34.4	32.5
87.5°	10.2	10.4	10.0	9.2	9.6	9.9	12.3	14.6	12.7	11.4	10.7
90°	8.4	6.8	5.2	3.9	3.0	2.1	1.2	0.4	1.2	2.1	3.0
92.5°	9.8	9.4	9.0	8.6	7.9	7.3	6.6	5.9	6.6	7.3	7.9
95°	21.0	20.8	20.7	20.3	19.5	18.8	18.1	17.3	18.1	18.8	19.5
97.5°	35.3	35.0	34.7	34.2	33.6	32.9	32.3	31.7	32.3	32.9	33.6
100°	45.5	45.2	45.1	44.7	44.1	43.5	42.9	42.3	42.9	43.5	44.1
102.5°	56.3	56.0	55.8	55.3	54.9	54.4	53.9	53.4	53.9	54.4	54.9
105°	73.0	72.9	72.7	72.5	72.3	72.0	71.8	71.6	71.8	72.0	72.3
107.5°	91.3	91.3	91.3	91.1	90.9	90.5	90.2	89.8	90.2	90.5	90.9
110°	103.6	103.6	103.6	103.3	102.9	102.5	102.0	101.6	102.0	102.5	102.9



TEST NUMBER: P331706-830
 CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	116.2	116.2	116.3	116.1	115.6	115.3	114.8	114.3	114.8	115.3	115.6
115°	134.8	135.0	135.2	135.0	134.5	134.1	133.7	133.2	133.7	134.1	134.5
117.5°	153.6	154.0	154.5	154.4	153.7	153.2	152.6	151.9	152.6	153.2	153.7
120°	165.7	166.3	166.8	166.8	166.3	165.7	165.1	164.5	165.1	165.7	166.3
122.5°	178.1	178.5	179.0	178.8	178.0	177.4	176.6	176.0	176.6	177.4	178.0
125°	196.2	196.4	196.7	196.4	195.8	195.1	194.4	193.8	194.4	195.1	195.8
127.5°	214.3	214.6	214.8	214.5	213.7	212.9	212.1	211.2	212.1	212.9	213.7
130°	226.1	226.2	226.4	225.9	225.0	224.0	223.1	222.2	223.1	224.0	225.0
132.5°	238.0	237.9	237.9	237.5	236.7	235.9	235.2	234.4	235.2	235.9	236.7
135°	254.8	254.7	254.5	254.0	253.2	252.4	251.6	250.7	251.6	252.4	253.2
137.5°	271.5	271.3	271.1	270.7	270.0	269.3	268.6	268.0	268.6	269.3	270.0
140°	282.3	281.9	281.5	281.1	280.4	279.7	279.1	278.4	279.1	279.7	280.4
142.5°	292.7	292.4	292.2	291.7	291.1	290.4	289.7	289.1	289.7	290.4	291.1
145°	307.8	307.4	306.9	306.4	305.9	305.4	304.9	304.3	304.9	305.4	305.9
147.5°	321.6	321.2	320.9	320.5	319.9	319.2	318.7	318.0	318.7	319.2	319.9
150°	330.1	329.8	329.5	329.1	328.7	328.2	327.8	327.3	327.8	328.2	328.7
152.5°	338.5	338.1	337.8	337.3	337.0	336.5	336.0	335.6	336.0	336.5	337.0
155°	349.5	349.3	349.1	348.8	348.6	348.5	348.2	348.0	348.2	348.5	348.6
157.5°	359.6	359.5	359.3	359.2	359.0	358.8	358.7	358.5	358.7	358.8	359.0
160°	365.8	365.7	365.7	365.5	365.4	365.2	365.1	365.0	365.1	365.2	365.4
162.5°	371.2	371.1	371.0	371.0	370.9	370.9	370.9	370.8	370.9	370.9	370.9
165°	378.2	378.2	378.2	378.3	378.4	378.4	378.5	378.6	378.5	378.4	378.4
167.5°	384.1	384.1	384.2	384.3	384.5	384.7	384.9	385.1	384.9	384.7	384.5
170°	387.4	387.5	387.6	387.8	388.0	388.1	388.4	388.6	388.4	388.1	388.0
172.5°	389.8	389.9	389.9	390.1	390.3	390.6	390.8	391.0	390.8	390.6	390.3
175°	392.6	392.8	392.9	393.0	393.2	393.5	393.7	394.0	393.7	393.5	393.2
177.5°	394.1	394.2	394.3	394.5	394.6	394.7	394.9	395.1	394.9	394.7	394.6
180°	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9
2.5°	1774.3	1770.8	1764.3	1754.4	1748.3	1737.9	1730.8	1734.8	1735.8	1734.8	1733.8
5°	1726.6	1713.5	1695.4	1677.9	1661.6	1644.2	1634.1	1629.8	1621.0	1616.0	1613.5
7.5°	1669.1	1646.4	1620.7	1590.3	1564.3	1537.2	1523.3	1516.5	1498.5	1488.7	1480.3
10°	1626.0	1590.4	1564.7	1524.7	1500.3	1464.6	1440.3	1440.9	1416.5	1402.7	1392.7
12.5°	1578.5	1539.4	1496.7	1460.7	1426.7	1398.1	1368.8	1356.8	1331.0	1317.7	1290.6
15°	1499.7	1454.1	1409.0	1360.2	1325.8	1281.4	1238.9	1186.9	1145.1	1108.8	1098.8
17.5°	1413.6	1357.1	1311.9	1254.6	1195.7	1121.1	1071.8	1041.6	1016.3	997.2	983.0
20°	1354.6	1297.0	1248.9	1162.6	1083.2	1032.6	996.3	973.1	946.9	926.2	914.9
22.5°	1292.5	1232.5	1166.9	1070.5	1008.6	968.0	935.7	909.1	891.3	875.2	864.9
25°	1204.5	1138.8	1030.7	964.3	914.3	871.8	849.2	833.0	814.3	792.4	782.3
27.5°	1111.4	1007.0	929.3	880.1	832.3	804.6	784.4	760.1	743.3	733.5	723.0
30°	1041.9	937.5	876.8	823.0	789.2	758.6	734.8	721.0	704.8	688.0	681.1
32.5°	964.3	880.9	822.7	778.0	743.7	717.6	698.8	676.6	664.8	654.4	640.0
35°	868.0	804.8	751.7	715.5	683.0	661.7	639.8	626.6	605.4	596.6	591.0
37.5°	786.5	731.7	692.0	653.7	628.0	604.5	591.1	570.2	561.0	548.8	537.0
40°	740.5	686.6	648.6	617.3	588.5	571.0	554.1	537.2	523.5	517.8	503.4
42.5°	693.4	649.7	611.5	577.2	558.0	539.4	518.1	505.7	491.4	482.3	473.4
45°	628.5	589.7	557.2	529.0	507.8	488.4	474.7	454.0	445.9	427.7	420.3
47.5°	571.5	535.5	504.4	477.7	456.9	444.3	424.1	408.0	395.0	383.9	374.2
50°	530.9	501.0	470.9	447.1	428.4	410.3	389.6	381.4	361.5	355.8	350.2
52.5°	493.9	465.4	437.9	414.6	395.9	378.2	360.1	349.5	335.9	330.4	326.2
55°	442.1	414.6	388.3	367.7	348.9	330.8	319.6	306.4	300.2	295.8	290.8
57.5°	390.1	365.3	345.3	324.3	305.5	291.1	278.1	270.1	263.6	257.9	251.9
60°	357.1	333.3	315.2	295.8	276.4	264.6	254.5	245.2	237.6	228.8	226.4
62.5°	322.1	301.3	284.6	265.8	248.9	238.0	228.5	219.6	210.7	197.8	194.4
65°	273.9	257.7	240.2	224.5	209.5	198.9	185.1	175.1	171.4	170.1	169.5
67.5°	230.4	215.0	200.0	184.0	170.3	160.5	153.4	151.9	149.3	148.5	146.8
70°	201.3	187.0	172.0	156.9	143.8	141.9	139.5	137.0	133.8	132.6	131.3
72.5°	175.3	160.5	145.4	133.5	127.8	125.5	122.9	120.5	118.3	117.1	116.3
75°	134.5	120.7	110.7	106.3	103.2	101.3	97.6	95.7	94.4	92.6	91.9
77.5°	96.8	89.1	84.5	81.7	78.4	76.4	74.3	72.4	71.1	70.7	69.7
80°	73.8	70.0	66.9	63.2	61.9	59.4	58.8	56.9	57.5	55.7	55.7
82.5°	57.3	52.5	49.9	48.2	46.9	44.9	44.3	43.4	43.5	42.1	42.1
85°	29.4	28.2	26.9	25.6	25.6	23.8	24.4	23.8	23.8	22.5	21.9
87.5°	10.3	10.0	9.3	9.7	10.0	9.8	9.8	9.2	9.2	9.2	8.7
90°	3.9	5.2	6.8	8.4	10.0	11.7	11.5	11.4	11.2	11.0	11.0
92.5°	8.6	9.0	9.4	9.8	10.2	10.6	10.7	10.7	10.7	10.7	10.7
95°	20.3	20.7	20.8	21.0	21.2	21.3	21.3	21.3	21.3	21.3	21.2
97.5°	34.2	34.7	35.0	35.3	35.5	35.8	35.8	35.8	35.8	35.8	35.8
100°	44.7	45.1	45.2	45.5	45.7	46.0	46.0	46.0	46.0	46.0	45.9
102.5°	55.3	55.8	56.0	56.3	56.6	56.8	56.9	57.0	57.0	57.1	57.1
105°	72.5	72.7	72.9	73.0	73.1	73.2	73.4	73.5	73.7	73.9	73.9
107.5°	91.1	91.3	91.3	91.3	91.3	91.3	91.3	91.4	91.5	91.5	91.4
110°	103.3	103.6	103.6	103.6	103.6	103.6	103.6	103.6	103.6	103.6	103.5



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	116.1	116.3	116.2	116.2	116.1	116.1	115.9	115.7	115.6	115.4	115.2
115°	135.0	135.2	135.0	134.8	134.7	134.5	134.5	134.4	134.3	134.2	134.1
117.5°	154.4	154.5	154.0	153.6	153.2	152.8	152.6	152.4	152.2	152.0	151.8
120°	166.8	166.8	166.3	165.7	165.1	164.5	164.5	164.5	164.5	164.5	164.4
122.5°	178.8	179.0	178.5	178.1	177.7	177.3	177.1	176.9	176.7	176.5	176.4
125°	196.4	196.7	196.4	196.2	196.0	195.8	195.6	195.4	195.1	194.9	194.7
127.5°	214.5	214.8	214.6	214.3	214.1	213.8	213.5	213.3	213.0	212.7	212.4
130°	225.9	226.4	226.2	226.1	225.9	225.7	225.6	225.5	225.4	225.2	225.0
132.5°	237.5	237.9	237.9	238.0	238.0	238.0	237.7	237.3	237.0	236.8	236.5
135°	254.0	254.5	254.7	254.8	255.0	255.1	255.0	255.0	254.9	254.8	254.7
137.5°	270.7	271.1	271.3	271.5	271.6	271.8	271.8	271.7	271.6	271.6	271.5
140°	281.1	281.5	281.9	282.3	282.7	283.0	283.0	283.0	283.0	283.0	282.9
142.5°	291.7	292.2	292.4	292.7	292.9	293.1	293.2	293.3	293.3	293.4	293.3
145°	306.4	306.9	307.4	307.8	308.2	308.7	308.8	308.9	308.9	309.0	308.9
147.5°	320.5	320.9	321.2	321.6	321.9	322.2	322.3	322.4	322.6	322.8	322.7
150°	329.1	329.5	329.8	330.1	330.4	330.6	330.9	331.1	331.3	331.6	331.6
152.5°	337.3	337.8	338.1	338.5	338.8	339.2	339.5	339.8	340.1	340.4	340.4
155°	348.8	349.1	349.3	349.5	349.8	350.0	350.3	350.7	351.1	351.5	351.6
157.5°	359.2	359.3	359.5	359.6	359.7	359.9	360.3	360.8	361.4	361.8	361.9
160°	365.5	365.7	365.7	365.8	365.9	366.0	366.4	366.8	367.3	367.8	367.8
162.5°	371.0	371.0	371.1	371.2	371.3	371.3	371.8	372.3	372.8	373.3	373.3
165°	378.3	378.2	378.2	378.2	378.2	378.2	378.8	379.3	379.8	380.3	380.4
167.5°	384.3	384.2	384.1	384.1	384.1	384.1	384.6	385.1	385.6	386.2	386.3
170°	387.8	387.6	387.5	387.4	387.4	387.3	387.8	388.3	388.8	389.4	389.4
172.5°	390.1	389.9	389.9	389.8	389.7	389.6	390.2	390.7	391.2	391.7	391.8
175°	393.0	392.9	392.8	392.6	392.4	392.3	392.8	393.3	393.8	394.4	394.4
177.5°	394.5	394.3	394.2	394.1	393.9	393.8	394.2	394.5	394.8	395.2	395.2
180°	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6



TEST NUMBER: P331706-830
 CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9
2.5°	1728.3	1729.3	1727.8	1728.8	1727.8	1729.3	1728.3	1733.8	1734.8	1735.8	1734.8
5°	1610.3	1602.9	1601.6	1599.8	1601.6	1602.9	1610.3	1613.5	1616.0	1621.0	1629.8
7.5°	1469.5	1468.4	1465.3	1460.9	1465.3	1468.4	1469.5	1480.3	1488.7	1498.5	1516.5
10°	1378.9	1375.8	1375.3	1370.8	1375.3	1375.8	1378.9	1392.7	1402.7	1416.5	1440.9
12.5°	1272.9	1252.7	1250.7	1239.7	1250.7	1252.7	1272.9	1290.6	1317.7	1331.0	1356.8
15°	1083.8	1080.1	1067.5	1059.4	1067.5	1080.1	1083.8	1098.8	1108.8	1145.1	1186.9
17.5°	975.7	963.5	959.6	957.8	959.6	963.5	975.7	983.0	997.2	1016.3	1041.6
20°	906.2	894.9	893.1	891.8	893.1	894.9	906.2	914.9	926.2	946.9	973.1
22.5°	858.2	846.4	841.5	837.7	841.5	846.4	858.2	864.9	875.2	891.3	909.1
25°	776.1	771.8	769.2	768.0	769.2	771.8	776.1	782.3	792.4	814.3	833.0
27.5°	711.9	702.3	700.4	697.2	700.4	702.3	711.9	723.0	733.5	743.3	760.1
30°	675.4	672.3	667.9	664.1	667.9	672.3	675.4	681.1	688.0	704.8	721.0
32.5°	632.4	629.8	625.8	624.2	625.8	629.8	632.4	640.0	654.4	664.8	676.6
35°	584.8	576.0	572.2	566.6	572.2	576.0	584.8	591.0	596.6	605.4	626.6
37.5°	534.3	529.7	524.4	526.3	524.4	529.7	534.3	537.0	548.8	561.0	570.2
40°	495.3	492.2	491.0	490.3	491.0	492.2	495.3	503.4	517.8	523.5	537.2
42.5°	464.3	455.6	452.4	452.2	452.4	455.6	464.3	473.4	482.3	491.4	505.7
45°	417.2	409.0	403.4	404.0	403.4	409.0	417.2	420.3	427.7	445.9	454.0
47.5°	368.8	368.6	365.1	366.3	365.1	368.6	368.8	374.2	383.9	395.0	408.0
50°	345.8	342.0	339.6	340.2	339.6	342.0	345.8	350.2	355.8	361.5	381.4
52.5°	323.9	320.6	318.6	321.2	318.6	320.6	323.9	326.2	330.4	335.9	349.5
55°	287.7	283.9	283.3	282.7	283.3	283.9	287.7	290.8	295.8	300.2	306.4
57.5°	247.3	244.8	241.0	239.4	241.0	244.8	247.3	251.9	257.9	263.6	270.1
60°	218.3	213.3	207.0	206.4	207.0	213.3	218.3	226.4	228.8	237.6	245.2
62.5°	191.7	190.8	189.5	189.4	189.5	190.8	191.7	194.4	197.8	210.7	219.6
65°	168.2	167.6	168.2	168.8	168.2	167.6	168.2	169.5	170.1	171.4	175.1
67.5°	146.6	145.4	144.3	144.9	144.3	145.4	146.6	146.8	148.5	149.3	151.9
70°	130.1	129.4	128.8	128.8	128.8	129.4	130.1	131.3	132.6	133.8	137.0
72.5°	114.0	114.0	113.3	112.8	113.3	114.0	114.0	116.3	117.1	118.3	120.5
75°	91.3	90.0	90.0	90.0	90.0	90.0	91.3	91.9	92.6	94.4	95.7
77.5°	69.6	68.9	68.3	67.8	68.3	68.9	69.6	69.7	70.7	71.1	72.4
80°	55.0	54.4	53.8	53.8	53.8	54.4	55.0	55.7	55.7	57.5	56.9
82.5°	42.0	41.4	41.3	40.8	41.3	41.4	42.0	42.1	42.1	43.5	43.4
85°	22.5	23.1	22.5	23.8	22.5	23.1	22.5	21.9	22.5	23.8	23.8
87.5°	8.8	8.2	8.8	8.3	8.8	8.2	8.8	8.7	9.2	9.2	9.2
90°	11.1	11.2	11.2	11.3	11.2	11.2	11.1	11.0	11.0	11.2	11.4
92.5°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7
95°	21.1	20.9	20.8	20.6	20.8	20.9	21.1	21.2	21.3	21.3	21.3
97.5°	35.8	35.8	35.8	35.7	35.8	35.8	35.8	35.8	35.8	35.8	35.8
100°	45.8	45.8	45.7	45.6	45.7	45.8	45.8	45.9	46.0	46.0	46.0
102.5°	57.0	56.9	56.9	56.8	56.9	56.9	57.0	57.1	57.1	57.0	57.0
105°	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.9	73.7	73.5
107.5°	91.0	90.8	90.4	90.0	90.4	90.8	91.0	91.4	91.5	91.5	91.4
110°	103.2	103.0	102.8	102.5	102.8	103.0	103.2	103.5	103.6	103.6	103.6



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	115.1	114.9	114.7	114.5	114.7	114.9	115.1	115.2	115.4	115.6	115.7
115°	133.8	133.7	133.5	133.2	133.5	133.7	133.8	134.1	134.2	134.3	134.4
117.5°	151.7	151.5	151.2	151.0	151.2	151.5	151.7	151.8	152.0	152.2	152.4
120°	164.2	163.9	163.7	163.5	163.7	163.9	164.2	164.4	164.5	164.5	164.5
122.5°	176.3	176.1	175.9	175.8	175.9	176.1	176.3	176.4	176.5	176.7	176.9
125°	194.7	194.6	194.5	194.4	194.5	194.6	194.7	194.7	194.9	195.1	195.4
127.5°	212.3	212.0	211.8	211.5	211.8	212.0	212.3	212.4	212.7	213.0	213.3
130°	224.7	224.3	224.0	223.8	224.0	224.3	224.7	225.0	225.2	225.4	225.5
132.5°	236.2	236.0	235.7	235.5	235.7	236.0	236.2	236.5	236.8	237.0	237.3
135°	254.4	254.2	254.0	253.7	254.0	254.2	254.4	254.7	254.8	254.9	255.0
137.5°	271.2	270.9	270.6	270.2	270.6	270.9	271.2	271.5	271.6	271.6	271.7
140°	282.6	282.3	282.0	281.7	282.0	282.3	282.6	282.9	283.0	283.0	283.0
142.5°	293.0	292.7	292.4	292.1	292.4	292.7	293.0	293.3	293.4	293.3	293.3
145°	308.6	308.3	308.0	307.6	308.0	308.3	308.6	308.9	309.0	308.9	308.9
147.5°	322.4	322.2	321.9	321.6	321.9	322.2	322.4	322.7	322.8	322.6	322.4
150°	331.3	331.1	330.9	330.6	330.9	331.1	331.3	331.6	331.6	331.3	331.1
152.5°	340.1	339.8	339.5	339.2	339.5	339.8	340.1	340.4	340.4	340.1	339.8
155°	351.3	351.1	350.9	350.6	350.9	351.1	351.3	351.6	351.5	351.1	350.7
157.5°	361.6	361.2	360.9	360.5	360.9	361.2	361.6	361.9	361.8	361.4	360.8
160°	367.5	367.2	366.9	366.6	366.9	367.2	367.5	367.8	367.8	367.3	366.8
162.5°	373.1	372.7	372.3	371.9	372.3	372.7	373.1	373.3	373.3	372.8	372.3
165°	380.0	379.7	379.3	379.0	379.3	379.7	380.0	380.4	380.3	379.8	379.3
167.5°	385.9	385.4	385.0	384.7	385.0	385.4	385.9	386.3	386.2	385.6	385.1
170°	389.0	388.5	388.0	387.6	388.0	388.5	389.0	389.4	389.4	388.8	388.3
172.5°	391.3	390.9	390.5	390.0	390.5	390.9	391.3	391.8	391.7	391.2	390.7
175°	394.0	393.5	393.0	392.6	393.0	393.5	394.0	394.4	394.4	393.8	393.3
177.5°	394.8	394.5	394.2	393.8	394.2	394.5	394.8	395.2	395.2	394.8	394.5
180°	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9
2.5°	1730.8	1737.9	1748.3	1754.4	1764.3	1770.8	1774.3	1780.8	1784.3	1796.9	1809.9
5°	1634.1	1644.2	1661.6	1677.9	1695.4	1713.5	1726.6	1741.7	1755.5	1779.2	1804.2
7.5°	1523.3	1537.2	1564.3	1590.3	1620.7	1646.4	1669.1	1694.7	1717.6	1751.6	1787.1
10°	1440.3	1464.6	1500.3	1524.7	1564.7	1590.4	1626.0	1654.2	1686.0	1731.1	1771.1
12.5°	1368.8	1398.1	1426.7	1460.7	1496.7	1539.4	1578.5	1614.6	1652.6	1699.0	1746.1
15°	1238.9	1281.4	1325.8	1360.2	1409.0	1454.1	1499.7	1548.4	1594.7	1650.4	1711.7
17.5°	1071.8	1121.1	1195.7	1254.6	1311.9	1357.1	1413.6	1472.6	1527.2	1594.3	1662.6
20°	996.3	1032.6	1083.2	1162.6	1248.9	1297.0	1354.6	1419.7	1482.1	1555.3	1628.5
22.5°	935.7	968.0	1008.6	1070.5	1166.9	1232.5	1292.5	1358.6	1431.2	1505.8	1587.0
25°	849.2	871.8	914.3	964.3	1030.7	1138.8	1204.5	1270.7	1349.6	1429.6	1522.2
27.5°	784.4	804.6	832.3	880.1	929.3	1007.0	1111.4	1183.7	1262.3	1352.4	1448.4
30°	734.8	758.6	789.2	823.0	876.8	937.5	1041.9	1125.7	1203.2	1295.8	1398.4
32.5°	698.8	717.6	743.7	778.0	822.7	880.9	964.3	1066.1	1141.7	1239.3	1346.3
35°	639.8	661.7	683.0	715.5	751.7	804.8	868.0	976.9	1051.9	1148.2	1255.7
37.5°	591.1	604.5	628.0	653.7	692.0	731.7	786.5	884.0	965.3	1059.8	1169.9
40°	554.1	571.0	588.5	617.3	648.6	686.6	740.5	813.0	906.2	998.7	1106.3
42.5°	518.1	539.4	558.0	577.2	611.5	649.7	693.4	755.0	850.2	937.7	1042.3
45°	474.7	488.4	507.8	529.0	557.2	589.7	628.5	682.3	773.6	849.2	947.4
47.5°	424.1	444.3	456.9	477.7	504.4	535.5	571.5	618.0	691.9	762.8	853.9
50°	389.6	410.3	428.4	447.1	470.9	501.0	530.9	576.0	635.4	709.8	794.8
52.5°	360.1	378.2	395.9	414.6	437.9	465.4	493.9	533.5	584.4	652.8	735.4
55°	319.6	330.8	348.9	367.7	388.3	414.6	442.1	475.3	519.1	576.6	643.6
57.5°	278.1	291.1	305.5	324.3	345.3	365.3	390.1	420.1	454.7	506.7	564.0
60°	254.5	264.6	276.4	295.8	315.2	333.3	357.1	382.1	414.6	459.7	508.4
62.5°	228.5	238.0	248.9	265.8	284.6	301.3	322.1	348.6	376.1	417.2	459.9
65°	185.1	198.9	209.5	224.5	240.2	257.7	273.9	295.2	319.6	352.1	390.2
67.5°	153.4	160.5	170.3	184.0	200.0	215.0	230.4	247.0	268.2	293.3	323.6
70°	139.5	141.9	143.8	156.9	172.0	187.0	201.3	217.0	235.2	255.8	282.0
72.5°	122.9	125.5	127.8	133.5	145.4	160.5	175.3	187.0	204.2	221.2	242.5
75°	97.6	101.3	103.2	106.3	110.7	120.7	134.5	145.7	155.7	168.8	185.8
77.5°	74.3	76.4	78.4	81.7	84.5	89.1	96.8	107.0	116.3	123.9	135.5
80°	58.8	59.4	61.9	63.2	66.9	70.0	73.8	81.9	91.3	94.4	102.5
82.5°	44.3	44.9	46.9	48.2	49.9	52.5	57.3	59.4	66.8	70.9	76.1
85°	24.4	23.8	25.6	25.6	26.9	28.2	29.4	32.5	34.4	39.4	40.6
87.5°	9.8	9.8	10.0	9.7	9.3	10.0	10.3	10.7	11.4	12.7	14.6
90°	11.5	11.7	10.0	8.4	6.8	5.2	3.9	3.0	2.1	1.2	0.4
92.5°	10.7	10.6	10.2	9.8	9.4	9.0	8.6	7.9	7.3	6.6	5.9
95°	21.3	21.3	21.2	21.0	20.8	20.7	20.3	19.5	18.8	18.1	17.3
97.5°	35.8	35.8	35.5	35.3	35.0	34.7	34.2	33.6	32.9	32.3	31.7
100°	46.0	46.0	45.7	45.5	45.2	45.1	44.7	44.1	43.5	42.9	42.3
102.5°	56.9	56.8	56.6	56.3	56.0	55.8	55.3	54.9	54.4	53.9	53.4
105°	73.4	73.2	73.1	73.0	72.9	72.7	72.5	72.3	72.0	71.8	71.6
107.5°	91.3	91.3	91.3	91.3	91.3	91.3	91.1	90.9	90.5	90.2	89.8
110°	103.6	103.6	103.6	103.6	103.6	103.6	103.3	102.9	102.5	102.0	101.6



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	115.9	116.1	116.1	116.2	116.2	116.3	116.1	115.6	115.3	114.8	114.3
115°	134.5	134.5	134.7	134.8	135.0	135.2	135.0	134.5	134.1	133.7	133.2
117.5°	152.6	152.8	153.2	153.6	154.0	154.5	154.4	153.7	153.2	152.6	151.9
120°	164.5	164.5	165.1	165.7	166.3	166.8	166.8	166.3	165.7	165.1	164.5
122.5°	177.1	177.3	177.7	178.1	178.5	179.0	178.8	178.0	177.4	176.6	176.0
125°	195.6	195.8	196.0	196.2	196.4	196.7	196.4	195.8	195.1	194.4	193.8
127.5°	213.5	213.8	214.1	214.3	214.6	214.8	214.5	213.7	212.9	212.1	211.2
130°	225.6	225.7	225.9	226.1	226.2	226.4	225.9	225.0	224.0	223.1	222.2
132.5°	237.7	238.0	238.0	238.0	237.9	237.9	237.5	236.7	235.9	235.2	234.4
135°	255.0	255.1	255.0	254.8	254.7	254.5	254.0	253.2	252.4	251.6	250.7
137.5°	271.8	271.8	271.6	271.5	271.3	271.1	270.7	270.0	269.3	268.6	268.0
140°	283.0	283.0	282.7	282.3	281.9	281.5	281.1	280.4	279.7	279.1	278.4
142.5°	293.2	293.1	292.9	292.7	292.4	292.2	291.7	291.1	290.4	289.7	289.1
145°	308.8	308.7	308.2	307.8	307.4	306.9	306.4	305.9	305.4	304.9	304.3
147.5°	322.3	322.2	321.9	321.6	321.2	320.9	320.5	319.9	319.2	318.7	318.0
150°	330.9	330.6	330.4	330.1	329.8	329.5	329.1	328.7	328.2	327.8	327.3
152.5°	339.5	339.2	338.8	338.5	338.1	337.8	337.3	337.0	336.5	336.0	335.6
155°	350.3	350.0	349.8	349.5	349.3	349.1	348.8	348.6	348.5	348.2	348.0
157.5°	360.3	359.9	359.7	359.6	359.5	359.3	359.2	359.0	358.8	358.7	358.5
160°	366.4	366.0	365.9	365.8	365.7	365.7	365.5	365.4	365.2	365.1	365.0
162.5°	371.8	371.3	371.3	371.2	371.1	371.0	371.0	370.9	370.9	370.9	370.8
165°	378.8	378.2	378.2	378.2	378.2	378.2	378.3	378.4	378.4	378.5	378.6
167.5°	384.6	384.1	384.1	384.1	384.1	384.2	384.3	384.5	384.7	384.9	385.1
170°	387.8	387.3	387.4	387.4	387.5	387.6	387.8	388.0	388.1	388.4	388.6
172.5°	390.2	389.6	389.7	389.8	389.9	389.9	390.1	390.3	390.6	390.8	391.0
175°	392.8	392.3	392.4	392.6	392.8	392.9	393.0	393.2	393.5	393.7	394.0
177.5°	394.2	393.8	393.9	394.1	394.2	394.3	394.5	394.6	394.7	394.9	395.1
180°	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9
2.5°	1810.3	1811.8	1821.8	1826.4	1835.4	1838.9	1842.9	1841.9	1841.9	1843.9	1857.9
5°	1814.2	1826.7	1845.5	1863.7	1881.1	1896.2	1906.2	1916.2	1920.0	1938.1	1954.4
7.5°	1807.7	1830.8	1861.8	1889.4	1922.6	1948.4	1970.0	1989.3	2002.6	2029.0	2056.1
10°	1799.2	1831.7	1866.8	1902.4	1948.0	1982.4	2017.5	2044.4	2053.1	2092.5	2115.1
12.5°	1782.3	1825.7	1870.3	1916.5	1961.1	2008.5	2047.0	2073.9	2104.7	2140.0	2181.6
15°	1756.7	1806.8	1864.9	1924.3	1988.1	2045.6	2086.9	2133.8	2167.6	2206.4	2242.6
17.5°	1720.0	1784.5	1858.4	1927.2	2001.0	2062.8	2119.6	2164.5	2188.3	2210.5	2215.8
20°	1691.0	1760.5	1847.4	1928.7	2002.5	2073.8	2130.1	2167.6	2173.9	2174.4	2141.4
22.5°	1659.5	1738.0	1828.9	1912.1	2000.5	2079.8	2123.5	2139.6	2114.8	2072.4	2008.3
25°	1601.6	1692.3	1798.0	1893.0	1989.3	2064.4	2079.4	2051.3	1964.4	1873.0	1757.4
27.5°	1538.8	1640.8	1754.1	1859.7	1962.4	2008.8	1976.5	1875.0	1718.4	1582.3	1417.4
30°	1492.8	1607.2	1718.5	1836.7	1931.8	1951.8	1877.5	1728.0	1545.3	1340.2	1175.7
32.5°	1440.3	1560.2	1682.5	1804.8	1884.3	1864.7	1741.8	1557.8	1343.7	1142.1	986.7
35°	1365.2	1489.0	1621.0	1743.6	1794.2	1709.8	1526.0	1286.4	1067.5	879.3	772.3
37.5°	1278.6	1413.3	1550.6	1663.1	1659.5	1518.8	1268.4	1021.2	837.2	725.9	649.7
40°	1217.0	1353.3	1501.6	1596.6	1555.9	1372.7	1101.3	868.0	733.6	644.8	589.1
42.5°	1158.0	1294.8	1442.0	1517.6	1446.9	1221.6	951.2	768.5	657.5	588.2	543.1
45°	1057.5	1202.0	1338.3	1380.3	1253.9	1005.6	769.2	636.7	562.9	511.5	480.3
47.5°	959.3	1101.5	1225.9	1226.6	1055.7	815.5	648.9	551.0	488.0	448.3	425.6
50°	899.3	1034.3	1138.8	1122.6	928.7	725.5	580.3	496.0	443.4	412.7	389.0
52.5°	831.8	962.8	1053.3	1007.0	821.1	638.4	518.8	447.9	404.4	377.8	356.5
55°	733.6	849.9	913.7	843.7	669.8	530.9	438.4	382.8	350.2	327.7	309.5
57.5°	637.2	733.1	773.3	691.6	551.7	440.3	370.9	329.0	296.8	280.7	271.3
60°	576.6	658.6	686.6	596.6	479.7	385.2	328.3	289.5	265.8	255.1	245.8
62.5°	517.1	584.0	595.6	513.0	418.1	337.2	288.3	255.5	239.8	229.6	220.7
65°	429.0	477.2	471.6	405.3	330.8	267.7	232.1	212.0	200.1	185.8	170.1
67.5°	353.2	382.6	364.9	315.2	252.5	208.0	184.7	169.6	154.9	141.2	137.6
70°	305.2	322.1	303.3	257.7	207.0	174.5	155.7	137.6	128.8	125.7	120.1
72.5°	259.2	265.0	244.8	205.7	168.4	144.5	126.2	116.0	111.3	108.7	105.1
75°	194.5	190.1	172.6	141.9	117.0	100.7	95.1	91.3	88.2	85.7	83.8
77.5°	136.6	130.2	114.6	94.5	81.4	73.7	70.3	68.3	66.8	65.5	63.6
80°	102.5	98.2	82.6	67.6	61.9	58.2	56.3	53.8	53.8	52.5	50.6
82.5°	75.0	70.1	56.6	49.5	46.4	44.1	42.8	41.3	40.8	41.0	39.7
85°	39.4	31.9	28.2	26.9	25.0	23.8	24.4	23.1	23.1	23.1	22.5
87.5°	12.3	9.9	9.6	9.2	10.0	10.4	10.2	10.6	11.3	10.8	11.3
90°	1.2	2.1	3.0	3.9	5.2	6.8	8.4	10.0	11.7	11.5	11.4
92.5°	6.6	7.3	7.9	8.6	9.0	9.4	9.8	10.2	10.6	10.7	10.7
95°	18.1	18.8	19.5	20.3	20.7	20.8	21.0	21.2	21.3	21.3	21.3
97.5°	32.3	32.9	33.6	34.2	34.7	35.0	35.3	35.5	35.8	35.8	35.8
100°	42.9	43.5	44.1	44.7	45.1	45.2	45.5	45.7	46.0	46.0	46.0
102.5°	53.9	54.4	54.9	55.3	55.8	56.0	56.3	56.6	56.8	56.9	57.0
105°	71.8	72.0	72.3	72.5	72.7	72.9	73.0	73.1	73.2	73.4	73.5
107.5°	90.2	90.5	90.9	91.1	91.3	91.3	91.3	91.3	91.3	91.3	91.4
110°	102.0	102.5	102.9	103.3	103.6	103.6	103.6	103.6	103.6	103.6	103.6



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	114.8	115.3	115.6	116.1	116.3	116.2	116.2	116.1	116.1	115.9	115.7
115°	133.7	134.1	134.5	135.0	135.2	135.0	134.8	134.7	134.5	134.5	134.4
117.5°	152.6	153.2	153.7	154.4	154.5	154.0	153.6	153.2	152.8	152.6	152.4
120°	165.1	165.7	166.3	166.8	166.8	166.3	165.7	165.1	164.5	164.5	164.5
122.5°	176.6	177.4	178.0	178.8	179.0	178.5	178.1	177.7	177.3	177.1	176.9
125°	194.4	195.1	195.8	196.4	196.7	196.4	196.2	196.0	195.8	195.6	195.4
127.5°	212.1	212.9	213.7	214.5	214.8	214.6	214.3	214.1	213.8	213.5	213.3
130°	223.1	224.0	225.0	225.9	226.4	226.2	226.1	225.9	225.7	225.6	225.5
132.5°	235.2	235.9	236.7	237.5	237.9	237.9	238.0	238.0	238.0	237.7	237.3
135°	251.6	252.4	253.2	254.0	254.5	254.7	254.8	255.0	255.1	255.0	255.0
137.5°	268.6	269.3	270.0	270.7	271.1	271.3	271.5	271.6	271.8	271.8	271.7
140°	279.1	279.7	280.4	281.1	281.5	281.9	282.3	282.7	283.0	283.0	283.0
142.5°	289.7	290.4	291.1	291.7	292.2	292.4	292.7	292.9	293.1	293.2	293.3
145°	304.9	305.4	305.9	306.4	306.9	307.4	307.8	308.2	308.7	308.8	308.9
147.5°	318.7	319.2	319.9	320.5	320.9	321.2	321.6	321.9	322.2	322.3	322.4
150°	327.8	328.2	328.7	329.1	329.5	329.8	330.1	330.4	330.6	330.9	331.1
152.5°	336.0	336.5	337.0	337.3	337.8	338.1	338.5	338.8	339.2	339.5	339.8
155°	348.2	348.5	348.6	348.8	349.1	349.3	349.5	349.8	350.0	350.3	350.7
157.5°	358.7	358.8	359.0	359.2	359.3	359.5	359.6	359.7	359.9	360.3	360.8
160°	365.1	365.2	365.4	365.5	365.7	365.7	365.8	365.9	366.0	366.4	366.8
162.5°	370.9	370.9	370.9	371.0	371.0	371.1	371.2	371.3	371.3	371.8	372.3
165°	378.5	378.4	378.4	378.3	378.2	378.2	378.2	378.2	378.2	378.8	379.3
167.5°	384.9	384.7	384.5	384.3	384.2	384.1	384.1	384.1	384.1	384.6	385.1
170°	388.4	388.1	388.0	387.8	387.6	387.5	387.4	387.4	387.3	387.8	388.3
172.5°	390.8	390.6	390.3	390.1	389.9	389.9	389.8	389.7	389.6	390.2	390.7
175°	393.7	393.5	393.2	393.0	392.9	392.8	392.6	392.4	392.3	392.8	393.3
177.5°	394.9	394.7	394.6	394.5	394.3	394.2	394.1	393.9	393.8	394.2	394.5
180°	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6	394.6



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9	1799.9
2.5°	1862.9	1869.4	1872.4	1872.4	1875.9	1874.4	1872.9
5°	1970.0	1981.9	1984.3	1995.6	2003.8	2001.2	2002.5
7.5°	2076.4	2095.6	2114.4	2123.1	2124.4	2129.4	2131.3
10°	2141.9	2157.6	2187.0	2182.6	2204.5	2217.0	2196.3
12.5°	2205.0	2226.1	2246.6	2252.1	2264.6	2268.5	2260.4
15°	2262.0	2273.3	2274.5	2271.4	2275.1	2272.0	2260.1
17.5°	2208.8	2190.5	2153.4	2135.9	2122.0	2101.6	2093.3
20°	2120.7	2066.9	2004.3	1979.3	1949.9	1892.4	1906.2
22.5°	1930.6	1869.3	1806.8	1733.7	1698.8	1644.3	1641.0
25°	1634.7	1529.1	1412.8	1331.4	1283.9	1229.5	1205.7
27.5°	1271.0	1137.9	1042.6	994.4	950.5	907.3	905.6
30°	1031.9	931.8	858.0	816.7	789.9	771.8	775.5
32.5°	869.8	801.3	751.5	717.2	697.3	683.6	683.4
35°	711.1	664.1	632.3	617.8	603.5	593.5	594.1
37.5°	608.5	580.3	562.6	546.7	537.7	532.8	530.1
40°	556.0	532.8	519.1	509.7	502.2	495.3	494.1
42.5°	514.4	495.3	481.5	474.2	467.1	462.3	461.0
45°	456.6	440.9	428.4	420.3	417.2	412.7	412.7
47.5°	406.1	390.8	381.0	375.9	370.5	367.6	367.5
50°	372.1	360.2	351.5	348.4	343.9	342.0	341.5
52.5°	341.6	332.7	326.5	324.3	322.4	320.1	320.5
55°	300.2	295.2	292.7	290.8	287.7	283.9	286.4
57.5°	265.3	261.0	254.3	248.4	245.5	242.9	243.9
60°	240.8	232.1	223.3	216.4	214.5	208.9	208.9
62.5°	209.7	197.5	186.7	182.9	181.0	178.3	177.9
65°	161.4	156.4	153.8	151.4	150.1	150.1	148.8
67.5°	133.7	131.7	128.9	128.4	127.1	126.7	126.3
70°	118.2	115.6	114.4	113.9	112.5	113.2	111.3
72.5°	103.2	101.2	100.9	99.3	98.6	98.7	97.3
75°	81.3	81.3	80.7	80.0	78.8	78.1	78.8
77.5°	62.6	62.7	61.5	61.5	61.3	61.5	60.8
80°	50.0	50.6	50.0	49.4	48.8	49.4	48.8
82.5°	39.5	38.6	38.5	38.4	38.3	37.9	37.8
85°	22.5	23.1	22.5	21.9	21.9	21.9	22.5
87.5°	10.7	10.7	10.7	10.7	10.7	10.7	10.3
90°	11.2	11.0	11.0	11.1	11.2	11.2	11.3
92.5°	10.7	10.7	10.7	10.7	10.7	10.7	10.7
95°	21.3	21.3	21.2	21.1	20.9	20.8	20.6
97.5°	35.8	35.8	35.8	35.8	35.8	35.8	35.7
100°	46.0	46.0	45.9	45.8	45.8	45.7	45.6
102.5°	57.0	57.1	57.1	57.0	56.9	56.9	56.8
105°	73.7	73.9	73.9	73.9	73.9	73.9	73.9
107.5°	91.5	91.5	91.4	91.0	90.8	90.4	90.0
110°	103.6	103.6	103.5	103.2	103.0	102.8	102.5



TEST NUMBER: P331706-830

CATALOG NUMBER: SA2XXRDIP-C865D330U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	115.6	115.4	115.2	115.1	114.9	114.7	114.5
115°	134.3	134.2	134.1	133.8	133.7	133.5	133.2
117.5°	152.2	152.0	151.8	151.7	151.5	151.2	151.0
120°	164.5	164.5	164.4	164.2	163.9	163.7	163.5
122.5°	176.7	176.5	176.4	176.3	176.1	175.9	175.8
125°	195.1	194.9	194.7	194.7	194.6	194.5	194.4
127.5°	213.0	212.7	212.4	212.3	212.0	211.8	211.5
130°	225.4	225.2	225.0	224.7	224.3	224.0	223.8
132.5°	237.0	236.8	236.5	236.2	236.0	235.7	235.5
135°	254.9	254.8	254.7	254.4	254.2	254.0	253.7
137.5°	271.6	271.6	271.5	271.2	270.9	270.6	270.2
140°	283.0	283.0	282.9	282.6	282.3	282.0	281.7
142.5°	293.3	293.4	293.3	293.0	292.7	292.4	292.1
145°	308.9	309.0	308.9	308.6	308.3	308.0	307.6
147.5°	322.6	322.8	322.7	322.4	322.2	321.9	321.6
150°	331.3	331.6	331.6	331.3	331.1	330.9	330.6
152.5°	340.1	340.4	340.4	340.1	339.8	339.5	339.2
155°	351.1	351.5	351.6	351.3	351.1	350.9	350.6
157.5°	361.4	361.8	361.9	361.6	361.2	360.9	360.5
160°	367.3	367.8	367.8	367.5	367.2	366.9	366.6
162.5°	372.8	373.3	373.3	373.1	372.7	372.3	371.9
165°	379.8	380.3	380.4	380.0	379.7	379.3	379.0
167.5°	385.6	386.2	386.3	385.9	385.4	385.0	384.7
170°	388.8	389.4	389.4	389.0	388.5	388.0	387.6
172.5°	391.2	391.7	391.8	391.3	390.9	390.5	390.0
175°	393.8	394.4	394.4	394.0	393.5	393.0	392.6
177.5°	394.8	395.2	395.2	394.8	394.5	394.2	393.8
180°	394.6	394.6	394.6	394.6	394.6	394.6	394.6

(END OF REPORT)