

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331716-830

Luminaire Tested: **SA2XXRDIP-C865D530U830-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331716-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C865D530U830-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 530 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4790.0 lumens
Efficiency: N/A
Efficacy: 98.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331716-830
CATALOG NUMBER: SA2XXRDIP-C865D530U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

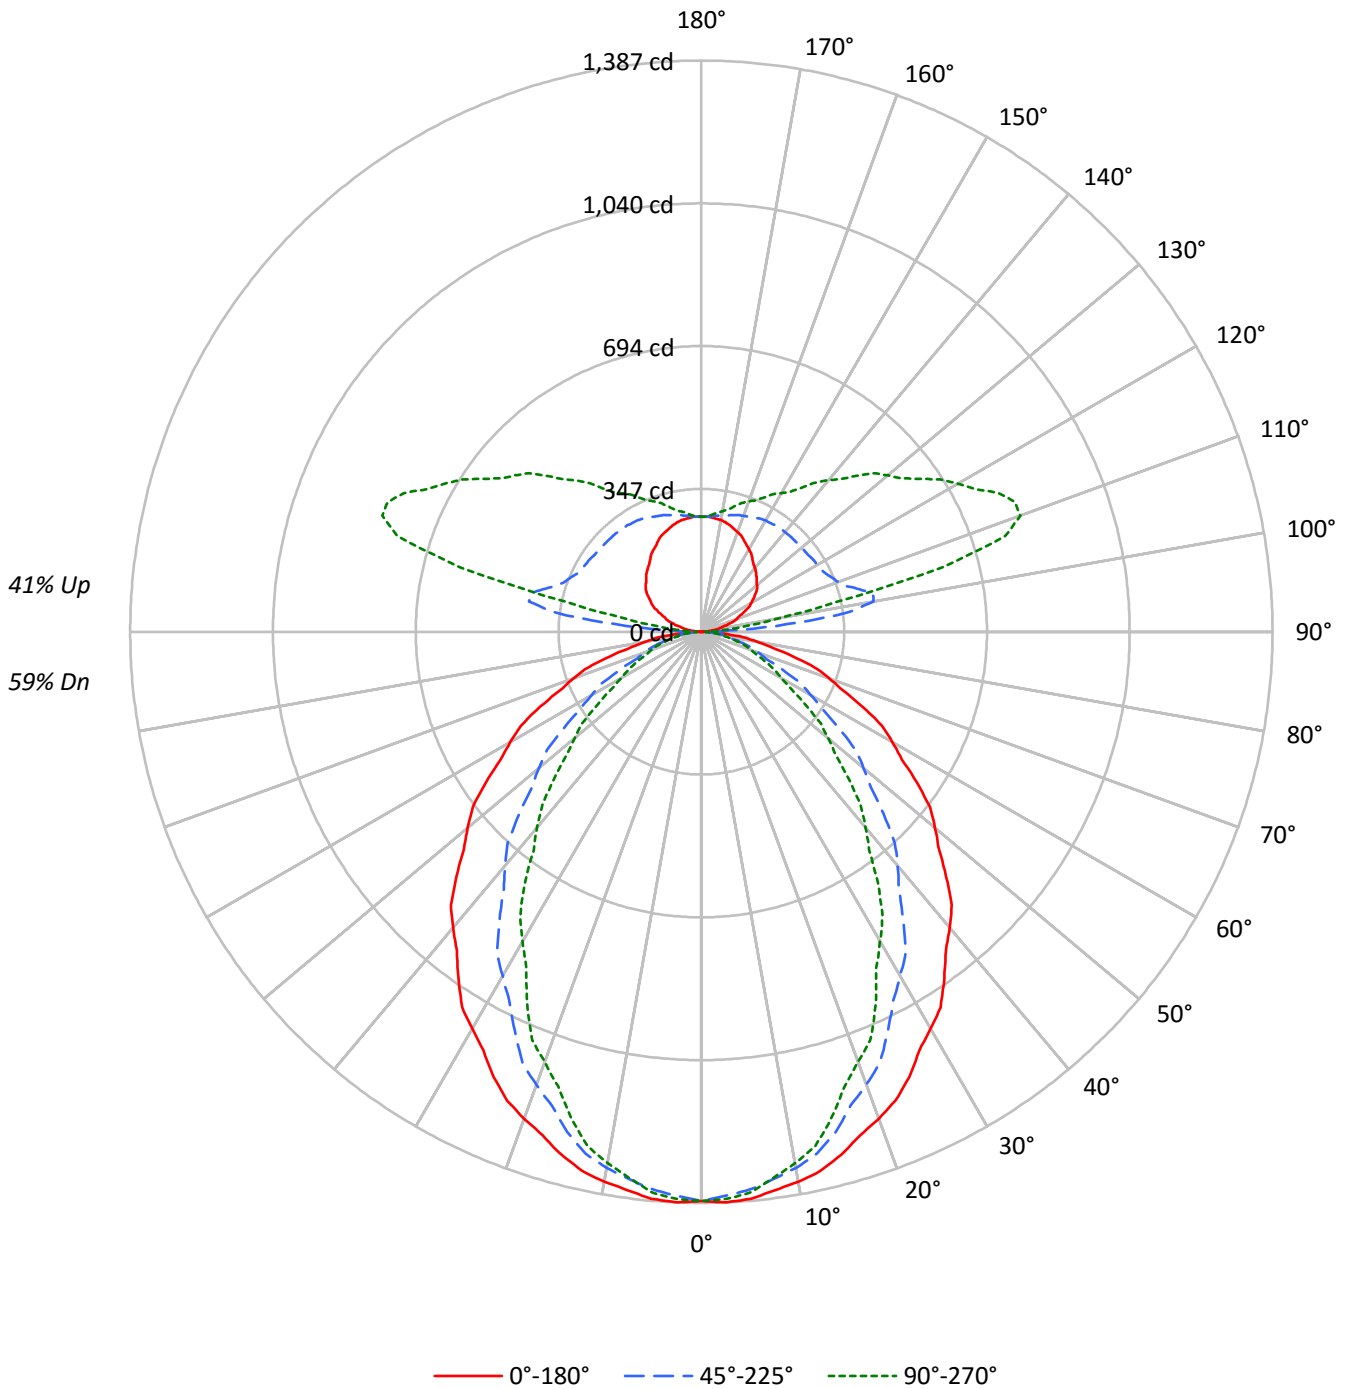



TEST NUMBER: P331716-830

CATALOG NUMBER: SA2XXRDIP-C865D530U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	89	89	89	76	76	76	65	65	65	59
1	100	96	93	89	94	90	87	84	79	76	74	68	66	65	58	57	56	51
2	92	85	79	74	86	79	74	70	69	66	62	60	57	55	52	50	48	44
3	84	75	68	62	78	70	64	59	62	57	53	54	50	47	46	44	41	38
4	77	67	59	53	72	63	56	51	55	50	46	48	44	41	42	39	36	33
5	71	60	52	46	66	56	49	44	50	44	40	44	39	36	38	35	32	29
6	66	54	46	40	61	51	44	39	45	39	35	40	35	32	35	31	28	26
7	61	49	41	36	57	46	39	34	41	35	31	36	32	28	32	28	25	23
8	57	45	37	32	53	42	35	31	38	32	28	33	29	25	29	26	23	21
9	53	41	34	29	50	39	32	27	35	29	25	31	26	23	27	24	21	19
10	50	38	31	26	47	36	29	25	32	27	23	29	24	21	25	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22315	22315	22315
5°	22400	22034	22156
10°	22228	21674	21489
15°	21972	21031	20425
20°	21618	20113	19105
25°	21257	19073	17826
30°	20752	18000	16183
35°	20262	16837	14741
40°	19770	15633	13076
45°	19192	14280	11565
50°	18600	12913	10083
55°	17990	11443	8659
60°	17286	9894	7188
65°	16485	8313	6548
70°	15526	6850	6019
75°	14361	6245	5614
80°	12673	5579	5114
85°	9967	4409	4409



TEST NUMBER: P331716-830

CATALOG NUMBER: SA2XXRDIP-C865D530U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.4	2.7
10°-20°	355.2	7.4
20°-30°	498.8	10.4
30°-40°	543.9	11.4
40°-50°	500.1	10.4
50°-60°	392.8	8.2
60°-70°	256.1	5.3
70°-80°	132.0	2.8
80°-90°	36.8	0.8
90°-100°	111.8	2.3
100°-110°	379.3	7.9
110°-120°	402.9	8.4
120°-130°	331.7	6.9
130°-140°	266.3	5.6
140°-150°	201.3	4.2
150°-160°	141.4	3.0
160°-170°	83.3	1.7
170°-180°	27.1	0.6
0°-30°	983.3	20.5
0°-40°	1527.2	31.9
0°-60°	2420.1	50.5
0°-90°	2845.0	59.4
90°-120°	893.9	18.7
90°-150°	1693.2	35.3
90°-180°	1945.0	40.6
0°-180°	4790.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1382	1382	1382	1382	1382	
5°	1382	1375	1360	1370	1367	131
15°	1314	1299	1258	1235	1222	370
25°	1193	1151	1071	1021	1001	548
35°	1028	962	854	778	748	643
45°	840	754	625	540	506	649
55°	639	539	406	334	308	571
65°	432	330	218	177	171	428
75°	230	145	100	92	90	244
85°	54	29	24	24	24	63
90°	1	7	18	17	18	3
95°	19	46	211	80	61	20
105°	66	99	398	712	606	70
115°	116	146	333	688	797	115
125°	161	191	320	557	647	143
135°	189	226	317	468	536	146
145°	216	248	315	391	428	136
155°	246	265	306	346	360	113
165°	268	276	293	311	316	75
175°	279	279	282	285	284	26
180°	280	280	280	280	280	



TEST NUMBER: P331716-830

CATALOG NUMBER: SA2XXRDIP-C865D530U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1
2.5°	1387.0	1385.9	1384.8	1383.7	1382.6	1380.8	1378.4	1375.9	1373.5	1371.0	1373.3
5°	1382.1	1380.6	1379.2	1377.8	1376.5	1373.9	1370.4	1366.8	1363.1	1359.5	1362.0
7.5°	1367.7	1366.0	1364.3	1362.6	1360.8	1357.9	1353.7	1349.4	1345.2	1341.0	1341.7
10°	1355.8	1353.8	1351.9	1349.9	1347.9	1344.3	1338.7	1333.1	1327.6	1322.0	1321.2
12.5°	1340.8	1338.3	1336.0	1333.6	1331.2	1326.4	1319.3	1312.2	1305.0	1298.0	1296.5
15°	1314.5	1311.5	1308.3	1305.3	1302.2	1296.0	1286.6	1277.1	1267.6	1258.2	1252.9
17.5°	1282.2	1277.5	1272.9	1268.2	1263.6	1255.2	1243.0	1230.9	1218.8	1206.6	1200.4
20°	1258.2	1252.6	1247.1	1241.5	1236.0	1226.2	1212.3	1198.4	1184.6	1170.6	1163.7
22.5°	1232.2	1226.0	1219.7	1213.5	1207.3	1196.4	1180.6	1165.0	1149.3	1133.6	1124.6
25°	1193.2	1184.3	1175.4	1166.5	1157.6	1144.0	1125.6	1107.3	1088.9	1070.6	1059.2
27.5°	1146.1	1136.4	1126.8	1117.1	1107.5	1092.3	1071.6	1050.9	1030.2	1009.6	996.3
30°	1113.1	1102.6	1092.0	1081.5	1070.9	1054.5	1032.3	1010.0	987.8	965.5	951.4
32.5°	1081.1	1068.7	1056.4	1044.1	1031.7	1014.3	991.6	968.8	946.2	923.5	907.4
35°	1028.0	1013.9	999.8	985.5	971.4	952.1	927.6	903.1	878.7	854.2	836.7
37.5°	975.1	959.5	944.0	928.3	912.8	891.9	865.9	839.8	813.8	787.7	768.4
40°	938.0	921.3	904.7	888.0	871.3	849.5	822.6	795.6	768.6	741.7	721.9
42.5°	900.0	882.4	864.9	847.3	829.7	807.0	779.2	751.3	723.5	695.6	675.2
45°	840.5	821.8	803.2	784.6	766.0	742.1	712.9	683.7	654.5	625.4	605.6
47.5°	782.4	762.7	743.0	723.2	703.5	678.5	648.5	618.3	588.1	558.1	538.5
50°	740.5	720.7	701.0	681.2	661.5	636.3	605.8	575.1	544.6	514.1	494.8
52.5°	699.4	678.7	658.2	637.5	616.9	591.6	561.8	531.8	501.9	472.0	453.5
55°	639.1	617.5	595.8	574.1	552.4	526.5	496.5	466.5	436.5	406.5	389.8
57.5°	577.3	555.1	532.8	510.6	488.4	462.9	433.9	405.1	376.3	347.4	332.2
60°	535.3	513.0	490.9	468.6	446.4	420.9	392.3	363.6	335.1	306.4	292.3
62.5°	494.3	472.0	449.8	427.5	405.3	380.6	353.3	326.0	298.7	271.4	257.9
65°	431.5	409.0	386.4	363.9	341.5	317.6	292.7	267.7	242.6	217.6	208.2
67.5°	371.0	348.6	326.3	303.9	281.5	259.1	236.7	214.1	191.6	169.1	164.8
70°	328.9	307.3	285.6	263.9	242.2	221.8	202.6	183.4	164.3	145.1	142.3
72.5°	288.9	268.2	247.3	226.6	205.8	187.7	172.3	156.8	141.5	126.1	123.8
75°	230.2	210.7	191.2	171.7	152.3	137.9	128.4	118.9	109.5	100.1	98.1
77.5°	172.4	155.2	138.2	121.1	104.1	93.3	88.7	84.2	79.6	75.0	73.9
80°	136.3	122.2	108.0	93.8	79.6	71.2	68.3	65.6	62.8	60.0	58.9
82.5°	103.3	92.3	81.2	70.1	59.1	52.6	50.7	48.8	46.9	45.1	44.4
85°	53.8	48.0	42.1	36.3	30.4	27.1	26.3	25.4	24.6	23.8	23.8
87.5°	16.1	14.7	13.3	11.8	10.2	9.6	10.2	10.9	11.6	11.7	11.3
90°	0.6	2.2	4.3	5.4	6.4	8.1	10.7	14.5	17.7	18.3	17.7
92.5°	6.6	9.4	13.3	15.7	19.3	24.4	36.6	53.6	68.9	69.8	59.0
95°	18.9	20.9	26.3	31.2	39.8	52.7	77.4	124.1	186.5	210.8	184.4
97.5°	30.6	33.6	39.2	46.6	56.5	71.1	102.2	167.3	270.9	359.7	377.3
100°	41.4	43.0	47.9	56.5	67.2	82.3	110.7	176.3	292.4	424.6	502.0
102.5°	51.3	52.5	57.3	65.9	77.1	92.1	118.5	176.7	284.3	426.8	548.5
105°	65.6	67.8	71.4	79.6	91.3	106.4	131.7	179.6	268.2	398.3	541.3
107.5°	81.1	82.8	86.4	93.9	105.6	120.7	145.2	186.9	260.2	367.8	494.1
110°	91.3	93.5	96.8	103.8	115.0	130.6	154.3	192.9	258.5	353.2	464.4



TEST NUMBER: P331716-830

CATALOG NUMBER: SA2XXRDIP-C865D530U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	100.9	103.0	106.6	113.2	124.0	140.1	162.9	199.4	259.0	343.7	443.7
115°	115.6	118.3	121.5	127.9	138.6	153.2	176.3	209.1	261.3	333.3	418.2
117.5°	130.8	133.0	136.2	141.9	152.2	167.3	188.7	219.4	265.1	328.2	402.1
120°	140.3	142.4	145.6	150.5	161.3	176.3	197.3	226.3	267.7	325.2	393.5
122.5°	149.3	151.1	154.3	159.6	170.3	185.8	205.5	232.3	270.7	323.5	386.2
125°	161.3	162.9	166.1	172.6	183.3	198.3	217.7	241.9	275.2	320.4	375.7
127.5°	170.7	172.9	177.4	184.5	194.8	210.3	229.1	250.8	279.8	318.6	366.1
130°	176.3	178.4	183.8	191.3	202.1	217.2	236.0	256.4	283.2	317.6	359.6
132.5°	181.4	184.1	189.8	197.8	209.0	224.0	242.0	262.0	286.7	317.3	354.4
135°	189.2	191.3	197.8	205.9	218.2	233.3	250.5	269.3	290.8	316.6	347.2
137.5°	196.5	199.1	205.6	214.1	226.4	240.3	257.4	274.8	294.5	316.5	342.1
140°	202.1	204.2	210.8	219.3	231.1	245.2	261.3	277.9	296.1	316.0	339.2
142.5°	207.7	209.4	215.5	224.0	235.4	248.5	264.3	280.5	297.5	316.0	336.2
145°	216.1	218.2	223.6	231.7	242.4	254.2	268.7	283.8	298.9	315.0	332.2
147.5°	225.1	226.7	231.9	239.3	248.3	258.7	272.4	285.7	299.3	313.0	328.1
150°	231.1	232.7	237.0	244.0	252.1	261.7	274.1	286.5	298.9	311.8	324.7
152.5°	237.1	237.9	242.2	248.4	256.0	264.8	275.9	286.9	298.0	309.6	321.7
155°	245.6	246.2	249.4	255.3	261.3	269.3	278.4	287.6	296.7	305.9	316.0
157.5°	252.7	253.3	255.9	261.0	265.8	272.5	280.2	287.6	294.3	302.0	310.8
160°	257.5	258.0	260.1	264.5	268.7	274.7	281.2	287.6	292.9	299.4	306.9
162.5°	262.2	261.8	264.0	267.5	271.4	276.0	281.5	287.1	291.6	297.3	303.5
165°	267.7	267.1	268.2	271.5	274.1	277.4	282.2	286.0	289.2	292.9	297.7
167.5°	272.2	271.5	272.5	274.6	276.5	278.5	282.1	285.2	286.7	289.2	292.2
170°	275.2	274.1	274.7	276.3	277.4	279.0	281.6	284.4	285.4	287.0	289.2
172.5°	276.9	276.3	276.0	277.6	278.2	279.4	281.3	283.0	283.7	284.5	286.2
175°	279.0	278.4	277.9	279.0	279.0	279.5	280.6	281.6	281.2	281.6	282.2
177.5°	279.9	279.1	278.6	279.5	279.5	279.5	279.9	280.8	279.9	279.5	279.9
180°	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5



TEST NUMBER: P331716-830
 CATALOG NUMBER: SA2XXRDIP-C865D530U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1	1382.1
2.5°	1375.5	1377.7	1379.9	1380.8	1380.4	1379.9	1379.5	1379.0
5°	1364.5	1367.0	1369.5	1370.4	1369.5	1368.7	1367.8	1367.0
7.5°	1342.5	1343.1	1343.9	1343.5	1342.1	1340.7	1339.2	1337.8
10°	1320.3	1319.5	1318.6	1317.4	1315.7	1314.1	1312.4	1310.7
12.5°	1295.0	1293.5	1291.9	1289.9	1287.0	1284.3	1281.5	1278.7
15°	1247.6	1242.4	1237.1	1233.0	1230.3	1227.5	1224.7	1221.9
17.5°	1194.1	1187.8	1181.6	1176.0	1171.2	1166.5	1161.7	1156.9
20°	1156.8	1149.8	1142.8	1136.3	1130.2	1124.1	1117.9	1111.9
22.5°	1115.8	1106.8	1097.9	1091.1	1086.6	1081.9	1077.4	1072.9
25°	1047.8	1036.4	1025.0	1017.2	1013.0	1008.9	1004.8	1000.6
27.5°	983.0	969.7	956.4	946.5	939.9	933.2	926.6	920.0
30°	937.2	923.0	908.8	898.0	890.5	883.0	875.5	868.0
32.5°	891.2	875.0	858.8	847.2	840.2	833.1	826.0	819.0
35°	819.2	801.7	784.2	772.4	766.3	760.2	754.0	747.9
37.5°	749.1	729.8	710.6	697.4	690.4	683.3	676.4	669.4
40°	702.2	682.5	662.7	649.2	642.1	634.8	627.5	620.4
42.5°	654.9	634.4	614.1	600.3	593.3	586.4	579.3	572.3
45°	585.9	566.2	546.4	533.2	526.5	519.9	513.2	506.5
47.5°	518.8	499.2	479.6	466.7	460.7	454.6	448.6	442.5
50°	475.7	456.5	437.3	424.8	419.0	413.1	407.3	401.4
52.5°	435.0	416.5	397.9	386.1	380.6	375.2	369.9	364.5
55°	373.2	356.5	339.8	328.8	323.5	318.2	312.9	307.6
57.5°	316.9	301.6	286.3	276.4	272.0	267.5	263.1	258.6
60°	278.1	263.9	249.7	240.4	235.9	231.5	227.1	222.6
62.5°	244.4	230.9	217.4	209.2	206.6	204.0	201.2	198.6
65°	198.7	189.3	179.8	174.7	173.8	173.1	172.2	171.4
67.5°	160.4	156.1	151.7	149.1	148.3	147.3	146.5	145.6
70°	139.5	136.8	133.9	132.1	130.9	129.8	128.7	127.5
72.5°	121.4	119.0	116.7	115.3	114.5	113.9	113.2	112.5
75°	96.1	94.3	92.3	91.1	90.9	90.6	90.3	90.0
77.5°	72.9	71.7	70.6	69.8	69.4	68.9	68.5	68.1
80°	57.8	56.7	55.6	55.0	55.0	55.0	55.0	55.0
82.5°	43.7	43.0	42.3	42.0	42.0	42.0	42.0	42.0
85°	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8
87.5°	11.0	10.6	10.6	10.6	10.6	10.6	10.6	10.6
90°	17.2	16.1	17.2	17.7	17.7	17.7	17.7	17.7
92.5°	46.8	40.2	35.7	32.3	32.0	30.3	30.6	29.8
95°	140.8	108.0	85.5	73.6	66.6	62.4	60.7	61.3
97.5°	328.7	268.9	210.8	171.9	146.2	133.0	125.2	120.6
100°	490.8	424.1	350.4	285.4	240.8	217.7	202.1	192.5
102.5°	597.0	581.9	528.1	459.1	410.7	371.2	351.8	338.7
105°	653.1	713.8	720.9	703.0	669.8	636.4	613.3	605.8
107.5°	612.7	704.2	760.1	786.1	790.2	788.4	783.8	773.8
110°	577.9	674.0	742.8	786.9	810.0	820.3	825.1	824.5



TEST NUMBER: P331716-830

CATALOG NUMBER: SA2XXRDIP-C865D530U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	546.0	638.4	711.9	762.4	794.6	811.6	820.8	823.7
115°	506.9	589.7	660.1	715.5	753.6	778.4	792.3	797.1
117.5°	477.4	550.1	614.0	665.9	704.8	730.9	745.6	749.7
120°	462.8	529.4	586.4	635.4	673.0	698.2	713.8	719.2
122.5°	451.2	512.3	566.2	610.4	644.1	669.0	682.9	687.4
125°	434.3	489.7	537.0	577.3	608.5	628.9	642.3	646.7
127.5°	417.6	467.8	512.4	549.6	576.7	595.9	607.5	611.0
130°	406.9	453.2	495.6	531.0	557.4	575.7	586.4	590.7
132.5°	396.6	439.4	478.4	511.7	537.6	555.9	565.8	569.7
135°	382.2	417.6	453.2	483.2	506.3	524.1	533.8	535.9
137.5°	370.7	400.4	428.5	454.8	475.8	491.1	499.5	502.8
140°	363.4	389.2	413.9	437.5	454.8	468.7	476.7	480.0
142.5°	357.3	379.3	400.6	420.4	436.7	449.4	456.6	457.2
145°	348.8	366.6	383.2	398.9	411.7	420.8	426.2	427.8
147.5°	342.3	356.3	369.3	380.7	391.3	398.6	402.3	403.2
150°	337.5	349.4	360.7	370.3	378.4	384.8	388.0	388.6
152.5°	332.8	343.8	353.4	361.7	368.1	373.7	376.1	376.2
155°	326.3	334.9	342.9	348.8	354.8	358.5	360.7	359.6
157.5°	318.7	325.8	332.6	337.2	341.4	344.6	345.5	345.5
160°	313.9	319.8	325.7	329.5	333.3	335.9	336.5	336.5
162.5°	309.2	314.2	319.3	322.2	325.9	327.8	328.3	327.9
165°	302.1	305.9	309.6	311.8	313.9	316.0	316.0	315.6
167.5°	295.3	298.2	300.8	302.7	303.7	304.9	304.8	304.2
170°	291.9	293.5	295.7	296.7	297.3	298.9	298.3	297.3
172.5°	288.0	289.2	290.9	291.5	292.1	292.8	292.3	291.6
175°	283.8	284.4	284.9	285.4	285.4	286.0	285.4	284.4
177.5°	280.8	280.8	281.3	281.3	281.3	281.3	280.8	279.9
180°	279.5	279.5	279.5	279.5	279.5	279.5	279.5	279.5

(END OF REPORT)