

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331329-930

Luminaire Tested: **SA2XXDIP-C485D1080U930-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331329-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXDIP-C485D1080U930-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1080 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5042.6 lumens  
Efficiency: N/A  
Efficacy: 102.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 49.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331329-930  
CATALOG NUMBER: SA2XXDIP-C485D1080U930-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

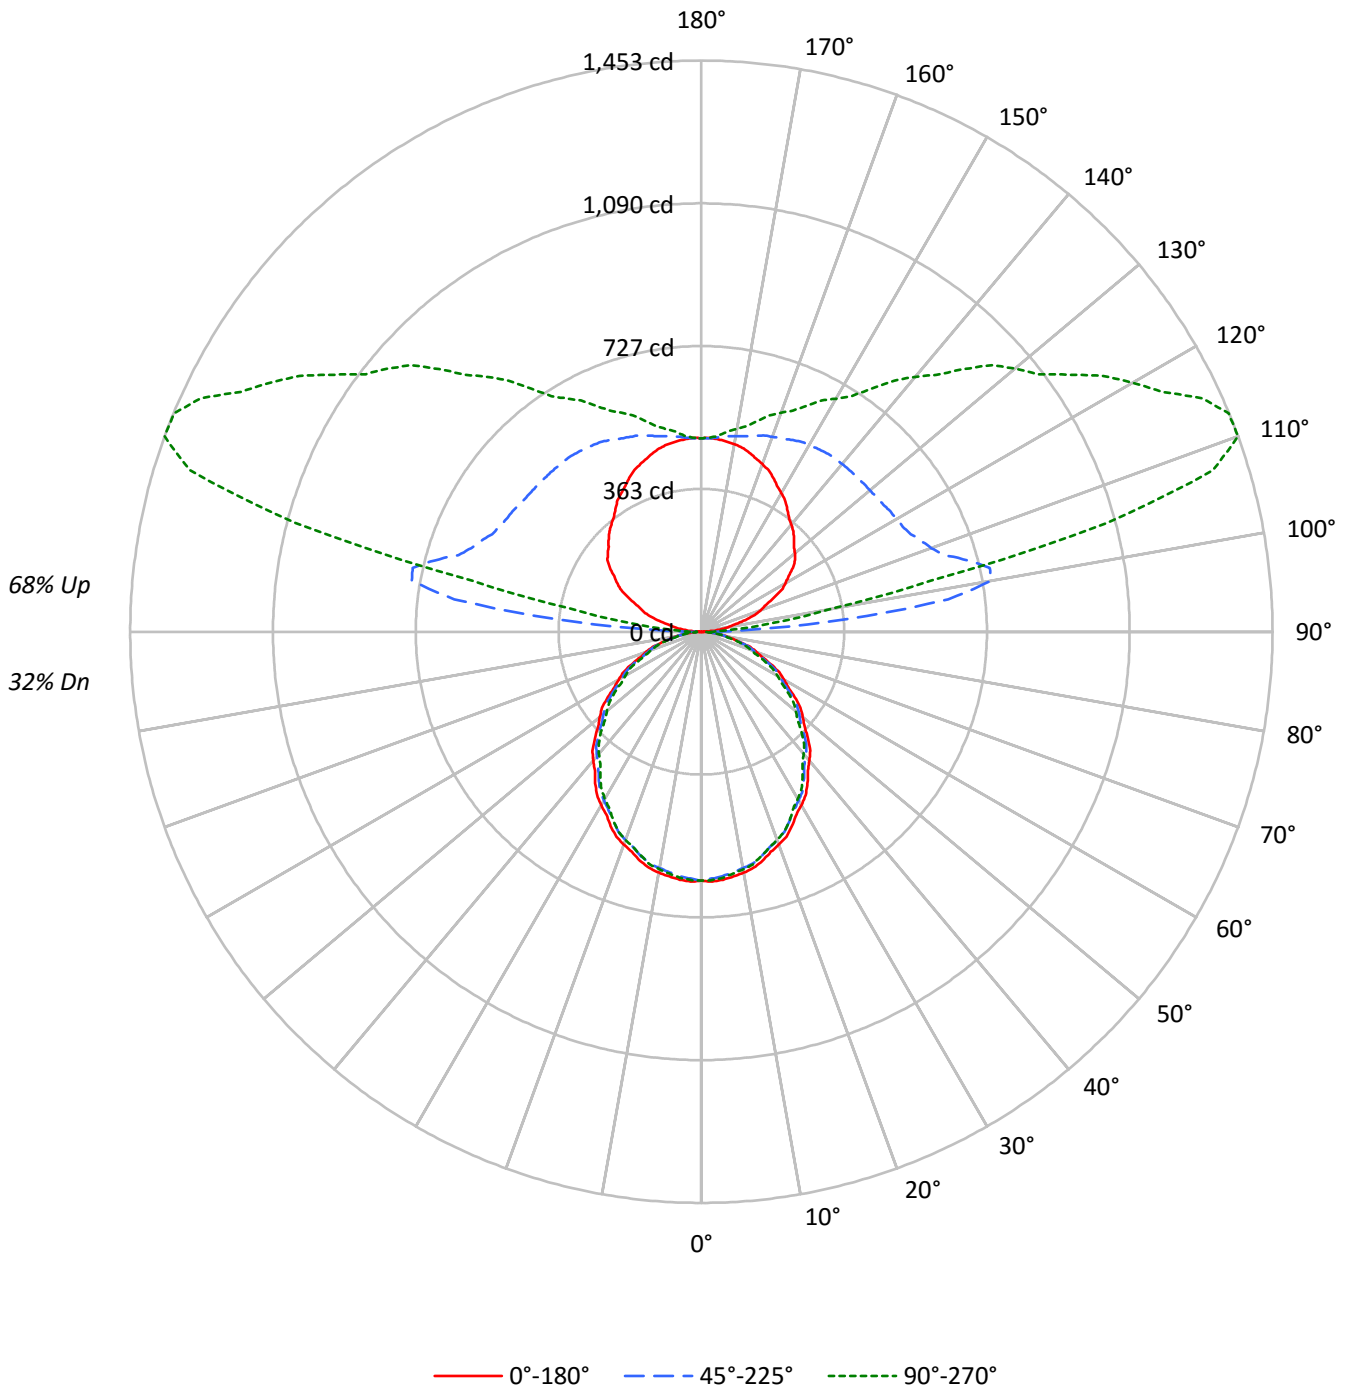



TEST NUMBER: P331329-930

CATALOG NUMBER: SA2XXDIP-C485D1080U930-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	73	73	73	56	56	56	40	40	40	32
1	94	90	86	82	84	81	78	75	64	62	60	49	48	46	35	34	33	27
2	85	78	72	67	77	70	65	61	56	53	50	43	41	39	31	29	28	23
3	78	69	62	56	70	62	56	51	50	45	42	38	35	33	27	25	24	19
4	71	61	53	47	64	55	48	43	44	39	35	34	31	28	24	22	21	16
5	65	54	46	40	58	49	42	37	39	34	30	30	27	24	22	20	18	14
6	60	48	40	35	54	44	37	32	35	30	26	27	24	21	20	18	16	13
7	55	43	36	30	50	39	33	28	32	27	23	25	21	19	18	16	14	11
8	51	39	32	27	46	36	29	25	29	24	20	23	19	16	17	14	12	10
9	48	36	29	24	43	33	26	22	26	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	19	24	20	16	19	16	13	14	12	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10224	10224	10224
5°	10263	10115	10175
10°	10203	10012	10063
15°	10076	9884	9872
20°	9897	9689	9677
25°	9720	9449	9449
30°	9491	9229	9148
35°	9278	8966	8834
40°	9010	8703	8534
45°	8745	8439	8229
50°	8457	8166	7877
55°	8158	7848	7561
60°	7824	7472	7195
65°	7465	7095	6770
70°	7010	6637	6326
75°	6382	6114	5964
80°	5662	5486	5207
85°	4613	4390	3946



TEST NUMBER: P331329-930

CATALOG NUMBER: SA2XXDIP-C485D1080U930-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	59.5	1.2
10°-20°	167.6	3.3
20°-30°	246.3	4.9
30°-40°	286.1	5.7
40°-50°	285.8	5.7
50°-60°	249.2	4.9
60°-70°	184.3	3.7
70°-80°	104.4	2.1
80°-90°	32.5	0.6
90°-100°	196.9	3.9
100°-110°	668.2	13.3
110°-120°	709.9	14.1
120°-130°	584.4	11.6
130°-140°	469.3	9.3
140°-150°	354.6	7.0
150°-160°	249.2	4.9
160°-170°	146.7	2.9
170°-180°	47.8	0.9
0°-30°	473.4	9.4
0°-40°	759.4	15.1
0°-60°	1294.4	25.7
0°-90°	1615.5	32.0
90°-120°	1575.1	31.2
90°-150°	2983.4	59.2
90°-180°	3427.0	68.0
0°-180°	5042.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	633	633	633	633	633	
5°	633	631	624	629	628	60
15°	603	599	591	593	591	170
25°	546	540	530	531	530	251
35°	471	464	455	451	448	294
45°	383	378	370	363	360	295
55°	290	286	279	272	269	259
65°	195	192	186	180	177	193
75°	102	101	98	95	96	109
85°	25	24	24	22	21	29
90°	1	13	32	31	31	3
95°	33	81	371	140	108	35
105°	116	174	702	1254	1067	123
115°	204	257	587	1212	1405	202
125°	284	336	564	982	1139	252
135°	333	398	558	825	944	258
145°	381	438	555	689	754	239
155°	433	467	539	609	634	199
165°	472	486	516	547	556	133
175°	492	492	496	502	501	47
180°	492	492	492	492	492	



TEST NUMBER: P331329-930

CATALOG NUMBER: SA2XXDIP-C485D1080U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2
2.5°	636.2	635.6	635.1	634.5	634.0	633.2	631.9	630.8	629.6	628.4	629.5
5°	633.2	632.7	632.2	631.6	631.1	630.1	628.6	627.1	625.6	624.1	625.2
7.5°	627.6	626.8	626.0	625.1	624.3	623.1	621.6	620.1	618.6	617.0	618.2
10°	622.3	621.3	620.4	619.5	618.5	617.2	615.6	614.0	612.4	610.7	611.8
12.5°	615.0	614.2	613.3	612.5	611.6	610.4	608.8	607.2	605.5	603.9	604.6
15°	602.8	602.0	601.2	600.4	599.6	598.3	596.5	594.8	593.0	591.3	591.7
17.5°	587.2	586.4	585.6	584.8	584.0	582.7	580.9	579.1	577.3	575.5	576.2
20°	576.0	575.2	574.4	573.6	572.7	571.4	569.5	567.6	565.7	563.9	564.3
22.5°	564.8	563.7	562.6	561.4	560.3	558.8	557.0	555.2	553.4	551.6	551.7
25°	545.6	544.5	543.4	542.3	541.3	539.6	537.3	534.9	532.6	530.4	530.6
27.5°	523.7	522.7	521.7	520.7	519.8	518.4	516.6	514.7	512.9	511.1	510.7
30°	509.1	507.9	506.9	505.8	504.7	503.1	501.1	499.1	497.1	495.0	494.6
32.5°	493.4	492.6	491.7	490.8	490.0	488.4	486.3	484.2	482.1	480.0	479.2
35°	470.7	469.3	468.0	466.6	465.3	463.5	461.4	459.2	457.0	454.9	454.0
37.5°	445.0	443.8	442.6	441.4	440.2	438.5	436.3	434.2	432.0	429.9	428.8
40°	427.5	426.3	425.3	424.2	423.1	421.5	419.3	417.2	415.0	412.9	411.6
42.5°	410.4	409.3	408.2	407.2	406.1	404.5	402.3	400.1	397.9	395.7	394.4
45°	383.0	382.0	381.1	380.2	379.2	377.7	375.7	373.7	371.6	369.6	368.1
47.5°	355.7	354.8	353.9	353.0	352.1	350.7	348.5	346.4	344.3	342.2	340.6
50°	336.7	336.1	335.3	334.7	334.0	332.7	330.8	329.0	327.0	325.1	323.3
52.5°	318.2	317.3	316.4	315.5	314.6	313.3	311.5	309.7	307.9	306.1	304.6
55°	289.8	289.0	288.2	287.4	286.6	285.4	283.7	282.1	280.5	278.8	277.3
57.5°	261.3	260.7	260.0	259.4	258.8	257.6	255.8	254.0	252.2	250.4	248.7
60°	242.3	241.8	241.2	240.7	240.2	239.0	237.1	235.1	233.3	231.4	229.9
62.5°	223.8	223.0	222.1	221.2	220.4	219.2	217.8	216.3	214.8	213.4	212.0
65°	195.4	194.6	193.8	193.0	192.2	191.1	189.8	188.4	187.0	185.7	184.5
67.5°	166.6	165.9	165.3	164.6	164.0	163.1	161.8	160.6	159.4	158.2	157.3
70°	148.5	148.1	147.5	146.9	146.4	145.5	144.3	143.1	141.9	140.6	139.7
72.5°	130.0	129.6	129.0	128.4	127.9	127.3	126.5	125.6	124.9	124.1	123.1
75°	102.3	102.0	101.7	101.5	101.2	100.8	100.0	99.4	98.7	98.0	97.2
77.5°	77.5	77.0	76.6	76.1	75.6	75.3	75.0	74.7	74.4	74.2	73.8
80°	60.9	60.7	60.7	60.5	60.3	60.2	59.8	59.6	59.4	59.0	58.6
82.5°	45.3	45.2	45.2	45.2	45.2	45.1	44.9	44.8	44.6	44.4	43.9
85°	24.9	24.9	24.7	24.5	24.5	24.3	24.1	24.1	23.9	23.7	23.3
87.5°	9.0	9.3	9.9	10.0	10.2	10.5	11.3	12.4	13.3	13.3	12.7
90°	1.0	3.8	7.6	9.5	11.3	14.2	18.9	25.6	31.2	32.2	31.2
92.5°	11.6	16.6	23.5	27.6	34.1	43.0	64.4	94.5	121.4	123.1	104.0
95°	33.2	36.9	46.4	55.0	70.1	92.8	136.4	218.7	328.6	371.3	324.9
97.5°	54.0	59.1	69.1	82.0	99.5	125.2	179.9	294.7	477.4	633.8	664.9
100°	72.9	75.7	84.3	99.5	118.4	144.9	195.1	310.6	515.2	748.2	884.6
102.5°	90.3	92.5	100.9	116.1	135.8	162.3	208.7	311.4	500.8	752.0	966.5
105°	115.5	119.4	126.0	140.1	161.0	187.5	232.0	316.3	472.6	701.8	953.7
107.5°	142.8	145.9	152.3	165.3	186.1	212.7	255.9	329.4	458.6	648.0	870.6
110°	161.0	164.8	170.5	182.8	202.7	230.2	271.8	340.0	455.6	622.2	818.3



TEST NUMBER: P331329-930

CATALOG NUMBER: SA2XXDIP-C485D1080U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	177.7	181.5	187.9	199.4	218.6	246.8	287.0	351.4	456.3	605.6	782.0
115°	203.7	208.4	214.0	225.4	244.3	269.9	310.6	368.4	460.3	587.2	736.9
117.5°	230.6	234.3	240.0	250.1	268.2	294.7	332.4	386.6	467.1	578.3	708.4
120°	247.2	250.9	256.7	265.2	284.1	310.6	347.6	398.8	471.7	573.0	693.2
122.5°	263.1	266.1	271.8	281.1	300.0	327.3	362.0	409.4	477.0	570.0	680.4
125°	284.1	287.0	292.7	304.0	322.9	349.5	383.6	426.2	484.9	564.5	662.0
127.5°	300.8	304.6	312.6	325.1	343.2	370.5	403.7	441.9	493.1	561.3	645.0
130°	310.6	314.5	323.9	337.2	356.1	382.6	415.8	451.8	499.1	559.7	633.7
132.5°	319.8	324.3	334.5	348.5	368.3	394.8	426.4	461.6	505.2	559.0	624.5
135°	333.4	337.2	348.5	362.7	384.5	411.1	441.3	474.5	512.4	557.8	611.8
137.5°	346.3	350.8	362.2	377.3	398.9	423.5	453.5	484.4	518.9	557.7	602.9
140°	356.1	359.9	371.3	386.5	407.2	431.9	460.3	489.7	521.9	556.9	597.6
142.5°	366.0	369.0	379.6	394.8	414.8	438.0	465.6	494.2	524.2	556.9	592.3
145°	380.7	384.5	394.0	408.2	427.1	448.0	473.5	500.1	526.6	555.0	585.3
147.5°	396.6	399.5	408.5	421.7	437.4	455.9	480.0	503.3	527.3	551.6	578.1
150°	407.2	410.1	417.7	430.0	444.2	461.2	483.1	504.8	526.6	549.3	572.0
152.5°	417.8	419.2	426.7	437.6	451.0	466.5	486.1	505.6	525.1	545.5	566.7
155°	432.8	433.7	439.4	449.9	460.3	474.5	490.6	506.7	522.8	538.9	556.9
157.5°	445.3	446.3	450.9	459.9	468.2	480.2	493.8	506.7	518.4	532.1	547.6
160°	453.6	454.6	458.4	465.9	473.5	484.0	495.4	506.7	516.2	527.6	540.8
162.5°	462.0	461.5	465.2	471.2	478.1	486.2	496.1	506.0	513.9	523.7	534.8
165°	471.7	470.8	472.6	478.3	483.1	488.7	497.3	503.9	509.6	516.2	524.7
167.5°	479.6	478.5	480.2	483.8	487.2	490.8	497.0	502.6	505.2	509.6	514.9
170°	484.9	483.1	484.0	486.8	488.7	491.5	496.3	501.0	502.9	505.7	509.6
172.5°	488.0	486.8	486.2	489.1	490.2	492.3	495.5	498.7	499.9	501.2	504.3
175°	491.5	490.6	489.7	491.5	491.5	492.5	494.4	496.3	495.4	496.3	497.3
177.5°	493.3	491.7	491.0	492.5	492.5	492.5	493.3	494.8	493.3	492.5	493.3
180°	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5



TEST NUMBER: P331329-930

CATALOG NUMBER: SA2XXDIP-C485D1080U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2
2.5°	630.6	631.6	632.7	633.2	632.9	632.7	632.5	632.3
5°	626.3	627.4	628.4	628.8	628.6	628.3	628.0	627.8
7.5°	619.2	620.3	621.4	621.7	621.5	621.2	620.9	620.6
10°	612.9	614.0	615.1	615.4	615.0	614.6	614.2	613.8
12.5°	605.4	606.2	606.9	607.2	606.8	606.6	606.3	605.9
15°	592.3	592.9	593.4	593.3	592.6	592.0	591.3	590.6
17.5°	576.7	577.4	578.0	578.0	577.3	576.7	576.1	575.4
20°	564.7	565.1	565.5	565.4	564.8	564.3	563.8	563.2
22.5°	551.8	551.9	552.0	551.9	551.5	551.2	550.9	550.6
25°	530.9	531.2	531.4	531.4	531.2	530.9	530.6	530.4
27.5°	510.3	509.9	509.5	509.0	508.3	507.7	507.0	506.4
30°	494.2	493.8	493.4	492.9	492.4	491.9	491.3	490.7
32.5°	478.5	477.8	477.0	476.4	475.8	475.3	474.7	474.2
35°	453.2	452.4	451.6	450.9	450.2	449.5	448.8	448.2
37.5°	427.9	426.9	425.9	425.0	424.4	423.7	423.1	422.5
40°	410.4	409.2	408.0	407.1	406.5	406.0	405.4	404.9
42.5°	393.1	391.8	390.4	389.5	388.7	387.9	387.2	386.4
45°	366.6	365.2	363.6	362.6	362.1	361.6	361.0	360.4
47.5°	339.1	337.5	335.9	334.8	333.9	333.2	332.4	331.6
50°	321.4	319.4	317.6	316.3	315.6	315.0	314.2	313.6
52.5°	303.0	301.4	299.9	298.6	297.7	296.9	296.0	295.1
55°	275.7	274.0	272.4	271.3	270.5	269.9	269.2	268.6
57.5°	247.2	245.6	244.0	243.0	242.4	241.9	241.4	240.8
60°	228.4	226.9	225.4	224.5	224.0	223.6	223.2	222.8
62.5°	210.6	209.2	207.8	206.9	206.4	205.9	205.4	204.8
65°	183.3	182.1	180.8	179.9	179.2	178.6	177.9	177.2
67.5°	156.3	155.3	154.4	153.7	153.1	152.5	152.1	151.5
70°	138.8	137.8	136.9	136.2	135.6	135.0	134.5	134.0
72.5°	122.2	121.2	120.3	119.6	119.2	118.7	118.3	117.9
75°	96.4	95.6	94.8	94.5	94.8	95.1	95.3	95.6
77.5°	73.4	73.0	72.6	72.2	71.7	71.4	71.0	70.6
80°	58.2	57.8	57.5	57.1	56.8	56.6	56.3	56.0
82.5°	43.5	42.9	42.4	42.1	42.1	42.0	41.9	41.9
85°	22.9	22.5	22.1	21.9	21.7	21.6	21.4	21.3
87.5°	12.2	11.5	11.6	11.6	11.4	11.3	11.3	11.1
90°	30.3	28.5	30.3	31.2	31.2	31.2	31.2	31.2
92.5°	82.6	70.8	62.9	57.0	56.3	53.2	54.0	52.5
95°	248.2	190.4	150.6	129.7	117.4	109.9	107.0	107.9
97.5°	579.0	473.8	371.3	302.9	257.6	234.3	220.5	212.5
100°	864.7	747.3	617.5	502.9	424.3	383.6	356.1	339.1
102.5°	1051.9	1025.3	930.4	809.0	723.6	654.1	619.8	596.7
105°	1150.7	1257.8	1270.1	1238.8	1180.1	1121.4	1080.7	1067.4
107.5°	1079.5	1240.7	1339.2	1385.0	1392.4	1389.2	1381.0	1363.4
110°	1018.1	1187.6	1308.9	1386.6	1427.3	1445.3	1453.8	1452.9





TEST NUMBER: P331329-930  
 CATALOG NUMBER: SA2XXDIP-C485D1080U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	962.1	1124.8	1254.3	1343.4	1400.0	1430.1	1446.3	1451.3
115°	893.2	1039.0	1163.0	1260.6	1327.9	1371.4	1396.0	1404.6
117.5°	841.2	969.3	1081.8	1173.3	1241.9	1287.8	1313.9	1321.0
120°	815.5	932.9	1033.3	1119.5	1185.8	1230.3	1257.8	1267.2
122.5°	795.0	902.6	997.7	1075.5	1135.0	1178.8	1203.2	1211.1
125°	765.2	862.8	946.2	1017.2	1072.1	1108.2	1131.8	1139.4
127.5°	735.9	824.2	902.8	968.3	1016.3	1049.9	1070.4	1076.5
130°	717.0	798.4	873.3	935.7	982.2	1014.4	1033.3	1040.9
132.5°	698.8	774.2	842.9	901.6	947.3	979.5	996.9	1003.7
135°	673.4	735.9	798.4	851.4	892.2	923.4	940.4	944.3
137.5°	653.1	705.4	755.0	801.3	838.4	865.3	880.3	885.9
140°	640.3	685.7	729.3	770.9	801.3	825.9	840.1	845.8
142.5°	629.7	668.3	705.8	740.6	769.4	791.8	804.5	805.6
145°	614.7	646.0	675.3	702.8	725.5	741.6	751.1	753.9
147.5°	603.2	627.8	650.7	670.7	689.5	702.4	708.8	710.5
150°	594.8	615.6	635.5	652.6	666.8	678.2	683.8	684.8
152.5°	586.4	605.8	622.6	637.4	648.6	658.4	662.6	662.8
155°	574.9	590.0	604.2	614.7	625.1	631.7	635.5	633.7
157.5°	561.4	574.1	586.0	594.2	601.6	607.1	608.8	608.8
160°	553.1	563.5	574.0	580.6	587.2	591.9	592.9	592.9
162.5°	544.8	553.7	562.6	567.7	574.3	577.6	578.5	577.7
165°	532.3	538.9	545.5	549.3	553.1	556.9	556.9	556.0
167.5°	520.3	525.5	530.0	533.5	535.1	537.2	537.0	535.9
170°	514.3	517.1	520.9	522.8	523.7	526.6	525.6	523.7
172.5°	507.4	509.6	512.6	513.7	514.7	516.0	515.0	513.9
175°	500.1	501.0	502.0	502.9	502.9	503.9	502.9	501.0
177.5°	494.8	494.8	495.5	495.5	495.5	495.5	494.8	493.3
180°	492.5	492.5	492.5	492.5	492.5	492.5	492.5	492.5

(END OF REPORT)