

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331748-930

Luminaire Tested: **SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331748-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 725 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5222.1 lumens
Efficiency: N/A
Efficacy: 86.0 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

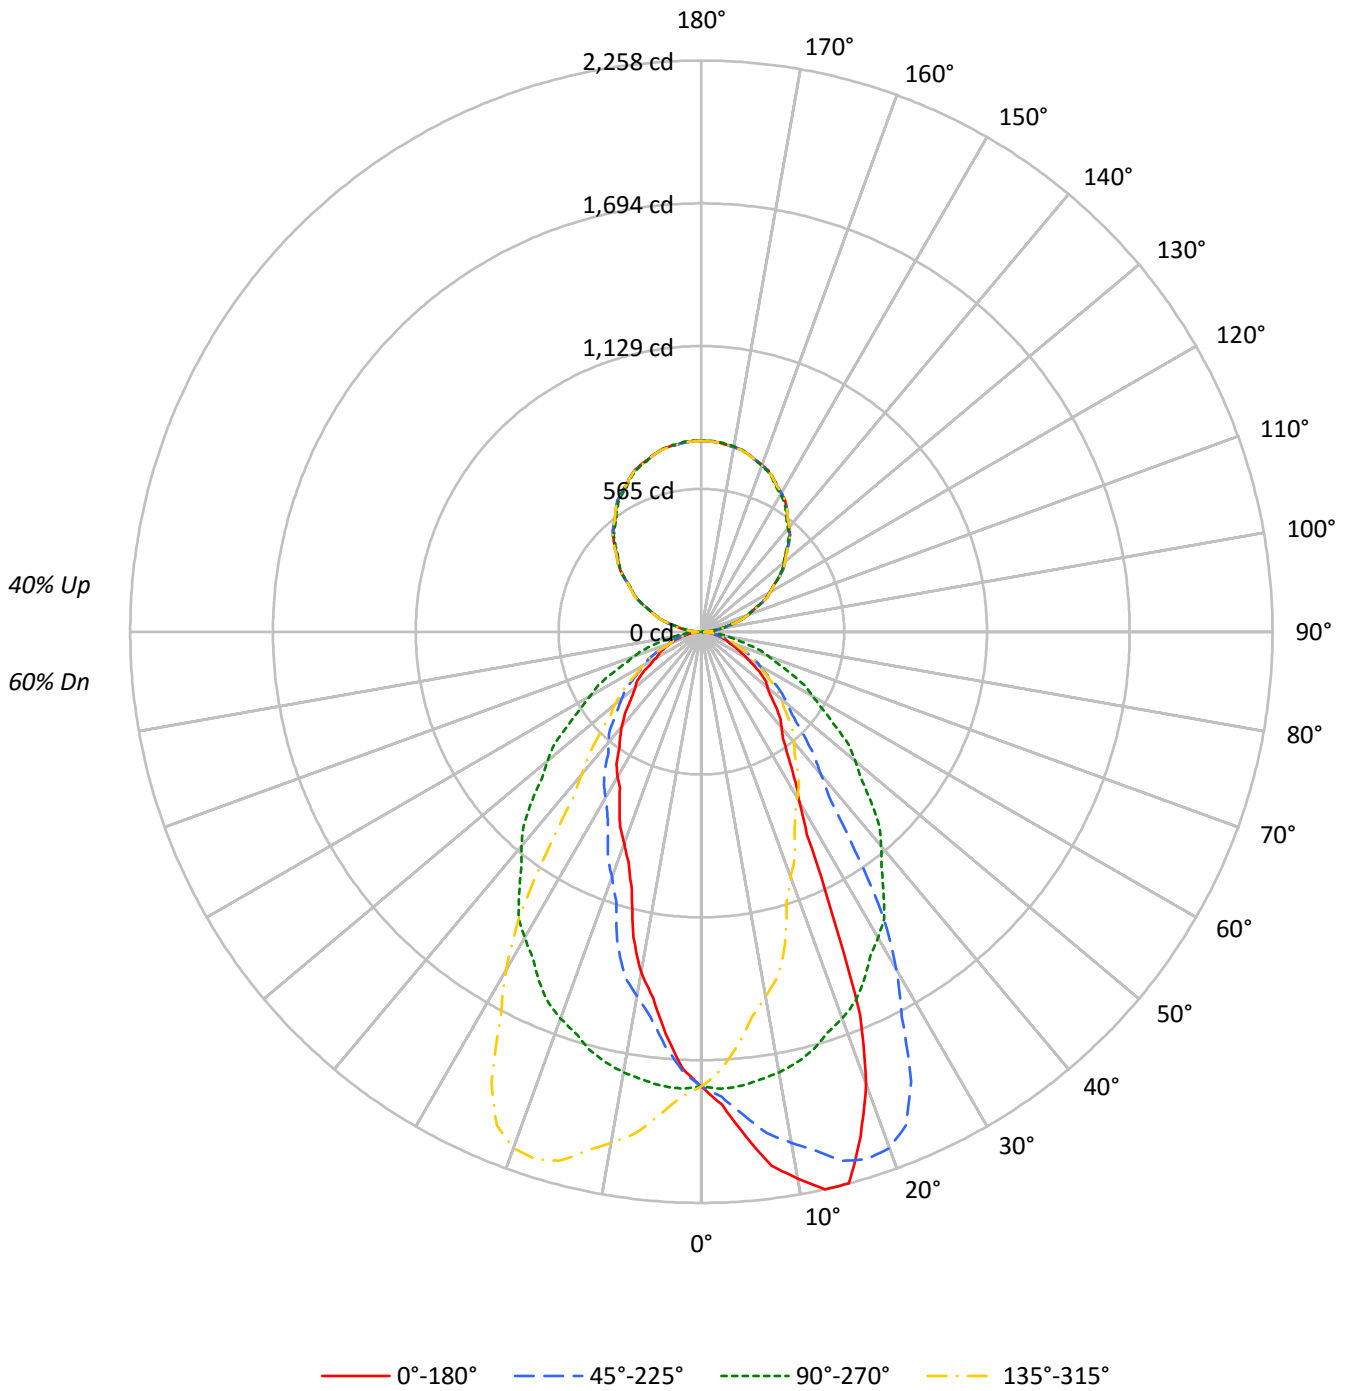



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	89	89	89	76	76	76	65	65	65	60
1	101	97	93	90	94	91	88	85	79	77	75	69	67	65	59	58	57	52
2	93	86	80	75	86	80	75	71	70	67	63	61	59	56	53	51	49	45
3	85	76	69	64	79	72	66	61	63	58	55	55	52	49	48	45	43	39
4	79	68	61	55	73	64	58	52	57	52	48	50	46	43	43	41	38	35
5	73	61	54	48	68	58	51	46	51	46	42	45	41	38	40	37	34	31
6	67	56	48	42	63	53	46	41	47	41	37	42	37	34	37	33	30	28
7	63	51	43	38	59	48	41	36	43	37	33	38	34	30	34	30	28	25
8	58	46	39	34	55	44	37	33	40	34	30	35	31	28	31	28	25	23
9	55	43	35	31	51	41	34	29	37	31	27	33	28	25	29	26	23	21
10	51	39	32	28	48	38	31	27	34	29	25	30	26	23	27	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	29032	29032	29032	29032
5°	32423	29214	25901	29214
10°	35974	29009	22453	29009
15°	37742	28583	17690	28583
20°	32720	27953	15309	27953
25°	21458	27091	13668	27091
30°	14443	26045	12370	26045
35°	11698	24727	11158	24727
40°	10404	23294	10323	23294
45°	9417	21614	9216	21614
50°	8568	19947	8538	19947
55°	8056	18097	7949	18097
60°	6736	16401	6659	16401
65°	5681	14896	6445	14896
70°	5249	13303	6076	13303
75°	4916	11578	5608	11578
80°	4537	9530	4993	9530
85°	4168	7521	4390	7521



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	170.4	3.3
10°-20°	474.9	9.1
20°-30°	612.0	11.7
30°-40°	581.6	11.1
40°-50°	498.2	9.5
50°-60°	379.4	7.3
60°-70°	239.9	4.6
70°-80°	119.8	2.3
80°-90°	34.2	0.7
90°-100°	47.9	0.9
100°-110°	148.6	2.8
110°-120°	254.0	4.9
120°-130°	334.1	6.4
130°-140°	375.0	7.2
140°-150°	367.7	7.0
150°-160°	308.4	5.9
160°-170°	204.5	3.9
170°-180°	71.5	1.4
0°-30°	1257.4	24.1
0°-40°	1839.0	35.2
0°-60°	2716.7	52.0
0°-90°	3110.5	59.6
90°-120°	450.5	8.6
90°-150°	1527.2	29.2
90°-180°	2112.0	40.4
0°-180°	5222.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1798	1798	1798	1798	1798	
5°	2000	1802	1598	1802	2000	197
15°	2258	1710	1058	1710	2258	609
25°	1204	1521	767	1521	1204	572
35°	594	1254	566	1254	594	380
45°	412	947	404	947	412	319
55°	286	643	282	643	286	251
65°	149	390	169	390	149	151
75°	79	186	90	186	79	84
85°	22	41	24	41	22	25
90°	22	1	22	1	22	10
95°	40	33	40	33	40	44
105°	142	137	142	137	142	149
115°	255	255	255	255	255	252
125°	372	371	372	371	372	332
135°	486	480	486	480	486	374
145°	589	582	589	582	589	368
155°	671	666	671	666	671	309
165°	725	725	725	725	725	205
175°	751	754	751	754	751	71
180°	755	755	755	755	755	



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1871.0	1872.6	1874.0	1870.5	1870.5	1867.5	1861.1	1856.0	1842.1	1840.0	1840.0
5°	2000.5	1999.3	2001.7	1993.7	1982.4	1979.9	1968.1	1952.4	1936.2	1918.1	1914.3
7.5°	2129.2	2127.4	2122.3	2121.0	2112.4	2093.4	2074.4	2054.0	2027.0	2000.7	1987.4
10°	2194.2	2214.8	2202.3	2180.4	2184.8	2155.5	2139.8	2113.0	2090.5	2051.1	2042.4
12.5°	2258.1	2266.3	2262.3	2249.9	2244.3	2223.9	2202.8	2179.5	2138.0	2102.6	2071.8
15°	2257.9	2269.8	2272.9	2269.1	2272.3	2271.0	2259.8	2240.4	2204.2	2165.4	2131.7
17.5°	2091.2	2099.5	2119.9	2133.8	2151.3	2188.3	2206.5	2213.7	2208.3	2186.2	2162.4
20°	1904.3	1890.5	1948.0	1977.4	2002.4	2064.8	2118.6	2139.2	2172.3	2171.7	2165.4
22.5°	1639.4	1642.7	1697.1	1732.0	1805.0	1867.4	1928.7	2006.3	2070.4	2112.7	2137.5
25°	1204.5	1228.3	1282.6	1330.2	1411.4	1527.5	1633.1	1755.6	1871.2	1962.4	2049.3
27.5°	904.7	906.4	949.5	993.4	1041.6	1136.9	1269.7	1416.0	1580.8	1716.8	1873.2
30°	774.7	770.9	789.0	816.0	857.2	930.9	1030.9	1174.6	1338.9	1543.8	1726.2
32.5°	682.7	683.0	696.6	716.5	750.7	800.5	868.9	985.6	1140.9	1342.4	1556.3
35°	593.5	592.9	602.9	617.3	631.6	663.5	710.4	771.6	878.4	1066.5	1285.2
37.5°	529.5	532.3	537.2	546.2	562.1	579.8	607.9	649.0	725.1	836.3	1020.1
40°	493.6	494.8	501.7	509.2	518.5	532.3	555.4	588.6	644.2	732.9	867.2
42.5°	460.6	461.9	466.7	473.7	481.1	494.8	514.0	542.6	587.7	656.9	767.7
45°	412.4	412.4	416.7	419.9	428.0	440.4	456.1	479.8	511.0	562.3	636.0
47.5°	367.1	367.2	370.1	375.5	380.6	390.4	405.7	425.1	447.8	487.5	550.4
50°	341.1	341.8	343.6	348.0	351.1	359.9	371.8	388.6	412.4	443.0	495.5
52.5°	320.2	319.8	322.1	324.0	326.1	332.4	341.3	356.1	377.3	404.0	447.4
55°	286.2	283.6	287.4	290.5	292.4	294.9	299.9	309.2	327.3	349.8	382.4
57.5°	243.7	242.6	245.3	248.2	254.0	260.8	265.1	271.0	280.4	296.5	328.7
60°	208.6	208.6	214.3	216.1	223.1	231.8	240.5	245.6	254.9	265.5	289.3
62.5°	177.7	178.2	180.8	182.7	186.5	197.3	209.5	220.5	229.4	239.5	255.3
65°	148.7	149.9	149.9	151.2	153.7	156.2	161.2	169.9	185.6	199.9	211.8
67.5°	126.2	126.6	126.9	128.2	128.8	131.6	133.5	137.5	141.0	154.7	169.4
70°	111.2	113.1	112.4	113.7	114.3	115.6	118.1	119.9	125.6	128.7	137.5
72.5°	97.2	98.6	98.5	99.2	100.9	101.1	103.1	104.9	108.6	111.2	115.9
75°	78.8	78.1	78.8	80.0	80.6	81.2	81.2	83.7	85.6	88.1	91.2
77.5°	60.7	61.4	61.2	61.4	61.5	62.6	62.5	63.6	65.5	66.7	68.2
80°	48.8	49.3	48.8	49.3	50.0	50.6	50.0	50.6	52.5	53.7	53.7
82.5°	37.7	37.8	38.2	38.4	38.5	38.6	39.5	39.6	41.0	40.8	41.3
85°	22.5	21.9	21.9	21.9	22.5	23.2	22.5	22.5	23.2	23.2	23.2
87.5°	12.3	12.8	12.8	12.7	12.7	12.7	12.8	13.4	12.9	13.5	12.3
90°	21.7	21.5	21.4	21.3	21.1	21.2	21.4	21.8	22.0	22.3	19.2
92.5°	20.6	20.6	20.6	20.5	20.5	20.5	20.5	20.4	20.3	20.3	19.6
95°	39.5	39.8	40.1	40.4	40.7	40.8	40.8	40.8	40.8	40.8	40.5
97.5°	68.4	68.5	68.5	68.6	68.6	68.6	68.6	68.6	68.6	68.6	68.0
100°	87.3	87.5	87.6	87.7	87.9	88.0	88.0	88.0	88.0	88.0	87.5
102.5°	108.7	108.8	109.0	109.2	109.3	109.3	109.2	109.1	108.9	108.8	108.3
105°	141.5	141.5	141.5	141.5	141.5	141.4	141.0	140.8	140.5	140.2	139.9
107.5°	172.4	173.0	173.7	174.3	175.0	175.2	175.0	175.0	174.9	174.7	174.7
110°	196.2	196.7	197.1	197.5	198.0	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	219.2	219.6	219.8	220.1	220.5	220.8	221.1	221.4	221.8	222.2	222.3
115°	254.9	255.4	255.8	256.2	256.6	256.9	257.1	257.1	257.3	257.5	257.7
117.5°	288.9	289.3	289.8	290.2	290.7	291.0	291.4	291.7	292.0	292.4	293.2
120°	312.9	313.3	313.7	314.1	314.6	314.8	314.8	314.8	314.8	314.8	315.9
122.5°	336.4	336.6	337.0	337.3	337.6	337.9	338.3	338.6	338.9	339.2	340.1
125°	372.2	372.3	372.4	372.6	372.8	373.0	373.4	373.9	374.3	374.7	375.1
127.5°	404.8	405.3	405.7	406.2	406.6	407.1	407.6	408.1	408.6	409.1	409.6
130°	428.3	428.8	429.4	429.9	430.5	431.0	431.2	431.5	431.8	432.1	432.4
132.5°	450.7	451.1	451.6	452.0	452.5	453.1	453.6	454.3	454.9	455.5	455.4
135°	485.6	486.0	486.5	486.9	487.3	487.5	487.7	487.9	488.0	488.1	487.9
137.5°	517.2	517.8	518.4	518.9	519.5	519.8	519.9	520.1	520.2	520.2	519.9
140°	539.2	539.7	540.3	540.9	541.4	541.7	541.7	541.7	541.7	541.7	541.0
142.5°	559.1	559.6	560.1	560.7	561.3	561.5	561.4	561.3	561.2	561.1	560.6
145°	588.8	589.4	590.0	590.5	591.1	591.3	591.2	591.0	590.9	590.8	589.9
147.5°	615.5	616.0	616.5	617.1	617.7	617.8	617.4	617.1	616.8	616.5	616.0
150°	632.8	633.2	633.7	634.1	634.5	634.5	634.1	633.7	633.2	632.8	632.3
152.5°	649.1	649.6	650.2	650.8	651.3	651.3	650.8	650.2	649.6	649.1	648.4
155°	671.1	671.5	671.9	672.3	672.8	672.6	671.9	671.2	670.5	669.8	669.4
157.5°	689.9	690.6	691.3	691.9	692.6	692.5	691.5	690.6	689.6	688.6	688.4
160°	701.6	702.2	702.8	703.4	703.9	703.8	703.0	702.1	701.2	700.3	700.3
162.5°	711.8	712.5	713.2	713.9	714.5	714.4	713.5	712.5	711.5	710.5	710.5
165°	725.2	725.9	726.6	727.3	728.1	727.9	726.9	725.9	725.0	723.9	723.9
167.5°	736.2	736.9	737.7	738.4	739.2	739.0	738.0	737.0	736.1	735.0	735.1
170°	741.8	742.7	743.5	744.4	745.2	745.1	744.1	743.1	742.2	741.1	741.3
172.5°	746.4	747.2	748.0	748.9	749.7	749.7	748.7	747.7	746.7	745.8	745.9
175°	751.4	752.2	753.0	753.9	754.7	754.6	753.7	752.7	751.7	750.7	751.0
177.5°	753.7	754.3	755.0	755.7	756.4	756.4	755.7	755.0	754.3	753.7	753.8
180°	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1841.1	1837.0	1833.6	1824.6	1820.1	1810.0	1808.6	1808.1	1795.1	1782.6	1779.1
5°	1904.3	1894.3	1879.3	1861.8	1843.7	1825.0	1812.5	1802.5	1777.4	1753.7	1740.0
7.5°	1968.1	1946.5	1920.7	1887.6	1859.9	1829.0	1806.0	1785.3	1749.9	1715.9	1693.0
10°	2015.5	1980.5	1946.1	1900.5	1864.9	1829.9	1797.5	1769.4	1729.3	1684.4	1652.5
12.5°	2045.0	2006.5	1959.2	1914.6	1868.4	1824.0	1780.5	1744.3	1697.4	1650.9	1613.1
15°	2084.9	2043.6	1986.2	1922.4	1863.0	1805.0	1755.0	1710.0	1648.8	1593.2	1546.9
17.5°	2117.5	2060.8	1999.0	1925.3	1856.6	1782.7	1718.4	1660.9	1592.8	1525.7	1471.2
20°	2127.9	2071.8	2000.5	1926.8	1845.6	1758.8	1689.4	1626.9	1553.8	1480.7	1418.2
22.5°	2121.5	2077.7	1998.5	1910.3	1827.1	1736.3	1657.9	1585.4	1504.3	1429.7	1357.2
25°	2077.4	2062.4	1987.4	1891.2	1796.2	1690.6	1600.0	1520.7	1428.2	1348.3	1269.5
27.5°	1974.5	2006.9	1960.4	1857.9	1752.3	1639.2	1537.3	1447.0	1351.0	1261.0	1182.6
30°	1875.6	1949.9	1929.9	1834.9	1716.9	1605.7	1491.3	1397.0	1294.5	1202.1	1124.6
32.5°	1740.1	1863.0	1882.4	1803.0	1680.9	1558.7	1438.8	1345.0	1238.0	1140.6	1065.1
35°	1524.4	1708.1	1792.4	1741.9	1619.4	1487.6	1363.8	1254.5	1147.0	1050.8	975.9
37.5°	1267.1	1517.4	1657.9	1661.5	1549.1	1412.0	1277.2	1168.7	1058.7	964.3	883.2
40°	1100.2	1371.3	1554.4	1595.1	1500.1	1352.0	1215.8	1105.2	997.8	905.3	812.2
42.5°	950.3	1220.4	1445.4	1516.0	1440.6	1293.6	1156.8	1041.2	936.8	849.3	754.2
45°	768.5	1004.6	1252.6	1378.8	1337.0	1200.8	1056.5	946.6	848.4	772.8	681.6
47.5°	648.2	814.7	1054.8	1225.4	1224.7	1100.3	958.4	853.0	762.1	691.2	617.4
50°	579.8	724.7	927.8	1121.4	1137.7	1033.4	898.4	794.1	709.1	634.8	575.4
52.5°	518.3	637.7	820.4	1006.0	1052.2	961.9	831.0	734.6	652.2	583.8	533.0
55°	438.0	530.4	669.1	842.8	912.8	849.1	732.9	642.9	576.0	518.5	474.8
57.5°	370.5	439.9	551.1	691.0	772.5	732.4	636.5	563.5	506.2	454.2	419.7
60°	328.0	384.8	479.2	596.1	686.0	657.9	576.0	507.9	459.2	414.3	381.7
62.5°	288.0	336.9	417.8	512.6	595.0	583.4	516.6	459.4	416.7	375.8	348.2
65°	231.8	267.4	330.5	404.9	471.1	476.7	428.6	389.9	351.7	319.3	294.9
67.5°	184.6	207.8	252.3	314.9	364.5	382.2	352.9	323.3	293.0	267.9	246.8
70°	155.6	174.3	206.8	257.4	303.0	321.7	304.9	281.8	255.5	234.9	216.8
72.5°	126.0	144.3	168.3	205.5	244.5	264.8	258.9	242.3	221.0	203.9	186.8
75°	95.0	100.6	116.8	141.9	172.4	190.0	194.3	185.6	168.7	155.6	145.5
77.5°	70.2	73.6	81.4	94.5	114.5	130.0	136.5	135.4	123.8	116.2	106.8
80°	56.3	58.1	61.9	67.5	82.5	98.1	102.5	102.5	94.3	91.2	81.9
82.5°	42.7	44.1	46.4	49.5	56.5	70.1	75.0	76.0	70.8	66.7	59.4
85°	24.4	23.7	25.0	26.9	28.1	31.9	39.4	40.6	39.4	34.3	32.4
87.5°	11.7	11.6	10.9	9.9	10.1	10.3	12.5	14.6	13.0	11.8	11.2
90°	16.1	13.0	9.9	7.4	5.7	4.1	2.4	0.7	2.4	4.1	5.7
92.5°	18.8	18.0	17.3	16.3	15.1	13.9	12.6	11.3	12.6	13.9	15.1
95°	40.2	39.9	39.6	38.8	37.4	36.0	34.6	33.1	34.6	36.0	37.4
97.5°	67.5	66.9	66.4	65.6	64.2	63.0	61.8	60.6	61.8	63.0	64.2
100°	87.1	86.7	86.3	85.4	84.3	83.2	82.1	81.0	82.1	83.2	84.3
102.5°	107.8	107.2	106.7	106.0	105.1	104.2	103.2	102.3	103.2	104.2	105.1
105°	139.7	139.3	139.1	138.7	138.3	137.9	137.5	137.1	137.5	137.9	138.3
107.5°	174.7	174.7	174.7	174.4	173.8	173.2	172.6	171.9	172.6	173.2	173.8
110°	198.2	198.2	198.2	197.8	196.9	196.1	195.2	194.4	195.2	196.1	196.9



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	222.4	222.5	222.6	222.3	221.4	220.5	219.7	218.8	219.7	220.5	221.4
115°	258.0	258.3	258.6	258.3	257.5	256.6	255.8	254.9	255.8	256.6	257.5
117.5°	294.0	294.7	295.5	295.4	294.2	293.1	292.0	290.8	292.0	293.1	294.2
120°	317.1	318.2	319.4	319.4	318.2	317.1	315.9	314.8	315.9	317.1	318.2
122.5°	340.9	341.7	342.4	342.2	340.8	339.5	338.1	336.7	338.1	339.5	340.8
125°	375.5	376.0	376.4	376.0	374.7	373.4	372.2	370.9	372.2	373.4	374.7
127.5°	410.2	410.7	411.2	410.6	409.0	407.4	405.8	404.1	405.8	407.4	409.0
130°	432.6	432.9	433.2	432.4	430.6	428.8	426.9	425.1	426.9	428.8	430.6
132.5°	455.4	455.3	455.3	454.5	453.0	451.5	450.0	448.5	450.0	451.5	453.0
135°	487.5	487.3	487.0	486.1	484.5	483.0	481.4	479.9	481.4	483.0	484.5
137.5°	519.5	519.2	518.8	518.0	516.7	515.4	514.1	512.9	514.1	515.4	516.7
140°	540.3	539.6	538.8	537.9	536.5	535.3	534.0	532.8	534.0	535.3	536.5
142.5°	560.1	559.6	559.1	558.2	557.0	555.7	554.4	553.2	554.4	555.7	557.0
145°	589.1	588.2	587.3	586.4	585.5	584.5	583.4	582.4	583.4	584.5	585.5
147.5°	615.4	614.8	614.2	613.3	612.1	611.0	609.8	608.6	609.8	611.0	612.1
150°	631.7	631.1	630.6	629.8	629.0	628.1	627.3	626.5	627.3	628.1	629.0
152.5°	647.8	647.1	646.4	645.6	644.8	643.9	643.1	642.2	643.1	643.9	644.8
155°	669.0	668.5	668.1	667.6	667.2	666.8	666.3	665.9	666.3	666.8	667.2
157.5°	688.1	687.9	687.6	687.4	687.1	686.8	686.5	686.2	686.5	686.8	687.1
160°	700.1	699.9	699.8	699.6	699.3	699.0	698.7	698.5	698.7	699.0	699.3
162.5°	710.3	710.1	710.0	709.9	709.8	709.8	709.7	709.6	709.7	709.8	709.8
165°	723.9	723.9	723.9	724.0	724.1	724.3	724.5	724.6	724.5	724.3	724.1
167.5°	735.1	735.2	735.2	735.4	735.8	736.2	736.6	737.0	736.6	736.2	735.8
170°	741.4	741.6	741.7	742.0	742.4	742.8	743.3	743.7	743.3	742.8	742.4
172.5°	746.0	746.2	746.3	746.6	747.0	747.5	747.9	748.3	747.9	747.5	747.0
175°	751.3	751.5	751.9	752.2	752.6	753.0	753.5	753.9	753.5	753.0	752.6
177.5°	754.1	754.3	754.6	754.8	755.1	755.5	755.9	756.2	755.9	755.5	755.1
180°	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1772.6	1769.1	1762.6	1752.6	1746.6	1736.1	1729.1	1733.1	1734.1	1733.1	1732.1
5°	1725.0	1711.9	1693.8	1676.3	1660.0	1642.5	1632.6	1628.2	1619.4	1614.4	1611.9
7.5°	1667.4	1644.8	1619.2	1588.7	1562.8	1535.7	1521.8	1514.9	1497.1	1487.4	1478.8
10°	1624.4	1588.8	1563.2	1523.2	1498.8	1463.2	1438.8	1439.5	1415.1	1401.3	1391.4
12.5°	1577.0	1537.8	1495.2	1459.2	1425.4	1396.8	1367.3	1355.5	1329.7	1316.4	1289.4
15°	1498.2	1452.6	1407.6	1358.9	1324.5	1280.2	1237.7	1185.9	1143.9	1107.7	1097.7
17.5°	1412.3	1355.8	1310.7	1253.4	1194.6	1120.0	1070.7	1040.6	1015.4	996.3	982.0
20°	1353.2	1295.8	1247.7	1161.5	1082.1	1031.5	995.2	972.2	945.9	925.3	914.0
22.5°	1291.3	1231.3	1165.7	1069.5	1007.6	967.0	934.7	908.2	890.4	874.3	864.1
25°	1203.3	1137.7	1029.6	963.4	913.4	870.9	848.4	832.2	813.4	791.6	781.6
27.5°	1110.4	1006.0	928.4	879.1	831.4	803.8	783.6	759.4	742.6	732.7	722.4
30°	1040.9	936.5	876.0	822.2	788.5	757.8	734.1	720.4	704.1	687.2	680.4
32.5°	963.4	880.0	822.0	777.2	743.0	716.9	698.1	675.9	664.1	653.8	639.4
35°	867.2	804.0	751.0	714.8	682.2	661.0	639.1	626.0	604.8	596.1	590.4
37.5°	785.7	731.0	691.4	653.1	627.4	603.9	590.5	569.6	560.4	548.3	536.5
40°	739.7	686.0	647.9	616.6	587.9	570.4	553.5	536.7	522.9	517.3	503.0
42.5°	692.8	649.0	610.9	576.7	557.4	538.9	517.6	505.2	491.0	481.8	473.0
45°	627.9	589.1	556.7	528.6	507.3	488.0	474.2	453.6	445.5	427.4	419.9
47.5°	571.0	534.9	503.9	477.2	456.5	443.8	423.7	407.6	394.6	383.5	373.9
50°	530.4	500.4	470.4	446.7	428.0	409.9	389.2	381.1	361.1	355.5	349.8
52.5°	493.4	465.0	437.5	414.3	395.5	377.9	359.7	349.1	335.7	330.0	325.9
55°	441.7	414.3	388.0	367.4	348.6	330.5	319.3	306.1	299.9	295.5	290.5
57.5°	389.7	365.0	344.9	324.0	305.2	290.7	277.8	269.9	263.4	257.6	251.7
60°	356.8	333.0	314.9	295.5	276.1	264.2	254.3	244.9	237.4	228.7	226.2
62.5°	321.7	301.0	284.4	265.5	248.7	237.8	228.3	219.4	210.4	197.7	194.2
65°	273.6	257.4	239.9	224.3	209.3	198.7	184.9	175.0	171.2	169.9	169.3
67.5°	230.2	214.8	199.8	183.8	170.2	160.3	153.4	151.8	149.2	148.5	146.7
70°	201.2	186.8	171.8	156.8	143.7	141.9	139.3	136.8	133.7	132.5	131.2
72.5°	175.2	160.3	145.3	133.3	127.7	125.3	122.9	120.3	118.2	117.0	116.2
75°	134.4	120.6	110.6	106.2	103.1	101.2	97.4	95.6	94.3	92.5	91.8
77.5°	96.7	88.9	84.4	81.6	78.4	76.3	74.2	72.3	71.0	70.6	69.6
80°	73.7	70.0	66.9	63.1	61.9	59.4	58.7	56.8	57.5	55.6	55.6
82.5°	57.2	52.5	49.9	48.1	46.9	44.8	44.3	43.4	43.5	42.1	42.1
85°	29.4	28.1	26.9	25.6	25.6	23.7	24.4	23.7	23.7	22.5	21.9
87.5°	11.0	10.9	10.6	11.3	11.8	12.0	11.9	11.3	11.3	11.3	10.7
90°	7.4	9.9	13.0	16.1	19.2	22.3	22.0	21.8	21.4	21.2	21.1
92.5°	16.3	17.3	18.0	18.8	19.6	20.3	20.3	20.4	20.5	20.5	20.5
95°	38.8	39.6	39.9	40.2	40.5	40.8	40.8	40.8	40.8	40.8	40.7
97.5°	65.6	66.4	66.9	67.5	68.0	68.6	68.6	68.6	68.6	68.6	68.6
100°	85.4	86.3	86.7	87.1	87.5	88.0	88.0	88.0	88.0	88.0	87.9
102.5°	106.0	106.7	107.2	107.8	108.3	108.8	108.9	109.1	109.2	109.3	109.3
105°	138.7	139.1	139.3	139.7	139.9	140.2	140.5	140.8	141.0	141.4	141.5
107.5°	174.4	174.7	174.7	174.7	174.7	174.7	174.9	175.0	175.0	175.2	175.0
110°	197.8	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.2	198.0



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	222.3	222.6	222.5	222.4	222.3	222.2	221.8	221.4	221.1	220.8	220.5
115°	258.3	258.6	258.3	258.0	257.7	257.5	257.3	257.1	257.1	256.9	256.6
117.5°	295.4	295.5	294.7	294.0	293.2	292.4	292.0	291.7	291.4	291.0	290.7
120°	319.4	319.4	318.2	317.1	315.9	314.8	314.8	314.8	314.8	314.8	314.6
122.5°	342.2	342.4	341.7	340.9	340.1	339.2	338.9	338.6	338.3	337.9	337.6
125°	376.0	376.4	376.0	375.5	375.1	374.7	374.3	373.9	373.4	373.0	372.8
127.5°	410.6	411.2	410.7	410.2	409.6	409.1	408.6	408.1	407.6	407.1	406.6
130°	432.4	433.2	432.9	432.6	432.4	432.1	431.8	431.5	431.2	431.0	430.5
132.5°	454.5	455.3	455.3	455.4	455.4	455.5	454.9	454.3	453.6	453.1	452.5
135°	486.1	487.0	487.3	487.5	487.9	488.1	488.0	487.9	487.7	487.5	487.3
137.5°	518.0	518.8	519.2	519.5	519.9	520.2	520.2	520.1	519.9	519.8	519.5
140°	537.9	538.8	539.6	540.3	541.0	541.7	541.7	541.7	541.7	541.7	541.4
142.5°	558.2	559.1	559.6	560.1	560.6	561.1	561.2	561.3	561.4	561.5	561.3
145°	586.4	587.3	588.2	589.1	589.9	590.8	590.9	591.0	591.2	591.3	591.1
147.5°	613.3	614.2	614.8	615.4	616.0	616.5	616.8	617.1	617.4	617.8	617.7
150°	629.8	630.6	631.1	631.7	632.3	632.8	633.2	633.7	634.1	634.5	634.5
152.5°	645.6	646.4	647.1	647.8	648.4	649.1	649.6	650.2	650.8	651.3	651.3
155°	667.6	668.1	668.5	669.0	669.4	669.8	670.5	671.2	671.9	672.6	672.8
157.5°	687.4	687.6	687.9	688.1	688.4	688.6	689.6	690.6	691.5	692.5	692.6
160°	699.6	699.8	699.9	700.1	700.3	700.3	701.2	702.1	703.0	703.8	703.9
162.5°	709.9	710.0	710.1	710.3	710.5	710.5	711.5	712.5	713.5	714.4	714.5
165°	724.0	723.9	723.9	723.9	723.9	723.9	725.0	725.9	726.9	727.9	728.1
167.5°	735.4	735.2	735.2	735.1	735.1	735.0	736.1	737.0	738.0	739.0	739.2
170°	742.0	741.7	741.6	741.4	741.3	741.1	742.2	743.1	744.1	745.1	745.2
172.5°	746.6	746.3	746.2	746.0	745.9	745.8	746.7	747.7	748.7	749.7	749.7
175°	752.2	751.9	751.5	751.3	751.0	750.7	751.7	752.7	753.7	754.6	754.7
177.5°	754.8	754.6	754.3	754.1	753.8	753.7	754.3	755.0	755.7	756.4	756.4
180°	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1726.6	1727.6	1726.2	1727.1	1726.2	1727.6	1726.6	1732.1	1733.1	1734.1	1733.1
5°	1608.7	1601.2	1600.0	1598.1	1600.0	1601.2	1608.7	1611.9	1614.4	1619.4	1628.2
7.5°	1468.1	1467.0	1463.9	1459.5	1463.9	1467.0	1468.1	1478.8	1487.4	1497.1	1514.9
10°	1377.6	1374.5	1373.9	1369.5	1373.9	1374.5	1377.6	1391.4	1401.3	1415.1	1439.5
12.5°	1271.6	1251.6	1249.4	1238.5	1249.4	1251.6	1271.6	1289.4	1316.4	1329.7	1355.5
15°	1082.7	1079.0	1066.5	1058.3	1066.5	1079.0	1082.7	1097.7	1107.7	1143.9	1185.9
17.5°	974.8	962.5	958.6	956.9	958.6	962.5	974.8	982.0	996.3	1015.4	1040.6
20°	905.3	894.1	892.2	891.0	892.2	894.1	905.3	914.0	925.3	945.9	972.2
22.5°	857.3	845.5	840.7	836.9	840.7	845.5	857.3	864.1	874.3	890.4	908.2
25°	775.3	770.9	768.5	767.2	768.5	770.9	775.3	781.6	791.6	813.4	832.2
27.5°	711.3	701.6	699.8	696.5	699.8	701.6	711.3	722.4	732.7	742.6	759.4
30°	674.7	671.6	667.2	663.5	667.2	671.6	674.7	680.4	687.2	704.1	720.4
32.5°	631.8	629.2	625.3	623.5	625.3	629.2	631.8	639.4	653.8	664.1	675.9
35°	584.2	575.4	571.7	566.1	571.7	575.4	584.2	590.4	596.1	604.8	626.0
37.5°	533.8	529.2	523.9	525.8	523.9	529.2	533.8	536.5	548.3	560.4	569.6
40°	494.8	491.7	490.5	489.8	490.5	491.7	494.8	503.0	517.3	522.9	536.7
42.5°	463.8	455.2	451.9	451.8	451.9	455.2	463.8	473.0	481.8	491.0	505.2
45°	416.7	408.6	403.0	403.6	403.0	408.6	416.7	419.9	427.4	445.5	453.6
47.5°	368.5	368.3	364.8	365.8	364.8	368.3	368.5	373.9	383.5	394.6	407.6
50°	345.5	341.8	339.2	339.9	339.2	341.8	345.5	349.8	355.5	361.1	381.1
52.5°	323.5	320.2	318.3	320.9	318.3	320.2	323.5	325.9	330.0	335.7	349.1
55°	287.4	283.6	283.0	282.4	283.0	283.6	287.4	290.5	295.5	299.9	306.1
57.5°	247.0	244.5	240.8	239.1	240.8	244.5	247.0	251.7	257.6	263.4	269.9
60°	218.0	213.0	206.8	206.2	206.8	213.0	218.0	226.2	228.7	237.4	244.9
62.5°	191.5	190.5	189.3	189.1	189.3	190.5	191.5	194.2	197.7	210.4	219.4
65°	168.0	167.5	168.0	168.7	168.0	167.5	168.0	169.3	169.9	171.2	175.0
67.5°	146.4	145.3	144.2	144.7	144.2	145.3	146.4	146.7	148.5	149.2	151.8
70°	130.0	129.3	128.7	128.7	128.7	129.3	130.0	131.2	132.5	133.7	136.8
72.5°	114.0	113.8	113.2	112.7	113.2	113.8	114.0	116.2	117.0	118.2	120.3
75°	91.2	89.9	89.9	89.9	89.9	89.9	91.2	91.8	92.5	94.3	95.6
77.5°	69.5	68.8	68.2	67.8	68.2	68.8	69.5	69.6	70.6	71.0	72.3
80°	55.0	54.4	53.7	53.7	53.7	54.4	55.0	55.6	55.6	57.5	56.8
82.5°	42.0	41.3	41.3	40.8	41.3	41.3	42.0	42.1	42.1	43.5	43.4
85°	22.5	23.2	22.5	23.7	22.5	23.2	22.5	21.9	22.5	23.7	23.7
87.5°	10.8	10.3	10.8	10.4	10.8	10.3	10.8	10.7	11.3	11.3	11.3
90°	21.3	21.4	21.5	21.7	21.5	21.4	21.3	21.1	21.2	21.4	21.8
92.5°	20.5	20.6	20.6	20.6	20.6	20.6	20.5	20.5	20.5	20.5	20.4
95°	40.4	40.1	39.8	39.5	39.8	40.1	40.4	40.7	40.8	40.8	40.8
97.5°	68.6	68.5	68.5	68.4	68.5	68.5	68.6	68.6	68.6	68.6	68.6
100°	87.7	87.6	87.5	87.3	87.5	87.6	87.7	87.9	88.0	88.0	88.0
102.5°	109.2	109.0	108.8	108.7	108.8	109.0	109.2	109.3	109.3	109.2	109.1
105°	141.5	141.5	141.5	141.5	141.5	141.5	141.5	141.5	141.4	141.0	140.8
107.5°	174.3	173.7	173.0	172.4	173.0	173.7	174.3	175.0	175.2	175.0	175.0
110°	197.5	197.1	196.7	196.2	196.7	197.1	197.5	198.0	198.2	198.2	198.2



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	220.1	219.8	219.6	219.2	219.6	219.8	220.1	220.5	220.8	221.1	221.4
115°	256.2	255.8	255.4	254.9	255.4	255.8	256.2	256.6	256.9	257.1	257.1
117.5°	290.2	289.8	289.3	288.9	289.3	289.8	290.2	290.7	291.0	291.4	291.7
120°	314.1	313.7	313.3	312.9	313.3	313.7	314.1	314.6	314.8	314.8	314.8
122.5°	337.3	337.0	336.6	336.4	336.6	337.0	337.3	337.6	337.9	338.3	338.6
125°	372.6	372.4	372.3	372.2	372.3	372.4	372.6	372.8	373.0	373.4	373.9
127.5°	406.2	405.7	405.3	404.8	405.3	405.7	406.2	406.6	407.1	407.6	408.1
130°	429.9	429.4	428.8	428.3	428.8	429.4	429.9	430.5	431.0	431.2	431.5
132.5°	452.0	451.6	451.1	450.7	451.1	451.6	452.0	452.5	453.1	453.6	454.3
135°	486.9	486.5	486.0	485.6	486.0	486.5	486.9	487.3	487.5	487.7	487.9
137.5°	518.9	518.4	517.8	517.2	517.8	518.4	518.9	519.5	519.8	519.9	520.1
140°	540.9	540.3	539.7	539.2	539.7	540.3	540.9	541.4	541.7	541.7	541.7
142.5°	560.7	560.1	559.6	559.1	559.6	560.1	560.7	561.3	561.5	561.4	561.3
145°	590.5	590.0	589.4	588.8	589.4	590.0	590.5	591.1	591.3	591.2	591.0
147.5°	617.1	616.5	616.0	615.5	616.0	616.5	617.1	617.7	617.8	617.4	617.1
150°	634.1	633.7	633.2	632.8	633.2	633.7	634.1	634.5	634.5	634.1	633.7
152.5°	650.8	650.2	649.6	649.1	649.6	650.2	650.8	651.3	651.3	650.8	650.2
155°	672.3	671.9	671.5	671.1	671.5	671.9	672.3	672.8	672.6	671.9	671.2
157.5°	691.9	691.3	690.6	689.9	690.6	691.3	691.9	692.6	692.5	691.5	690.6
160°	703.4	702.8	702.2	701.6	702.2	702.8	703.4	703.9	703.8	703.0	702.1
162.5°	713.9	713.2	712.5	711.8	712.5	713.2	713.9	714.5	714.4	713.5	712.5
165°	727.3	726.6	725.9	725.2	725.9	726.6	727.3	728.1	727.9	726.9	725.9
167.5°	738.4	737.7	736.9	736.2	736.9	737.7	738.4	739.2	739.0	738.0	737.0
170°	744.4	743.5	742.7	741.8	742.7	743.5	744.4	745.2	745.1	744.1	743.1
172.5°	748.9	748.0	747.2	746.4	747.2	748.0	748.9	749.7	749.7	748.7	747.7
175°	753.9	753.0	752.2	751.4	752.2	753.0	753.9	754.7	754.6	753.7	752.7
177.5°	755.7	755.0	754.3	753.7	754.3	755.0	755.7	756.4	756.4	755.7	755.0
180°	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1729.1	1736.1	1746.6	1752.6	1762.6	1769.1	1772.6	1779.1	1782.6	1795.1	1808.1
5°	1632.6	1642.5	1660.0	1676.3	1693.8	1711.9	1725.0	1740.0	1753.7	1777.4	1802.5
7.5°	1521.8	1535.7	1562.8	1588.7	1619.2	1644.8	1667.4	1693.0	1715.9	1749.9	1785.3
10°	1438.8	1463.2	1498.8	1523.2	1563.2	1588.8	1624.4	1652.5	1684.4	1729.3	1769.4
12.5°	1367.3	1396.8	1425.4	1459.2	1495.2	1537.8	1577.0	1613.1	1650.9	1697.4	1744.3
15°	1237.7	1280.2	1324.5	1358.9	1407.6	1452.6	1498.2	1546.9	1593.2	1648.8	1710.0
17.5°	1070.7	1120.0	1194.6	1253.4	1310.7	1355.8	1412.3	1471.2	1525.7	1592.8	1660.9
20°	995.2	1031.5	1082.1	1161.5	1247.7	1295.8	1353.2	1418.2	1480.7	1553.8	1626.9
22.5°	934.7	967.0	1007.6	1069.5	1165.7	1231.3	1291.3	1357.2	1429.7	1504.3	1585.4
25°	848.4	870.9	913.4	963.4	1029.6	1137.7	1203.3	1269.5	1348.3	1428.2	1520.7
27.5°	783.6	803.8	831.4	879.1	928.4	1006.0	1110.4	1182.6	1261.0	1351.0	1447.0
30°	734.1	757.8	788.5	822.2	876.0	936.5	1040.9	1124.6	1202.1	1294.5	1397.0
32.5°	698.1	716.9	743.0	777.2	822.0	880.0	963.4	1065.1	1140.6	1238.0	1345.0
35°	639.1	661.0	682.2	714.8	751.0	804.0	867.2	975.9	1050.8	1147.0	1254.5
37.5°	590.5	603.9	627.4	653.1	691.4	731.0	785.7	883.2	964.3	1058.7	1168.7
40°	553.5	570.4	587.9	616.6	647.9	686.0	739.7	812.2	905.3	997.8	1105.2
42.5°	517.6	538.9	557.4	576.7	610.9	649.0	692.8	754.2	849.3	936.8	1041.2
45°	474.2	488.0	507.3	528.6	556.7	589.1	627.9	681.6	772.8	848.4	946.6
47.5°	423.7	443.8	456.5	477.2	503.9	534.9	571.0	617.4	691.2	762.1	853.0
50°	389.2	409.9	428.0	446.7	470.4	500.4	530.4	575.4	634.8	709.1	794.1
52.5°	359.7	377.9	395.5	414.3	437.5	465.0	493.4	533.0	583.8	652.2	734.6
55°	319.3	330.5	348.6	367.4	388.0	414.3	441.7	474.8	518.5	576.0	642.9
57.5°	277.8	290.7	305.2	324.0	344.9	365.0	389.7	419.7	454.2	506.2	563.5
60°	254.3	264.2	276.1	295.5	314.9	333.0	356.8	381.7	414.3	459.2	507.9
62.5°	228.3	237.8	248.7	265.5	284.4	301.0	321.7	348.2	375.8	416.7	459.4
65°	184.9	198.7	209.3	224.3	239.9	257.4	273.6	294.9	319.3	351.7	389.9
67.5°	153.4	160.3	170.2	183.8	199.8	214.8	230.2	246.8	267.9	293.0	323.3
70°	139.3	141.9	143.7	156.8	171.8	186.8	201.2	216.8	234.9	255.5	281.8
72.5°	122.9	125.3	127.7	133.3	145.3	160.3	175.2	186.8	203.9	221.0	242.3
75°	97.4	101.2	103.1	106.2	110.6	120.6	134.4	145.5	155.6	168.7	185.6
77.5°	74.2	76.3	78.4	81.6	84.4	88.9	96.7	106.8	116.2	123.8	135.4
80°	58.7	59.4	61.9	63.1	66.9	70.0	73.7	81.9	91.2	94.3	102.5
82.5°	44.3	44.8	46.9	48.1	49.9	52.5	57.2	59.4	66.7	70.8	76.0
85°	24.4	23.7	25.6	25.6	26.9	28.1	29.4	32.4	34.3	39.4	40.6
87.5°	11.9	12.0	11.8	11.3	10.6	10.9	11.0	11.2	11.8	13.0	14.6
90°	22.0	22.3	19.2	16.1	13.0	9.9	7.4	5.7	4.1	2.4	0.7
92.5°	20.3	20.3	19.6	18.8	18.0	17.3	16.3	15.1	13.9	12.6	11.3
95°	40.8	40.8	40.5	40.2	39.9	39.6	38.8	37.4	36.0	34.6	33.1
97.5°	68.6	68.6	68.0	67.5	66.9	66.4	65.6	64.2	63.0	61.8	60.6
100°	88.0	88.0	87.5	87.1	86.7	86.3	85.4	84.3	83.2	82.1	81.0
102.5°	108.9	108.8	108.3	107.8	107.2	106.7	106.0	105.1	104.2	103.2	102.3
105°	140.5	140.2	139.9	139.7	139.3	139.1	138.7	138.3	137.9	137.5	137.1
107.5°	174.9	174.7	174.7	174.7	174.7	174.7	174.4	173.8	173.2	172.6	171.9
110°	198.2	198.2	198.2	198.2	198.2	198.2	197.8	196.9	196.1	195.2	194.4



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	221.8	222.2	222.3	222.4	222.5	222.6	222.3	221.4	220.5	219.7	218.8
115°	257.3	257.5	257.7	258.0	258.3	258.6	258.3	257.5	256.6	255.8	254.9
117.5°	292.0	292.4	293.2	294.0	294.7	295.5	295.4	294.2	293.1	292.0	290.8
120°	314.8	314.8	315.9	317.1	318.2	319.4	319.4	318.2	317.1	315.9	314.8
122.5°	338.9	339.2	340.1	340.9	341.7	342.4	342.2	340.8	339.5	338.1	336.7
125°	374.3	374.7	375.1	375.5	376.0	376.4	376.0	374.7	373.4	372.2	370.9
127.5°	408.6	409.1	409.6	410.2	410.7	411.2	410.6	409.0	407.4	405.8	404.1
130°	431.8	432.1	432.4	432.6	432.9	433.2	432.4	430.6	428.8	426.9	425.1
132.5°	454.9	455.5	455.4	455.4	455.3	455.3	454.5	453.0	451.5	450.0	448.5
135°	488.0	488.1	487.9	487.5	487.3	487.0	486.1	484.5	483.0	481.4	479.9
137.5°	520.2	520.2	519.9	519.5	519.2	518.8	518.0	516.7	515.4	514.1	512.9
140°	541.7	541.7	541.0	540.3	539.6	538.8	537.9	536.5	535.3	534.0	532.8
142.5°	561.2	561.1	560.6	560.1	559.6	559.1	558.2	557.0	555.7	554.4	553.2
145°	590.9	590.8	589.9	589.1	588.2	587.3	586.4	585.5	584.5	583.4	582.4
147.5°	616.8	616.5	616.0	615.4	614.8	614.2	613.3	612.1	611.0	609.8	608.6
150°	633.2	632.8	632.3	631.7	631.1	630.6	629.8	629.0	628.1	627.3	626.5
152.5°	649.6	649.1	648.4	647.8	647.1	646.4	645.6	644.8	643.9	643.1	642.2
155°	670.5	669.8	669.4	669.0	668.5	668.1	667.6	667.2	666.8	666.3	665.9
157.5°	689.6	688.6	688.4	688.1	687.9	687.6	687.4	687.1	686.8	686.5	686.2
160°	701.2	700.3	700.3	700.1	699.9	699.8	699.6	699.3	699.0	698.7	698.5
162.5°	711.5	710.5	710.5	710.3	710.1	710.0	709.9	709.8	709.8	709.7	709.6
165°	725.0	723.9	723.9	723.9	723.9	723.9	724.0	724.1	724.3	724.5	724.6
167.5°	736.1	735.0	735.1	735.1	735.2	735.2	735.4	735.8	736.2	736.6	737.0
170°	742.2	741.1	741.3	741.4	741.6	741.7	742.0	742.4	742.8	743.3	743.7
172.5°	746.7	745.8	745.9	746.0	746.2	746.3	746.6	747.0	747.5	747.9	748.3
175°	751.7	750.7	751.0	751.3	751.5	751.9	752.2	752.6	753.0	753.5	753.9
177.5°	754.3	753.7	753.8	754.1	754.3	754.6	754.8	755.1	755.5	755.9	756.2
180°	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1808.6	1810.0	1820.1	1824.6	1833.6	1837.0	1841.1	1840.0	1840.0	1842.1	1856.0
5°	1812.5	1825.0	1843.7	1861.8	1879.3	1894.3	1904.3	1914.3	1918.1	1936.2	1952.4
7.5°	1806.0	1829.0	1859.9	1887.6	1920.7	1946.5	1968.1	1987.4	2000.7	2027.0	2054.0
10°	1797.5	1829.9	1864.9	1900.5	1946.1	1980.5	2015.5	2042.4	2051.1	2090.5	2113.0
12.5°	1780.5	1824.0	1868.4	1914.6	1959.2	2006.5	2045.0	2071.8	2102.6	2138.0	2179.5
15°	1755.0	1805.0	1863.0	1922.4	1986.2	2043.6	2084.9	2131.7	2165.4	2204.2	2240.4
17.5°	1718.4	1782.7	1856.6	1925.3	1999.0	2060.8	2117.5	2162.4	2186.2	2208.3	2213.7
20°	1689.4	1758.8	1845.6	1926.8	2000.5	2071.8	2127.9	2165.4	2171.7	2172.3	2139.2
22.5°	1657.9	1736.3	1827.1	1910.3	1998.5	2077.7	2121.5	2137.5	2112.7	2070.4	2006.3
25°	1600.0	1690.6	1796.2	1891.2	1987.4	2062.4	2077.4	2049.3	1962.4	1871.2	1755.6
27.5°	1537.3	1639.2	1752.3	1857.9	1960.4	2006.9	1974.5	1873.2	1716.8	1580.8	1416.0
30°	1491.3	1605.7	1716.9	1834.9	1929.9	1949.9	1875.6	1726.2	1543.8	1338.9	1174.6
32.5°	1438.8	1558.7	1680.9	1803.0	1882.4	1863.0	1740.1	1556.3	1342.4	1140.9	985.6
35°	1363.8	1487.6	1619.4	1741.9	1792.4	1708.1	1524.4	1285.2	1066.5	878.4	771.6
37.5°	1277.2	1412.0	1549.1	1661.5	1657.9	1517.4	1267.1	1020.1	836.3	725.1	649.0
40°	1215.8	1352.0	1500.1	1595.1	1554.4	1371.3	1100.2	867.2	732.9	644.2	588.6
42.5°	1156.8	1293.6	1440.6	1516.0	1445.4	1220.4	950.3	767.7	656.9	587.7	542.6
45°	1056.5	1200.8	1337.0	1378.8	1252.6	1004.6	768.5	636.0	562.3	511.0	479.8
47.5°	958.4	1100.3	1224.7	1225.4	1054.8	814.7	648.2	550.4	487.5	447.8	425.1
50°	898.4	1033.4	1137.7	1121.4	927.8	724.7	579.8	495.5	443.0	412.4	388.6
52.5°	831.0	961.9	1052.2	1006.0	820.4	637.7	518.3	447.4	404.0	377.3	356.1
55°	732.9	849.1	912.8	842.8	669.1	530.4	438.0	382.4	349.8	327.3	309.2
57.5°	636.5	732.4	772.5	691.0	551.1	439.9	370.5	328.7	296.5	280.4	271.0
60°	576.0	657.9	686.0	596.1	479.2	384.8	328.0	289.3	265.5	254.9	245.6
62.5°	516.6	583.4	595.0	512.6	417.8	336.9	288.0	255.3	239.5	229.4	220.5
65°	428.6	476.7	471.1	404.9	330.5	267.4	231.8	211.8	199.9	185.6	169.9
67.5°	352.9	382.2	364.5	314.9	252.3	207.8	184.6	169.4	154.7	141.0	137.5
70°	304.9	321.7	303.0	257.4	206.8	174.3	155.6	137.5	128.7	125.6	119.9
72.5°	258.9	264.8	244.5	205.5	168.3	144.3	126.0	115.9	111.2	108.6	104.9
75°	194.3	190.0	172.4	141.9	116.8	100.6	95.0	91.2	88.1	85.6	83.7
77.5°	136.5	130.0	114.5	94.5	81.4	73.6	70.2	68.2	66.7	65.5	63.6
80°	102.5	98.1	82.5	67.5	61.9	58.1	56.3	53.7	53.7	52.5	50.6
82.5°	75.0	70.1	56.5	49.5	46.4	44.1	42.7	41.3	40.8	41.0	39.6
85°	39.4	31.9	28.1	26.9	25.0	23.7	24.4	23.2	23.2	23.2	22.5
87.5°	12.5	10.3	10.1	9.9	10.9	11.6	11.7	12.3	13.5	12.9	13.4
90°	2.4	4.1	5.7	7.4	9.9	13.0	16.1	19.2	22.3	22.0	21.8
92.5°	12.6	13.9	15.1	16.3	17.3	18.0	18.8	19.6	20.3	20.3	20.4
95°	34.6	36.0	37.4	38.8	39.6	39.9	40.2	40.5	40.8	40.8	40.8
97.5°	61.8	63.0	64.2	65.6	66.4	66.9	67.5	68.0	68.6	68.6	68.6
100°	82.1	83.2	84.3	85.4	86.3	86.7	87.1	87.5	88.0	88.0	88.0
102.5°	103.2	104.2	105.1	106.0	106.7	107.2	107.8	108.3	108.8	108.9	109.1
105°	137.5	137.9	138.3	138.7	139.1	139.3	139.7	139.9	140.2	140.5	140.8
107.5°	172.6	173.2	173.8	174.4	174.7	174.7	174.7	174.7	174.7	174.9	175.0
110°	195.2	196.1	196.9	197.8	198.2	198.2	198.2	198.2	198.2	198.2	198.2



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	219.7	220.5	221.4	222.3	222.6	222.5	222.4	222.3	222.2	221.8	221.4
115°	255.8	256.6	257.5	258.3	258.6	258.3	258.0	257.7	257.5	257.3	257.1
117.5°	292.0	293.1	294.2	295.4	295.5	294.7	294.0	293.2	292.4	292.0	291.7
120°	315.9	317.1	318.2	319.4	319.4	318.2	317.1	315.9	314.8	314.8	314.8
122.5°	338.1	339.5	340.8	342.2	342.4	341.7	340.9	340.1	339.2	338.9	338.6
125°	372.2	373.4	374.7	376.0	376.4	376.0	375.5	375.1	374.7	374.3	373.9
127.5°	405.8	407.4	409.0	410.6	411.2	410.7	410.2	409.6	409.1	408.6	408.1
130°	426.9	428.8	430.6	432.4	433.2	432.9	432.6	432.4	432.1	431.8	431.5
132.5°	450.0	451.5	453.0	454.5	455.3	455.3	455.4	455.4	455.5	454.9	454.3
135°	481.4	483.0	484.5	486.1	487.0	487.3	487.5	487.9	488.1	488.0	487.9
137.5°	514.1	515.4	516.7	518.0	518.8	519.2	519.5	519.9	520.2	520.2	520.1
140°	534.0	535.3	536.5	537.9	538.8	539.6	540.3	541.0	541.7	541.7	541.7
142.5°	554.4	555.7	557.0	558.2	559.1	559.6	560.1	560.6	561.1	561.2	561.3
145°	583.4	584.5	585.5	586.4	587.3	588.2	589.1	589.9	590.8	590.9	591.0
147.5°	609.8	611.0	612.1	613.3	614.2	614.8	615.4	616.0	616.5	616.8	617.1
150°	627.3	628.1	629.0	629.8	630.6	631.1	631.7	632.3	632.8	633.2	633.7
152.5°	643.1	643.9	644.8	645.6	646.4	647.1	647.8	648.4	649.1	649.6	650.2
155°	666.3	666.8	667.2	667.6	668.1	668.5	669.0	669.4	669.8	670.5	671.2
157.5°	686.5	686.8	687.1	687.4	687.6	687.9	688.1	688.4	688.6	689.6	690.6
160°	698.7	699.0	699.3	699.6	699.8	699.9	700.1	700.3	700.3	701.2	702.1
162.5°	709.7	709.8	709.8	709.9	710.0	710.1	710.3	710.5	710.5	711.5	712.5
165°	724.5	724.3	724.1	724.0	723.9	723.9	723.9	723.9	723.9	725.0	725.9
167.5°	736.6	736.2	735.8	735.4	735.2	735.2	735.1	735.1	735.0	736.1	737.0
170°	743.3	742.8	742.4	742.0	741.7	741.6	741.4	741.3	741.1	742.2	743.1
172.5°	747.9	747.5	747.0	746.6	746.3	746.2	746.0	745.9	745.8	746.7	747.7
175°	753.5	753.0	752.6	752.2	751.9	751.5	751.3	751.0	750.7	751.7	752.7
177.5°	755.9	755.5	755.1	754.8	754.6	754.3	754.1	753.8	753.7	754.3	755.0
180°	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1	755.1



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1861.1	1867.5	1870.5	1870.5	1874.0	1872.6	1871.0
5°	1968.1	1979.9	1982.4	1993.7	2001.7	1999.3	2000.5
7.5°	2074.4	2093.4	2112.4	2121.0	2122.3	2127.4	2129.2
10°	2139.8	2155.5	2184.8	2180.4	2202.3	2214.8	2194.2
12.5°	2202.8	2223.9	2244.3	2249.9	2262.3	2266.3	2258.1
15°	2259.8	2271.0	2272.3	2269.1	2272.9	2269.8	2257.9
17.5°	2206.5	2188.3	2151.3	2133.8	2119.9	2099.5	2091.2
20°	2118.6	2064.8	2002.4	1977.4	1948.0	1890.5	1904.3
22.5°	1928.7	1867.4	1805.0	1732.0	1697.1	1642.7	1639.4
25°	1633.1	1527.5	1411.4	1330.2	1282.6	1228.3	1204.5
27.5°	1269.7	1136.9	1041.6	993.4	949.5	906.4	904.7
30°	1030.9	930.9	857.2	816.0	789.0	770.9	774.7
32.5°	868.9	800.5	750.7	716.5	696.6	683.0	682.7
35°	710.4	663.5	631.6	617.3	602.9	592.9	593.5
37.5°	607.9	579.8	562.1	546.2	537.2	532.3	529.5
40°	555.4	532.3	518.5	509.2	501.7	494.8	493.6
42.5°	514.0	494.8	481.1	473.7	466.7	461.9	460.6
45°	456.1	440.4	428.0	419.9	416.7	412.4	412.4
47.5°	405.7	390.4	380.6	375.5	370.1	367.2	367.1
50°	371.8	359.9	351.1	348.0	343.6	341.8	341.1
52.5°	341.3	332.4	326.1	324.0	322.1	319.8	320.2
55°	299.9	294.9	292.4	290.5	287.4	283.6	286.2
57.5°	265.1	260.8	254.0	248.2	245.3	242.6	243.7
60°	240.5	231.8	223.1	216.1	214.3	208.6	208.6
62.5°	209.5	197.3	186.5	182.7	180.8	178.2	177.7
65°	161.2	156.2	153.7	151.2	149.9	149.9	148.7
67.5°	133.5	131.6	128.8	128.2	126.9	126.6	126.2
70°	118.1	115.6	114.3	113.7	112.4	113.1	111.2
72.5°	103.1	101.1	100.9	99.2	98.5	98.6	97.2
75°	81.2	81.2	80.6	80.0	78.8	78.1	78.8
77.5°	62.5	62.6	61.5	61.4	61.2	61.4	60.7
80°	50.0	50.6	50.0	49.3	48.8	49.3	48.8
82.5°	39.5	38.6	38.5	38.4	38.2	37.8	37.7
85°	22.5	23.2	22.5	21.9	21.9	21.9	22.5
87.5°	12.8	12.7	12.7	12.7	12.8	12.8	12.3
90°	21.4	21.2	21.1	21.3	21.4	21.5	21.7
92.5°	20.5	20.5	20.5	20.5	20.6	20.6	20.6
95°	40.8	40.8	40.7	40.4	40.1	39.8	39.5
97.5°	68.6	68.6	68.6	68.6	68.5	68.5	68.4
100°	88.0	88.0	87.9	87.7	87.6	87.5	87.3
102.5°	109.2	109.3	109.3	109.2	109.0	108.8	108.7
105°	141.0	141.4	141.5	141.5	141.5	141.5	141.5
107.5°	175.0	175.2	175.0	174.3	173.7	173.0	172.4
110°	198.2	198.2	198.0	197.5	197.1	196.7	196.2



TEST NUMBER: P331748-930

CATALOG NUMBER: SA2XXRDIP-C1005D725U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	221.1	220.8	220.5	220.1	219.8	219.6	219.2
115°	257.1	256.9	256.6	256.2	255.8	255.4	254.9
117.5°	291.4	291.0	290.7	290.2	289.8	289.3	288.9
120°	314.8	314.8	314.6	314.1	313.7	313.3	312.9
122.5°	338.3	337.9	337.6	337.3	337.0	336.6	336.4
125°	373.4	373.0	372.8	372.6	372.4	372.3	372.2
127.5°	407.6	407.1	406.6	406.2	405.7	405.3	404.8
130°	431.2	431.0	430.5	429.9	429.4	428.8	428.3
132.5°	453.6	453.1	452.5	452.0	451.6	451.1	450.7
135°	487.7	487.5	487.3	486.9	486.5	486.0	485.6
137.5°	519.9	519.8	519.5	518.9	518.4	517.8	517.2
140°	541.7	541.7	541.4	540.9	540.3	539.7	539.2
142.5°	561.4	561.5	561.3	560.7	560.1	559.6	559.1
145°	591.2	591.3	591.1	590.5	590.0	589.4	588.8
147.5°	617.4	617.8	617.7	617.1	616.5	616.0	615.5
150°	634.1	634.5	634.5	634.1	633.7	633.2	632.8
152.5°	650.8	651.3	651.3	650.8	650.2	649.6	649.1
155°	671.9	672.6	672.8	672.3	671.9	671.5	671.1
157.5°	691.5	692.5	692.6	691.9	691.3	690.6	689.9
160°	703.0	703.8	703.9	703.4	702.8	702.2	701.6
162.5°	713.5	714.4	714.5	713.9	713.2	712.5	711.8
165°	726.9	727.9	728.1	727.3	726.6	725.9	725.2
167.5°	738.0	739.0	739.2	738.4	737.7	736.9	736.2
170°	744.1	745.1	745.2	744.4	743.5	742.7	741.8
172.5°	748.7	749.7	749.7	748.9	748.0	747.2	746.4
175°	753.7	754.6	754.7	753.9	753.0	752.2	751.4
177.5°	755.7	756.4	756.4	755.7	755.0	754.3	753.7
180°	755.1	755.1	755.1	755.1	755.1	755.1	755.1

(END OF REPORT)