

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331723-930

Luminaire Tested: **SA2XXRDIP-C865D925U930-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331723-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5708.8 lumens
Efficiency: N/A
Efficacy: 94.4 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331723-930
CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

Luminous Intensity Polar Plot

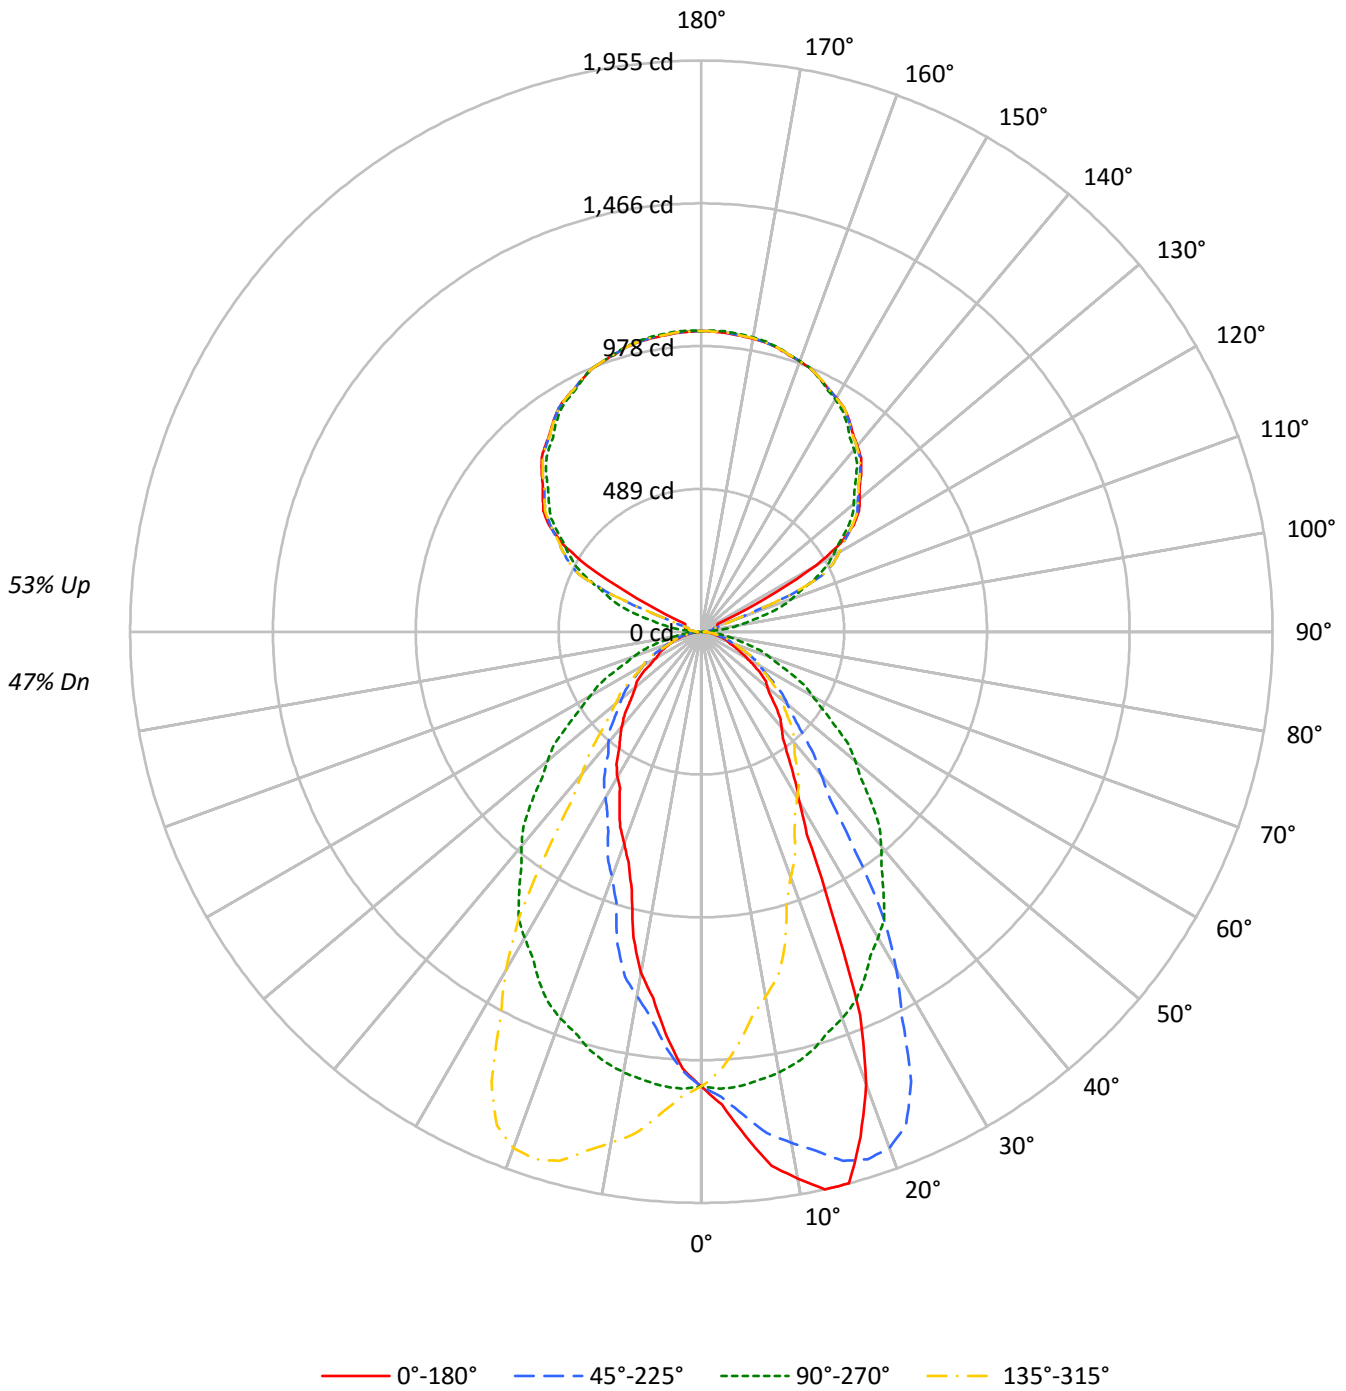



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47				47
1	98	94	90	87	90	86	83	81	73	71	69	60	59	57	48	47	47	41				41
2	90	83	77	72	82	76	72	67	65	61	58	54	51	49	44	42	40	36				36
3	82	74	67	61	76	68	62	57	58	53	50	48	45	42	39	37	35	31				31
4	76	66	58	53	70	61	54	49	52	47	43	43	40	37	36	33	31	28				28
5	70	59	51	46	64	55	48	43	47	42	38	39	36	33	33	30	28	25				25
6	65	53	46	40	59	50	43	38	43	37	33	36	32	29	30	27	25	22				22
7	60	48	41	35	55	45	38	34	39	34	30	33	29	26	28	25	23	20				20
8	56	44	37	32	52	41	35	30	36	31	27	30	27	24	26	23	20	18				18
9	52	40	33	28	48	38	31	27	33	28	24	28	24	21	24	21	19	17				17
10	49	37	30	26	45	35	29	25	30	26	22	26	22	20	22	19	17	15				15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	25137	25137	25137	25137
5°	28075	25293	22428	25293
10°	31147	25117	19441	25117
15°	32679	24749	15318	24749
20°	28331	24204	13254	24204
25°	18579	23457	11834	23457
30°	12506	22551	10711	22551
35°	10129	21409	9660	21409
40°	9008	20168	8939	20168
45°	8152	18712	7978	18712
50°	7420	17269	7390	17269
55°	6975	15671	6883	15671
60°	5835	14202	5767	14202
65°	4917	12894	5578	12894
70°	4546	11514	5264	11514
75°	4255	10025	4860	10025
80°	3924	8247	4333	8247
85°	3612	6502	3798	6502



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.6	2.6
10°-20°	411.2	7.2
20°-30°	529.9	9.3
30°-40°	503.6	8.8
40°-50°	431.4	7.6
50°-60°	328.5	5.8
60°-70°	207.7	3.6
70°-80°	103.7	1.8
80°-90°	29.5	0.5
90°-100°	34.3	0.6
100°-110°	125.9	2.2
110°-120°	336.5	5.9
120°-130°	555.4	9.7
130°-140°	590.7	10.3
140°-150°	549.0	9.6
150°-160°	441.4	7.7
160°-170°	284.5	5.0
170°-180°	97.9	1.7
0°-30°	1088.7	19.1
0°-40°	1592.3	27.9
0°-60°	2352.3	41.2
0°-90°	2693.2	47.2
90°-120°	496.7	8.7
90°-150°	2191.9	38.4
90°-180°	3016.0	52.8
0°-180°	5708.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1557	1557	1557	1557	1557	
5°	1732	1561	1384	1561	1732	171
15°	1955	1481	916	1481	1955	527
25°	1043	1317	664	1317	1043	495
35°	514	1086	490	1086	514	329
45°	357	820	349	820	357	276
55°	248	557	244	557	248	217
65°	129	338	146	338	129	131
75°	68	161	78	161	68	72
85°	20	35	20	35	20	21
90°	20	1	20	1	20	10
95°	32	48	32	48	32	30
105°	57	226	57	226	57	59
115°	61	428	61	428	61	153
125°	637	605	637	605	637	551
135°	774	749	774	749	774	596
145°	882	869	882	869	882	552
155°	958	957	958	957	958	442
165°	1006	1008	1006	1008	1006	284
175°	1025	1031	1025	1031	1025	98
180°	1029	1029	1029	1029	1029	



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1620.1	1621.4	1622.7	1619.6	1619.6	1617.1	1611.4	1607.1	1595.0	1593.3	1593.3
5°	1732.2	1731.0	1733.2	1726.2	1716.4	1714.3	1704.1	1690.5	1676.4	1660.8	1657.5
7.5°	1843.6	1841.9	1837.6	1836.5	1829.0	1812.7	1796.1	1778.5	1755.1	1732.3	1720.8
10°	1899.8	1917.7	1906.9	1887.9	1891.7	1866.3	1852.8	1829.5	1810.0	1776.0	1768.4
12.5°	1955.3	1962.3	1958.8	1948.1	1943.3	1925.6	1907.3	1887.1	1851.1	1820.6	1793.9
15°	1955.0	1965.3	1968.0	1964.8	1967.5	1966.4	1956.6	1939.8	1908.5	1874.9	1845.8
17.5°	1810.7	1817.9	1835.6	1847.5	1862.7	1894.8	1910.6	1916.7	1912.0	1892.9	1872.3
20°	1648.9	1637.0	1686.7	1712.1	1733.7	1787.9	1834.4	1852.3	1880.9	1880.4	1874.9
22.5°	1419.4	1422.3	1469.5	1499.7	1562.8	1616.9	1670.0	1737.2	1792.6	1829.3	1850.7
25°	1042.9	1063.6	1110.6	1151.7	1222.1	1322.7	1414.1	1520.1	1620.2	1699.2	1774.3
27.5°	783.3	784.8	822.1	860.1	901.9	984.3	1099.4	1226.0	1368.7	1486.5	1621.9
30°	670.8	667.6	683.2	706.5	742.2	806.0	892.6	1017.0	1159.3	1336.7	1494.7
32.5°	591.2	591.3	603.2	620.4	650.0	693.1	752.4	853.5	987.9	1162.3	1347.5
35°	513.9	513.4	522.0	534.4	546.9	574.5	615.1	668.1	760.6	923.4	1112.7
37.5°	458.5	460.9	465.1	472.9	486.7	502.0	526.4	562.0	627.9	724.1	883.3
40°	427.4	428.4	434.4	440.9	449.0	460.9	480.9	509.6	557.7	634.5	750.8
42.5°	398.8	399.9	404.1	410.2	416.5	428.4	445.0	469.8	508.8	568.8	664.7
45°	357.0	357.0	360.9	363.5	370.6	381.4	394.9	415.5	442.5	486.9	550.7
47.5°	317.9	318.0	320.5	325.1	329.5	338.0	351.3	368.1	387.8	422.1	476.6
50°	295.4	295.9	297.5	301.3	304.0	311.6	321.9	336.5	357.0	383.5	429.0
52.5°	277.2	276.9	278.9	280.5	282.4	287.8	295.5	308.3	326.8	349.8	387.4
55°	247.8	245.6	248.8	251.5	253.2	255.4	259.7	267.7	283.5	303.0	331.1
57.5°	211.0	210.1	212.4	214.8	220.0	225.8	229.5	234.6	242.8	256.7	284.6
60°	180.7	180.7	185.6	187.2	193.1	200.7	208.3	212.6	220.7	229.9	250.5
62.5°	153.8	154.3	156.5	158.2	161.5	170.8	181.4	190.9	198.6	207.4	221.0
65°	128.7	129.8	129.8	130.9	133.1	135.3	139.6	147.2	160.7	173.1	183.4
67.5°	109.3	109.6	109.9	111.0	111.5	113.9	115.7	119.0	122.1	134.0	146.7
70°	96.3	97.9	97.3	98.5	99.0	100.0	102.2	103.9	108.8	111.5	119.0
72.5°	84.1	85.4	85.3	85.9	87.3	87.6	89.3	90.9	94.0	96.3	100.4
75°	68.2	67.6	68.2	69.2	69.8	70.4	70.4	72.5	74.1	76.3	79.0
77.5°	52.6	53.2	53.0	53.2	53.2	54.2	54.1	55.0	56.7	57.8	59.1
80°	42.2	42.7	42.2	42.7	43.3	43.8	43.3	43.8	45.4	46.6	46.6
82.5°	32.7	32.8	33.1	33.2	33.3	33.4	34.2	34.3	35.5	35.3	35.7
85°	19.5	18.9	18.9	18.9	19.5	20.0	19.5	19.5	20.0	20.0	20.0
87.5°	10.9	11.3	11.3	11.2	11.1	11.0	10.8	11.1	10.5	10.8	10.1
90°	20.1	19.8	19.4	19.1	18.8	18.2	17.4	16.6	15.7	14.9	13.5
92.5°	20.1	19.9	19.7	19.5	19.3	19.0	18.6	18.1	17.7	17.3	16.6
95°	32.0	32.2	32.4	32.5	32.7	32.4	31.6	30.7	29.8	29.0	27.9
97.5°	42.7	42.6	42.3	42.2	41.9	41.5	40.8	40.2	39.5	38.9	36.2
100°	49.9	49.6	49.2	48.9	48.6	47.8	46.4	45.1	43.8	42.5	39.6
102.5°	53.5	53.0	52.5	52.1	51.6	50.5	48.8	47.0	45.3	43.6	67.2
105°	56.6	55.9	55.3	54.6	54.0	52.7	50.9	49.1	47.2	45.4	90.6
107.5°	58.2	57.6	56.9	56.3	55.6	56.2	58.0	59.8	61.7	63.6	117.7
110°	58.9	58.1	57.5	56.8	56.2	64.1	80.6	97.2	113.7	130.3	178.1



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	59.4	58.9	58.4	57.8	57.3	87.2	147.6	208.0	268.3	328.6	340.5
115°	61.1	73.0	84.9	96.8	108.7	153.0	229.6	306.2	382.8	459.4	455.3
117.5°	249.3	288.5	327.6	366.7	405.9	434.7	453.3	471.8	490.3	508.8	506.1
120°	454.2	476.5	498.9	521.2	543.6	553.8	551.8	549.8	547.8	545.8	542.8
122.5°	566.8	571.1	575.4	579.8	584.2	585.7	584.5	583.3	582.1	581.0	577.7
125°	636.7	636.2	635.6	635.1	634.6	633.8	632.7	631.5	630.4	629.2	626.1
127.5°	680.7	680.6	680.5	680.4	680.3	679.5	677.8	676.0	674.3	672.7	670.3
130°	708.1	708.3	708.4	708.7	708.8	707.9	706.1	704.3	702.5	700.7	698.9
132.5°	734.9	735.1	735.2	735.4	735.6	734.9	733.4	731.8	730.3	728.6	726.8
135°	773.6	774.0	774.3	774.6	774.9	774.3	772.7	771.0	769.3	767.7	766.2
137.5°	808.9	809.5	810.1	810.7	811.2	810.7	809.0	807.4	805.8	804.2	802.5
140°	831.0	831.8	832.7	833.5	834.3	834.0	832.5	831.0	829.5	828.0	826.2
142.5°	852.4	853.3	854.1	854.9	855.7	855.5	854.1	852.7	851.4	850.0	848.0
145°	882.4	883.2	884.0	884.8	885.7	885.5	884.4	883.2	882.0	880.8	878.1
147.5°	908.7	909.4	910.1	910.8	911.5	911.4	910.5	909.7	908.8	908.0	905.2
150°	924.8	925.6	926.4	927.3	928.1	928.1	927.1	926.0	925.0	924.1	921.5
152.5°	938.5	939.6	940.7	941.8	942.9	942.9	941.9	940.9	940.0	939.0	936.5
155°	957.6	958.9	960.2	961.6	962.9	963.0	962.1	961.1	960.0	959.0	957.1
157.5°	975.0	976.2	977.5	978.8	980.2	980.2	979.1	978.0	976.9	975.8	974.4
160°	985.1	986.3	987.4	988.6	989.8	989.9	988.9	987.8	986.8	985.9	984.9
162.5°	993.4	994.9	996.3	997.8	999.1	999.3	998.2	997.0	995.9	994.8	993.9
165°	1006.0	1007.1	1008.3	1009.4	1010.6	1010.6	1009.4	1008.3	1007.1	1006.0	1005.5
167.5°	1013.8	1015.4	1016.8	1018.3	1019.8	1020.0	1018.8	1017.7	1016.5	1015.4	1014.9
170°	1018.6	1020.1	1021.6	1023.1	1024.6	1024.7	1023.6	1022.5	1021.2	1020.1	1019.8
172.5°	1022.2	1023.7	1025.2	1026.6	1028.2	1028.3	1027.2	1026.0	1024.8	1023.7	1023.4
175°	1025.3	1027.0	1028.7	1030.3	1031.9	1032.2	1031.0	1029.9	1028.7	1027.5	1027.2
177.5°	1027.3	1028.4	1029.6	1030.9	1032.0	1032.2	1031.3	1030.3	1029.4	1028.4	1028.3
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1594.1	1590.6	1587.6	1579.8	1575.9	1567.2	1565.9	1565.5	1554.3	1543.4	1540.4
5°	1648.9	1640.2	1627.2	1612.1	1596.4	1580.1	1569.3	1560.6	1539.0	1518.5	1506.6
7.5°	1704.1	1685.4	1663.0	1634.3	1610.5	1583.6	1563.7	1545.8	1515.2	1485.7	1465.9
10°	1745.1	1714.8	1685.1	1645.6	1614.8	1584.5	1556.3	1532.0	1497.4	1458.4	1430.9
12.5°	1770.7	1737.3	1696.3	1657.7	1617.8	1579.2	1541.6	1510.3	1469.7	1429.5	1396.6
15°	1805.2	1769.4	1719.7	1664.5	1613.2	1562.8	1519.6	1480.6	1427.6	1379.4	1339.4
17.5°	1833.4	1784.3	1730.9	1667.0	1607.5	1543.6	1487.8	1438.1	1379.1	1321.0	1273.8
20°	1842.5	1793.8	1732.2	1668.3	1598.0	1522.8	1462.7	1408.7	1345.3	1282.1	1228.0
22.5°	1836.9	1799.0	1730.4	1654.0	1582.0	1503.3	1435.5	1372.7	1302.5	1238.0	1175.2
25°	1798.7	1785.7	1720.8	1637.4	1555.3	1463.9	1385.4	1316.7	1236.6	1167.4	1099.2
27.5°	1709.7	1737.6	1697.5	1608.7	1517.3	1419.3	1331.1	1252.9	1169.8	1091.8	1023.9
30°	1624.0	1688.3	1671.0	1588.8	1486.5	1390.2	1291.3	1209.6	1120.9	1040.8	973.7
32.5°	1506.7	1613.0	1629.9	1561.1	1455.4	1349.6	1245.9	1164.6	1072.0	987.6	922.2
35°	1320.0	1479.0	1552.0	1508.2	1402.2	1288.0	1180.9	1086.2	993.2	909.9	845.0
37.5°	1097.1	1313.8	1435.5	1438.6	1341.2	1222.5	1106.0	1011.9	916.7	834.9	764.7
40°	952.6	1187.4	1345.9	1381.0	1298.9	1170.6	1052.7	956.9	863.9	783.8	703.3
42.5°	822.8	1056.7	1251.6	1312.7	1247.3	1120.0	1001.7	901.6	811.1	735.4	653.1
45°	665.4	869.8	1084.6	1193.9	1157.6	1039.8	914.8	819.5	734.6	669.2	590.2
47.5°	561.3	705.4	913.2	1061.0	1060.4	952.8	829.8	738.7	659.8	598.5	534.6
50°	502.0	627.5	803.3	971.0	985.0	894.7	777.9	687.5	614.0	549.6	498.2
52.5°	448.7	552.2	710.3	871.1	911.1	832.8	719.5	636.1	564.7	505.5	461.5
55°	379.2	459.3	579.4	729.8	790.4	735.2	634.5	556.7	498.8	449.0	411.2
57.5°	320.8	380.8	477.2	598.3	668.9	634.1	551.1	487.9	438.3	393.3	363.4
60°	284.0	333.2	414.9	516.1	593.9	569.6	498.8	439.8	397.6	358.7	330.5
62.5°	249.4	291.7	361.7	443.8	515.2	505.2	447.3	397.8	360.9	325.3	301.5
65°	200.7	231.5	286.2	350.6	407.9	412.8	371.1	337.5	304.6	276.5	255.4
67.5°	159.8	179.9	218.4	272.6	315.6	330.9	305.5	279.9	253.7	232.0	213.7
70°	134.7	150.9	179.0	222.9	262.4	278.6	264.0	243.9	221.3	203.4	187.7
72.5°	109.2	125.0	145.7	177.9	211.7	229.3	224.2	209.8	191.4	176.6	161.8
75°	82.3	87.1	101.2	122.8	149.3	164.4	168.3	160.7	146.0	134.7	126.0
77.5°	60.8	63.8	70.4	81.8	99.1	112.6	118.1	117.2	107.2	100.6	92.5
80°	48.7	50.3	53.6	58.5	71.4	85.0	88.7	88.7	81.7	79.0	70.8
82.5°	37.0	38.2	40.1	42.8	48.9	60.7	64.9	65.8	61.3	57.8	51.4
85°	21.1	20.5	21.6	23.2	24.4	27.6	34.1	35.1	34.1	29.8	28.1
87.5°	9.8	9.9	9.7	9.0	9.0	9.1	10.9	12.7	11.3	10.4	9.9
90°	12.2	10.9	9.6	8.0	6.2	4.4	2.5	0.7	2.5	4.4	6.2
92.5°	16.0	15.3	14.6	14.3	14.5	14.7	14.8	15.0	14.8	14.7	14.5
95°	26.7	25.6	24.4	26.6	32.0	37.5	43.0	48.4	43.0	37.5	32.0
97.5°	33.5	30.8	28.1	34.5	49.9	65.3	80.6	96.0	80.6	65.3	49.9
100°	36.9	34.0	31.2	41.1	63.8	86.4	109.1	131.8	109.1	86.4	63.8
102.5°	90.7	114.2	137.8	151.9	156.7	161.5	166.3	171.1	166.3	161.5	156.7
105°	135.7	180.9	226.1	246.2	241.2	236.3	231.3	226.3	231.3	236.3	241.2
107.5°	171.9	226.1	280.3	305.4	301.3	297.3	293.3	289.3	293.3	297.3	301.3
110°	225.9	273.8	321.6	343.7	340.3	336.8	333.4	329.9	333.4	336.8	340.3



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	352.3	364.1	375.9	380.3	377.2	374.1	371.0	367.9	371.0	374.1	377.2
115°	451.2	447.0	442.9	439.4	436.6	433.7	431.0	428.1	431.0	433.7	436.6
117.5°	503.2	500.3	497.5	494.5	491.4	488.2	485.0	481.9	485.0	488.2	491.4
120°	539.8	536.9	533.9	531.2	528.6	526.2	523.7	521.2	523.7	526.2	528.6
122.5°	574.5	571.2	567.9	565.0	562.4	559.8	557.2	554.6	557.2	559.8	562.4
125°	622.9	619.8	616.6	614.0	611.8	609.7	607.5	605.4	607.5	609.7	611.8
127.5°	668.0	665.6	663.2	660.9	658.5	656.2	653.8	651.3	653.8	656.2	658.5
130°	697.0	695.2	693.4	691.1	688.5	685.8	683.2	680.6	683.2	685.8	688.5
132.5°	725.0	723.3	721.4	719.3	717.1	714.9	712.6	710.4	712.6	714.9	717.1
135°	764.8	763.2	761.7	759.7	757.0	754.4	751.7	749.1	751.7	754.4	757.0
137.5°	800.8	799.1	797.4	795.7	793.8	792.0	790.1	788.2	790.1	792.0	793.8
140°	824.3	822.6	820.8	819.1	817.8	816.5	815.2	813.8	815.2	816.5	817.8
142.5°	845.9	843.8	841.7	840.1	838.9	837.7	836.5	835.3	836.5	837.7	838.9
145°	875.2	872.5	869.6	868.3	868.5	868.6	868.8	868.9	868.8	868.6	868.5
147.5°	902.5	899.6	896.8	895.8	896.4	897.1	897.6	898.3	897.6	897.1	896.4
150°	918.8	916.2	913.5	912.7	913.9	915.0	916.2	917.4	916.2	915.0	913.9
152.5°	933.9	931.4	928.9	928.3	929.6	930.8	932.1	933.4	932.1	930.8	929.6
155°	955.1	953.1	951.1	950.9	952.4	953.8	955.4	956.8	955.4	953.8	952.4
157.5°	973.0	971.6	970.2	970.1	971.3	972.7	973.9	975.1	973.9	972.7	971.3
160°	983.9	982.8	981.9	981.9	982.8	983.9	984.9	985.9	984.9	983.9	982.8
162.5°	993.0	992.2	991.3	991.4	992.4	993.4	994.4	995.4	994.4	993.4	992.4
165°	1004.9	1004.4	1004.0	1004.2	1005.2	1006.2	1007.2	1008.2	1007.2	1006.2	1005.2
167.5°	1014.4	1014.0	1013.5	1013.7	1014.7	1015.8	1016.8	1017.7	1016.8	1015.8	1014.7
170°	1019.5	1019.1	1018.8	1019.1	1020.1	1021.1	1022.1	1023.1	1022.1	1021.1	1020.1
172.5°	1023.0	1022.7	1022.4	1022.7	1023.7	1024.7	1025.6	1026.6	1025.6	1024.7	1023.7
175°	1026.9	1026.5	1026.2	1026.6	1027.8	1029.0	1030.1	1031.3	1030.1	1029.0	1027.8
177.5°	1028.2	1028.1	1027.9	1028.3	1029.2	1030.2	1031.1	1032.0	1031.1	1030.2	1029.2
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1534.8	1531.8	1526.2	1517.5	1512.3	1503.2	1497.1	1500.6	1501.5	1500.6	1499.7
5°	1493.5	1482.2	1466.6	1451.4	1437.3	1422.2	1413.5	1409.7	1402.2	1397.8	1395.7
7.5°	1443.7	1424.2	1401.9	1375.6	1353.2	1329.7	1317.7	1311.7	1296.2	1287.8	1280.4
10°	1406.5	1375.7	1353.5	1318.8	1297.8	1266.9	1245.9	1246.3	1225.2	1213.3	1204.7
12.5°	1365.4	1331.5	1294.6	1263.5	1234.1	1209.3	1184.0	1173.6	1151.3	1139.8	1116.4
15°	1297.2	1257.8	1218.8	1176.6	1146.8	1108.4	1071.6	1026.7	990.5	959.1	950.5
17.5°	1222.8	1173.9	1134.8	1085.2	1034.3	969.7	927.1	901.0	879.1	862.6	850.3
20°	1171.7	1121.9	1080.3	1005.7	936.9	893.2	861.8	841.7	819.0	801.2	791.4
22.5°	1118.0	1066.1	1009.3	926.0	872.5	837.3	809.3	786.4	770.9	757.0	748.1
25°	1041.9	985.0	891.5	834.1	790.8	754.1	734.6	720.6	704.3	685.4	676.7
27.5°	961.4	871.1	803.9	761.2	719.9	696.0	678.5	657.5	642.9	634.5	625.4
30°	901.2	810.9	758.4	711.9	682.7	656.2	635.6	623.7	609.7	595.1	589.1
32.5°	834.1	762.0	711.7	672.9	643.3	620.7	604.5	585.2	575.0	566.1	553.6
35°	750.8	696.2	650.2	618.9	590.8	572.3	553.4	542.0	523.7	516.1	511.2
37.5°	680.3	632.9	598.6	565.5	543.2	522.9	511.3	493.3	485.3	474.7	464.5
40°	640.5	593.9	561.0	533.9	509.1	493.9	479.3	464.7	452.8	447.9	435.5
42.5°	599.8	562.0	529.0	499.3	482.7	466.6	448.2	437.4	425.1	417.2	409.5
45°	543.6	510.1	482.0	457.6	439.3	422.5	410.6	392.7	385.7	370.0	363.5
47.5°	494.3	463.2	436.3	413.2	395.3	384.3	366.9	352.9	341.7	332.1	323.7
50°	459.3	433.3	407.3	386.8	370.6	354.9	337.0	330.0	312.7	307.8	303.0
52.5°	427.2	402.6	378.8	358.7	342.4	327.2	311.4	302.3	290.6	285.8	282.2
55°	382.5	358.7	335.9	318.0	301.8	286.2	276.5	265.1	259.7	255.8	251.5
57.5°	337.5	316.0	298.6	280.5	264.2	251.8	240.5	233.7	228.0	223.1	217.9
60°	308.9	288.3	272.6	255.8	239.1	228.9	220.1	212.1	205.5	198.0	195.8
62.5°	278.6	260.7	246.2	229.9	215.3	205.9	197.6	190.0	182.2	171.1	168.1
65°	236.9	222.9	207.7	194.2	181.2	172.0	160.1	151.5	148.2	147.2	146.6
67.5°	199.3	186.0	173.0	159.1	147.3	138.8	132.7	131.4	129.1	128.5	127.0
70°	174.1	161.8	148.8	135.7	124.4	122.8	120.7	118.5	115.8	114.7	113.6
72.5°	151.6	138.8	125.8	115.4	110.6	108.5	106.3	104.2	102.3	101.3	100.6
75°	116.3	104.4	95.7	92.0	89.3	87.6	84.4	82.8	81.7	80.1	79.5
77.5°	83.7	77.0	73.1	70.7	67.8	66.1	64.2	62.6	61.5	61.1	60.3
80°	63.8	60.6	57.9	54.6	53.6	51.4	50.9	49.2	49.7	48.2	48.2
82.5°	49.6	45.4	43.1	41.7	40.6	38.8	38.3	37.5	37.7	36.4	36.4
85°	25.4	24.4	23.2	22.2	22.2	20.5	21.1	20.5	20.5	19.5	18.9
87.5°	9.9	9.7	9.1	9.4	9.6	9.5	9.6	9.4	9.5	9.7	9.4
90°	8.0	9.6	10.9	12.2	13.5	14.9	15.7	16.6	17.4	18.2	18.8
92.5°	14.3	14.6	15.3	16.0	16.6	17.3	17.7	18.1	18.6	19.0	19.3
95°	26.6	24.4	25.6	26.7	27.9	29.0	29.8	30.7	31.6	32.4	32.7
97.5°	34.5	28.1	30.8	33.5	36.2	38.9	39.5	40.2	40.8	41.5	41.9
100°	41.1	31.2	34.0	36.9	39.6	42.5	43.8	45.1	46.4	47.8	48.6
102.5°	151.9	137.8	114.2	90.7	67.2	43.6	45.3	47.0	48.8	50.5	51.6
105°	246.2	226.1	180.9	135.7	90.6	45.4	47.2	49.1	50.9	52.7	54.0
107.5°	305.4	280.3	226.1	171.9	117.7	63.6	61.7	59.8	58.0	56.2	55.6
110°	343.7	321.6	273.8	225.9	178.1	130.3	113.7	97.2	80.6	64.1	56.2



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	380.3	375.9	364.1	352.3	340.5	328.6	268.3	208.0	147.6	87.2	57.3
115°	439.4	442.9	447.0	451.2	455.3	459.4	382.8	306.2	229.6	153.0	108.7
117.5°	494.5	497.5	500.3	503.2	506.1	508.8	490.3	471.8	453.3	434.7	405.9
120°	531.2	533.9	536.9	539.8	542.8	545.8	547.8	549.8	551.8	553.8	543.6
122.5°	565.0	567.9	571.2	574.5	577.7	581.0	582.1	583.3	584.5	585.7	584.2
125°	614.0	616.6	619.8	622.9	626.1	629.2	630.4	631.5	632.7	633.8	634.6
127.5°	660.9	663.2	665.6	668.0	670.3	672.7	674.3	676.0	677.8	679.5	680.3
130°	691.1	693.4	695.2	697.0	698.9	700.7	702.5	704.3	706.1	707.9	708.8
132.5°	719.3	721.4	723.3	725.0	726.8	728.6	730.3	731.8	733.4	734.9	735.6
135°	759.7	761.7	763.2	764.8	766.2	767.7	769.3	771.0	772.7	774.3	774.9
137.5°	795.7	797.4	799.1	800.8	802.5	804.2	805.8	807.4	809.0	810.7	811.2
140°	819.1	820.8	822.6	824.3	826.2	828.0	829.5	831.0	832.5	834.0	834.3
142.5°	840.1	841.7	843.8	845.9	848.0	850.0	851.4	852.7	854.1	855.5	855.7
145°	868.3	869.6	872.5	875.2	878.1	880.8	882.0	883.2	884.4	885.5	885.7
147.5°	895.8	896.8	899.6	902.5	905.2	908.0	908.8	909.7	910.5	911.4	911.5
150°	912.7	913.5	916.2	918.8	921.5	924.1	925.0	926.0	927.1	928.1	928.1
152.5°	928.3	928.9	931.4	933.9	936.5	939.0	940.0	940.9	941.9	942.9	942.9
155°	950.9	951.1	953.1	955.1	957.1	959.0	960.0	961.1	962.1	963.0	962.9
157.5°	970.1	970.2	971.6	973.0	974.4	975.8	976.9	978.0	979.1	980.2	980.2
160°	981.9	981.9	982.8	983.9	984.9	985.9	986.8	987.8	988.9	989.9	989.8
162.5°	991.4	991.3	992.2	993.0	993.9	994.8	995.9	997.0	998.2	999.3	999.1
165°	1004.2	1004.0	1004.4	1004.9	1005.5	1006.0	1007.1	1008.3	1009.4	1010.6	1010.6
167.5°	1013.7	1013.5	1014.0	1014.4	1014.9	1015.4	1016.5	1017.7	1018.8	1020.0	1019.8
170°	1019.1	1018.8	1019.1	1019.5	1019.8	1020.1	1021.2	1022.5	1023.6	1024.7	1024.6
172.5°	1022.7	1022.4	1022.7	1023.0	1023.4	1023.7	1024.8	1026.0	1027.2	1028.3	1028.2
175°	1026.6	1026.2	1026.5	1026.9	1027.2	1027.5	1028.7	1029.9	1031.0	1032.2	1031.9
177.5°	1028.3	1027.9	1028.1	1028.2	1028.3	1028.4	1029.4	1030.3	1031.3	1032.2	1032.0
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1495.0	1495.8	1494.5	1495.4	1494.5	1495.8	1495.0	1499.7	1500.6	1501.5	1500.6
5°	1392.9	1386.5	1385.4	1383.8	1385.4	1386.5	1392.9	1395.7	1397.8	1402.2	1409.7
7.5°	1271.1	1270.2	1267.5	1263.7	1267.5	1270.2	1271.1	1280.4	1287.8	1296.2	1311.7
10°	1192.8	1190.1	1189.6	1185.8	1189.6	1190.1	1192.8	1204.7	1213.3	1225.2	1246.3
12.5°	1101.1	1083.6	1081.8	1072.4	1081.8	1083.6	1101.1	1116.4	1139.8	1151.3	1173.6
15°	937.5	934.3	923.4	916.4	923.4	934.3	937.5	950.5	959.1	990.5	1026.7
17.5°	844.0	833.4	830.1	828.5	830.1	833.4	844.0	850.3	862.6	879.1	901.0
20°	783.8	774.1	772.5	771.4	772.5	774.1	783.8	791.4	801.2	819.0	841.7
22.5°	742.3	732.1	727.9	724.6	727.9	732.1	742.3	748.1	757.0	770.9	786.4
25°	671.3	667.6	665.4	664.3	665.4	667.6	671.3	676.7	685.4	704.3	720.6
27.5°	615.8	607.5	605.8	603.1	605.8	607.5	615.8	625.4	634.5	642.9	657.5
30°	584.2	581.6	577.7	574.5	577.7	581.6	584.2	589.1	595.1	609.7	623.7
32.5°	547.0	544.8	541.4	539.9	541.4	544.8	547.0	553.6	566.1	575.0	585.2
35°	505.8	498.2	495.0	490.1	495.0	498.2	505.8	511.2	516.1	523.7	542.0
37.5°	462.2	458.2	453.6	455.3	453.6	458.2	462.2	464.5	474.7	485.3	493.3
40°	428.4	425.7	424.7	424.1	424.7	425.7	428.4	435.5	447.9	452.8	464.7
42.5°	401.6	394.1	391.3	391.2	391.3	394.1	401.6	409.5	417.2	425.1	437.4
45°	360.9	353.8	348.9	349.4	348.9	353.8	360.9	363.5	370.0	385.7	392.7
47.5°	319.0	318.9	315.8	316.8	315.8	318.9	319.0	323.7	332.1	341.7	352.9
50°	299.1	295.9	293.8	294.2	293.8	295.9	299.1	303.0	307.8	312.7	330.0
52.5°	280.1	277.3	275.6	277.9	275.6	277.3	280.1	282.2	285.8	290.6	302.3
55°	248.8	245.6	245.1	244.5	245.1	245.6	248.8	251.5	255.8	259.7	265.1
57.5°	213.9	211.7	208.5	207.1	208.5	211.7	213.9	217.9	223.1	228.0	233.7
60°	188.8	184.5	179.0	178.6	179.0	184.5	188.8	195.8	198.0	205.5	212.1
62.5°	165.8	165.0	163.9	163.8	163.9	165.0	165.8	168.1	171.1	182.2	190.0
65°	145.5	145.0	145.5	146.0	145.5	145.0	145.5	146.6	147.2	148.2	151.5
67.5°	126.8	125.8	124.8	125.3	124.8	125.8	126.8	127.0	128.5	129.1	131.4
70°	112.5	111.9	111.5	111.5	111.5	111.9	112.5	113.6	114.7	115.8	118.5
72.5°	98.7	98.6	98.0	97.6	98.0	98.6	98.7	100.6	101.3	102.3	104.2
75°	79.0	77.9	77.9	77.9	77.9	77.9	79.0	79.5	80.1	81.7	82.8
77.5°	60.2	59.6	59.1	58.6	59.1	59.6	60.2	60.3	61.1	61.5	62.6
80°	47.6	47.0	46.6	46.6	46.6	47.0	47.6	48.2	48.2	49.7	49.2
82.5°	36.4	35.8	35.7	35.3	35.7	35.8	36.4	36.4	36.4	37.7	37.5
85°	19.5	20.0	19.5	20.5	19.5	20.0	19.5	18.9	19.5	20.5	20.5
87.5°	9.5	9.0	9.6	9.2	9.6	9.0	9.5	9.4	9.7	9.5	9.4
90°	19.1	19.4	19.8	20.1	19.8	19.4	19.1	18.8	18.2	17.4	16.6
92.5°	19.5	19.7	19.9	20.1	19.9	19.7	19.5	19.3	19.0	18.6	18.1
95°	32.5	32.4	32.2	32.0	32.2	32.4	32.5	32.7	32.4	31.6	30.7
97.5°	42.2	42.3	42.6	42.7	42.6	42.3	42.2	41.9	41.5	40.8	40.2
100°	48.9	49.2	49.6	49.9	49.6	49.2	48.9	48.6	47.8	46.4	45.1
102.5°	52.1	52.5	53.0	53.5	53.0	52.5	52.1	51.6	50.5	48.8	47.0
105°	54.6	55.3	55.9	56.6	55.9	55.3	54.6	54.0	52.7	50.9	49.1
107.5°	56.3	56.9	57.6	58.2	57.6	56.9	56.3	55.6	56.2	58.0	59.8
110°	56.8	57.5	58.1	58.9	58.1	57.5	56.8	56.2	64.1	80.6	97.2



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	57.8	58.4	58.9	59.4	58.9	58.4	57.8	57.3	87.2	147.6	208.0
115°	96.8	84.9	73.0	61.1	73.0	84.9	96.8	108.7	153.0	229.6	306.2
117.5°	366.7	327.6	288.5	249.3	288.5	327.6	366.7	405.9	434.7	453.3	471.8
120°	521.2	498.9	476.5	454.2	476.5	498.9	521.2	543.6	553.8	551.8	549.8
122.5°	579.8	575.4	571.1	566.8	571.1	575.4	579.8	584.2	585.7	584.5	583.3
125°	635.1	635.6	636.2	636.7	636.2	635.6	635.1	634.6	633.8	632.7	631.5
127.5°	680.4	680.5	680.6	680.7	680.6	680.5	680.4	680.3	679.5	677.8	676.0
130°	708.7	708.4	708.3	708.1	708.3	708.4	708.7	708.8	707.9	706.1	704.3
132.5°	735.4	735.2	735.1	734.9	735.1	735.2	735.4	735.6	734.9	733.4	731.8
135°	774.6	774.3	774.0	773.6	774.0	774.3	774.6	774.9	774.3	772.7	771.0
137.5°	810.7	810.1	809.5	808.9	809.5	810.1	810.7	811.2	810.7	809.0	807.4
140°	833.5	832.7	831.8	831.0	831.8	832.7	833.5	834.3	834.0	832.5	831.0
142.5°	854.9	854.1	853.3	852.4	853.3	854.1	854.9	855.7	855.5	854.1	852.7
145°	884.8	884.0	883.2	882.4	883.2	884.0	884.8	885.7	885.5	884.4	883.2
147.5°	910.8	910.1	909.4	908.7	909.4	910.1	910.8	911.5	911.4	910.5	909.7
150°	927.3	926.4	925.6	924.8	925.6	926.4	927.3	928.1	928.1	927.1	926.0
152.5°	941.8	940.7	939.6	938.5	939.6	940.7	941.8	942.9	942.9	941.9	940.9
155°	961.6	960.2	958.9	957.6	958.9	960.2	961.6	962.9	963.0	962.1	961.1
157.5°	978.8	977.5	976.2	975.0	976.2	977.5	978.8	980.2	980.2	979.1	978.0
160°	988.6	987.4	986.3	985.1	986.3	987.4	988.6	989.8	989.9	988.9	987.8
162.5°	997.8	996.3	994.9	993.4	994.9	996.3	997.8	999.1	999.3	998.2	997.0
165°	1009.4	1008.3	1007.1	1006.0	1007.1	1008.3	1009.4	1010.6	1010.6	1009.4	1008.3
167.5°	1018.3	1016.8	1015.4	1013.8	1015.4	1016.8	1018.3	1019.8	1020.0	1018.8	1017.7
170°	1023.1	1021.6	1020.1	1018.6	1020.1	1021.6	1023.1	1024.6	1024.7	1023.6	1022.5
172.5°	1026.6	1025.2	1023.7	1022.2	1023.7	1025.2	1026.6	1028.2	1028.3	1027.2	1026.0
175°	1030.3	1028.7	1027.0	1025.3	1027.0	1028.7	1030.3	1031.9	1032.2	1031.0	1029.9
177.5°	1030.9	1029.6	1028.4	1027.3	1028.4	1029.6	1030.9	1032.0	1032.2	1031.3	1030.3
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1497.1	1503.2	1512.3	1517.5	1526.2	1531.8	1534.8	1540.4	1543.4	1554.3	1565.5
5°	1413.5	1422.2	1437.3	1451.4	1466.6	1482.2	1493.5	1506.6	1518.5	1539.0	1560.6
7.5°	1317.7	1329.7	1353.2	1375.6	1401.9	1424.2	1443.7	1465.9	1485.7	1515.2	1545.8
10°	1245.9	1266.9	1297.8	1318.8	1353.5	1375.7	1406.5	1430.9	1458.4	1497.4	1532.0
12.5°	1184.0	1209.3	1234.1	1263.5	1294.6	1331.5	1365.4	1396.6	1429.5	1469.7	1510.3
15°	1071.6	1108.4	1146.8	1176.6	1218.8	1257.8	1297.2	1339.4	1379.4	1427.6	1480.6
17.5°	927.1	969.7	1034.3	1085.2	1134.8	1173.9	1222.8	1273.8	1321.0	1379.1	1438.1
20°	861.8	893.2	936.9	1005.7	1080.3	1121.9	1171.7	1228.0	1282.1	1345.3	1408.7
22.5°	809.3	837.3	872.5	926.0	1009.3	1066.1	1118.0	1175.2	1238.0	1302.5	1372.7
25°	734.6	754.1	790.8	834.1	891.5	985.0	1041.9	1099.2	1167.4	1236.6	1316.7
27.5°	678.5	696.0	719.9	761.2	803.9	871.1	961.4	1023.9	1091.8	1169.8	1252.9
30°	635.6	656.2	682.7	711.9	758.4	810.9	901.2	973.7	1040.8	1120.9	1209.6
32.5°	604.5	620.7	643.3	672.9	711.7	762.0	834.1	922.2	987.6	1072.0	1164.6
35°	553.4	572.3	590.8	618.9	650.2	696.2	750.8	845.0	909.9	993.2	1086.2
37.5°	511.3	522.9	543.2	565.5	598.6	632.9	680.3	764.7	834.9	916.7	1011.9
40°	479.3	493.9	509.1	533.9	561.0	593.9	640.5	703.3	783.8	863.9	956.9
42.5°	448.2	466.6	482.7	499.3	529.0	562.0	599.8	653.1	735.4	811.1	901.6
45°	410.6	422.5	439.3	457.6	482.0	510.1	543.6	590.2	669.2	734.6	819.5
47.5°	366.9	384.3	395.3	413.2	436.3	463.2	494.3	534.6	598.5	659.8	738.7
50°	337.0	354.9	370.6	386.8	407.3	433.3	459.3	498.2	549.6	614.0	687.5
52.5°	311.4	327.2	342.4	358.7	378.8	402.6	427.2	461.5	505.5	564.7	636.1
55°	276.5	286.2	301.8	318.0	335.9	358.7	382.5	411.2	449.0	498.8	556.7
57.5°	240.5	251.8	264.2	280.5	298.6	316.0	337.5	363.4	393.3	438.3	487.9
60°	220.1	228.9	239.1	255.8	272.6	288.3	308.9	330.5	358.7	397.6	439.8
62.5°	197.6	205.9	215.3	229.9	246.2	260.7	278.6	301.5	325.3	360.9	397.8
65°	160.1	172.0	181.2	194.2	207.7	222.9	236.9	255.4	276.5	304.6	337.5
67.5°	132.7	138.8	147.3	159.1	173.0	186.0	199.3	213.7	232.0	253.7	279.9
70°	120.7	122.8	124.4	135.7	148.8	161.8	174.1	187.7	203.4	221.3	243.9
72.5°	106.3	108.5	110.6	115.4	125.8	138.8	151.6	161.8	176.6	191.4	209.8
75°	84.4	87.6	89.3	92.0	95.7	104.4	116.3	126.0	134.7	146.0	160.7
77.5°	64.2	66.1	67.8	70.7	73.1	77.0	83.7	92.5	100.6	107.2	117.2
80°	50.9	51.4	53.6	54.6	57.9	60.6	63.8	70.8	79.0	81.7	88.7
82.5°	38.3	38.8	40.6	41.7	43.1	45.4	49.6	51.4	57.8	61.3	65.8
85°	21.1	20.5	22.2	22.2	23.2	24.4	25.4	28.1	29.8	34.1	35.1
87.5°	9.6	9.5	9.6	9.4	9.1	9.7	9.9	9.9	10.4	11.3	12.7
90°	15.7	14.9	13.5	12.2	10.9	9.6	8.0	6.2	4.4	2.5	0.7
92.5°	17.7	17.3	16.6	16.0	15.3	14.6	14.3	14.5	14.7	14.8	15.0
95°	29.8	29.0	27.9	26.7	25.6	24.4	26.6	32.0	37.5	43.0	48.4
97.5°	39.5	38.9	36.2	33.5	30.8	28.1	34.5	49.9	65.3	80.6	96.0
100°	43.8	42.5	39.6	36.9	34.0	31.2	41.1	63.8	86.4	109.1	131.8
102.5°	45.3	43.6	67.2	90.7	114.2	137.8	151.9	156.7	161.5	166.3	171.1
105°	47.2	45.4	90.6	135.7	180.9	226.1	246.2	241.2	236.3	231.3	226.3
107.5°	61.7	63.6	117.7	171.9	226.1	280.3	305.4	301.3	297.3	293.3	289.3
110°	113.7	130.3	178.1	225.9	273.8	321.6	343.7	340.3	336.8	333.4	329.9



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	268.3	328.6	340.5	352.3	364.1	375.9	380.3	377.2	374.1	371.0	367.9
115°	382.8	459.4	455.3	451.2	447.0	442.9	439.4	436.6	433.7	431.0	428.1
117.5°	490.3	508.8	506.1	503.2	500.3	497.5	494.5	491.4	488.2	485.0	481.9
120°	547.8	545.8	542.8	539.8	536.9	533.9	531.2	528.6	526.2	523.7	521.2
122.5°	582.1	581.0	577.7	574.5	571.2	567.9	565.0	562.4	559.8	557.2	554.6
125°	630.4	629.2	626.1	622.9	619.8	616.6	614.0	611.8	609.7	607.5	605.4
127.5°	674.3	672.7	670.3	668.0	665.6	663.2	660.9	658.5	656.2	653.8	651.3
130°	702.5	700.7	698.9	697.0	695.2	693.4	691.1	688.5	685.8	683.2	680.6
132.5°	730.3	728.6	726.8	725.0	723.3	721.4	719.3	717.1	714.9	712.6	710.4
135°	769.3	767.7	766.2	764.8	763.2	761.7	759.7	757.0	754.4	751.7	749.1
137.5°	805.8	804.2	802.5	800.8	799.1	797.4	795.7	793.8	792.0	790.1	788.2
140°	829.5	828.0	826.2	824.3	822.6	820.8	819.1	817.8	816.5	815.2	813.8
142.5°	851.4	850.0	848.0	845.9	843.8	841.7	840.1	838.9	837.7	836.5	835.3
145°	882.0	880.8	878.1	875.2	872.5	869.6	868.3	868.5	868.6	868.8	868.9
147.5°	908.8	908.0	905.2	902.5	899.6	896.8	895.8	896.4	897.1	897.6	898.3
150°	925.0	924.1	921.5	918.8	916.2	913.5	912.7	913.9	915.0	916.2	917.4
152.5°	940.0	939.0	936.5	933.9	931.4	928.9	928.3	929.6	930.8	932.1	933.4
155°	960.0	959.0	957.1	955.1	953.1	951.1	950.9	952.4	953.8	955.4	956.8
157.5°	976.9	975.8	974.4	973.0	971.6	970.2	970.1	971.3	972.7	973.9	975.1
160°	986.8	985.9	984.9	983.9	982.8	981.9	981.9	982.8	983.9	984.9	985.9
162.5°	995.9	994.8	993.9	993.0	992.2	991.3	991.4	992.4	993.4	994.4	995.4
165°	1007.1	1006.0	1005.5	1004.9	1004.4	1004.0	1004.2	1005.2	1006.2	1007.2	1008.2
167.5°	1016.5	1015.4	1014.9	1014.4	1014.0	1013.5	1013.7	1014.7	1015.8	1016.8	1017.7
170°	1021.2	1020.1	1019.8	1019.5	1019.1	1018.8	1019.1	1020.1	1021.1	1022.1	1023.1
172.5°	1024.8	1023.7	1023.4	1023.0	1022.7	1022.4	1022.7	1023.7	1024.7	1025.6	1026.6
175°	1028.7	1027.5	1027.2	1026.9	1026.5	1026.2	1026.6	1027.8	1029.0	1030.1	1031.3
177.5°	1029.4	1028.4	1028.3	1028.2	1028.1	1027.9	1028.3	1029.2	1030.2	1031.1	1032.0
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1565.9	1567.2	1575.9	1579.8	1587.6	1590.6	1594.1	1593.3	1593.3	1595.0	1607.1
5°	1569.3	1580.1	1596.4	1612.1	1627.2	1640.2	1648.9	1657.5	1660.8	1676.4	1690.5
7.5°	1563.7	1583.6	1610.5	1634.3	1663.0	1685.4	1704.1	1720.8	1732.3	1755.1	1778.5
10°	1556.3	1584.5	1614.8	1645.6	1685.1	1714.8	1745.1	1768.4	1776.0	1810.0	1829.5
12.5°	1541.6	1579.2	1617.8	1657.7	1696.3	1737.3	1770.7	1793.9	1820.6	1851.1	1887.1
15°	1519.6	1562.8	1613.2	1664.5	1719.7	1769.4	1805.2	1845.8	1874.9	1908.5	1939.8
17.5°	1487.8	1543.6	1607.5	1667.0	1730.9	1784.3	1833.4	1872.3	1892.9	1912.0	1916.7
20°	1462.7	1522.8	1598.0	1668.3	1732.2	1793.8	1842.5	1874.9	1880.4	1880.9	1852.3
22.5°	1435.5	1503.3	1582.0	1654.0	1730.4	1799.0	1836.9	1850.7	1829.3	1792.6	1737.2
25°	1385.4	1463.9	1555.3	1637.4	1720.8	1785.7	1798.7	1774.3	1699.2	1620.2	1520.1
27.5°	1331.1	1419.3	1517.3	1608.7	1697.5	1737.6	1709.7	1621.9	1486.5	1368.7	1226.0
30°	1291.3	1390.2	1486.5	1588.8	1671.0	1688.3	1624.0	1494.7	1336.7	1159.3	1017.0
32.5°	1245.9	1349.6	1455.4	1561.1	1629.9	1613.0	1506.7	1347.5	1162.3	987.9	853.5
35°	1180.9	1288.0	1402.2	1508.2	1552.0	1479.0	1320.0	1112.7	923.4	760.6	668.1
37.5°	1106.0	1222.5	1341.2	1438.6	1435.5	1313.8	1097.1	883.3	724.1	627.9	562.0
40°	1052.7	1170.6	1298.9	1381.0	1345.9	1187.4	952.6	750.8	634.5	557.7	509.6
42.5°	1001.7	1120.0	1247.3	1312.7	1251.6	1056.7	822.8	664.7	568.8	508.8	469.8
45°	914.8	1039.8	1157.6	1193.9	1084.6	869.8	665.4	550.7	486.9	442.5	415.5
47.5°	829.8	952.8	1060.4	1061.0	913.2	705.4	561.3	476.6	422.1	387.8	368.1
50°	777.9	894.7	985.0	971.0	803.3	627.5	502.0	429.0	383.5	357.0	336.5
52.5°	719.5	832.8	911.1	871.1	710.3	552.2	448.7	387.4	349.8	326.8	308.3
55°	634.5	735.2	790.4	729.8	579.4	459.3	379.2	331.1	303.0	283.5	267.7
57.5°	551.1	634.1	668.9	598.3	477.2	380.8	320.8	284.6	256.7	242.8	234.6
60°	498.8	569.6	593.9	516.1	414.9	333.2	284.0	250.5	229.9	220.7	212.6
62.5°	447.3	505.2	515.2	443.8	361.7	291.7	249.4	221.0	207.4	198.6	190.9
65°	371.1	412.8	407.9	350.6	286.2	231.5	200.7	183.4	173.1	160.7	147.2
67.5°	305.5	330.9	315.6	272.6	218.4	179.9	159.8	146.7	134.0	122.1	119.0
70°	264.0	278.6	262.4	222.9	179.0	150.9	134.7	119.0	111.5	108.8	103.9
72.5°	224.2	229.3	211.7	177.9	145.7	125.0	109.2	100.4	96.3	94.0	90.9
75°	168.3	164.4	149.3	122.8	101.2	87.1	82.3	79.0	76.3	74.1	72.5
77.5°	118.1	112.6	99.1	81.8	70.4	63.8	60.8	59.1	57.8	56.7	55.0
80°	88.7	85.0	71.4	58.5	53.6	50.3	48.7	46.6	46.6	45.4	43.8
82.5°	64.9	60.7	48.9	42.8	40.1	38.2	37.0	35.7	35.3	35.5	34.3
85°	34.1	27.6	24.4	23.2	21.6	20.5	21.1	20.0	20.0	20.0	19.5
87.5°	10.9	9.1	9.0	9.0	9.7	9.9	9.8	10.1	10.8	10.5	11.1
90°	2.5	4.4	6.2	8.0	9.6	10.9	12.2	13.5	14.9	15.7	16.6
92.5°	14.8	14.7	14.5	14.3	14.6	15.3	16.0	16.6	17.3	17.7	18.1
95°	43.0	37.5	32.0	26.6	24.4	25.6	26.7	27.9	29.0	29.8	30.7
97.5°	80.6	65.3	49.9	34.5	28.1	30.8	33.5	36.2	38.9	39.5	40.2
100°	109.1	86.4	63.8	41.1	31.2	34.0	36.9	39.6	42.5	43.8	45.1
102.5°	166.3	161.5	156.7	151.9	137.8	114.2	90.7	67.2	43.6	45.3	47.0
105°	231.3	236.3	241.2	246.2	226.1	180.9	135.7	90.6	45.4	47.2	49.1
107.5°	293.3	297.3	301.3	305.4	280.3	226.1	171.9	117.7	63.6	61.7	59.8
110°	333.4	336.8	340.3	343.7	321.6	273.8	225.9	178.1	130.3	113.7	97.2



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	371.0	374.1	377.2	380.3	375.9	364.1	352.3	340.5	328.6	268.3	208.0
115°	431.0	433.7	436.6	439.4	442.9	447.0	451.2	455.3	459.4	382.8	306.2
117.5°	485.0	488.2	491.4	494.5	497.5	500.3	503.2	506.1	508.8	490.3	471.8
120°	523.7	526.2	528.6	531.2	533.9	536.9	539.8	542.8	545.8	547.8	549.8
122.5°	557.2	559.8	562.4	565.0	567.9	571.2	574.5	577.7	581.0	582.1	583.3
125°	607.5	609.7	611.8	614.0	616.6	619.8	622.9	626.1	629.2	630.4	631.5
127.5°	653.8	656.2	658.5	660.9	663.2	665.6	668.0	670.3	672.7	674.3	676.0
130°	683.2	685.8	688.5	691.1	693.4	695.2	697.0	698.9	700.7	702.5	704.3
132.5°	712.6	714.9	717.1	719.3	721.4	723.3	725.0	726.8	728.6	730.3	731.8
135°	751.7	754.4	757.0	759.7	761.7	763.2	764.8	766.2	767.7	769.3	771.0
137.5°	790.1	792.0	793.8	795.7	797.4	799.1	800.8	802.5	804.2	805.8	807.4
140°	815.2	816.5	817.8	819.1	820.8	822.6	824.3	826.2	828.0	829.5	831.0
142.5°	836.5	837.7	838.9	840.1	841.7	843.8	845.9	848.0	850.0	851.4	852.7
145°	868.8	868.6	868.5	868.3	869.6	872.5	875.2	878.1	880.8	882.0	883.2
147.5°	897.6	897.1	896.4	895.8	896.8	899.6	902.5	905.2	908.0	908.8	909.7
150°	916.2	915.0	913.9	912.7	913.5	916.2	918.8	921.5	924.1	925.0	926.0
152.5°	932.1	930.8	929.6	928.3	928.9	931.4	933.9	936.5	939.0	940.0	940.9
155°	955.4	953.8	952.4	950.9	951.1	953.1	955.1	957.1	959.0	960.0	961.1
157.5°	973.9	972.7	971.3	970.1	970.2	971.6	973.0	974.4	975.8	976.9	978.0
160°	984.9	983.9	982.8	981.9	981.9	982.8	983.9	984.9	985.9	986.8	987.8
162.5°	994.4	993.4	992.4	991.4	991.3	992.2	993.0	993.9	994.8	995.9	997.0
165°	1007.2	1006.2	1005.2	1004.2	1004.0	1004.4	1004.9	1005.5	1006.0	1007.1	1008.3
167.5°	1016.8	1015.8	1014.7	1013.7	1013.5	1014.0	1014.4	1014.9	1015.4	1016.5	1017.7
170°	1022.1	1021.1	1020.1	1019.1	1018.8	1019.1	1019.5	1019.8	1020.1	1021.2	1022.5
172.5°	1025.6	1024.7	1023.7	1022.7	1022.4	1022.7	1023.0	1023.4	1023.7	1024.8	1026.0
175°	1030.1	1029.0	1027.8	1026.6	1026.2	1026.5	1026.9	1027.2	1027.5	1028.7	1029.9
177.5°	1031.1	1030.2	1029.2	1028.3	1027.9	1028.1	1028.2	1028.3	1028.4	1029.4	1030.3
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1611.4	1617.1	1619.6	1619.6	1622.7	1621.4	1620.1
5°	1704.1	1714.3	1716.4	1726.2	1733.2	1731.0	1732.2
7.5°	1796.1	1812.7	1829.0	1836.5	1837.6	1841.9	1843.6
10°	1852.8	1866.3	1891.7	1887.9	1906.9	1917.7	1899.8
12.5°	1907.3	1925.6	1943.3	1948.1	1958.8	1962.3	1955.3
15°	1956.6	1966.4	1967.5	1964.8	1968.0	1965.3	1955.0
17.5°	1910.6	1894.8	1862.7	1847.5	1835.6	1817.9	1810.7
20°	1834.4	1787.9	1733.7	1712.1	1686.7	1637.0	1648.9
22.5°	1670.0	1616.9	1562.8	1499.7	1469.5	1422.3	1419.4
25°	1414.1	1322.7	1222.1	1151.7	1110.6	1063.6	1042.9
27.5°	1099.4	984.3	901.9	860.1	822.1	784.8	783.3
30°	892.6	806.0	742.2	706.5	683.2	667.6	670.8
32.5°	752.4	693.1	650.0	620.4	603.2	591.3	591.2
35°	615.1	574.5	546.9	534.4	522.0	513.4	513.9
37.5°	526.4	502.0	486.7	472.9	465.1	460.9	458.5
40°	480.9	460.9	449.0	440.9	434.4	428.4	427.4
42.5°	445.0	428.4	416.5	410.2	404.1	399.9	398.8
45°	394.9	381.4	370.6	363.5	360.9	357.0	357.0
47.5°	351.3	338.0	329.5	325.1	320.5	318.0	317.9
50°	321.9	311.6	304.0	301.3	297.5	295.9	295.4
52.5°	295.5	287.8	282.4	280.5	278.9	276.9	277.2
55°	259.7	255.4	253.2	251.5	248.8	245.6	247.8
57.5°	229.5	225.8	220.0	214.8	212.4	210.1	211.0
60°	208.3	200.7	193.1	187.2	185.6	180.7	180.7
62.5°	181.4	170.8	161.5	158.2	156.5	154.3	153.8
65°	139.6	135.3	133.1	130.9	129.8	129.8	128.7
67.5°	115.7	113.9	111.5	111.0	109.9	109.6	109.3
70°	102.2	100.0	99.0	98.5	97.3	97.9	96.3
72.5°	89.3	87.6	87.3	85.9	85.3	85.4	84.1
75°	70.4	70.4	69.8	69.2	68.2	67.6	68.2
77.5°	54.1	54.2	53.2	53.2	53.0	53.2	52.6
80°	43.3	43.8	43.3	42.7	42.2	42.7	42.2
82.5°	34.2	33.4	33.3	33.2	33.1	32.8	32.7
85°	19.5	20.0	19.5	18.9	18.9	18.9	19.5
87.5°	10.8	11.0	11.1	11.2	11.3	11.3	10.9
90°	17.4	18.2	18.8	19.1	19.4	19.8	20.1
92.5°	18.6	19.0	19.3	19.5	19.7	19.9	20.1
95°	31.6	32.4	32.7	32.5	32.4	32.2	32.0
97.5°	40.8	41.5	41.9	42.2	42.3	42.6	42.7
100°	46.4	47.8	48.6	48.9	49.2	49.6	49.9
102.5°	48.8	50.5	51.6	52.1	52.5	53.0	53.5
105°	50.9	52.7	54.0	54.6	55.3	55.9	56.6
107.5°	58.0	56.2	55.6	56.3	56.9	57.6	58.2
110°	80.6	64.1	56.2	56.8	57.5	58.1	58.9



TEST NUMBER: P331723-930

CATALOG NUMBER: SA2XXRDIP-C865D925U930-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	147.6	87.2	57.3	57.8	58.4	58.9	59.4
115°	229.6	153.0	108.7	96.8	84.9	73.0	61.1
117.5°	453.3	434.7	405.9	366.7	327.6	288.5	249.3
120°	551.8	553.8	543.6	521.2	498.9	476.5	454.2
122.5°	584.5	585.7	584.2	579.8	575.4	571.1	566.8
125°	632.7	633.8	634.6	635.1	635.6	636.2	636.7
127.5°	677.8	679.5	680.3	680.4	680.5	680.6	680.7
130°	706.1	707.9	708.8	708.7	708.4	708.3	708.1
132.5°	733.4	734.9	735.6	735.4	735.2	735.1	734.9
135°	772.7	774.3	774.9	774.6	774.3	774.0	773.6
137.5°	809.0	810.7	811.2	810.7	810.1	809.5	808.9
140°	832.5	834.0	834.3	833.5	832.7	831.8	831.0
142.5°	854.1	855.5	855.7	854.9	854.1	853.3	852.4
145°	884.4	885.5	885.7	884.8	884.0	883.2	882.4
147.5°	910.5	911.4	911.5	910.8	910.1	909.4	908.7
150°	927.1	928.1	928.1	927.3	926.4	925.6	924.8
152.5°	941.9	942.9	942.9	941.8	940.7	939.6	938.5
155°	962.1	963.0	962.9	961.6	960.2	958.9	957.6
157.5°	979.1	980.2	980.2	978.8	977.5	976.2	975.0
160°	988.9	989.9	989.8	988.6	987.4	986.3	985.1
162.5°	998.2	999.3	999.1	997.8	996.3	994.9	993.4
165°	1009.4	1010.6	1010.6	1009.4	1008.3	1007.1	1006.0
167.5°	1018.8	1020.0	1019.8	1018.3	1016.8	1015.4	1013.8
170°	1023.6	1024.7	1024.6	1023.1	1021.6	1020.1	1018.6
172.5°	1027.2	1028.3	1028.2	1026.6	1025.2	1023.7	1022.2
175°	1031.0	1032.2	1031.9	1030.3	1028.7	1027.0	1025.3
177.5°	1031.3	1032.2	1032.0	1030.9	1029.6	1028.4	1027.3
180°	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1	1029.1

(END OF REPORT)