

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331437

Luminaire Tested: **SA2XXDIP-C1005D530U835-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331437  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXDIP-C1005D530U835-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 530 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6121.2 lumens  
Efficiency: N/A  
Efficacy: 111.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 55.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331437  
CATALOG NUMBER: SA2XXDIP-C1005D530U835-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

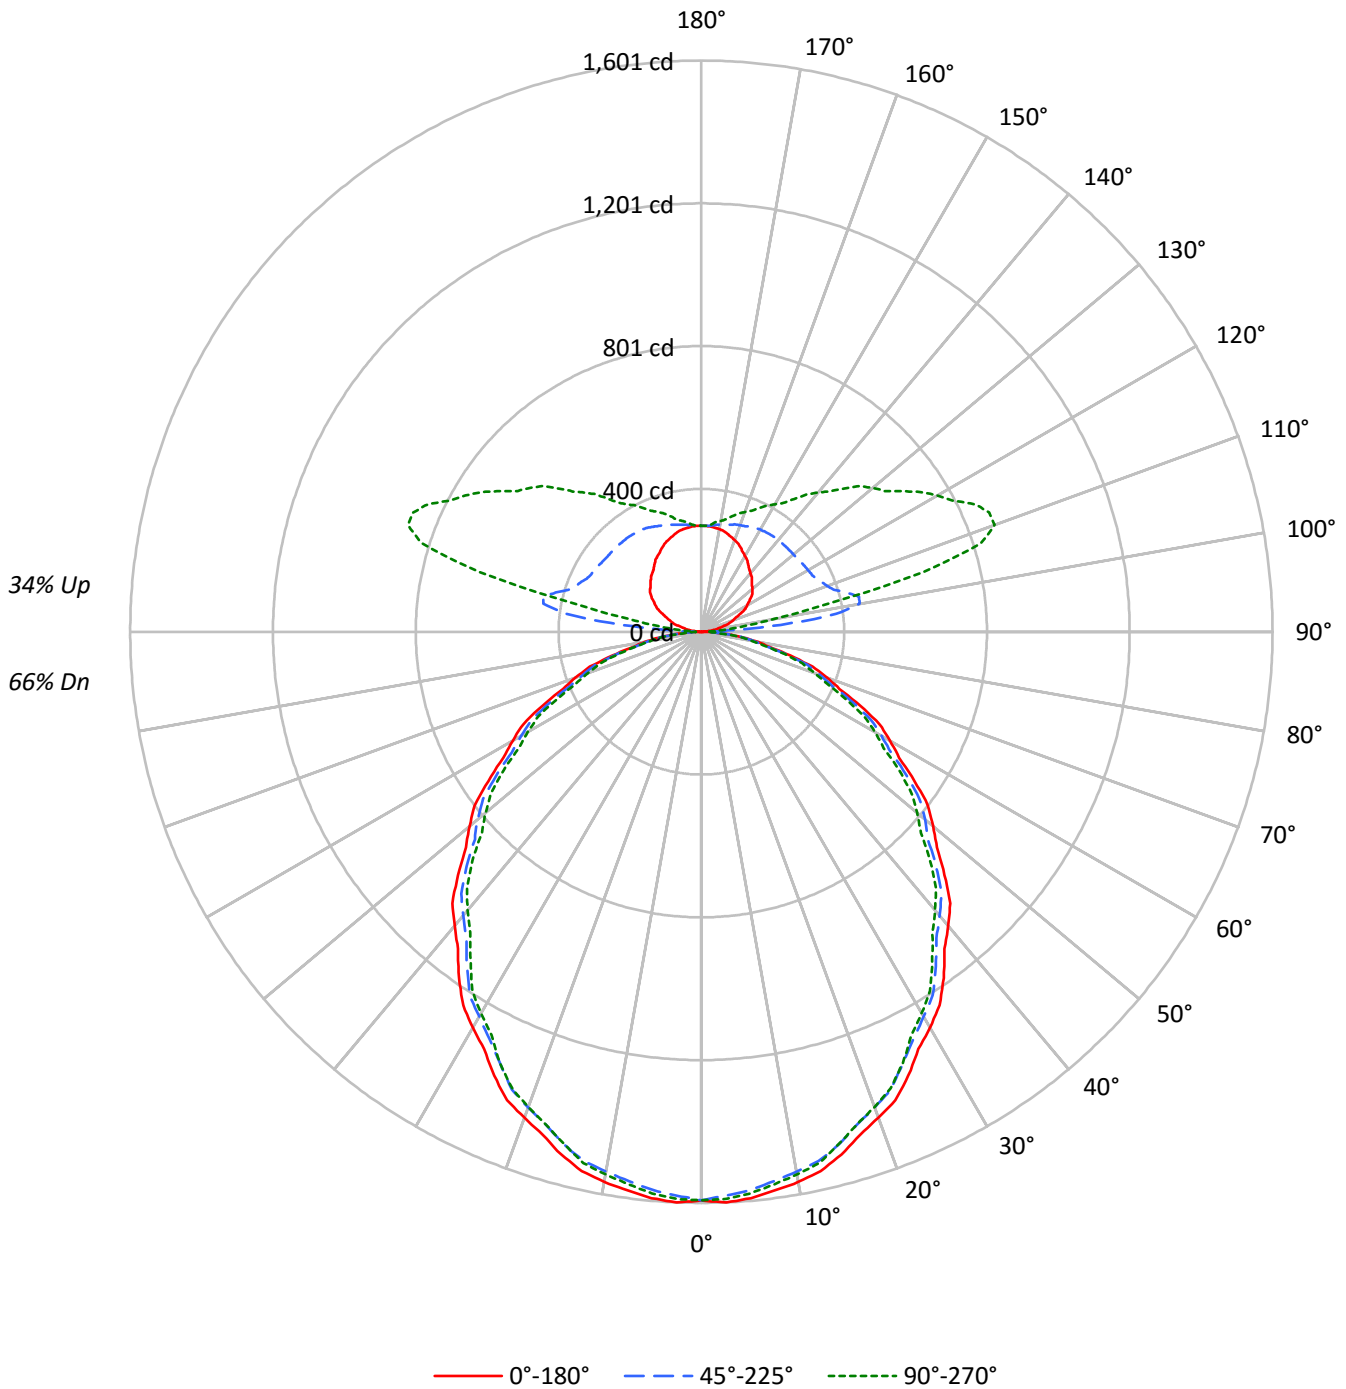



TEST NUMBER: P331437

CATALOG NUMBER: SA2XXDIP-C1005D530U835-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	105	105	105	105	92	92	92	81	81	81	71	71	71	66				
1	101	97	93	89	95	91	88	85	81	78	76	72	70	68	63	61	60	56				
2	92	85	78	73	87	80	74	70	71	67	63	63	60	57	55	53	51	47				
3	84	75	67	61	79	70	64	58	63	57	53	56	51	48	49	46	43	40				
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37	34				
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	32	30				
6	65	53	45	39	61	50	43	37	45	39	34	40	35	31	36	32	29	26				
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	25	23				
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23	21				
9	53	40	32	27	49	38	31	26	34	28	24	31	26	22	28	24	21	19				
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19	17				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	25733	25733	25733
5°	25832	25459	25608
10°	25678	25201	25327
15°	25361	24874	24849
20°	24911	24383	24357
25°	24464	23779	23779
30°	23886	23228	23029
35°	23349	22565	22231
40°	22675	21901	21479
45°	22012	21240	20717
50°	21288	20557	19826
55°	20535	19758	19023
60°	19695	18807	18112
65°	18793	17857	17039
70°	17651	16711	15918
75°	16064	15390	15009
80°	14254	13826	13110
85°	11634	11078	9930



TEST NUMBER: P331437

CATALOG NUMBER: SA2XXDIP-C1005D530U835-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	149.9	2.4
10°-20°	421.7	6.9
20°-30°	619.8	10.1
30°-40°	720.0	11.8
40°-50°	719.2	11.7
50°-60°	627.2	10.2
60°-70°	463.8	7.6
70°-80°	262.7	4.3
80°-90°	73.3	1.2
90°-100°	118.6	1.9
100°-110°	402.4	6.6
110°-120°	427.5	7.0
120°-130°	351.9	5.7
130°-140°	282.6	4.6
140°-150°	213.5	3.5
150°-160°	150.1	2.5
160°-170°	88.3	1.4
170°-180°	28.8	0.5
0°-30°	1191.4	19.5
0°-40°	1911.4	31.2
0°-60°	3257.9	53.2
0°-90°	4057.6	66.3
90°-120°	948.4	15.5
90°-150°	1796.4	29.3
90°-180°	2064.0	33.7
0°-180°	6121.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1594	1594	1594	1594	1594	
5°	1594	1587	1571	1582	1580	151
15°	1517	1507	1488	1493	1487	427
25°	1373	1360	1335	1338	1335	631
35°	1185	1169	1145	1136	1128	739
45°	964	953	930	914	907	744
55°	730	720	702	684	676	652
65°	492	482	467	454	446	486
75°	258	254	247	238	241	275
85°	63	61	60	55	54	72
90°	1	8	19	18	19	4
95°	20	49	224	84	65	21
105°	70	105	423	755	643	74
115°	123	155	354	730	846	122
125°	171	202	340	591	686	152
135°	201	240	336	497	569	155
145°	229	263	334	415	454	144
155°	261	281	324	367	382	120
165°	284	293	311	330	335	80
175°	296	296	299	303	302	28
180°	296	296	296	296	296	



TEST NUMBER: P331437

CATALOG NUMBER: SA2XXDIP-C1005D530U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8
2.5°	1601.2	1599.8	1598.5	1597.1	1595.7	1593.6	1590.6	1587.6	1584.6	1581.6	1584.3
5°	1593.8	1592.5	1591.1	1589.7	1588.4	1585.8	1582.1	1578.3	1574.6	1570.8	1573.6
7.5°	1579.7	1577.6	1575.5	1573.4	1571.3	1568.3	1564.5	1560.7	1556.9	1553.1	1555.8
10°	1566.2	1563.9	1561.5	1559.1	1556.7	1553.5	1549.4	1545.3	1541.2	1537.1	1539.9
12.5°	1547.9	1545.7	1543.6	1541.5	1539.4	1536.3	1532.2	1528.1	1524.1	1520.0	1521.9
15°	1517.2	1515.2	1513.1	1511.1	1509.0	1505.8	1501.4	1496.9	1492.5	1488.1	1489.5
17.5°	1478.0	1475.9	1473.9	1471.8	1469.8	1466.5	1462.0	1457.5	1453.0	1448.6	1450.1
20°	1449.8	1447.7	1445.7	1443.6	1441.6	1438.2	1433.4	1428.7	1423.9	1419.1	1420.1
22.5°	1421.6	1418.7	1415.9	1413.0	1410.1	1406.5	1402.0	1397.5	1393.0	1388.5	1388.7
25°	1373.2	1370.4	1367.7	1365.0	1362.3	1358.0	1352.2	1346.4	1340.6	1334.8	1335.5
27.5°	1318.0	1315.5	1313.1	1310.6	1308.2	1304.7	1300.1	1295.5	1291.0	1286.4	1285.4
30°	1281.2	1278.5	1275.7	1273.0	1270.3	1266.4	1261.3	1256.2	1251.1	1245.9	1244.9
32.5°	1242.0	1239.8	1237.6	1235.4	1233.2	1229.5	1224.1	1218.7	1213.3	1207.9	1206.1
35°	1184.6	1181.2	1177.8	1174.4	1171.0	1166.6	1161.1	1155.7	1150.3	1144.8	1142.8
37.5°	1120.0	1117.0	1114.0	1111.0	1108.0	1103.8	1098.3	1092.9	1087.4	1082.0	1079.4
40°	1075.8	1073.1	1070.4	1067.7	1064.9	1060.9	1055.4	1050.0	1044.5	1039.1	1036.0
42.5°	1032.9	1030.2	1027.5	1024.8	1022.0	1017.9	1012.5	1007.0	1001.6	996.1	992.8
45°	964.0	961.6	959.2	956.8	954.4	950.7	945.6	940.5	935.4	930.2	926.5
47.5°	895.3	893.1	890.8	888.6	886.3	882.5	877.2	871.9	866.6	861.3	857.3
50°	847.5	845.8	844.1	842.4	840.7	837.4	832.7	827.9	823.1	818.4	813.6
52.5°	800.9	798.7	796.4	794.2	791.9	788.5	784.0	779.5	775.1	770.6	766.6
55°	729.5	727.4	725.4	723.4	721.3	718.2	714.2	710.1	706.0	701.9	697.8
57.5°	657.8	656.1	654.5	652.9	651.2	648.2	643.7	639.2	634.7	630.2	626.2
60°	609.9	608.6	607.2	605.9	604.5	601.4	596.7	591.9	587.1	582.4	578.6
62.5°	563.4	561.2	559.0	556.8	554.6	551.7	548.0	544.4	540.7	537.0	533.5
65°	491.9	489.9	487.9	485.8	483.8	481.0	477.6	474.2	470.8	467.4	464.4
67.5°	419.3	417.7	416.0	414.4	412.8	410.4	407.3	404.3	401.2	398.2	395.8
70°	373.9	372.6	371.2	369.9	368.5	366.3	363.2	360.1	357.1	354.0	351.6
72.5°	327.3	326.0	324.6	323.3	321.9	320.2	318.3	316.3	314.3	312.3	309.9
75°	257.5	256.8	256.1	255.4	254.7	253.5	251.8	250.1	248.4	246.7	244.7
77.5°	194.9	193.8	192.6	191.5	190.3	189.4	188.7	188.0	187.3	186.7	185.6
80°	153.3	152.9	152.6	152.2	151.9	151.4	150.7	150.0	149.3	148.7	147.6
82.5°	114.0	114.0	113.9	113.8	113.7	113.5	113.1	112.7	112.3	111.9	110.6
85°	62.8	62.5	62.2	61.8	61.5	61.1	60.8	60.4	60.1	59.8	58.7
87.5°	22.2	22.0	21.9	21.6	21.3	21.1	21.1	21.3	21.5	21.0	20.1
90°	0.6	2.3	4.6	5.7	6.8	8.6	11.4	15.4	18.8	19.4	18.8
92.5°	7.0	10.0	14.1	16.7	20.5	25.9	38.8	56.9	73.1	74.1	62.6
95°	20.0	22.2	27.9	33.1	42.2	55.9	82.1	131.7	197.9	223.6	195.6
97.5°	32.5	35.6	41.6	49.4	59.9	75.4	108.4	177.5	287.4	381.6	400.3
100°	43.9	45.6	50.8	59.9	71.3	87.3	117.5	187.1	310.2	450.5	532.6
102.5°	54.4	55.7	60.8	69.9	81.8	97.7	125.7	187.5	301.6	452.8	581.9
105°	69.6	71.9	75.8	84.4	96.9	112.9	139.7	190.5	284.6	422.6	574.3
107.5°	86.0	87.8	91.7	99.6	112.0	128.1	154.1	198.3	276.1	390.2	524.2
110°	96.9	99.2	102.7	110.1	122.0	138.6	163.7	204.7	274.3	374.7	492.7



TEST NUMBER: P331437

CATALOG NUMBER: SA2XXDIP-C1005D530U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	107.0	109.3	113.1	120.1	131.6	148.6	172.8	211.6	274.8	364.6	470.8
115°	122.6	125.5	128.9	135.7	147.1	162.5	187.1	221.8	277.2	353.6	443.7
117.5°	138.8	141.1	144.5	150.6	161.5	177.5	200.2	232.8	281.3	348.2	426.6
120°	148.8	151.1	154.5	159.7	171.1	187.1	209.3	240.1	284.0	345.0	417.5
122.5°	158.4	160.3	163.7	169.3	180.7	197.1	218.0	246.5	287.2	343.2	409.7
125°	171.1	172.8	176.2	183.1	194.5	210.4	231.0	256.6	292.0	339.9	398.6
127.5°	181.1	183.4	188.2	195.7	206.7	223.1	243.1	266.1	296.9	338.0	388.4
130°	187.1	189.3	195.0	203.0	214.4	230.4	250.4	272.0	300.5	337.0	381.5
132.5°	192.5	195.3	201.4	209.9	221.7	237.7	256.7	278.0	304.2	336.6	376.0
135°	200.7	203.0	209.9	218.4	231.5	247.5	265.8	285.7	308.5	335.9	368.4
137.5°	208.5	211.2	218.1	227.2	240.2	255.0	273.1	291.6	312.4	335.8	363.0
140°	214.4	216.7	223.6	232.7	245.2	260.1	277.2	294.8	314.2	335.3	359.9
142.5°	220.4	222.2	228.6	237.7	249.8	263.7	280.4	297.6	315.6	335.3	356.7
145°	229.3	231.5	237.2	245.8	257.2	269.7	285.1	301.1	317.1	334.2	352.4
147.5°	238.8	240.5	246.0	253.9	263.4	274.5	289.0	303.1	317.5	332.1	348.1
150°	245.2	246.9	251.5	258.9	267.5	277.7	290.8	304.0	317.1	330.8	344.5
152.5°	251.6	252.4	257.0	263.5	271.6	280.9	292.7	304.4	316.2	328.5	341.3
155°	260.6	261.2	264.6	270.9	277.2	285.7	295.4	305.1	314.8	324.5	335.3
157.5°	268.1	268.7	271.5	276.9	282.0	289.1	297.3	305.1	312.2	320.4	329.7
160°	273.2	273.7	276.0	280.6	285.1	291.4	298.3	305.1	310.8	317.7	325.6
162.5°	278.2	277.8	280.1	283.8	287.9	292.8	298.7	304.6	309.4	315.4	322.0
165°	284.0	283.4	284.6	288.0	290.8	294.3	299.4	303.4	306.8	310.8	315.9
167.5°	288.8	288.1	289.1	291.3	293.4	295.5	299.3	302.6	304.2	306.8	310.0
170°	292.0	290.8	291.4	293.1	294.3	296.0	298.8	301.7	302.8	304.5	306.8
172.5°	293.8	293.1	292.8	294.5	295.2	296.4	298.4	300.3	301.0	301.8	303.6
175°	296.0	295.4	294.8	296.0	296.0	296.5	297.7	298.8	298.3	298.8	299.4
177.5°	297.0	296.1	295.6	296.5	296.5	296.5	297.0	297.9	297.0	296.5	297.0
180°	296.5	296.5	296.5	296.5	296.5	296.5	296.5	296.5	296.5	296.5	296.5



TEST NUMBER: P331437

CATALOG NUMBER: SA2XXDIP-C1005D530U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8	1593.8
2.5°	1587.0	1589.7	1592.5	1593.6	1593.0	1592.5	1591.9	1591.4
5°	1576.3	1579.0	1581.7	1582.8	1582.1	1581.4	1580.7	1580.0
7.5°	1558.5	1561.2	1564.0	1565.0	1564.2	1563.5	1562.7	1562.0
10°	1542.6	1545.3	1548.0	1548.9	1547.9	1546.8	1545.8	1544.8
12.5°	1523.8	1525.7	1527.6	1528.2	1527.4	1526.7	1525.9	1525.2
15°	1490.8	1492.2	1493.5	1493.4	1491.7	1490.0	1488.3	1486.6
17.5°	1451.7	1453.3	1454.8	1454.8	1453.1	1451.5	1449.9	1448.2
20°	1421.2	1422.2	1423.2	1423.0	1421.7	1420.3	1419.0	1417.6
22.5°	1388.9	1389.1	1389.3	1389.0	1388.2	1387.4	1386.5	1385.7
25°	1336.2	1336.9	1337.6	1337.6	1336.9	1336.2	1335.5	1334.8
27.5°	1284.4	1283.3	1282.3	1281.0	1279.4	1277.7	1276.1	1274.5
30°	1243.9	1242.9	1241.9	1240.7	1239.3	1237.9	1236.6	1235.2
32.5°	1204.3	1202.4	1200.6	1199.0	1197.6	1196.3	1194.9	1193.5
35°	1140.7	1138.7	1136.6	1134.8	1133.1	1131.4	1129.6	1127.9
37.5°	1076.9	1074.4	1071.9	1069.8	1068.2	1066.5	1064.9	1063.3
40°	1032.9	1029.9	1026.8	1024.6	1023.2	1021.9	1020.5	1019.1
42.5°	989.5	986.1	982.8	980.2	978.3	976.4	974.5	972.5
45°	922.8	919.0	915.3	912.7	911.3	910.0	908.6	907.3
47.5°	853.4	849.4	845.5	842.5	840.5	838.6	836.6	834.6
50°	808.8	804.1	799.3	796.1	794.4	792.7	791.0	789.3
52.5°	762.7	758.7	754.8	751.7	749.4	747.2	744.9	742.7
55°	693.7	689.6	685.6	682.7	681.0	679.3	677.6	675.8
57.5°	622.1	618.1	614.1	611.4	610.2	608.9	607.6	606.3
60°	574.9	571.1	567.4	565.0	564.0	563.0	561.9	560.9
62.5°	530.1	526.6	523.1	520.7	519.4	518.1	516.8	515.5
65°	461.3	458.2	455.2	452.8	451.1	449.4	447.7	446.0
67.5°	393.4	391.0	388.6	386.7	385.4	384.0	382.7	381.3
70°	349.2	346.9	344.5	342.6	341.2	339.9	338.5	337.2
72.5°	307.6	305.2	302.8	301.1	300.0	298.9	297.8	296.7
75°	242.7	240.6	238.6	237.9	238.6	239.2	239.9	240.6
77.5°	184.6	183.6	182.6	181.6	180.6	179.7	178.7	177.8
80°	146.6	145.6	144.6	143.7	143.0	142.4	141.7	141.0
82.5°	109.3	108.0	106.7	106.0	105.8	105.7	105.6	105.4
85°	57.7	56.7	55.7	55.0	54.7	54.3	54.0	53.6
87.5°	19.2	18.1	17.5	17.1	16.8	16.6	16.3	16.0
90°	18.2	17.1	18.2	18.8	18.8	18.8	18.8	18.8
92.5°	49.7	42.7	37.9	34.3	33.9	32.1	32.5	31.6
95°	149.4	114.6	90.7	78.1	70.7	66.2	64.4	65.0
97.5°	348.7	285.3	223.6	182.4	155.1	141.1	132.8	128.0
100°	520.7	450.0	371.8	302.8	255.5	231.0	214.4	204.2
102.5°	633.4	617.4	560.3	487.1	435.7	393.8	373.2	359.3
105°	692.9	757.3	764.8	745.9	710.6	675.2	650.7	642.7
107.5°	650.0	747.1	806.4	834.0	838.4	836.5	831.6	821.0
110°	613.1	715.1	788.1	834.9	859.4	870.3	875.4	874.8





TEST NUMBER: P331437

CATALOG NUMBER: SA2XXDIP-C1005D530U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	579.3	677.3	755.3	808.9	843.0	861.1	870.8	873.9
115°	537.8	625.6	700.3	759.1	799.5	825.8	840.6	845.7
117.5°	506.5	583.6	651.4	706.5	747.8	775.5	791.1	795.4
120°	491.0	561.7	622.2	674.1	714.0	740.8	757.3	763.0
122.5°	478.7	543.5	600.7	647.6	683.4	709.8	724.5	729.3
125°	460.8	519.5	569.7	612.5	645.6	667.2	681.5	686.1
127.5°	443.1	496.3	543.6	583.1	611.9	632.2	644.5	648.2
130°	431.7	480.8	525.8	563.4	591.4	610.8	622.2	626.7
132.5°	420.8	466.2	507.6	542.9	570.4	589.8	600.3	604.4
135°	405.5	443.1	480.8	512.7	537.2	556.0	566.3	568.6
137.5°	393.3	424.8	454.6	482.5	504.8	521.0	530.0	533.4
140°	385.5	412.9	439.1	464.2	482.5	497.3	505.8	509.3
142.5°	379.1	402.4	425.0	446.0	463.3	476.8	484.4	485.1
145°	370.1	388.9	406.6	423.2	436.8	446.5	452.2	453.9
147.5°	363.2	378.0	391.8	403.9	415.2	422.9	426.8	427.8
150°	358.1	370.7	382.7	392.9	401.5	408.3	411.7	412.3
152.5°	353.1	364.8	374.9	383.8	390.5	396.5	399.0	399.1
155°	346.2	355.3	363.8	370.1	376.4	380.4	382.7	381.5
157.5°	338.1	345.7	352.9	357.8	362.2	365.6	366.6	366.6
160°	333.0	339.3	345.6	349.6	353.6	356.4	357.0	357.0
162.5°	328.0	333.4	338.8	341.8	345.8	347.8	348.3	347.9
165°	320.5	324.5	328.5	330.8	333.0	335.3	335.3	334.8
167.5°	313.3	316.4	319.1	321.2	322.2	323.5	323.4	322.7
170°	309.7	311.4	313.7	314.8	315.4	317.1	316.5	315.4
172.5°	305.6	306.8	308.6	309.3	309.9	310.7	310.1	309.4
175°	301.1	301.7	302.3	302.8	302.8	303.4	302.8	301.7
177.5°	297.9	297.9	298.4	298.4	298.4	298.4	297.9	297.0
180°	296.5	296.5	296.5	296.5	296.5	296.5	296.5	296.5

(END OF REPORT)