

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331309

Luminaire Tested: **SA2XXDIP-C485D725U835-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331309
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C485D725U835-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4875.6 lumens
Efficiency: N/A
Efficacy: 127.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331309
CATALOG NUMBER: SA2XXDIP-C485D725U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

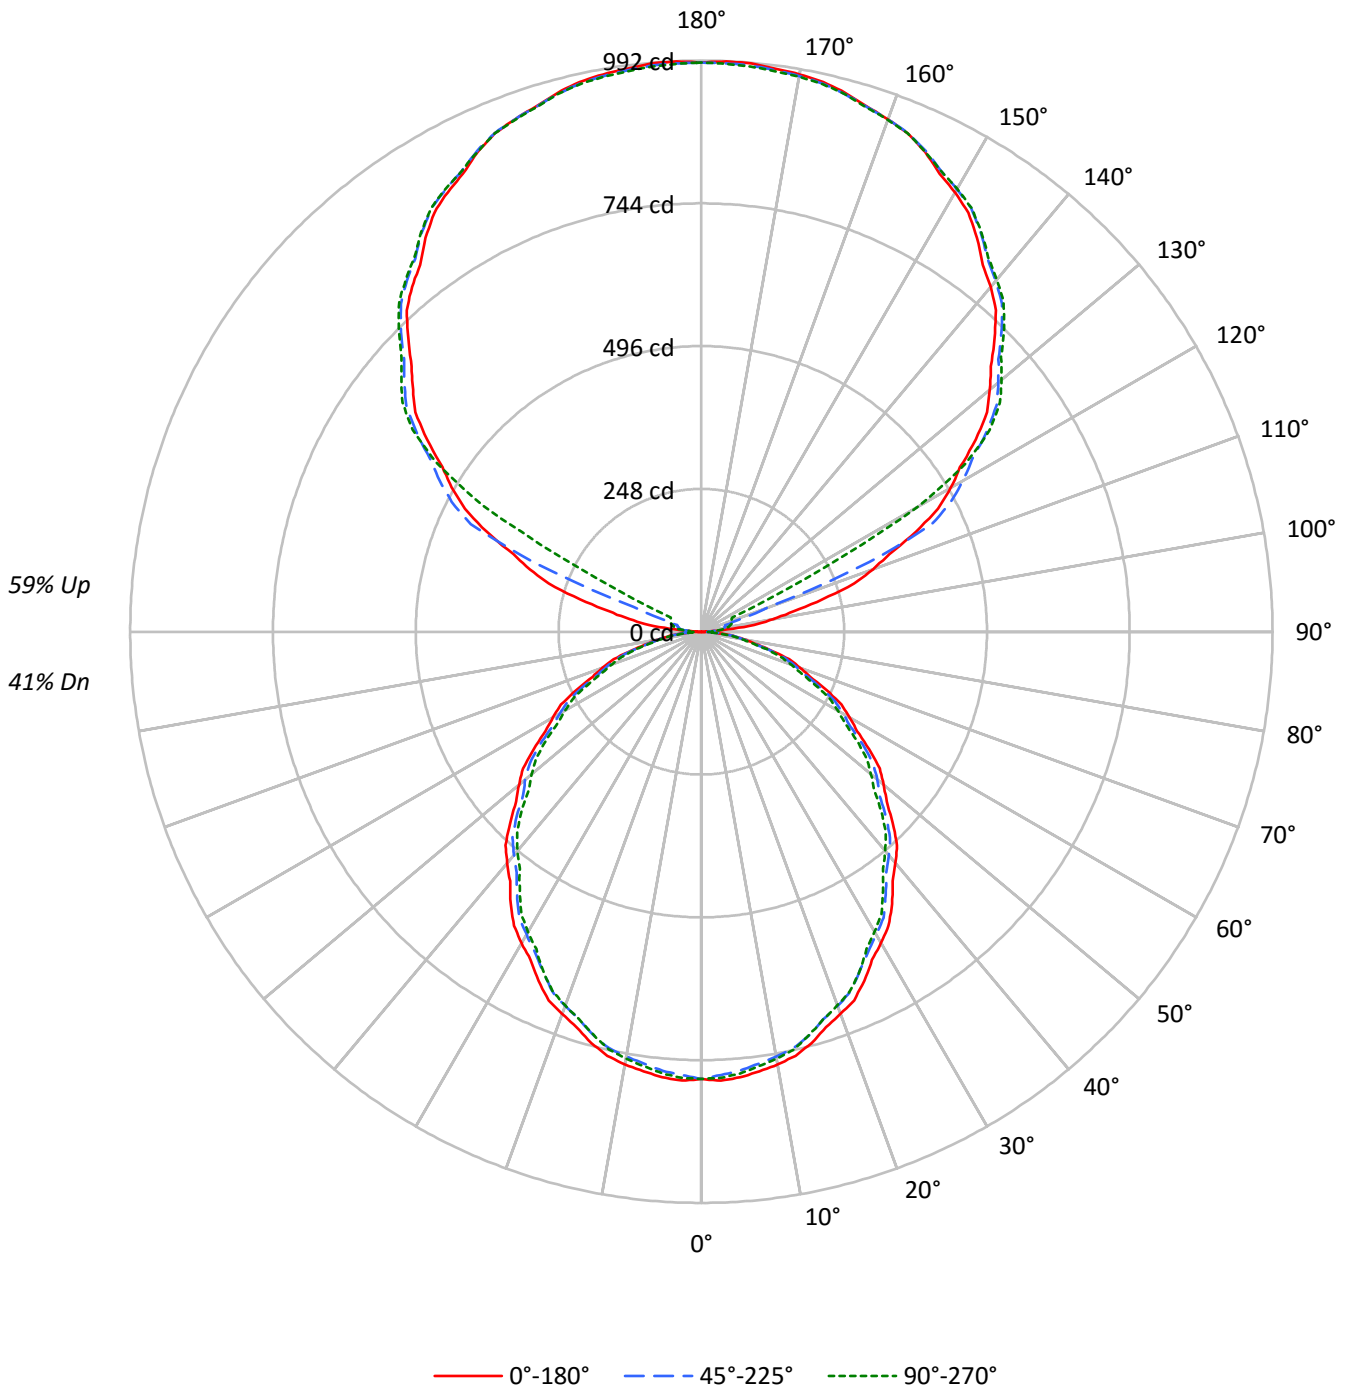



TEST NUMBER: P331309

CATALOG NUMBER: SA2XXDIP-C485D725U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	47	47	47	41
1	96	91	88	84	87	83	80	77	68	66	64	55	53	52	42	41	40	34
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	34	29
3	79	70	63	57	72	64	58	53	53	48	45	42	39	36	33	31	29	24
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	29	27	25	21
5	67	55	47	41	60	51	44	38	42	37	33	34	30	27	26	24	22	18
6	61	49	41	36	56	45	38	33	38	32	28	31	27	24	24	21	19	16
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17	14
8	53	40	33	28	48	37	30	26	31	26	22	25	21	19	20	17	15	13
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	16	14	11
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12540	12540	12540
5°	12588	12407	12480
10°	12514	12281	12342
15°	12359	12122	12109
20°	12139	11883	11869
25°	11922	11589	11589
30°	11641	11320	11222
35°	11379	10996	10835
40°	11051	10673	10467
45°	10727	10351	10095
50°	10374	10017	9661
55°	10007	9627	9272
60°	9597	9164	8825
65°	9158	8703	8302
70°	8601	8143	7756
75°	7829	7498	7317
80°	6946	6732	6388
85°	5669	5391	4835



TEST NUMBER: P331309

CATALOG NUMBER: SA2XXDIP-C485D725U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.0	1.5
10°-20°	205.5	4.2
20°-30°	302.1	6.2
30°-40°	350.9	7.2
40°-50°	350.5	7.2
50°-60°	305.6	6.3
60°-70°	226.0	4.6
70°-80°	128.0	2.6
80°-90°	36.9	0.8
90°-100°	33.0	0.7
100°-110°	120.9	2.5
110°-120°	323.3	6.6
120°-130°	533.6	10.9
130°-140°	567.5	11.6
140°-150°	527.5	10.8
150°-160°	424.1	8.7
160°-170°	273.3	5.6
170°-180°	94.1	1.9
0°-30°	580.6	11.9
0°-40°	931.5	19.1
0°-60°	1587.6	32.6
0°-90°	1978.5	40.6
90°-120°	477.2	9.8
90°-150°	2105.7	43.2
90°-180°	2897.0	59.4
0°-180°	4875.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	777	777	777	777	777	
5°	777	773	766	771	770	74
15°	739	735	725	728	724	208
25°	669	663	650	652	650	308
35°	577	570	558	553	550	360
45°	470	464	453	445	442	362
55°	356	351	342	333	329	318
65°	240	235	228	221	217	237
75°	126	124	120	116	117	134
85°	31	30	29	27	26	35
90°	1	8	14	18	19	4
95°	46	24	28	31	31	57
105°	218	227	44	51	54	232
115°	411	424	441	126	59	405
125°	582	591	604	609	612	518
135°	720	731	738	744	743	556
145°	835	835	846	851	848	522
155°	919	914	921	925	920	423
165°	969	965	966	971	966	274
175°	991	986	987	992	985	94
180°	989	989	989	989	989	



TEST NUMBER: P331309

CATALOG NUMBER: SA2XXDIP-C485D725U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	780.3	779.6	779.0	778.3	777.6	776.6	775.1	773.7	772.2	770.7	772.1
5°	776.7	776.0	775.4	774.7	774.1	772.8	771.0	769.2	767.3	765.5	766.8
7.5°	769.8	768.8	767.8	766.7	765.7	764.3	762.4	760.6	758.7	756.8	758.2
10°	763.3	762.1	760.9	759.8	758.6	757.0	755.0	753.1	751.1	749.1	750.4
12.5°	754.3	753.3	752.2	751.2	750.2	748.7	746.7	744.7	742.7	740.7	741.6
15°	739.4	738.4	737.4	736.4	735.4	733.8	731.6	729.5	727.3	725.2	725.8
17.5°	720.2	719.3	718.3	717.3	716.3	714.7	712.5	710.3	708.1	705.9	706.7
20°	706.5	705.5	704.5	703.5	702.5	700.9	698.5	696.2	693.9	691.6	692.1
22.5°	692.8	691.4	690.0	688.6	687.2	685.4	683.2	681.0	678.8	676.6	676.7
25°	669.2	667.8	666.5	665.2	663.9	661.8	659.0	656.1	653.3	650.5	650.8
27.5°	642.3	641.1	639.9	638.7	637.5	635.8	633.6	631.3	629.1	626.9	626.4
30°	624.4	623.0	621.7	620.4	619.0	617.1	614.6	612.2	609.7	607.2	606.7
32.5°	605.2	604.2	603.1	602.0	601.0	599.1	596.5	593.9	591.3	588.7	587.8
35°	577.3	575.6	574.0	572.3	570.7	568.5	565.9	563.2	560.5	557.9	556.9
37.5°	545.8	544.3	542.9	541.4	539.9	537.9	535.2	532.6	529.9	527.3	526.0
40°	524.3	522.9	521.6	520.3	519.0	517.0	514.3	511.7	509.0	506.4	504.9
42.5°	503.4	502.0	500.7	499.4	498.1	496.1	493.4	490.8	488.1	485.4	483.8
45°	469.8	468.6	467.4	466.3	465.1	463.3	460.8	458.3	455.8	453.3	451.5
47.5°	436.3	435.2	434.1	433.0	431.9	430.1	427.5	424.9	422.3	419.7	417.8
50°	413.0	412.2	411.3	410.5	409.7	408.1	405.8	403.5	401.1	398.8	396.5
52.5°	390.3	389.2	388.1	387.0	385.9	384.3	382.1	379.9	377.7	375.5	373.6
55°	355.5	354.5	353.5	352.5	351.5	350.0	348.0	346.0	344.0	342.0	340.1
57.5°	320.5	319.7	318.9	318.2	317.4	315.9	313.7	311.5	309.3	307.1	305.1
60°	297.2	296.6	295.9	295.2	294.6	293.1	290.8	288.4	286.1	283.8	282.0
62.5°	274.5	273.5	272.4	271.3	270.3	268.9	267.1	265.3	263.5	261.7	260.0
65°	239.7	238.7	237.7	236.7	235.8	234.4	232.8	231.1	229.4	227.8	226.3
67.5°	204.3	203.5	202.7	201.9	201.1	200.0	198.5	197.0	195.5	194.0	192.9
70°	182.2	181.6	180.9	180.2	179.6	178.5	177.0	175.5	174.0	172.5	171.4
72.5°	159.5	158.9	158.2	157.5	156.9	156.1	155.1	154.1	153.2	152.2	151.0
75°	125.5	125.1	124.8	124.5	124.1	123.6	122.7	121.9	121.1	120.2	119.2
77.5°	95.0	94.4	93.9	93.3	92.7	92.3	92.0	91.6	91.3	91.0	90.5
80°	74.7	74.5	74.4	74.2	74.0	73.8	73.4	73.1	72.8	72.4	71.9
82.5°	55.6	55.5	55.5	55.5	55.4	55.3	55.1	54.9	54.7	54.5	53.9
85°	30.6	30.5	30.3	30.1	30.0	29.8	29.6	29.5	29.3	29.1	28.6
87.5°	10.9	11.0	11.1	11.2	11.2	11.3	11.3	11.2	11.2	11.2	11.0
90°	0.7	2.5	4.2	6.0	7.7	9.2	10.5	11.8	13.0	14.3	15.1
92.5°	14.4	14.3	14.1	14.0	13.8	14.1	14.7	15.3	16.0	16.6	17.0
95°	46.5	41.3	36.0	30.8	25.5	23.4	24.6	25.7	26.8	27.9	28.7
97.5°	92.3	77.5	62.7	47.9	33.1	27.0	29.6	32.2	34.8	37.3	38.0
100°	126.6	104.8	83.1	61.3	39.5	30.0	32.7	35.4	38.1	40.8	42.0
102.5°	164.4	159.8	155.2	150.6	145.9	132.3	109.7	87.1	64.5	41.9	43.6
105°	217.5	222.2	227.0	231.8	236.5	217.2	173.8	130.4	87.0	43.6	45.4
107.5°	278.0	281.8	285.7	289.5	293.4	269.3	217.2	165.2	113.1	61.1	59.3
110°	316.9	320.2	323.6	326.9	330.2	308.9	263.0	217.1	171.1	125.2	109.3



TEST NUMBER: P331309

CATALOG NUMBER: SA2XXDIP-C485D725U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	353.5	356.5	359.4	362.4	365.3	361.1	349.8	338.4	327.1	315.7	257.8
115°	411.3	414.0	416.7	419.4	422.1	425.5	429.4	433.4	437.4	441.4	367.8
117.5°	463.0	466.0	469.0	472.0	475.0	477.9	480.7	483.4	486.1	488.9	471.1
120°	500.7	503.1	505.5	507.9	510.3	512.9	515.8	518.6	521.5	524.3	526.2
122.5°	532.8	535.3	537.8	540.3	542.8	545.6	548.8	551.9	555.0	558.1	559.2
125°	581.6	583.6	585.7	587.8	589.8	592.4	595.4	598.4	601.4	604.5	605.6
127.5°	625.8	628.1	630.4	632.6	634.9	637.2	639.5	641.7	644.0	646.2	647.9
130°	653.8	656.4	658.9	661.4	664.0	666.1	667.9	669.6	671.4	673.1	674.9
132.5°	682.4	684.6	686.8	688.9	691.1	693.0	694.8	696.5	698.3	700.0	701.5
135°	719.6	722.2	724.7	727.3	729.8	731.8	733.2	734.6	736.1	737.5	739.1
137.5°	757.3	759.0	760.8	762.6	764.4	766.1	767.7	769.3	770.9	772.6	774.1
140°	781.9	783.1	784.4	785.7	786.9	788.5	790.2	792.0	793.7	795.5	796.9
142.5°	802.5	803.6	804.8	805.9	807.0	808.6	810.6	812.6	814.6	816.6	817.9
145°	834.8	834.6	834.5	834.3	834.2	835.4	838.1	840.8	843.5	846.2	847.4
147.5°	863.0	862.4	861.8	861.2	860.6	861.6	864.3	866.9	869.6	872.3	873.1
150°	881.3	880.2	879.1	878.0	876.8	877.6	880.1	882.6	885.2	887.7	888.7
152.5°	896.7	895.5	894.3	893.0	891.8	892.4	894.8	897.2	899.6	902.0	903.0
155°	919.2	917.8	916.3	914.9	913.5	913.7	915.6	917.5	919.4	921.3	922.3
157.5°	936.8	935.6	934.4	933.2	932.0	932.0	933.4	934.7	936.0	937.4	938.5
160°	947.1	946.1	945.2	944.2	943.3	943.3	944.2	945.2	946.1	947.1	948.1
162.5°	956.3	955.3	954.4	953.4	952.4	952.4	953.2	954.0	954.9	955.7	956.8
165°	968.6	967.6	966.7	965.7	964.7	964.5	965.0	965.5	965.9	966.4	967.5
167.5°	977.7	976.8	975.8	974.9	973.9	973.6	974.1	974.5	975.0	975.4	976.5
170°	982.9	981.9	981.0	980.0	979.1	978.7	979.1	979.4	979.7	980.0	981.1
172.5°	986.3	985.3	984.4	983.4	982.5	982.2	982.5	982.8	983.1	983.4	984.6
175°	990.7	989.6	988.5	987.4	986.3	985.9	986.2	986.5	986.8	987.2	988.3
177.5°	991.5	990.6	989.7	988.8	987.9	987.5	987.6	987.8	987.9	988.0	988.9
180°	988.6	988.6	988.6	988.6	988.6	988.6	988.6	988.6	988.6	988.6	988.6



TEST NUMBER: P331309

CATALOG NUMBER: SA2XXDIP-C485D725U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	773.4	774.7	776.0	776.6	776.3	776.0	775.8	775.5
5°	768.2	769.5	770.8	771.3	771.0	770.6	770.3	770.0
7.5°	759.5	760.8	762.2	762.6	762.3	761.9	761.5	761.2
10°	751.7	753.1	754.4	754.8	754.3	753.8	753.3	752.8
12.5°	742.6	743.5	744.4	744.7	744.3	744.0	743.6	743.2
15°	726.5	727.2	727.8	727.7	726.9	726.1	725.3	724.4
17.5°	707.4	708.2	709.0	708.9	708.1	707.4	706.6	705.8
20°	692.6	693.1	693.6	693.5	692.8	692.1	691.5	690.8
22.5°	676.8	676.9	677.0	676.9	676.5	676.1	675.7	675.3
25°	651.2	651.5	651.8	651.8	651.5	651.2	650.8	650.5
27.5°	625.9	625.4	624.9	624.3	623.5	622.7	621.9	621.1
30°	606.2	605.7	605.2	604.6	603.9	603.3	602.6	601.9
32.5°	586.9	586.0	585.1	584.3	583.6	583.0	582.3	581.6
35°	555.9	554.9	553.9	553.0	552.2	551.3	550.5	549.7
37.5°	524.8	523.6	522.4	521.3	520.5	519.7	518.9	518.2
40°	503.4	501.9	500.4	499.3	498.6	498.0	497.3	496.6
42.5°	482.2	480.6	478.9	477.7	476.7	475.8	474.9	473.9
45°	449.7	447.9	446.0	444.8	444.1	443.5	442.8	442.1
47.5°	415.9	413.9	412.0	410.6	409.6	408.7	407.7	406.7
50°	394.2	391.8	389.5	387.9	387.1	386.3	385.4	384.6
52.5°	371.7	369.7	367.8	366.3	365.2	364.1	363.0	361.9
55°	338.1	336.1	334.1	332.7	331.8	331.0	330.2	329.4
57.5°	303.2	301.2	299.3	298.0	297.3	296.7	296.1	295.4
60°	280.1	278.3	276.5	275.3	274.8	274.3	273.8	273.3
62.5°	258.3	256.6	254.9	253.8	253.1	252.5	251.9	251.2
65°	224.8	223.3	221.8	220.6	219.8	219.0	218.2	217.3
67.5°	191.7	190.5	189.4	188.5	187.8	187.1	186.5	185.8
70°	170.2	169.0	167.9	167.0	166.3	165.6	165.0	164.3
72.5°	149.9	148.7	147.6	146.7	146.2	145.6	145.1	144.6
75°	118.2	117.3	116.3	115.9	116.3	116.6	116.9	117.3
77.5°	90.0	89.5	89.0	88.5	88.0	87.6	87.1	86.6
80°	71.4	70.9	70.5	70.0	69.7	69.4	69.0	68.7
82.5°	53.3	52.6	52.0	51.6	51.6	51.5	51.4	51.4
85°	28.1	27.6	27.1	26.8	26.6	26.5	26.3	26.1
87.5°	10.7	10.5	10.3	10.1	10.0	10.0	9.9	9.8
90°	15.9	16.7	17.5	18.0	18.4	18.7	19.0	19.3
92.5°	17.4	17.8	18.2	18.6	18.7	18.9	19.1	19.3
95°	29.5	30.3	31.1	31.4	31.2	31.1	30.9	30.8
97.5°	38.6	39.2	39.9	40.3	40.5	40.7	40.9	41.1
100°	43.3	44.6	45.9	46.7	47.0	47.3	47.6	47.9
102.5°	45.2	46.9	48.5	49.6	50.0	50.5	50.9	51.4
105°	47.1	48.9	50.6	51.8	52.5	53.1	53.7	54.4
107.5°	57.5	55.7	54.0	53.4	54.0	54.7	55.3	55.9
110°	93.4	77.5	61.6	54.0	54.6	55.2	55.9	56.5



TEST NUMBER: P331309

CATALOG NUMBER: SA2XXDIP-C485D725U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	199.8	141.8	83.8	55.0	55.6	56.1	56.6	57.1
115°	294.2	220.6	147.0	104.4	93.0	81.5	70.1	58.7
117.5°	453.3	435.4	417.6	389.9	352.3	314.7	277.1	239.5
120°	528.2	530.1	532.0	522.2	500.7	479.3	457.8	436.4
122.5°	560.4	561.5	562.7	561.2	557.0	552.8	548.7	544.5
125°	606.7	607.8	608.9	609.7	610.2	610.7	611.1	611.6
127.5°	649.5	651.1	652.7	653.6	653.7	653.8	653.9	654.0
130°	676.6	678.4	680.1	680.9	680.8	680.6	680.4	680.3
132.5°	703.0	704.5	706.0	706.7	706.5	706.4	706.2	706.0
135°	740.7	742.3	743.9	744.5	744.2	743.9	743.5	743.2
137.5°	775.7	777.2	778.8	779.3	778.8	778.2	777.7	777.1
140°	798.3	799.7	801.2	801.5	800.7	799.9	799.1	798.3
142.5°	819.2	820.5	821.8	822.1	821.3	820.5	819.7	818.9
145°	848.5	849.6	850.7	850.8	850.1	849.3	848.5	847.7
147.5°	873.9	874.8	875.6	875.7	875.0	874.3	873.7	873.0
150°	889.6	890.6	891.5	891.6	890.8	890.0	889.2	888.4
152.5°	903.9	904.9	905.9	905.8	904.8	903.7	902.7	901.6
155°	923.3	924.2	925.2	925.0	923.7	922.5	921.2	919.9
157.5°	939.5	940.6	941.7	941.6	940.4	939.1	937.9	936.7
160°	949.0	950.0	950.9	950.8	949.7	948.6	947.5	946.4
162.5°	957.8	958.9	960.0	959.9	958.5	957.1	955.8	954.4
165°	968.6	969.8	970.9	970.9	969.8	968.6	967.5	966.4
167.5°	977.7	978.8	979.9	979.7	978.3	976.9	975.4	974.0
170°	982.2	983.3	984.5	984.3	982.9	981.4	980.0	978.6
172.5°	985.7	986.8	987.9	987.7	986.3	984.9	983.4	982.0
175°	989.4	990.5	991.6	991.4	989.8	988.2	986.6	985.0
177.5°	989.8	990.7	991.6	991.5	990.3	989.2	988.0	986.9
180°	988.6	988.6	988.6	988.6	988.6	988.6	988.6	988.6

(END OF REPORT)