

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331320

Luminaire Tested: **SA2XXDIP-C485D925U835-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331320
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C485D925U835-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5592.1 lumens
Efficiency: N/A
Efficacy: 125.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 44.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331320
CATALOG NUMBER: SA2XXDIP-C485D925U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

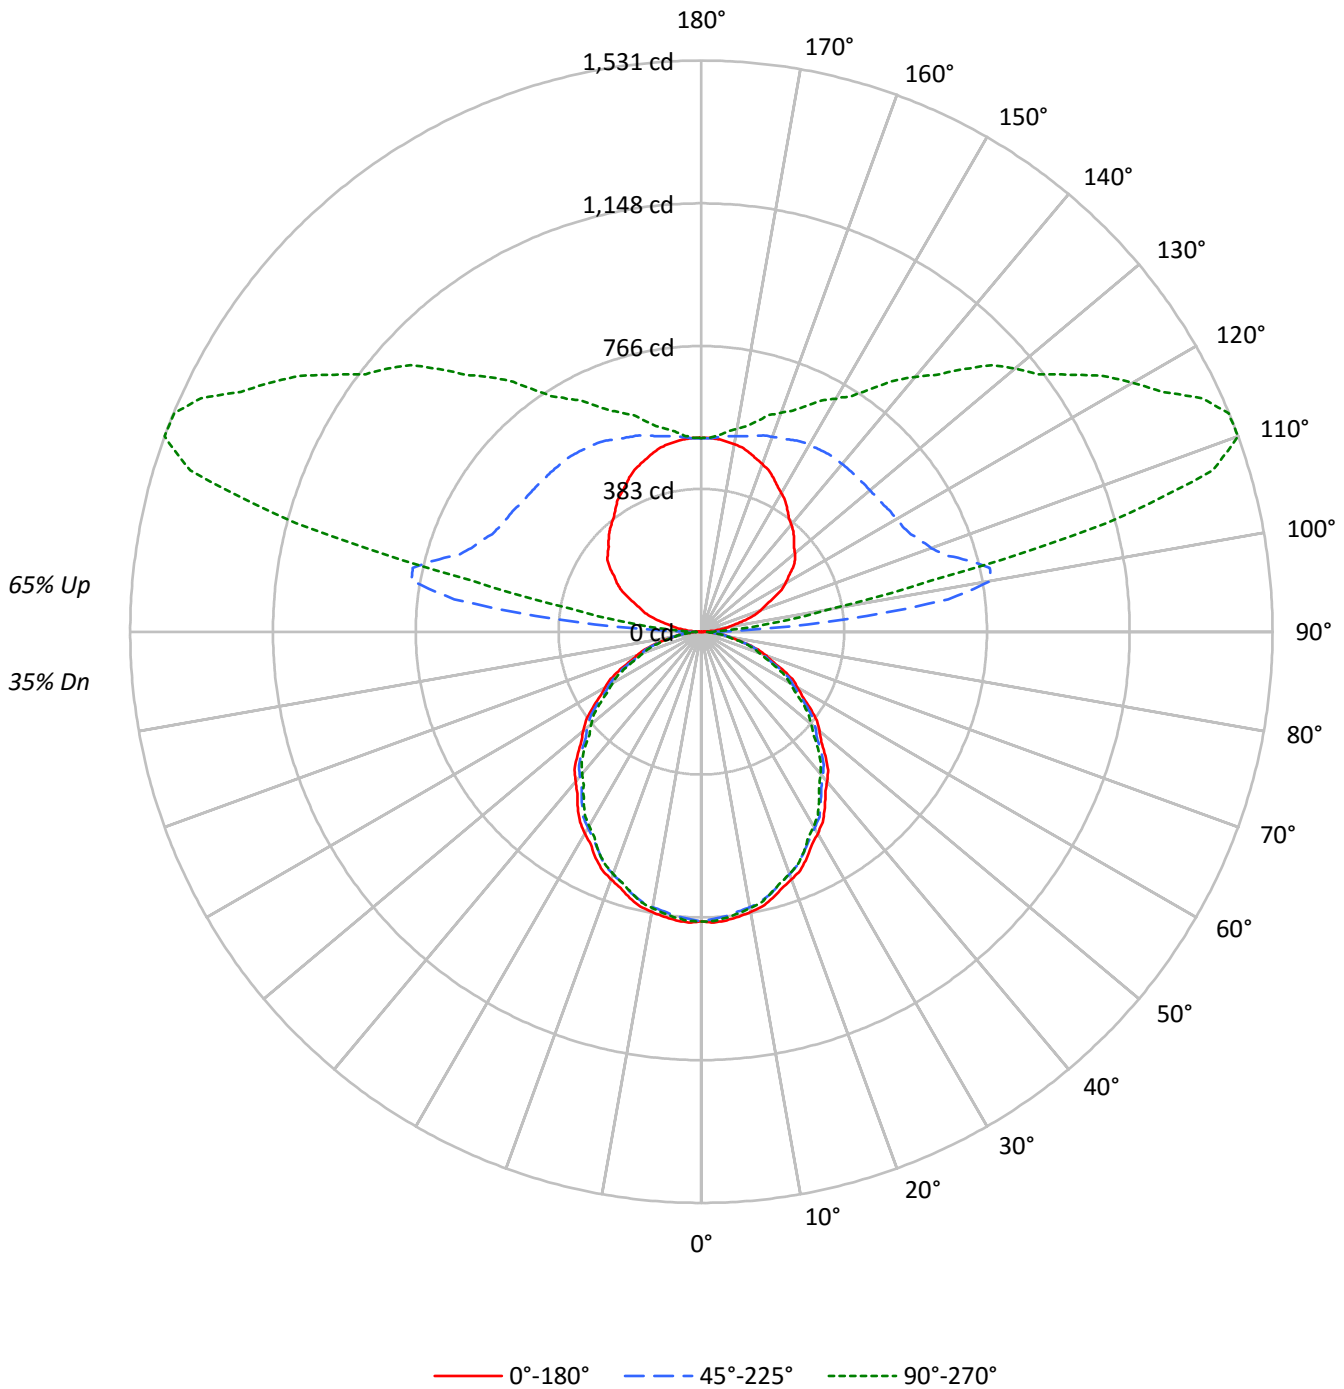



TEST NUMBER: P331320

CATALOG NUMBER: SA2XXDIP-C485D925U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43	35
1	95	90	86	83	85	82	79	76	66	64	62	51	50	48	38	37	36	30
2	86	79	73	68	78	71	66	62	58	54	51	45	43	40	33	32	30	25
3	78	69	62	56	71	63	57	52	51	46	43	40	37	34	29	27	26	21
4	72	61	53	48	65	56	49	44	45	40	36	35	32	29	26	24	22	18
5	66	54	46	41	59	50	43	37	40	35	31	32	28	25	24	21	19	16
6	60	49	41	35	54	44	37	32	36	31	27	29	25	22	21	19	17	14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	19	20	17	15	12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	15	14	11
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	17	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17	20	16	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12540	12540	12540
5°	12588	12407	12480
10°	12514	12281	12342
15°	12359	12122	12109
20°	12139	11883	11869
25°	11922	11589	11589
30°	11641	11320	11222
35°	11379	10996	10835
40°	11051	10673	10467
45°	10727	10351	10095
50°	10374	10017	9661
55°	10007	9627	9272
60°	9597	9164	8825
65°	9158	8703	8302
70°	8601	8143	7756
75°	7829	7498	7317
80°	6946	6732	6388
85°	5669	5391	4835



TEST NUMBER: P331320

CATALOG NUMBER: SA2XXDIP-C485D925U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.0	1.3
10°-20°	205.5	3.7
20°-30°	302.1	5.4
30°-40°	350.9	6.3
40°-50°	350.5	6.3
50°-60°	305.6	5.5
60°-70°	226.0	4.0
70°-80°	128.0	2.3
80°-90°	39.1	0.7
90°-100°	207.5	3.7
100°-110°	704.2	12.6
110°-120°	748.1	13.4
120°-130°	615.8	11.0
130°-140°	494.5	8.8
140°-150°	373.7	6.7
150°-160°	262.6	4.7
160°-170°	154.6	2.8
170°-180°	50.3	0.9
0°-30°	580.6	10.4
0°-40°	931.5	16.7
0°-60°	1587.6	28.4
0°-90°	1980.7	35.4
90°-120°	1659.8	29.7
90°-150°	3143.8	56.2
90°-180°	3611.0	64.6
0°-180°	5592.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	777	777	777	777	777	
5°	777	773	766	771	770	74
15°	739	735	725	728	724	208
25°	669	663	650	652	650	308
35°	577	570	558	553	550	360
45°	470	464	453	445	442	362
55°	356	351	342	333	329	318
65°	240	235	228	221	217	237
75°	126	124	120	116	117	134
85°	31	30	29	27	26	35
90°	1	14	34	32	33	3
95°	35	86	391	148	114	37
105°	122	184	740	1322	1125	129
115°	215	271	619	1277	1480	213
125°	299	354	595	1034	1201	266
135°	351	419	588	869	995	271
145°	401	461	585	726	794	252
155°	456	492	568	642	668	210
165°	497	512	544	577	586	140
175°	518	518	523	530	528	49
180°	519	519	519	519	519	



TEST NUMBER: P331320

CATALOG NUMBER: SA2XXDIP-C485D925U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	780.3	779.6	779.0	778.3	777.6	776.6	775.1	773.7	772.2	770.7	772.1
5°	776.7	776.0	775.4	774.7	774.1	772.8	771.0	769.2	767.3	765.5	766.8
7.5°	769.8	768.8	767.8	766.7	765.7	764.3	762.4	760.6	758.7	756.8	758.2
10°	763.3	762.1	760.9	759.8	758.6	757.0	755.0	753.1	751.1	749.1	750.4
12.5°	754.3	753.3	752.2	751.2	750.2	748.7	746.7	744.7	742.7	740.7	741.6
15°	739.4	738.4	737.4	736.4	735.4	733.8	731.6	729.5	727.3	725.2	725.8
17.5°	720.2	719.3	718.3	717.3	716.3	714.7	712.5	710.3	708.1	705.9	706.7
20°	706.5	705.5	704.5	703.5	702.5	700.9	698.5	696.2	693.9	691.6	692.1
22.5°	692.8	691.4	690.0	688.6	687.2	685.4	683.2	681.0	678.8	676.6	676.7
25°	669.2	667.8	666.5	665.2	663.9	661.8	659.0	656.1	653.3	650.5	650.8
27.5°	642.3	641.1	639.9	638.7	637.5	635.8	633.6	631.3	629.1	626.9	626.4
30°	624.4	623.0	621.7	620.4	619.0	617.1	614.6	612.2	609.7	607.2	606.7
32.5°	605.2	604.2	603.1	602.0	601.0	599.1	596.5	593.9	591.3	588.7	587.8
35°	577.3	575.6	574.0	572.3	570.7	568.5	565.9	563.2	560.5	557.9	556.9
37.5°	545.8	544.3	542.9	541.4	539.9	537.9	535.2	532.6	529.9	527.3	526.0
40°	524.3	522.9	521.6	520.3	519.0	517.0	514.3	511.7	509.0	506.4	504.9
42.5°	503.4	502.0	500.7	499.4	498.1	496.1	493.4	490.8	488.1	485.4	483.8
45°	469.8	468.6	467.4	466.3	465.1	463.3	460.8	458.3	455.8	453.3	451.5
47.5°	436.3	435.2	434.1	433.0	431.9	430.1	427.5	424.9	422.3	419.7	417.8
50°	413.0	412.2	411.3	410.5	409.7	408.1	405.8	403.5	401.1	398.8	396.5
52.5°	390.3	389.2	388.1	387.0	385.9	384.3	382.1	379.9	377.7	375.5	373.6
55°	355.5	354.5	353.5	352.5	351.5	350.0	348.0	346.0	344.0	342.0	340.1
57.5°	320.5	319.7	318.9	318.2	317.4	315.9	313.7	311.5	309.3	307.1	305.1
60°	297.2	296.6	295.9	295.2	294.6	293.1	290.8	288.4	286.1	283.8	282.0
62.5°	274.5	273.5	272.4	271.3	270.3	268.9	267.1	265.3	263.5	261.7	260.0
65°	239.7	238.7	237.7	236.7	235.8	234.4	232.8	231.1	229.4	227.8	226.3
67.5°	204.3	203.5	202.7	201.9	201.1	200.0	198.5	197.0	195.5	194.0	192.9
70°	182.2	181.6	180.9	180.2	179.6	178.5	177.0	175.5	174.0	172.5	171.4
72.5°	159.5	158.9	158.2	157.5	156.9	156.1	155.1	154.1	153.2	152.2	151.0
75°	125.5	125.1	124.8	124.5	124.1	123.6	122.7	121.9	121.1	120.2	119.2
77.5°	95.0	94.4	93.9	93.3	92.7	92.3	92.0	91.6	91.3	91.0	90.5
80°	74.7	74.5	74.4	74.2	74.0	73.8	73.4	73.1	72.8	72.4	71.9
82.5°	55.6	55.5	55.5	55.5	55.4	55.3	55.1	54.9	54.7	54.5	53.9
85°	30.6	30.5	30.3	30.1	30.0	29.8	29.6	29.5	29.3	29.1	28.6
87.5°	11.0	11.3	11.8	12.0	12.1	12.4	13.2	14.3	15.2	15.2	14.6
90°	1.0	4.0	8.0	10.0	12.0	15.0	20.0	26.9	32.9	33.9	32.9
92.5°	12.2	17.6	24.8	29.1	35.9	45.3	67.9	99.6	127.9	129.7	109.6
95°	34.9	38.9	48.9	57.9	73.9	97.8	143.7	230.5	346.3	391.2	342.3
97.5°	56.9	62.3	72.9	86.4	104.8	131.9	189.6	310.6	503.0	667.9	700.6
100°	76.8	79.8	88.8	104.8	124.8	152.7	205.6	327.4	542.9	788.4	932.2
102.5°	95.2	97.4	106.4	122.4	143.1	171.1	220.0	328.2	527.8	792.4	1018.4
105°	121.8	125.8	132.7	147.7	169.7	197.6	244.5	333.3	498.0	739.5	1005.0
107.5°	150.5	153.7	160.5	174.3	196.0	224.2	269.7	347.1	483.2	682.9	917.4
110°	169.7	173.7	179.6	192.6	213.6	242.5	286.4	358.3	480.1	655.7	862.3



TEST NUMBER: P331320

CATALOG NUMBER: SA2XXDIP-C485D925U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	187.2	191.2	198.0	210.2	230.3	260.1	302.4	370.3	480.8	638.1	824.0
115°	214.6	219.6	225.6	237.5	257.5	284.4	327.4	388.2	485.0	618.8	776.5
117.5°	242.9	246.9	252.9	263.5	282.6	310.6	350.3	407.4	492.2	609.4	746.5
120°	260.5	264.5	270.5	279.4	299.4	327.4	366.3	420.2	497.0	603.8	730.6
122.5°	277.3	280.4	286.4	296.2	316.2	344.9	381.4	431.3	502.6	600.6	717.0
125°	299.4	302.4	308.4	320.4	340.3	368.3	404.2	449.1	511.0	594.8	697.6
127.5°	317.0	321.0	329.3	342.5	361.7	390.4	425.4	465.7	519.6	591.4	679.7
130°	327.4	331.3	341.3	355.3	375.3	403.2	438.1	476.1	526.0	589.8	667.7
132.5°	336.9	341.7	352.5	367.3	388.0	416.0	449.3	486.4	532.3	589.0	658.1
135°	351.3	355.3	367.3	382.2	405.2	433.1	465.1	500.0	539.9	587.8	644.7
137.5°	364.9	369.7	381.6	397.6	420.4	446.3	477.9	510.4	546.7	587.6	635.3
140°	375.3	379.3	391.2	407.2	429.2	455.1	485.0	516.0	549.9	586.8	629.8
142.5°	385.6	388.8	400.0	416.0	437.1	461.5	490.6	520.8	552.3	586.8	624.2
145°	401.2	405.2	415.2	430.2	450.1	472.1	499.0	527.0	554.9	584.8	616.8
147.5°	418.0	421.0	430.5	444.3	460.9	480.5	505.8	530.4	555.7	581.3	609.2
150°	429.2	432.1	440.1	453.1	468.1	486.0	509.0	531.9	554.9	578.9	602.8
152.5°	440.3	441.7	449.7	461.1	475.3	491.6	512.2	532.7	553.3	574.9	597.2
155°	456.1	457.1	463.1	474.1	485.0	500.0	517.0	533.9	550.9	567.9	586.8
157.5°	469.3	470.3	475.1	484.6	493.4	506.0	520.4	533.9	546.3	560.7	577.1
160°	478.1	479.1	483.0	491.0	499.0	510.0	522.0	533.9	543.9	555.9	569.9
162.5°	486.8	486.2	490.2	496.6	503.8	512.4	522.8	533.1	541.5	551.9	563.5
165°	497.0	496.0	498.0	504.0	509.0	515.0	524.0	531.0	536.9	543.9	552.9
167.5°	505.4	504.2	506.0	509.8	513.4	517.2	523.8	529.6	532.3	536.9	542.5
170°	511.0	509.0	510.0	513.0	515.0	518.0	523.0	528.0	530.0	532.9	536.9
172.5°	514.2	513.0	512.4	515.4	516.6	518.8	522.2	525.6	526.8	528.2	531.4
175°	518.0	517.0	516.0	518.0	518.0	519.0	521.0	523.0	522.0	523.0	524.0
177.5°	519.8	518.2	517.4	519.0	519.0	519.0	519.8	521.4	519.8	519.0	519.8
180°	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0



TEST NUMBER: P331320

CATALOG NUMBER: SA2XXDIP-C485D925U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	773.4	774.7	776.0	776.6	776.3	776.0	775.8	775.5
5°	768.2	769.5	770.8	771.3	771.0	770.6	770.3	770.0
7.5°	759.5	760.8	762.2	762.6	762.3	761.9	761.5	761.2
10°	751.7	753.1	754.4	754.8	754.3	753.8	753.3	752.8
12.5°	742.6	743.5	744.4	744.7	744.3	744.0	743.6	743.2
15°	726.5	727.2	727.8	727.7	726.9	726.1	725.3	724.4
17.5°	707.4	708.2	709.0	708.9	708.1	707.4	706.6	705.8
20°	692.6	693.1	693.6	693.5	692.8	692.1	691.5	690.8
22.5°	676.8	676.9	677.0	676.9	676.5	676.1	675.7	675.3
25°	651.2	651.5	651.8	651.8	651.5	651.2	650.8	650.5
27.5°	625.9	625.4	624.9	624.3	623.5	622.7	621.9	621.1
30°	606.2	605.7	605.2	604.6	603.9	603.3	602.6	601.9
32.5°	586.9	586.0	585.1	584.3	583.6	583.0	582.3	581.6
35°	555.9	554.9	553.9	553.0	552.2	551.3	550.5	549.7
37.5°	524.8	523.6	522.4	521.3	520.5	519.7	518.9	518.2
40°	503.4	501.9	500.4	499.3	498.6	498.0	497.3	496.6
42.5°	482.2	480.6	478.9	477.7	476.7	475.8	474.9	473.9
45°	449.7	447.9	446.0	444.8	444.1	443.5	442.8	442.1
47.5°	415.9	413.9	412.0	410.6	409.6	408.7	407.7	406.7
50°	394.2	391.8	389.5	387.9	387.1	386.3	385.4	384.6
52.5°	371.7	369.7	367.8	366.3	365.2	364.1	363.0	361.9
55°	338.1	336.1	334.1	332.7	331.8	331.0	330.2	329.4
57.5°	303.2	301.2	299.3	298.0	297.3	296.7	296.1	295.4
60°	280.1	278.3	276.5	275.3	274.8	274.3	273.8	273.3
62.5°	258.3	256.6	254.9	253.8	253.1	252.5	251.9	251.2
65°	224.8	223.3	221.8	220.6	219.8	219.0	218.2	217.3
67.5°	191.7	190.5	189.4	188.5	187.8	187.1	186.5	185.8
70°	170.2	169.0	167.9	167.0	166.3	165.6	165.0	164.3
72.5°	149.9	148.7	147.6	146.7	146.2	145.6	145.1	144.6
75°	118.2	117.3	116.3	115.9	116.3	116.6	116.9	117.3
77.5°	90.0	89.5	89.0	88.5	88.0	87.6	87.1	86.6
80°	71.4	70.9	70.5	70.0	69.7	69.4	69.0	68.7
82.5°	53.3	52.6	52.0	51.6	51.6	51.5	51.4	51.4
85°	28.1	27.6	27.1	26.8	26.6	26.5	26.3	26.1
87.5°	14.0	13.2	13.2	13.1	13.0	12.8	12.7	12.6
90°	31.9	29.9	31.9	32.9	32.9	32.9	32.9	32.9
92.5°	87.0	74.7	66.3	60.1	59.3	56.1	56.9	55.3
95°	261.5	200.6	158.7	136.7	123.8	115.8	112.8	113.8
97.5°	610.2	499.2	391.2	319.2	271.5	246.9	232.3	224.0
100°	911.2	787.4	650.7	530.0	447.1	404.2	375.3	357.3
102.5°	1108.4	1080.5	980.5	852.5	762.5	689.2	653.1	628.8
105°	1212.6	1325.4	1338.4	1305.4	1243.5	1181.7	1138.7	1124.8
107.5°	1137.6	1307.4	1411.2	1459.5	1467.3	1463.9	1455.3	1436.8
110°	1072.9	1251.5	1379.3	1461.1	1504.0	1523.0	1532.0	1531.0



TEST NUMBER: P331320

CATALOG NUMBER: SA2XXDIP-C485D925U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1013.8	1185.3	1321.8	1415.6	1475.3	1507.0	1524.0	1529.4
115°	941.1	1094.8	1225.6	1328.4	1399.2	1445.1	1471.1	1480.1
117.5°	886.4	1021.4	1139.9	1236.4	1308.6	1357.1	1384.5	1392.0
120°	859.3	983.1	1088.8	1179.7	1249.5	1296.4	1325.4	1335.4
122.5°	837.7	951.1	1051.3	1133.4	1196.0	1242.1	1267.9	1276.3
125°	806.4	909.2	997.0	1071.9	1129.8	1167.7	1192.6	1200.6
127.5°	775.5	868.5	951.3	1020.4	1070.9	1106.4	1128.0	1134.4
130°	755.5	841.3	920.2	986.1	1035.0	1068.9	1088.8	1096.8
132.5°	736.3	815.8	888.2	950.1	998.2	1032.2	1050.5	1057.7
135°	709.6	775.5	841.3	897.2	940.1	973.1	991.0	995.0
137.5°	688.2	743.3	795.6	844.3	883.5	911.8	927.6	933.6
140°	674.7	722.6	768.5	812.4	844.3	870.3	885.3	891.2
142.5°	663.5	704.2	743.7	780.5	810.8	834.4	847.7	848.9
145°	647.7	680.7	711.6	740.5	764.5	781.5	791.4	794.4
147.5°	635.5	661.5	685.6	706.8	726.6	740.1	746.9	748.7
150°	626.8	648.7	669.7	687.6	702.6	714.6	720.6	721.6
152.5°	618.0	638.3	656.1	671.7	683.4	693.8	698.2	698.4
155°	605.8	621.8	636.7	647.7	658.7	665.7	669.7	667.7
157.5°	591.6	605.0	617.6	626.2	633.9	639.7	641.5	641.5
160°	582.8	593.8	604.8	611.8	618.8	623.8	624.8	624.8
162.5°	574.1	583.4	592.8	598.2	605.2	608.6	609.6	608.8
165°	560.9	567.9	574.9	578.9	582.8	586.8	586.8	585.8
167.5°	548.3	553.7	558.5	562.1	563.9	566.1	565.9	564.7
170°	541.9	544.9	548.9	550.9	551.9	554.9	553.9	551.9
172.5°	534.7	536.9	540.1	541.3	542.3	543.7	542.7	541.5
175°	527.0	528.0	529.0	530.0	530.0	531.0	530.0	528.0
177.5°	521.4	521.4	522.2	522.2	522.2	522.2	521.4	519.8
180°	519.0	519.0	519.0	519.0	519.0	519.0	519.0	519.0

(END OF REPORT)