

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331419

Luminaire Tested: **SA2XXDIP-C865D1080U835-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331419
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C865D1080U835-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7719.9 lumens
Efficiency: N/A
Efficacy: 118.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331419
CATALOG NUMBER: SA2XXDIP-C865D1080U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

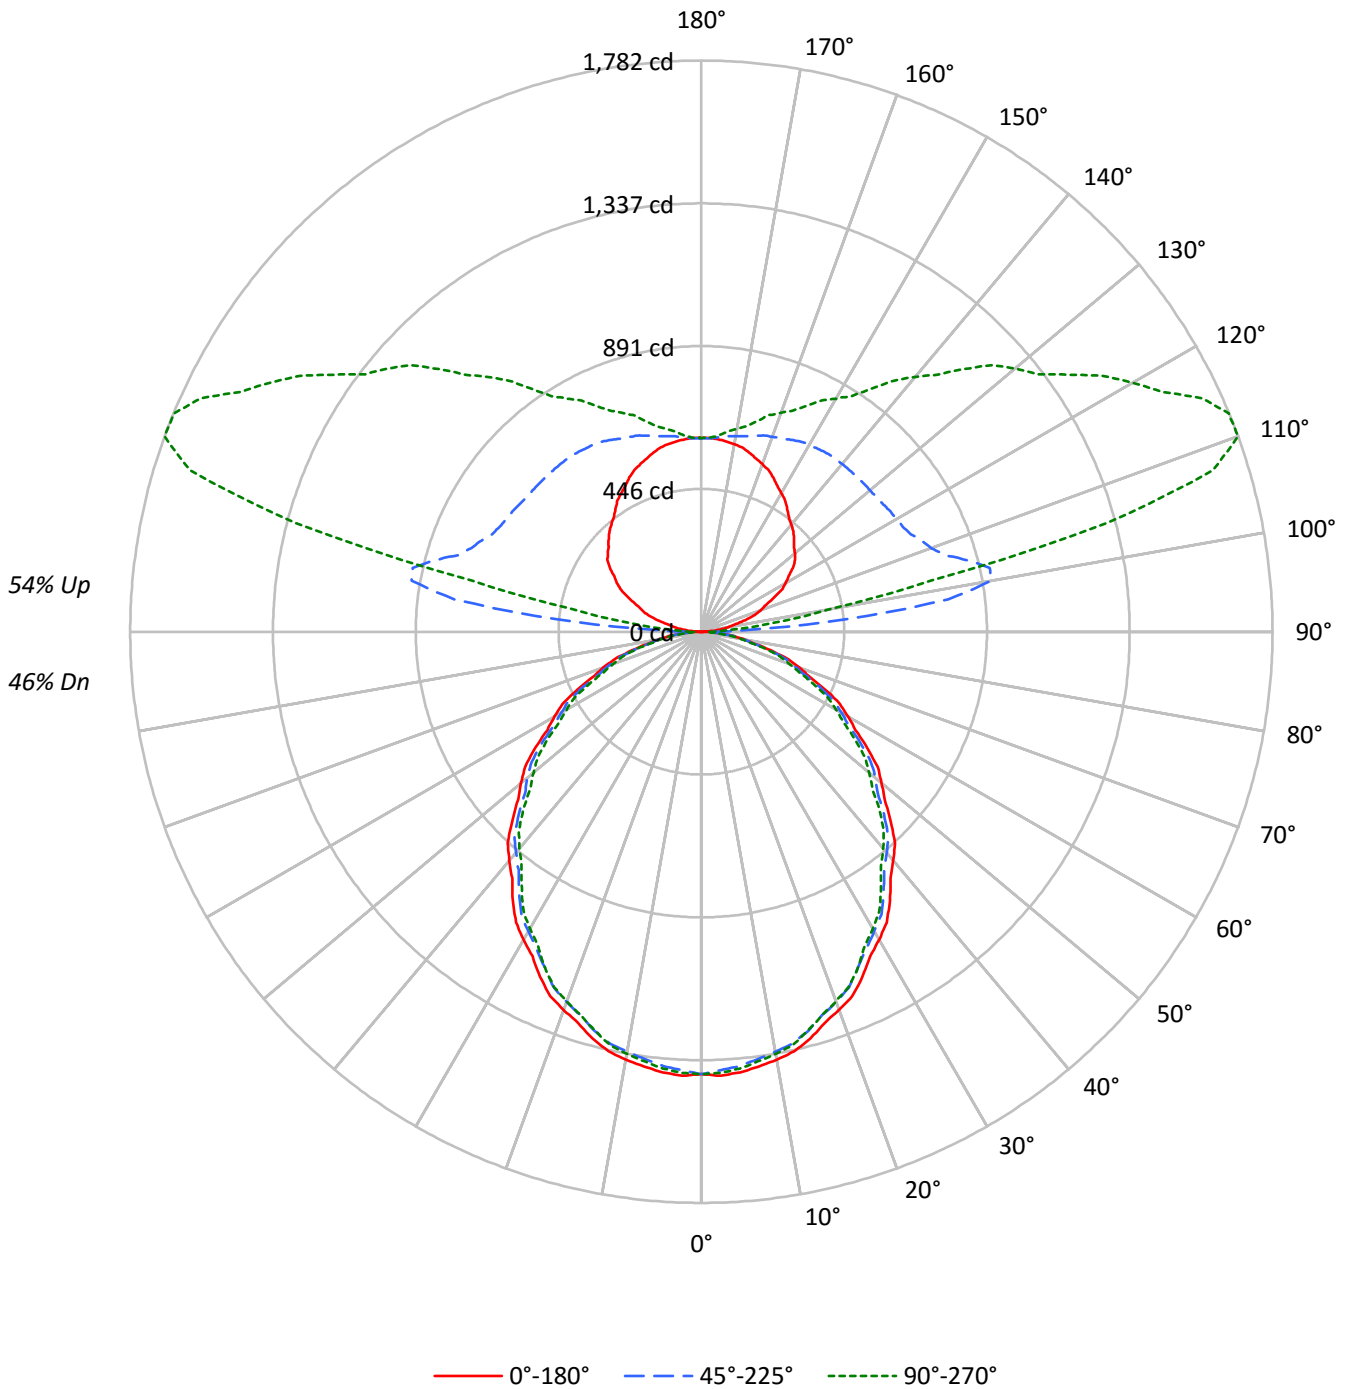



TEST NUMBER: P331419

CATALOG NUMBER: SA2XXDIP-C865D1080U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46				46
1	97	92	89	85	89	85	82	79	71	68	66	58	56	55	46	45	44				38	
2	88	81	75	69	81	74	69	65	62	58	55	51	48	46	40	39	37				32	
3	80	71	64	58	73	65	59	54	55	50	46	45	42	39	36	33	31				27	
4	74	63	55	49	67	58	51	46	49	43	39	40	36	33	32	29	27				23	
5	67	56	48	42	62	52	44	39	43	38	34	36	32	29	29	26	24				20	
6	62	50	42	36	57	46	39	34	39	34	30	32	28	25	26	23	21				18	
7	57	45	37	32	53	42	35	30	35	30	26	30	25	22	24	21	18				16	
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	17				14	
9	50	37	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15				13	
10	46	34	27	22	42	32	25	21	27	22	19	23	19	16	19	16	14				12	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22281	22281	22281
5°	22366	22044	22174
10°	22233	21820	21930
15°	21959	21538	21514
20°	21569	21113	21089
25°	21180	20591	20591
30°	20681	20113	19939
35°	20217	19537	19249
40°	19633	18963	18598
45°	19057	18393	17938
50°	18432	17799	17166
55°	17779	17106	16473
60°	17053	16281	15684
65°	16275	15461	14751
70°	15286	14469	13780
75°	13905	13325	12994
80°	12338	11967	11353
85°	10078	9596	8596



TEST NUMBER: P331419

CATALOG NUMBER: SA2XXDIP-C865D1080U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.8	1.7
10°-20°	365.1	4.7
20°-30°	536.7	7.0
30°-40°	623.4	8.1
40°-50°	622.7	8.1
50°-60°	543.1	7.0
60°-70°	401.6	5.2
70°-80°	227.4	2.9
80°-90°	66.6	0.9
90°-100°	241.5	3.1
100°-110°	819.6	10.6
110°-120°	870.7	11.3
120°-130°	716.8	9.3
130°-140°	575.6	7.5
140°-150°	435.0	5.6
150°-160°	305.7	4.0
160°-170°	180.0	2.3
170°-180°	58.6	0.8
0°-30°	1031.6	13.4
0°-40°	1655.0	21.4
0°-60°	2820.8	36.5
0°-90°	3516.4	45.5
90°-120°	1931.9	25.0
90°-150°	3659.3	47.4
90°-180°	4204.0	54.5
0°-180°	7719.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1380	1380	1380	1380	1380	
5°	1380	1374	1360	1370	1368	131
15°	1314	1305	1288	1293	1287	370
25°	1189	1178	1156	1158	1156	547
35°	1026	1012	991	983	977	640
45°	835	825	806	791	786	644
55°	632	623	608	592	585	565
65°	426	418	405	393	386	421
75°	223	220	214	206	208	238
85°	54	53	52	48	46	62
90°	1	16	40	38	38	5
95°	41	100	455	172	132	43
105°	142	214	861	1539	1309	151
115°	250	315	720	1486	1723	248
125°	348	412	692	1204	1398	309
135°	409	488	684	1012	1158	316
145°	467	537	681	845	925	293
155°	531	573	661	748	777	244
165°	578	596	633	671	682	163
175°	603	604	609	616	614	57
180°	604	604	604	604	604	



TEST NUMBER: P331419

CATALOG NUMBER: SA2XXDIP-C865D1080U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1380.0	1380.0	1380.0	1380.0	1380.0	1380.0	1380.0	1380.0	1380.0	1380.0	1380.0
2.5°	1386.4	1385.2	1384.0	1382.9	1381.7	1379.8	1377.2	1374.6	1372.0	1369.4	1371.8
5°	1380.0	1378.8	1377.7	1376.5	1375.3	1373.1	1369.9	1366.6	1363.4	1360.1	1362.5
7.5°	1367.8	1366.0	1364.2	1362.3	1360.5	1357.9	1354.6	1351.3	1348.0	1344.7	1347.1
10°	1356.1	1354.1	1352.0	1349.9	1347.9	1345.1	1341.5	1338.0	1334.5	1330.9	1333.3
12.5°	1340.2	1338.4	1336.6	1334.7	1332.9	1330.2	1326.7	1323.1	1319.6	1316.1	1317.7
15°	1313.7	1311.9	1310.1	1308.4	1306.6	1303.8	1300.0	1296.1	1292.3	1288.5	1289.6
17.5°	1279.7	1277.9	1276.2	1274.4	1272.6	1269.8	1265.9	1262.0	1258.1	1254.2	1255.6
20°	1255.3	1253.5	1251.8	1250.0	1248.2	1245.3	1241.1	1237.0	1232.9	1228.8	1229.6
22.5°	1230.9	1228.4	1225.9	1223.4	1221.0	1217.8	1213.9	1210.0	1206.1	1202.2	1202.4
25°	1188.9	1186.6	1184.2	1181.9	1179.5	1175.8	1170.8	1165.8	1160.8	1155.8	1156.4
27.5°	1141.2	1139.1	1136.9	1134.8	1132.7	1129.6	1125.7	1121.7	1117.8	1113.8	1113.0
30°	1109.3	1107.0	1104.6	1102.3	1099.9	1096.5	1092.1	1087.7	1083.2	1078.8	1077.9
32.5°	1075.4	1073.5	1071.6	1069.7	1067.8	1064.5	1059.9	1055.2	1050.6	1045.9	1044.3
35°	1025.7	1022.8	1019.8	1016.9	1013.9	1010.1	1005.4	1000.7	995.9	991.2	989.5
37.5°	969.7	967.1	964.5	961.9	959.4	955.7	951.0	946.3	941.5	936.8	934.6
40°	931.5	929.2	926.8	924.4	922.1	918.5	913.8	909.1	904.4	899.7	897.0
42.5°	894.4	892.0	889.6	887.3	884.9	881.4	876.7	872.0	867.2	862.5	859.6
45°	834.6	832.6	830.5	828.5	826.4	823.1	818.7	814.3	809.9	805.5	802.2
47.5°	775.2	773.3	771.3	769.4	767.4	764.1	759.5	754.9	750.3	745.7	742.3
50°	733.8	732.3	730.9	729.4	727.9	725.1	721.0	716.8	712.7	708.6	704.5
52.5°	693.5	691.5	689.6	687.6	685.7	682.8	678.9	675.0	671.1	667.2	663.8
55°	631.6	629.9	628.1	626.3	624.5	621.9	618.4	614.8	611.3	607.7	604.2
57.5°	569.5	568.1	566.7	565.3	563.9	561.2	557.3	553.4	549.5	545.6	542.2
60°	528.1	526.9	525.8	524.6	523.4	520.8	516.6	512.5	508.4	504.2	501.0
62.5°	487.8	485.9	484.0	482.1	480.2	477.7	474.5	471.3	468.1	465.0	462.0
65°	426.0	424.2	422.4	420.6	418.9	416.5	413.6	410.6	407.7	404.7	402.1
67.5°	363.1	361.6	360.2	358.8	357.4	355.4	352.7	350.0	347.4	344.7	342.7
70°	323.8	322.6	321.4	320.2	319.1	317.1	314.5	311.8	309.2	306.5	304.5
72.5°	283.4	282.3	281.1	279.9	278.7	277.3	275.6	273.9	272.1	270.4	268.4
75°	222.9	222.3	221.7	221.2	220.6	219.5	218.1	216.6	215.1	213.6	211.9
77.5°	168.8	167.8	166.8	165.8	164.8	164.0	163.4	162.8	162.2	161.6	160.7
80°	132.7	132.4	132.1	131.8	131.5	131.1	130.5	129.9	129.3	128.7	127.8
82.5°	98.7	98.7	98.6	98.5	98.5	98.3	97.9	97.6	97.2	96.9	95.7
85°	54.4	54.1	53.8	53.5	53.2	52.9	52.6	52.3	52.0	51.8	50.9
87.5°	19.3	19.6	20.0	20.0	20.0	20.2	20.9	22.1	23.0	22.8	21.8
90°	1.2	4.6	9.3	11.6	13.9	17.4	23.2	31.4	38.3	39.5	38.3
92.5°	14.2	20.4	28.8	33.9	41.8	52.7	79.0	115.9	148.9	151.0	127.6
95°	40.7	45.3	56.9	67.4	86.0	113.8	167.3	268.3	403.1	455.4	398.5
97.5°	66.2	72.5	84.8	100.6	122.0	153.6	220.7	361.5	585.5	777.4	815.5
100°	89.4	92.9	103.4	122.0	145.2	177.7	239.3	381.0	631.9	917.7	1085.0
102.5°	110.8	113.4	123.8	142.4	166.6	199.1	256.0	382.0	614.3	922.4	1185.4
105°	141.7	146.4	154.5	171.9	197.5	230.0	284.6	388.0	579.7	860.8	1169.8
107.5°	175.2	178.9	186.8	202.8	228.2	260.9	313.9	404.0	562.5	794.8	1067.8
110°	197.5	202.1	209.1	224.2	248.6	282.3	333.4	417.0	558.8	763.2	1003.7



TEST NUMBER: P331419

CATALOG NUMBER: SA2XXDIP-C865D1080U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	217.9	222.6	230.5	244.6	268.1	302.7	352.0	431.0	559.7	742.8	959.1
115°	249.8	255.6	262.5	276.5	299.7	331.1	381.0	451.9	564.6	720.2	903.8
117.5°	282.8	287.4	294.4	306.7	329.0	361.5	407.7	474.2	572.9	709.3	868.9
120°	303.2	307.8	314.8	325.3	348.5	381.0	426.3	489.1	578.5	702.8	850.3
122.5°	322.7	326.4	333.4	344.8	368.0	401.5	444.0	502.1	585.0	699.1	834.5
125°	348.5	352.0	359.0	372.9	396.1	428.7	470.5	522.8	594.8	692.4	812.0
127.5°	368.9	373.6	383.4	398.7	421.0	454.4	495.1	542.0	604.8	688.4	791.1
130°	381.0	385.7	397.3	413.6	436.8	469.3	510.0	554.1	612.2	686.5	777.2
132.5°	392.2	397.8	410.3	427.5	451.7	484.2	523.0	566.2	619.6	685.6	766.0
135°	408.9	413.6	427.5	444.9	471.6	504.2	541.3	582.0	628.5	684.2	750.4
137.5°	424.7	430.3	444.2	462.8	489.3	519.5	556.2	594.1	636.4	684.0	739.5
140°	436.8	441.4	455.4	474.0	499.5	529.7	564.6	600.6	640.1	683.1	733.0
142.5°	448.9	452.6	465.6	484.2	508.8	537.2	571.1	606.2	642.9	683.1	726.5
145°	467.0	471.6	483.3	500.7	523.9	549.5	580.8	613.4	645.9	680.7	717.9
147.5°	486.5	490.0	501.1	517.2	536.5	559.2	588.7	617.3	646.8	676.6	709.1
150°	499.5	503.0	512.3	527.4	544.8	565.7	592.5	619.2	645.9	673.8	701.6
152.5°	512.5	514.2	523.4	536.7	553.2	572.2	596.2	620.1	644.0	669.1	695.1
155°	530.9	532.0	539.0	551.8	564.6	582.0	601.7	621.5	641.2	661.0	683.1
157.5°	546.2	547.4	553.0	564.1	574.3	589.0	605.7	621.5	635.9	652.6	671.7
160°	556.4	557.6	562.2	571.5	580.8	593.6	607.6	621.5	633.1	647.1	663.3
162.5°	566.7	566.0	570.6	578.0	586.4	596.4	608.5	620.6	630.3	642.4	655.9
165°	578.5	577.4	579.7	586.6	592.5	599.4	609.9	618.0	625.0	633.1	643.6
167.5°	588.3	586.9	589.0	593.4	597.6	602.0	609.6	616.4	619.6	625.0	631.5
170°	594.8	592.5	593.6	597.1	599.4	602.9	608.7	614.5	616.8	620.3	625.0
172.5°	598.5	597.1	596.4	599.9	601.3	603.8	607.8	611.7	613.1	614.8	618.5
175°	602.9	601.7	600.6	602.9	602.9	604.1	606.4	608.7	607.6	608.7	609.9
177.5°	605.0	603.1	602.2	604.1	604.1	604.1	605.0	606.9	605.0	604.1	605.0
180°	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1



TEST NUMBER: P331419

CATALOG NUMBER: SA2XXDIP-C865D1080U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1380.0	1380.0	1380.0	1380.0	1380.0	1380.0	1380.0	1380.0
2.5°	1374.1	1376.5	1378.8	1379.8	1379.3	1378.8	1378.4	1377.9
5°	1364.8	1367.2	1369.6	1370.4	1369.9	1369.3	1368.7	1368.1
7.5°	1349.4	1351.8	1354.2	1355.0	1354.4	1353.7	1353.1	1352.4
10°	1335.6	1338.0	1340.4	1341.1	1340.2	1339.3	1338.4	1337.6
12.5°	1319.4	1321.0	1322.7	1323.2	1322.5	1321.9	1321.2	1320.6
15°	1290.8	1292.0	1293.2	1293.0	1291.6	1290.1	1288.6	1287.1
17.5°	1256.9	1258.3	1259.7	1259.6	1258.2	1256.8	1255.4	1254.0
20°	1230.5	1231.4	1232.3	1232.1	1231.0	1229.8	1228.6	1227.4
22.5°	1202.6	1202.7	1202.9	1202.7	1201.9	1201.2	1200.5	1199.8
25°	1157.0	1157.5	1158.1	1158.1	1157.5	1157.0	1156.4	1155.8
27.5°	1112.1	1111.2	1110.3	1109.2	1107.7	1106.3	1104.9	1103.5
30°	1077.0	1076.2	1075.3	1074.2	1073.1	1071.9	1070.7	1069.5
32.5°	1042.7	1041.1	1039.5	1038.1	1037.0	1035.8	1034.6	1033.4
35°	987.7	985.9	984.2	982.5	981.1	979.6	978.1	976.6
37.5°	932.5	930.3	928.1	926.3	924.9	923.5	922.1	920.6
40°	894.4	891.7	889.1	887.1	886.0	884.8	883.6	882.4
42.5°	856.7	853.8	851.0	848.7	847.0	845.4	843.7	842.1
45°	799.0	795.7	792.5	790.3	789.1	787.9	786.7	785.6
47.5°	738.9	735.5	732.1	729.5	727.8	726.1	724.4	722.7
50°	700.3	696.2	692.1	689.3	687.8	686.3	684.9	683.4
52.5°	660.3	656.9	653.5	650.8	648.9	646.9	645.0	643.0
55°	600.7	597.1	593.6	591.1	589.6	588.1	586.7	585.2
57.5°	538.7	535.2	531.7	529.4	528.3	527.2	526.1	524.9
60°	497.8	494.5	491.3	489.2	488.3	487.4	486.5	485.7
62.5°	458.9	455.9	452.9	450.9	449.7	448.6	447.5	446.4
65°	399.4	396.8	394.1	392.0	390.6	389.1	387.6	386.1
67.5°	340.6	338.5	336.5	334.9	333.7	332.5	331.3	330.1
70°	302.4	300.3	298.3	296.6	295.5	294.3	293.1	291.9
72.5°	266.3	264.2	262.2	260.7	259.7	258.8	257.8	256.9
75°	210.1	208.3	206.6	206.0	206.6	207.2	207.7	208.3
77.5°	159.9	159.0	158.1	157.2	156.4	155.6	154.8	153.9
80°	126.9	126.1	125.2	124.4	123.8	123.3	122.7	122.1
82.5°	94.6	93.5	92.4	91.8	91.6	91.5	91.4	91.3
85°	50.0	49.1	48.2	47.6	47.3	47.0	46.7	46.4
87.5°	20.9	19.7	19.5	19.2	19.0	18.8	18.5	18.3
90°	37.2	34.9	37.2	38.3	38.3	38.3	38.3	38.3
92.5°	101.3	86.9	77.1	69.9	69.0	65.3	66.2	64.4
95°	304.4	233.5	184.7	159.1	144.0	134.8	131.3	132.4
97.5°	710.2	581.1	455.4	371.5	316.0	287.4	270.4	260.7
100°	1060.6	916.6	757.4	616.8	520.4	470.5	436.8	415.9
102.5°	1290.2	1257.6	1141.2	992.3	887.5	802.3	760.2	731.9
105°	1411.4	1542.7	1557.8	1519.5	1447.4	1375.4	1325.5	1309.2
107.5°	1324.1	1521.8	1642.6	1698.8	1707.9	1703.9	1693.9	1672.3
110°	1248.8	1456.7	1605.4	1700.7	1750.6	1772.7	1783.2	1782.0



TEST NUMBER: P331419

CATALOG NUMBER: SA2XXDIP-C865D1080U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1180.0	1379.6	1538.5	1647.7	1717.2	1754.1	1773.9	1780.1
115°	1095.5	1274.4	1426.5	1546.2	1628.7	1682.1	1712.3	1722.8
117.5°	1031.8	1188.9	1326.9	1439.1	1523.2	1579.6	1611.5	1620.3
120°	1000.2	1144.2	1267.4	1373.1	1454.4	1509.0	1542.7	1554.3
122.5°	975.1	1107.1	1223.7	1319.2	1392.1	1445.8	1475.8	1485.5
125°	938.6	1058.3	1160.5	1247.6	1315.0	1359.2	1388.2	1397.5
127.5°	902.6	1010.9	1107.3	1187.7	1246.5	1287.8	1312.9	1320.4
130°	879.4	979.3	1071.1	1147.7	1204.7	1244.2	1267.4	1276.7
132.5°	857.1	949.6	1033.9	1105.9	1161.9	1201.4	1222.8	1231.1
135°	825.9	902.6	979.3	1044.3	1094.3	1132.6	1153.5	1158.2
137.5°	801.1	865.2	926.1	982.8	1028.3	1061.3	1079.7	1086.6
140°	785.3	841.1	894.5	945.6	982.8	1013.0	1030.4	1037.4
142.5°	772.3	819.7	865.7	908.4	943.7	971.2	986.7	988.1
145°	753.9	792.3	828.3	862.0	889.8	909.6	921.2	924.7
147.5°	739.8	770.0	798.1	822.7	845.7	861.5	869.4	871.5
150°	729.5	755.1	779.5	800.4	817.8	831.8	838.7	839.9
152.5°	719.3	743.0	763.7	781.8	795.5	807.6	812.7	812.9
155°	705.1	723.7	741.1	753.9	766.7	774.8	779.5	777.2
157.5°	688.6	704.2	718.8	728.8	737.9	744.6	746.7	746.7
160°	678.4	691.2	704.0	712.1	720.2	726.0	727.2	727.2
162.5°	668.2	679.1	690.0	696.3	704.4	708.4	709.5	708.6
165°	652.9	661.0	669.1	673.8	678.4	683.1	683.1	681.9
167.5°	638.2	644.5	650.1	654.3	656.3	658.9	658.7	657.3
170°	630.8	634.3	638.9	641.2	642.4	645.9	644.7	642.4
172.5°	622.4	625.0	628.7	630.1	631.3	632.9	631.7	630.3
175°	613.4	614.5	615.7	616.8	616.8	618.0	616.8	614.5
177.5°	606.9	606.9	607.8	607.8	607.8	607.8	606.9	605.0
180°	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1

(END OF REPORT)