

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331671

Luminaire Tested: **SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331671
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1080 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6066.4 lumens
Efficiency: N/A
Efficacy: 122.8 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

Luminous Intensity Polar Plot

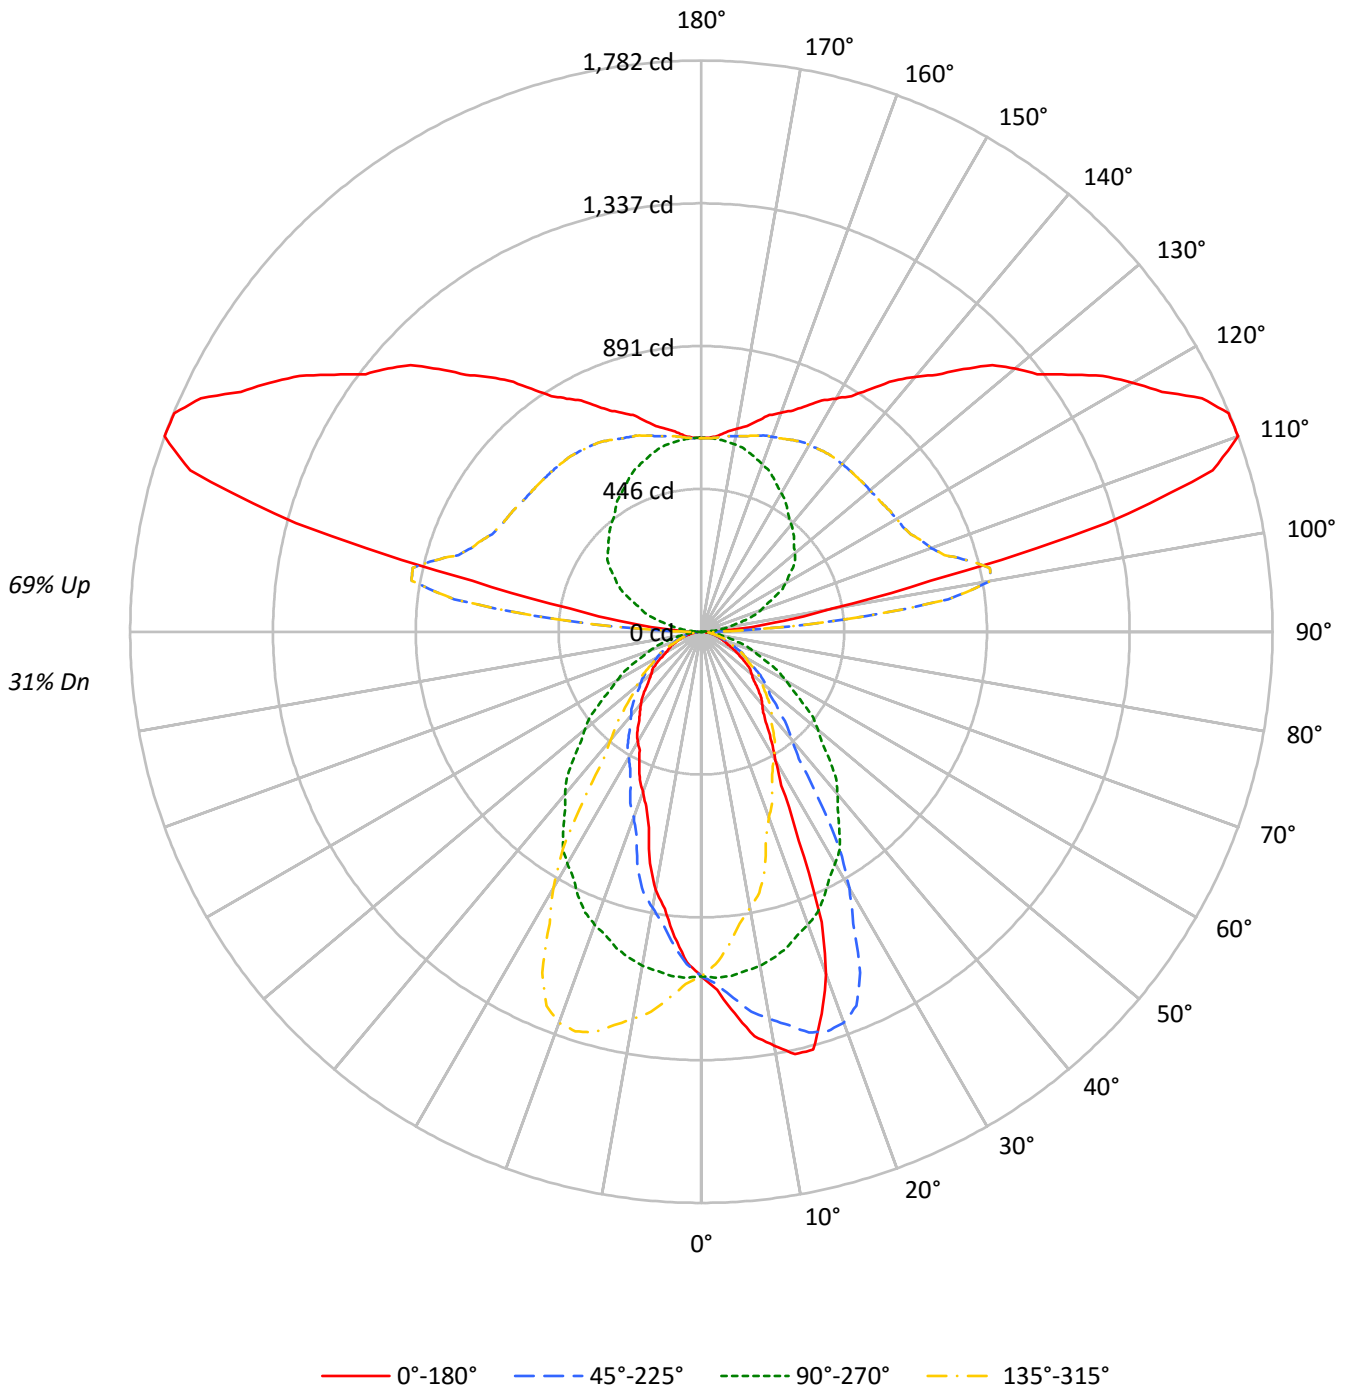



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	38	38	38	31
1	94	90	86	83	84	81	78	75	64	62	60	49	48	46	35	34	33	27
2	86	79	73	69	77	71	67	62	57	54	51	43	41	39	31	30	29	23
3	79	70	63	58	70	63	57	53	51	47	43	39	36	34	28	26	25	20
4	72	62	55	49	65	56	50	45	45	41	37	35	32	30	25	24	22	18
5	66	56	48	42	60	50	44	39	41	36	32	32	28	26	23	21	20	16
6	61	50	42	37	55	45	39	34	37	32	28	29	25	23	21	19	17	14
7	57	45	38	32	51	41	35	30	33	29	25	26	23	20	19	17	16	13
8	53	41	34	29	47	37	31	27	31	26	22	24	21	18	18	16	14	12
9	49	37	30	26	44	34	28	24	28	23	20	22	19	17	17	15	13	11
10	46	34	28	23	41	31	25	21	26	21	18	21	17	15	16	13	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	17354	17354	17354	17354
5°	19379	17462	15483	17462
10°	21502	17339	13421	17339
15°	22559	17085	10574	17085
20°	19557	16708	9149	16708
25°	12827	16192	8170	16192
30°	8634	15567	7394	15567
35°	6993	14781	6668	14781
40°	6218	13923	6171	13923
45°	5628	12919	5507	12919
50°	5122	11921	5102	11921
55°	4814	10818	4752	10818
60°	4027	9804	3978	9804
65°	3396	8902	3851	8902
70°	3139	7950	3630	7950
75°	2938	6918	3356	6918
80°	2706	5690	2985	5690
85°	2482	4502	2631	4502



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.9	1.7
10°-20°	283.9	4.7
20°-30°	365.8	6.0
30°-40°	347.6	5.7
40°-50°	297.8	4.9
50°-60°	226.8	3.7
60°-70°	143.4	2.4
70°-80°	71.6	1.2
80°-90°	24.1	0.4
90°-100°	241.5	4.0
100°-110°	819.6	13.5
110°-120°	870.7	14.4
120°-130°	716.8	11.8
130°-140°	575.6	9.5
140°-150°	435.0	7.2
150°-160°	305.7	5.0
160°-170°	180.0	3.0
170°-180°	58.6	1.0
0°-30°	751.6	12.4
0°-40°	1099.2	18.1
0°-60°	1623.8	26.8
0°-90°	1862.8	30.7
90°-120°	1931.9	31.8
90°-150°	3659.3	60.3
90°-180°	4204.0	69.3
0°-180°	6066.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1075	1075	1075	1075	1075	
5°	1196	1077	955	1077	1196	118
15°	1350	1022	633	1022	1350	364
25°	720	909	459	909	720	342
35°	355	750	338	750	355	227
45°	246	566	241	566	246	191
55°	171	384	169	384	171	150
65°	89	233	101	233	89	90
75°	47	111	54	111	47	50
85°	13	24	14	24	13	15
90°	38	1	38	1	38	21
95°	132	41	132	41	132	172
105°	1309	142	1309	142	1309	1267
115°	1723	250	1723	250	1723	1687
125°	1398	348	1398	348	1398	1263
135°	1158	409	1158	409	1158	900
145°	925	467	925	467	925	587
155°	777	531	777	531	777	363
165°	682	578	682	578	682	195
175°	614	603	614	603	614	60
180°	604	604	604	604	604	



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8
2.5°	1118.4	1119.3	1120.2	1118.1	1118.1	1116.3	1112.4	1109.4	1101.0	1099.8	1099.8
5°	1195.7	1195.0	1196.5	1191.6	1184.9	1183.4	1176.3	1167.0	1157.3	1146.4	1144.2
7.5°	1272.7	1271.6	1268.6	1267.7	1262.6	1251.3	1239.9	1227.7	1211.6	1195.8	1187.9
10°	1311.5	1323.8	1316.4	1303.3	1305.9	1288.4	1279.0	1263.0	1249.5	1226.0	1220.8
12.5°	1349.7	1354.6	1352.2	1344.8	1341.5	1329.3	1316.7	1302.7	1277.9	1256.8	1238.4
15°	1349.6	1356.7	1358.6	1356.3	1358.2	1357.4	1350.7	1339.1	1317.5	1294.3	1274.2
17.5°	1250.0	1254.9	1267.1	1275.4	1285.9	1308.0	1318.9	1323.2	1319.9	1306.7	1292.5
20°	1138.2	1130.0	1164.4	1181.9	1196.9	1234.2	1266.3	1278.6	1298.4	1298.1	1294.3
22.5°	979.9	981.8	1014.4	1035.2	1078.9	1116.2	1152.8	1199.2	1237.5	1262.8	1277.6
25°	720.0	734.2	766.7	795.0	843.6	913.1	976.2	1049.4	1118.4	1173.0	1224.9
27.5°	540.7	541.8	567.5	593.8	622.6	679.5	759.0	846.4	944.9	1026.1	1119.6
30°	463.1	460.8	471.7	487.7	512.4	556.4	616.2	702.1	800.3	922.8	1031.8
32.5°	408.1	408.2	416.4	428.3	448.7	478.4	519.4	589.1	682.0	802.4	930.2
35°	354.8	354.4	360.4	369.0	377.5	396.6	424.6	461.2	525.1	637.5	768.2
37.5°	316.5	318.2	321.1	326.5	335.9	346.5	363.4	387.9	433.4	499.9	609.7
40°	295.0	295.8	299.9	304.4	310.0	318.2	332.0	351.8	385.0	438.0	518.3
42.5°	275.3	276.0	279.0	283.1	287.5	295.8	307.2	324.3	351.3	392.6	458.9
45°	246.5	246.5	249.1	250.9	255.8	263.3	272.6	286.8	305.5	336.1	380.2
47.5°	219.4	219.5	221.2	224.4	227.5	233.3	242.5	254.1	267.7	291.4	329.0
50°	203.9	204.3	205.4	208.0	209.9	215.1	222.2	232.3	246.5	264.8	296.1
52.5°	191.3	191.1	192.5	193.7	194.9	198.7	204.0	212.9	225.6	241.5	267.5
55°	171.0	169.5	171.8	173.6	174.8	176.3	179.2	184.9	195.7	209.1	228.5
57.5°	145.6	145.0	146.6	148.3	151.8	155.9	158.4	162.0	167.6	177.2	196.5
60°	124.7	124.7	128.1	129.2	133.3	138.5	143.8	146.8	152.4	158.7	172.9
62.5°	106.2	106.5	108.1	109.2	111.5	117.9	125.3	131.8	137.1	143.2	152.6
65°	88.9	89.6	89.6	90.4	91.9	93.4	96.3	101.6	110.9	119.5	126.6
67.5°	75.4	75.7	75.9	76.6	77.0	78.6	79.8	82.2	84.3	92.5	101.3
70°	66.5	67.6	67.2	68.0	68.3	69.1	70.6	71.7	75.1	76.9	82.2
72.5°	58.1	58.9	58.9	59.3	60.3	60.4	61.6	62.7	64.9	66.5	69.3
75°	47.1	46.7	47.1	47.8	48.2	48.5	48.5	50.0	51.2	52.7	54.5
77.5°	36.3	36.7	36.6	36.7	36.7	37.4	37.3	38.0	39.1	39.9	40.8
80°	29.1	29.5	29.1	29.5	29.9	30.2	29.9	30.2	31.4	32.1	32.1
82.5°	22.6	22.6	22.9	22.9	23.0	23.1	23.6	23.7	24.5	24.3	24.6
85°	13.4	13.1	13.1	13.1	13.4	13.8	13.4	13.4	13.8	13.8	13.8
87.5°	12.4	12.7	12.7	12.7	12.7	12.5	12.0	12.8	12.7	13.3	12.7
90°	38.3	38.3	38.3	38.3	38.3	37.2	34.9	37.2	38.3	39.5	38.3
92.5°	64.4	66.2	65.3	69.0	69.9	77.1	86.9	101.3	127.6	151.0	148.9
95°	132.4	131.3	134.8	144.0	159.1	184.7	233.5	304.4	398.5	455.4	403.1
97.5°	260.7	270.4	287.4	316.0	371.5	455.4	581.1	710.2	815.5	777.4	585.5
100°	415.9	436.8	470.5	520.4	616.8	757.4	916.6	1060.6	1085.0	917.7	631.9
102.5°	731.9	760.2	802.3	887.5	992.3	1141.2	1257.6	1290.2	1185.4	922.4	614.3
105°	1309.2	1325.5	1375.4	1447.4	1519.5	1557.8	1542.7	1411.4	1169.8	860.8	579.7
107.5°	1672.3	1693.9	1703.9	1707.9	1698.8	1642.6	1521.8	1324.1	1067.8	794.8	562.5
110°	1782.0	1783.2	1772.7	1750.6	1700.7	1605.4	1456.7	1248.8	1003.7	763.2	558.8



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1780.1	1773.9	1754.1	1717.2	1647.7	1538.5	1379.6	1180.0	959.1	742.8	559.7
115°	1722.8	1712.3	1682.1	1628.7	1546.2	1426.5	1274.4	1095.5	903.8	720.2	564.6
117.5°	1620.3	1611.5	1579.6	1523.2	1439.1	1326.9	1188.9	1031.8	868.9	709.3	572.9
120°	1554.3	1542.7	1509.0	1454.4	1373.1	1267.4	1144.2	1000.2	850.3	702.8	578.5
122.5°	1485.5	1475.8	1445.8	1392.1	1319.2	1223.7	1107.1	975.1	834.5	699.1	585.0
125°	1397.5	1388.2	1359.2	1315.0	1247.6	1160.5	1058.3	938.6	812.0	692.4	594.8
127.5°	1320.4	1312.9	1287.8	1246.5	1187.7	1107.3	1010.9	902.6	791.1	688.4	604.8
130°	1276.7	1267.4	1244.2	1204.7	1147.7	1071.1	979.3	879.4	777.2	686.5	612.2
132.5°	1231.1	1222.8	1201.4	1161.9	1105.9	1033.9	949.6	857.1	766.0	685.6	619.6
135°	1158.2	1153.5	1132.6	1094.3	1044.3	979.3	902.6	825.9	750.4	684.2	628.5
137.5°	1086.6	1079.7	1061.3	1028.3	982.8	926.1	865.2	801.1	739.5	684.0	636.4
140°	1037.4	1030.4	1013.0	982.8	945.6	894.5	841.1	785.3	733.0	683.1	640.1
142.5°	988.1	986.7	971.2	943.7	908.4	865.7	819.7	772.3	726.5	683.1	642.9
145°	924.7	921.2	909.6	889.8	862.0	828.3	792.3	753.9	717.9	680.7	645.9
147.5°	871.5	869.4	861.5	845.7	822.7	798.1	770.0	739.8	709.1	676.6	646.8
150°	839.9	838.7	831.8	817.8	800.4	779.5	755.1	729.5	701.6	673.8	645.9
152.5°	812.9	812.7	807.6	795.5	781.8	763.7	743.0	719.3	695.1	669.1	644.0
155°	777.2	779.5	774.8	766.7	753.9	741.1	723.7	705.1	683.1	661.0	641.2
157.5°	746.7	746.7	744.6	737.9	728.8	718.8	704.2	688.6	671.7	652.6	635.9
160°	727.2	727.2	726.0	720.2	712.1	704.0	691.2	678.4	663.3	647.1	633.1
162.5°	708.6	709.5	708.4	704.4	696.3	690.0	679.1	668.2	655.9	642.4	630.3
165°	681.9	683.1	683.1	678.4	673.8	669.1	661.0	652.9	643.6	633.1	625.0
167.5°	657.3	658.7	658.9	656.3	654.3	650.1	644.5	638.2	631.5	625.0	619.6
170°	642.4	644.7	645.9	642.4	641.2	638.9	634.3	630.8	625.0	620.3	616.8
172.5°	630.3	631.7	632.9	631.3	630.1	628.7	625.0	622.4	618.5	614.8	613.1
175°	614.5	616.8	618.0	616.8	616.8	615.7	614.5	613.4	609.9	608.7	607.6
177.5°	605.0	606.9	607.8	607.8	607.8	607.8	606.9	606.9	605.0	604.1	605.0
180°	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8
2.5°	1100.4	1098.1	1096.0	1090.6	1087.9	1081.9	1081.0	1080.7	1073.0	1065.5	1063.4
5°	1138.2	1132.3	1123.3	1112.8	1102.0	1090.8	1083.3	1077.4	1062.4	1048.2	1040.0
7.5°	1176.3	1163.5	1148.0	1128.2	1111.7	1093.2	1079.5	1067.1	1045.9	1025.6	1011.9
10°	1204.7	1183.8	1163.3	1136.0	1114.7	1093.8	1074.4	1057.6	1033.7	1006.8	987.7
12.5°	1222.3	1199.3	1171.0	1144.4	1116.8	1090.2	1064.2	1042.6	1014.6	986.8	964.1
15°	1246.2	1221.5	1187.2	1149.1	1113.6	1078.9	1049.0	1022.1	985.5	952.3	924.6
17.5°	1265.7	1231.7	1194.8	1150.8	1109.7	1065.6	1027.1	992.7	952.0	911.9	879.4
20°	1271.9	1238.3	1195.7	1151.7	1103.1	1051.2	1009.8	972.4	928.7	885.0	847.7
22.5°	1268.0	1241.9	1194.5	1141.8	1092.1	1037.8	991.0	947.6	899.2	854.6	811.3
25°	1241.7	1232.7	1187.9	1130.4	1073.6	1010.5	956.4	908.9	853.7	805.9	758.8
27.5°	1180.2	1199.6	1171.8	1110.5	1047.4	979.7	918.9	864.9	807.5	753.7	706.8
30°	1121.1	1165.5	1153.5	1096.8	1026.2	959.7	891.4	835.0	773.8	718.5	672.2
32.5°	1040.1	1113.5	1125.2	1077.7	1004.7	931.6	860.0	803.9	740.0	681.7	636.6
35°	911.2	1021.0	1071.4	1041.1	967.9	889.2	815.2	749.9	685.6	628.1	583.3
37.5°	757.4	906.9	991.0	993.1	925.9	844.0	763.5	698.6	632.8	576.4	527.9
40°	657.6	819.7	929.1	953.4	896.6	808.1	726.7	660.6	596.4	541.1	485.5
42.5°	568.0	729.5	864.0	906.2	861.1	773.2	691.5	622.4	559.9	507.6	450.8
45°	459.3	600.5	748.7	824.2	799.2	717.7	631.5	565.8	507.1	461.9	407.4
47.5°	387.5	487.0	630.4	732.5	732.0	657.7	572.9	509.9	455.5	413.2	369.0
50°	346.5	433.2	554.6	670.3	680.0	617.7	537.0	474.6	423.9	379.4	343.9
52.5°	309.8	381.2	490.3	601.3	628.9	574.9	496.7	439.1	389.8	348.9	318.5
55°	261.8	317.0	400.0	503.8	545.6	507.5	438.0	384.3	344.3	310.0	283.8
57.5°	221.4	262.9	329.4	413.0	461.7	437.7	380.5	336.8	302.6	271.5	250.9
60°	196.1	230.0	286.4	356.3	410.0	393.2	344.3	303.6	274.5	247.6	228.2
62.5°	172.2	201.4	249.7	306.4	355.7	348.7	308.8	274.6	249.1	224.6	208.2
65°	138.5	159.8	197.5	242.0	281.6	284.9	256.2	233.0	210.2	190.8	176.3
67.5°	110.3	124.2	150.8	188.2	217.9	228.5	210.9	193.2	175.1	160.1	147.5
70°	93.0	104.2	123.6	153.9	181.1	192.3	182.2	168.4	152.7	140.4	129.6
72.5°	75.4	86.3	100.6	122.8	146.2	158.3	154.8	144.8	132.1	121.9	111.7
75°	56.8	60.1	69.8	84.8	103.1	113.5	116.1	110.9	100.8	93.0	87.0
77.5°	42.0	44.0	48.6	56.5	68.4	77.7	81.6	81.0	74.0	69.5	63.9
80°	33.6	34.7	37.0	40.3	49.3	58.6	61.2	61.2	56.4	54.5	48.9
82.5°	25.5	26.4	27.7	29.6	33.8	41.9	44.8	45.4	42.3	39.9	35.5
85°	14.6	14.2	14.9	16.1	16.8	19.0	23.5	24.3	23.5	20.5	19.4
87.5°	11.4	10.0	8.9	7.9	7.7	7.5	8.1	8.9	8.4	8.4	8.3
90°	31.4	23.2	17.4	13.9	11.6	9.3	4.6	1.2	4.6	9.3	11.6
92.5°	115.9	79.0	52.7	41.8	33.9	28.8	20.4	14.2	20.4	28.8	33.9
95°	268.3	167.3	113.8	86.0	67.4	56.9	45.3	40.7	45.3	56.9	67.4
97.5°	361.5	220.7	153.6	122.0	100.6	84.8	72.5	66.2	72.5	84.8	100.6
100°	381.0	239.3	177.7	145.2	122.0	103.4	92.9	89.4	92.9	103.4	122.0
102.5°	382.0	256.0	199.1	166.6	142.4	123.8	113.4	110.8	113.4	123.8	142.4
105°	388.0	284.6	230.0	197.5	171.9	154.5	146.4	141.7	146.4	154.5	171.9
107.5°	404.0	313.9	260.9	228.2	202.8	186.8	178.9	175.2	178.9	186.8	202.8
110°	417.0	333.4	282.3	248.6	224.2	209.1	202.1	197.5	202.1	209.1	224.2



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	431.0	352.0	302.7	268.1	244.6	230.5	222.6	217.9	222.6	230.5	244.6
115°	451.9	381.0	331.1	299.7	276.5	262.5	255.6	249.8	255.6	262.5	276.5
117.5°	474.2	407.7	361.5	329.0	306.7	294.4	287.4	282.8	287.4	294.4	306.7
120°	489.1	426.3	381.0	348.5	325.3	314.8	307.8	303.2	307.8	314.8	325.3
122.5°	502.1	444.0	401.5	368.0	344.8	333.4	326.4	322.7	326.4	333.4	344.8
125°	522.8	470.5	428.7	396.1	372.9	359.0	352.0	348.5	352.0	359.0	372.9
127.5°	542.0	495.1	454.4	421.0	398.7	383.4	373.6	368.9	373.6	383.4	398.7
130°	554.1	510.0	469.3	436.8	413.6	397.3	385.7	381.0	385.7	397.3	413.6
132.5°	566.2	523.0	484.2	451.7	427.5	410.3	397.8	392.2	397.8	410.3	427.5
135°	582.0	541.3	504.2	471.6	444.9	427.5	413.6	408.9	413.6	427.5	444.9
137.5°	594.1	556.2	519.5	489.3	462.8	444.2	430.3	424.7	430.3	444.2	462.8
140°	600.6	564.6	529.7	499.5	474.0	455.4	441.4	436.8	441.4	455.4	474.0
142.5°	606.2	571.1	537.2	508.8	484.2	465.6	452.6	448.9	452.6	465.6	484.2
145°	613.4	580.8	549.5	523.9	500.7	483.3	471.6	467.0	471.6	483.3	500.7
147.5°	617.3	588.7	559.2	536.5	517.2	501.1	490.0	486.5	490.0	501.1	517.2
150°	619.2	592.5	565.7	544.8	527.4	512.3	503.0	499.5	503.0	512.3	527.4
152.5°	620.1	596.2	572.2	553.2	536.7	523.4	514.2	512.5	514.2	523.4	536.7
155°	621.5	601.7	582.0	564.6	551.8	539.0	532.0	530.9	532.0	539.0	551.8
157.5°	621.5	605.7	589.0	574.3	564.1	553.0	547.4	546.2	547.4	553.0	564.1
160°	621.5	607.6	593.6	580.8	571.5	562.2	557.6	556.4	557.6	562.2	571.5
162.5°	620.6	608.5	596.4	586.4	578.0	570.6	566.0	566.7	566.0	570.6	578.0
165°	618.0	609.9	599.4	592.5	586.6	579.7	577.4	578.5	577.4	579.7	586.6
167.5°	616.4	609.6	602.0	597.6	593.4	589.0	586.9	588.3	586.9	589.0	593.4
170°	614.5	608.7	602.9	599.4	597.1	593.6	592.5	594.8	592.5	593.6	597.1
172.5°	611.7	607.8	603.8	601.3	599.9	596.4	597.1	598.5	597.1	596.4	599.9
175°	608.7	606.4	604.1	602.9	602.9	600.6	601.7	602.9	601.7	600.6	602.9
177.5°	606.9	605.0	604.1	604.1	604.1	602.2	603.1	605.0	603.1	602.2	604.1
180°	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8
2.5°	1059.5	1057.4	1053.5	1047.6	1044.0	1037.7	1033.5	1035.9	1036.5	1035.9	1035.3
5°	1031.1	1023.2	1012.4	1001.9	992.2	981.8	975.8	973.2	967.9	965.0	963.5
7.5°	996.6	983.1	967.8	949.6	934.1	917.9	909.6	905.5	894.8	889.0	883.9
10°	970.9	949.6	934.3	910.4	895.9	874.6	860.0	860.4	845.8	837.6	831.6
12.5°	942.6	919.2	893.7	872.2	852.0	834.9	817.3	810.2	794.7	786.8	770.7
15°	895.5	868.2	841.4	812.2	791.7	765.2	739.8	708.8	683.8	662.1	656.1
17.5°	844.1	810.4	783.4	749.2	714.0	669.4	640.0	622.0	606.9	595.5	587.0
20°	808.9	774.5	745.8	694.2	646.8	616.5	594.9	581.1	565.4	553.1	546.3
22.5°	771.8	736.0	696.8	639.2	602.3	578.0	558.7	542.8	532.2	522.6	516.5
25°	719.2	680.0	615.4	575.8	546.0	520.6	507.1	497.4	486.2	473.1	467.2
27.5°	663.7	601.3	554.9	525.5	497.0	480.5	468.4	453.9	443.9	438.0	431.8
30°	622.1	559.8	523.6	491.4	471.3	453.0	438.8	430.6	420.9	410.8	406.7
32.5°	575.8	526.0	491.3	464.6	444.1	428.5	417.3	404.0	397.0	390.8	382.2
35°	518.3	480.6	448.9	427.2	407.8	395.1	382.0	374.2	361.5	356.3	352.9
37.5°	469.6	436.9	413.2	390.4	375.0	361.0	353.0	340.5	335.0	327.7	320.6
40°	442.1	410.0	387.3	368.6	351.4	340.9	330.9	320.8	312.6	309.2	300.6
42.5°	414.1	387.9	365.1	344.7	333.2	322.1	309.4	302.0	293.4	288.0	282.7
45°	375.3	352.2	332.7	315.9	303.2	291.7	283.4	271.1	266.3	255.4	250.9
47.5°	341.2	319.7	301.2	285.2	272.8	265.3	253.3	243.6	235.9	229.2	223.5
50°	317.0	299.1	281.2	267.0	255.8	245.0	232.7	227.8	215.8	212.5	209.1
52.5°	294.9	277.9	261.5	247.6	236.4	225.9	215.0	208.7	200.6	197.2	194.8
55°	264.0	247.6	231.9	219.6	208.4	197.5	190.8	183.0	179.2	176.6	173.6
57.5°	232.9	218.2	206.1	193.7	182.4	173.8	166.0	161.3	157.4	154.0	150.4
60°	213.2	199.0	188.2	176.6	165.1	158.0	152.0	146.4	141.9	136.7	135.2
62.5°	192.3	179.9	170.0	158.7	148.6	142.1	136.5	131.2	125.8	118.2	116.1
65°	163.6	153.9	143.4	134.1	125.1	118.8	110.5	104.6	102.3	101.6	101.2
67.5°	137.6	128.4	119.4	109.9	101.7	95.8	91.6	90.7	89.2	88.7	87.7
70°	120.2	111.7	102.7	93.7	85.9	84.8	83.3	81.8	79.9	79.2	78.4
72.5°	104.7	95.8	86.9	79.7	76.3	74.9	73.4	71.9	70.7	69.9	69.5
75°	80.3	72.1	66.1	63.5	61.6	60.5	58.3	57.1	56.4	55.3	54.9
77.5°	57.8	53.2	50.4	48.8	46.8	45.6	44.4	43.2	42.4	42.2	41.6
80°	44.1	41.8	40.0	37.7	37.0	35.5	35.1	34.0	34.4	33.2	33.2
82.5°	34.2	31.4	29.8	28.8	28.0	26.8	26.4	25.9	26.0	25.2	25.2
85°	17.6	16.8	16.1	15.3	15.3	14.2	14.6	14.2	14.2	13.4	13.1
87.5°	8.5	8.9	9.4	11.1	12.4	12.4	12.1	11.6	11.2	11.6	11.6
90°	13.9	17.4	23.2	31.4	38.3	39.5	38.3	37.2	34.9	37.2	38.3
92.5°	41.8	52.7	79.0	115.9	148.9	151.0	127.6	101.3	86.9	77.1	69.9
95°	86.0	113.8	167.3	268.3	403.1	455.4	398.5	304.4	233.5	184.7	159.1
97.5°	122.0	153.6	220.7	361.5	585.5	777.4	815.5	710.2	581.1	455.4	371.5
100°	145.2	177.7	239.3	381.0	631.9	917.7	1085.0	1060.6	916.6	757.4	616.8
102.5°	166.6	199.1	256.0	382.0	614.3	922.4	1185.4	1290.2	1257.6	1141.2	992.3
105°	197.5	230.0	284.6	388.0	579.7	860.8	1169.8	1411.4	1542.7	1557.8	1519.5
107.5°	228.2	260.9	313.9	404.0	562.5	794.8	1067.8	1324.1	1521.8	1642.6	1698.8
110°	248.6	282.3	333.4	417.0	558.8	763.2	1003.7	1248.8	1456.7	1605.4	1700.7



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	268.1	302.7	352.0	431.0	559.7	742.8	959.1	1180.0	1379.6	1538.5	1647.7
115°	299.7	331.1	381.0	451.9	564.6	720.2	903.8	1095.5	1274.4	1426.5	1546.2
117.5°	329.0	361.5	407.7	474.2	572.9	709.3	868.9	1031.8	1188.9	1326.9	1439.1
120°	348.5	381.0	426.3	489.1	578.5	702.8	850.3	1000.2	1144.2	1267.4	1373.1
122.5°	368.0	401.5	444.0	502.1	585.0	699.1	834.5	975.1	1107.1	1223.7	1319.2
125°	396.1	428.7	470.5	522.8	594.8	692.4	812.0	938.6	1058.3	1160.5	1247.6
127.5°	421.0	454.4	495.1	542.0	604.8	688.4	791.1	902.6	1010.9	1107.3	1187.7
130°	436.8	469.3	510.0	554.1	612.2	686.5	777.2	879.4	979.3	1071.1	1147.7
132.5°	451.7	484.2	523.0	566.2	619.6	685.6	766.0	857.1	949.6	1033.9	1105.9
135°	471.6	504.2	541.3	582.0	628.5	684.2	750.4	825.9	902.6	979.3	1044.3
137.5°	489.3	519.5	556.2	594.1	636.4	684.0	739.5	801.1	865.2	926.1	982.8
140°	499.5	529.7	564.6	600.6	640.1	683.1	733.0	785.3	841.1	894.5	945.6
142.5°	508.8	537.2	571.1	606.2	642.9	683.1	726.5	772.3	819.7	865.7	908.4
145°	523.9	549.5	580.8	613.4	645.9	680.7	717.9	753.9	792.3	828.3	862.0
147.5°	536.5	559.2	588.7	617.3	646.8	676.6	709.1	739.8	770.0	798.1	822.7
150°	544.8	565.7	592.5	619.2	645.9	673.8	701.6	729.5	755.1	779.5	800.4
152.5°	553.2	572.2	596.2	620.1	644.0	669.1	695.1	719.3	743.0	763.7	781.8
155°	564.6	582.0	601.7	621.5	641.2	661.0	683.1	705.1	723.7	741.1	753.9
157.5°	574.3	589.0	605.7	621.5	635.9	652.6	671.7	688.6	704.2	718.8	728.8
160°	580.8	593.6	607.6	621.5	633.1	647.1	663.3	678.4	691.2	704.0	712.1
162.5°	586.4	596.4	608.5	620.6	630.3	642.4	655.9	668.2	679.1	690.0	696.3
165°	592.5	599.4	609.9	618.0	625.0	633.1	643.6	652.9	661.0	669.1	673.8
167.5°	597.6	602.0	609.6	616.4	619.6	625.0	631.5	638.2	644.5	650.1	654.3
170°	599.4	602.9	608.7	614.5	616.8	620.3	625.0	630.8	634.3	638.9	641.2
172.5°	601.3	603.8	607.8	611.7	613.1	614.8	618.5	622.4	625.0	628.7	630.1
175°	602.9	604.1	606.4	608.7	607.6	608.7	609.9	613.4	614.5	615.7	616.8
177.5°	604.1	604.1	605.0	606.9	605.0	604.1	605.0	606.9	606.9	607.8	607.8
180°	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8
2.5°	1032.0	1032.6	1031.7	1032.3	1031.7	1032.6	1032.0	1035.3	1035.9	1036.5	1035.9
5°	961.6	957.1	956.4	955.3	956.4	957.1	961.6	963.5	965.0	967.9	973.2
7.5°	877.5	876.8	875.0	872.3	875.0	876.8	877.5	883.9	889.0	894.8	905.5
10°	823.4	821.6	821.2	818.6	821.2	821.6	823.4	831.6	837.6	845.8	860.4
12.5°	760.1	748.1	746.8	740.3	746.8	748.1	760.1	770.7	786.8	794.7	810.2
15°	647.2	644.9	637.5	632.6	637.5	644.9	647.2	656.1	662.1	683.8	708.8
17.5°	582.6	575.3	573.0	572.0	573.0	575.3	582.6	587.0	595.5	606.9	622.0
20°	541.1	534.4	533.3	532.5	533.3	534.4	541.1	546.3	553.1	565.4	581.1
22.5°	512.4	505.4	502.5	500.3	502.5	505.4	512.4	516.5	522.6	532.2	542.8
25°	463.4	460.8	459.3	458.6	459.3	460.8	463.4	467.2	473.1	486.2	497.4
27.5°	425.1	419.4	418.2	416.3	418.2	419.4	425.1	431.8	438.0	443.9	453.9
30°	403.3	401.4	398.8	396.6	398.8	401.4	403.3	406.7	410.8	420.9	430.6
32.5°	377.6	376.1	373.7	372.7	373.7	376.1	377.6	382.2	390.8	397.0	404.0
35°	349.2	343.9	341.7	338.3	341.7	343.9	349.2	352.9	356.3	361.5	374.2
37.5°	319.1	316.3	313.2	314.3	313.2	316.3	319.1	320.6	327.7	335.0	340.5
40°	295.8	293.9	293.1	292.8	293.1	293.9	295.8	300.6	309.2	312.6	320.8
42.5°	277.2	272.1	270.1	270.1	270.1	272.1	277.2	282.7	288.0	293.4	302.0
45°	249.1	244.2	240.9	241.2	240.9	244.2	249.1	250.9	255.4	266.3	271.1
47.5°	220.3	220.1	218.0	218.7	218.0	220.1	220.3	223.5	229.2	235.9	243.6
50°	206.5	204.3	202.8	203.1	202.8	204.3	206.5	209.1	212.5	215.8	227.8
52.5°	193.4	191.4	190.2	191.8	190.2	191.4	193.4	194.8	197.2	200.6	208.7
55°	171.8	169.5	169.2	168.8	169.2	169.5	171.8	173.6	176.6	179.2	183.0
57.5°	147.7	146.2	143.9	143.0	143.9	146.2	147.7	150.4	154.0	157.4	161.3
60°	130.3	127.3	123.6	123.2	123.6	127.3	130.3	135.2	136.7	141.9	146.4
62.5°	114.5	113.9	113.2	113.1	113.2	113.9	114.5	116.1	118.2	125.8	131.2
65°	100.5	100.1	100.5	100.8	100.5	100.1	100.5	101.2	101.6	102.3	104.6
67.5°	87.5	86.9	86.2	86.5	86.2	86.9	87.5	87.7	88.7	89.2	90.7
70°	77.7	77.3	76.9	76.9	76.9	77.3	77.7	78.4	79.2	79.9	81.8
72.5°	68.1	68.0	67.7	67.4	67.7	68.0	68.1	69.5	69.9	70.7	71.9
75°	54.5	53.8	53.8	53.8	53.8	53.8	54.5	54.9	55.3	56.4	57.1
77.5°	41.5	41.2	40.8	40.5	40.8	41.2	41.5	41.6	42.2	42.4	43.2
80°	32.9	32.5	32.1	32.1	32.1	32.5	32.9	33.2	33.2	34.4	34.0
82.5°	25.1	24.7	24.6	24.3	24.6	24.7	25.1	25.2	25.2	26.0	25.9
85°	13.4	13.8	13.4	14.2	13.4	13.8	13.4	13.1	13.4	14.2	14.2
87.5°	11.6	11.3	11.6	11.3	11.6	11.3	11.6	11.6	11.6	11.2	11.6
90°	38.3	38.3	38.3	38.3	38.3	38.3	38.3	38.3	37.2	34.9	37.2
92.5°	69.0	65.3	66.2	64.4	66.2	65.3	69.0	69.9	77.1	86.9	101.3
95°	144.0	134.8	131.3	132.4	131.3	134.8	144.0	159.1	184.7	233.5	304.4
97.5°	316.0	287.4	270.4	260.7	270.4	287.4	316.0	371.5	455.4	581.1	710.2
100°	520.4	470.5	436.8	415.9	436.8	470.5	520.4	616.8	757.4	916.6	1060.6
102.5°	887.5	802.3	760.2	731.9	760.2	802.3	887.5	992.3	1141.2	1257.6	1290.2
105°	1447.4	1375.4	1325.5	1309.2	1325.5	1375.4	1447.4	1519.5	1557.8	1542.7	1411.4
107.5°	1707.9	1703.9	1693.9	1672.3	1693.9	1703.9	1707.9	1698.8	1642.6	1521.8	1324.1
110°	1750.6	1772.7	1783.2	1782.0	1783.2	1772.7	1750.6	1700.7	1605.4	1456.7	1248.8



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	1717.2	1754.1	1773.9	1780.1	1773.9	1754.1	1717.2	1647.7	1538.5	1379.6	1180.0
115°	1628.7	1682.1	1712.3	1722.8	1712.3	1682.1	1628.7	1546.2	1426.5	1274.4	1095.5
117.5°	1523.2	1579.6	1611.5	1620.3	1611.5	1579.6	1523.2	1439.1	1326.9	1188.9	1031.8
120°	1454.4	1509.0	1542.7	1554.3	1542.7	1509.0	1454.4	1373.1	1267.4	1144.2	1000.2
122.5°	1392.1	1445.8	1475.8	1485.5	1475.8	1445.8	1392.1	1319.2	1223.7	1107.1	975.1
125°	1315.0	1359.2	1388.2	1397.5	1388.2	1359.2	1315.0	1247.6	1160.5	1058.3	938.6
127.5°	1246.5	1287.8	1312.9	1320.4	1312.9	1287.8	1246.5	1187.7	1107.3	1010.9	902.6
130°	1204.7	1244.2	1267.4	1276.7	1267.4	1244.2	1204.7	1147.7	1071.1	979.3	879.4
132.5°	1161.9	1201.4	1222.8	1231.1	1222.8	1201.4	1161.9	1105.9	1033.9	949.6	857.1
135°	1094.3	1132.6	1153.5	1158.2	1153.5	1132.6	1094.3	1044.3	979.3	902.6	825.9
137.5°	1028.3	1061.3	1079.7	1086.6	1079.7	1061.3	1028.3	982.8	926.1	865.2	801.1
140°	982.8	1013.0	1030.4	1037.4	1030.4	1013.0	982.8	945.6	894.5	841.1	785.3
142.5°	943.7	971.2	986.7	988.1	986.7	971.2	943.7	908.4	865.7	819.7	772.3
145°	889.8	909.6	921.2	924.7	921.2	909.6	889.8	862.0	828.3	792.3	753.9
147.5°	845.7	861.5	869.4	871.5	869.4	861.5	845.7	822.7	798.1	770.0	739.8
150°	817.8	831.8	838.7	839.9	838.7	831.8	817.8	800.4	779.5	755.1	729.5
152.5°	795.5	807.6	812.7	812.9	812.7	807.6	795.5	781.8	763.7	743.0	719.3
155°	766.7	774.8	779.5	777.2	779.5	774.8	766.7	753.9	741.1	723.7	705.1
157.5°	737.9	744.6	746.7	746.7	746.7	744.6	737.9	728.8	718.8	704.2	688.6
160°	720.2	726.0	727.2	727.2	727.2	726.0	720.2	712.1	704.0	691.2	678.4
162.5°	704.4	708.4	709.5	708.6	709.5	708.4	704.4	696.3	690.0	679.1	668.2
165°	678.4	683.1	683.1	681.9	683.1	683.1	678.4	673.8	669.1	661.0	652.9
167.5°	656.3	658.9	658.7	657.3	658.7	658.9	656.3	654.3	650.1	644.5	638.2
170°	642.4	645.9	644.7	642.4	644.7	645.9	642.4	641.2	638.9	634.3	630.8
172.5°	631.3	632.9	631.7	630.3	631.7	632.9	631.3	630.1	628.7	625.0	622.4
175°	616.8	618.0	616.8	614.5	616.8	618.0	616.8	616.8	615.7	614.5	613.4
177.5°	607.8	607.8	606.9	605.0	606.9	607.8	607.8	607.8	607.8	606.9	606.9
180°	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8
2.5°	1033.5	1037.7	1044.0	1047.6	1053.5	1057.4	1059.5	1063.4	1065.5	1073.0	1080.7
5°	975.8	981.8	992.2	1001.9	1012.4	1023.2	1031.1	1040.0	1048.2	1062.4	1077.4
7.5°	909.6	917.9	934.1	949.6	967.8	983.1	996.6	1011.9	1025.6	1045.9	1067.1
10°	860.0	874.6	895.9	910.4	934.3	949.6	970.9	987.7	1006.8	1033.7	1057.6
12.5°	817.3	834.9	852.0	872.2	893.7	919.2	942.6	964.1	986.8	1014.6	1042.6
15°	739.8	765.2	791.7	812.2	841.4	868.2	895.5	924.6	952.3	985.5	1022.1
17.5°	640.0	669.4	714.0	749.2	783.4	810.4	844.1	879.4	911.9	952.0	992.7
20°	594.9	616.5	646.8	694.2	745.8	774.5	808.9	847.7	885.0	928.7	972.4
22.5°	558.7	578.0	602.3	639.2	696.8	736.0	771.8	811.3	854.6	899.2	947.6
25°	507.1	520.6	546.0	575.8	615.4	680.0	719.2	758.8	805.9	853.7	908.9
27.5°	468.4	480.5	497.0	525.5	554.9	601.3	663.7	706.8	753.7	807.5	864.9
30°	438.8	453.0	471.3	491.4	523.6	559.8	622.1	672.2	718.5	773.8	835.0
32.5°	417.3	428.5	444.1	464.6	491.3	526.0	575.8	636.6	681.7	740.0	803.9
35°	382.0	395.1	407.8	427.2	448.9	480.6	518.3	583.3	628.1	685.6	749.9
37.5°	353.0	361.0	375.0	390.4	413.2	436.9	469.6	527.9	576.4	632.8	698.6
40°	330.9	340.9	351.4	368.6	387.3	410.0	442.1	485.5	541.1	596.4	660.6
42.5°	309.4	322.1	333.2	344.7	365.1	387.9	414.1	450.8	507.6	559.9	622.4
45°	283.4	291.7	303.2	315.9	332.7	352.2	375.3	407.4	461.9	507.1	565.8
47.5°	253.3	265.3	272.8	285.2	301.2	319.7	341.2	369.0	413.2	455.5	509.9
50°	232.7	245.0	255.8	267.0	281.2	299.1	317.0	343.9	379.4	423.9	474.6
52.5°	215.0	225.9	236.4	247.6	261.5	277.9	294.9	318.5	348.9	389.8	439.1
55°	190.8	197.5	208.4	219.6	231.9	247.6	264.0	283.8	310.0	344.3	384.3
57.5°	166.0	173.8	182.4	193.7	206.1	218.2	232.9	250.9	271.5	302.6	336.8
60°	152.0	158.0	165.1	176.6	188.2	199.0	213.2	228.2	247.6	274.5	303.6
62.5°	136.5	142.1	148.6	158.7	170.0	179.9	192.3	208.2	224.6	249.1	274.6
65°	110.5	118.8	125.1	134.1	143.4	153.9	163.6	176.3	190.8	210.2	233.0
67.5°	91.6	95.8	101.7	109.9	119.4	128.4	137.6	147.5	160.1	175.1	193.2
70°	83.3	84.8	85.9	93.7	102.7	111.7	120.2	129.6	140.4	152.7	168.4
72.5°	73.4	74.9	76.3	79.7	86.9	95.8	104.7	111.7	121.9	132.1	144.8
75°	58.3	60.5	61.6	63.5	66.1	72.1	80.3	87.0	93.0	100.8	110.9
77.5°	44.4	45.6	46.8	48.8	50.4	53.2	57.8	63.9	69.5	74.0	81.0
80°	35.1	35.5	37.0	37.7	40.0	41.8	44.1	48.9	54.5	56.4	61.2
82.5°	26.4	26.8	28.0	28.8	29.8	31.4	34.2	35.5	39.9	42.3	45.4
85°	14.6	14.2	15.3	15.3	16.1	16.8	17.6	19.4	20.5	23.5	24.3
87.5°	12.1	12.4	12.4	11.1	9.4	8.9	8.5	8.3	8.4	8.4	8.9
90°	38.3	39.5	38.3	31.4	23.2	17.4	13.9	11.6	9.3	4.6	1.2
92.5°	127.6	151.0	148.9	115.9	79.0	52.7	41.8	33.9	28.8	20.4	14.2
95°	398.5	455.4	403.1	268.3	167.3	113.8	86.0	67.4	56.9	45.3	40.7
97.5°	815.5	777.4	585.5	361.5	220.7	153.6	122.0	100.6	84.8	72.5	66.2
100°	1085.0	917.7	631.9	381.0	239.3	177.7	145.2	122.0	103.4	92.9	89.4
102.5°	1185.4	922.4	614.3	382.0	256.0	199.1	166.6	142.4	123.8	113.4	110.8
105°	1169.8	860.8	579.7	388.0	284.6	230.0	197.5	171.9	154.5	146.4	141.7
107.5°	1067.8	794.8	562.5	404.0	313.9	260.9	228.2	202.8	186.8	178.9	175.2
110°	1003.7	763.2	558.8	417.0	333.4	282.3	248.6	224.2	209.1	202.1	197.5



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	959.1	742.8	559.7	431.0	352.0	302.7	268.1	244.6	230.5	222.6	217.9
115°	903.8	720.2	564.6	451.9	381.0	331.1	299.7	276.5	262.5	255.6	249.8
117.5°	868.9	709.3	572.9	474.2	407.7	361.5	329.0	306.7	294.4	287.4	282.8
120°	850.3	702.8	578.5	489.1	426.3	381.0	348.5	325.3	314.8	307.8	303.2
122.5°	834.5	699.1	585.0	502.1	444.0	401.5	368.0	344.8	333.4	326.4	322.7
125°	812.0	692.4	594.8	522.8	470.5	428.7	396.1	372.9	359.0	352.0	348.5
127.5°	791.1	688.4	604.8	542.0	495.1	454.4	421.0	398.7	383.4	373.6	368.9
130°	777.2	686.5	612.2	554.1	510.0	469.3	436.8	413.6	397.3	385.7	381.0
132.5°	766.0	685.6	619.6	566.2	523.0	484.2	451.7	427.5	410.3	397.8	392.2
135°	750.4	684.2	628.5	582.0	541.3	504.2	471.6	444.9	427.5	413.6	408.9
137.5°	739.5	684.0	636.4	594.1	556.2	519.5	489.3	462.8	444.2	430.3	424.7
140°	733.0	683.1	640.1	600.6	564.6	529.7	499.5	474.0	455.4	441.4	436.8
142.5°	726.5	683.1	642.9	606.2	571.1	537.2	508.8	484.2	465.6	452.6	448.9
145°	717.9	680.7	645.9	613.4	580.8	549.5	523.9	500.7	483.3	471.6	467.0
147.5°	709.1	676.6	646.8	617.3	588.7	559.2	536.5	517.2	501.1	490.0	486.5
150°	701.6	673.8	645.9	619.2	592.5	565.7	544.8	527.4	512.3	503.0	499.5
152.5°	695.1	669.1	644.0	620.1	596.2	572.2	553.2	536.7	523.4	514.2	512.5
155°	683.1	661.0	641.2	621.5	601.7	582.0	564.6	551.8	539.0	532.0	530.9
157.5°	671.7	652.6	635.9	621.5	605.7	589.0	574.3	564.1	553.0	547.4	546.2
160°	663.3	647.1	633.1	621.5	607.6	593.6	580.8	571.5	562.2	557.6	556.4
162.5°	655.9	642.4	630.3	620.6	608.5	596.4	586.4	578.0	570.6	566.0	566.7
165°	643.6	633.1	625.0	618.0	609.9	599.4	592.5	586.6	579.7	577.4	578.5
167.5°	631.5	625.0	619.6	616.4	609.6	602.0	597.6	593.4	589.0	586.9	588.3
170°	625.0	620.3	616.8	614.5	608.7	602.9	599.4	597.1	593.6	592.5	594.8
172.5°	618.5	614.8	613.1	611.7	607.8	603.8	601.3	599.9	596.4	597.1	598.5
175°	609.9	608.7	607.6	608.7	606.4	604.1	602.9	602.9	600.6	601.7	602.9
177.5°	605.0	604.1	605.0	606.9	605.0	604.1	604.1	604.1	602.2	603.1	605.0
180°	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8
2.5°	1081.0	1081.9	1087.9	1090.6	1096.0	1098.1	1100.4	1099.8	1099.8	1101.0	1109.4
5°	1083.3	1090.8	1102.0	1112.8	1123.3	1132.3	1138.2	1144.2	1146.4	1157.3	1167.0
7.5°	1079.5	1093.2	1111.7	1128.2	1148.0	1163.5	1176.3	1187.9	1195.8	1211.6	1227.7
10°	1074.4	1093.8	1114.7	1136.0	1163.3	1183.8	1204.7	1220.8	1226.0	1249.5	1263.0
12.5°	1064.2	1090.2	1116.8	1144.4	1171.0	1199.3	1222.3	1238.4	1256.8	1277.9	1302.7
15°	1049.0	1078.9	1113.6	1149.1	1187.2	1221.5	1246.2	1274.2	1294.3	1317.5	1339.1
17.5°	1027.1	1065.6	1109.7	1150.8	1194.8	1231.7	1265.7	1292.5	1306.7	1319.9	1323.2
20°	1009.8	1051.2	1103.1	1151.7	1195.7	1238.3	1271.9	1294.3	1298.1	1298.4	1278.6
22.5°	991.0	1037.8	1092.1	1141.8	1194.5	1241.9	1268.0	1277.6	1262.8	1237.5	1199.2
25°	956.4	1010.5	1073.6	1130.4	1187.9	1232.7	1241.7	1224.9	1173.0	1118.4	1049.4
27.5°	918.9	979.7	1047.4	1110.5	1171.8	1199.6	1180.2	1119.6	1026.1	944.9	846.4
30°	891.4	959.7	1026.2	1096.8	1153.5	1165.5	1121.1	1031.8	922.8	800.3	702.1
32.5°	860.0	931.6	1004.7	1077.7	1125.2	1113.5	1040.1	930.2	802.4	682.0	589.1
35°	815.2	889.2	967.9	1041.1	1071.4	1021.0	911.2	768.2	637.5	525.1	461.2
37.5°	763.5	844.0	925.9	993.1	991.0	906.9	757.4	609.7	499.9	433.4	387.9
40°	726.7	808.1	896.6	953.4	929.1	819.7	657.6	518.3	438.0	385.0	351.8
42.5°	691.5	773.2	861.1	906.2	864.0	729.5	568.0	458.9	392.6	351.3	324.3
45°	631.5	717.7	799.2	824.2	748.7	600.5	459.3	380.2	336.1	305.5	286.8
47.5°	572.9	657.7	732.0	732.5	630.4	487.0	387.5	329.0	291.4	267.7	254.1
50°	537.0	617.7	680.0	670.3	554.6	433.2	346.5	296.1	264.8	246.5	232.3
52.5°	496.7	574.9	628.9	601.3	490.3	381.2	309.8	267.5	241.5	225.6	212.9
55°	438.0	507.5	545.6	503.8	400.0	317.0	261.8	228.5	209.1	195.7	184.9
57.5°	380.5	437.7	461.7	413.0	329.4	262.9	221.4	196.5	177.2	167.6	162.0
60°	344.3	393.2	410.0	356.3	286.4	230.0	196.1	172.9	158.7	152.4	146.8
62.5°	308.8	348.7	355.7	306.4	249.7	201.4	172.2	152.6	143.2	137.1	131.8
65°	256.2	284.9	281.6	242.0	197.5	159.8	138.5	126.6	119.5	110.9	101.6
67.5°	210.9	228.5	217.9	188.2	150.8	124.2	110.3	101.3	92.5	84.3	82.2
70°	182.2	192.3	181.1	153.9	123.6	104.2	93.0	82.2	76.9	75.1	71.7
72.5°	154.8	158.3	146.2	122.8	100.6	86.3	75.4	69.3	66.5	64.9	62.7
75°	116.1	113.5	103.1	84.8	69.8	60.1	56.8	54.5	52.7	51.2	50.0
77.5°	81.6	77.7	68.4	56.5	48.6	44.0	42.0	40.8	39.9	39.1	38.0
80°	61.2	58.6	49.3	40.3	37.0	34.7	33.6	32.1	32.1	31.4	30.2
82.5°	44.8	41.9	33.8	29.6	27.7	26.4	25.5	24.6	24.3	24.5	23.7
85°	23.5	19.0	16.8	16.1	14.9	14.2	14.6	13.8	13.8	13.8	13.4
87.5°	8.1	7.5	7.7	7.9	8.9	10.0	11.4	12.7	13.3	12.7	12.8
90°	4.6	9.3	11.6	13.9	17.4	23.2	31.4	38.3	39.5	38.3	37.2
92.5°	20.4	28.8	33.9	41.8	52.7	79.0	115.9	148.9	151.0	127.6	101.3
95°	45.3	56.9	67.4	86.0	113.8	167.3	268.3	403.1	455.4	398.5	304.4
97.5°	72.5	84.8	100.6	122.0	153.6	220.7	361.5	585.5	777.4	815.5	710.2
100°	92.9	103.4	122.0	145.2	177.7	239.3	381.0	631.9	917.7	1085.0	1060.6
102.5°	113.4	123.8	142.4	166.6	199.1	256.0	382.0	614.3	922.4	1185.4	1290.2
105°	146.4	154.5	171.9	197.5	230.0	284.6	388.0	579.7	860.8	1169.8	1411.4
107.5°	178.9	186.8	202.8	228.2	260.9	313.9	404.0	562.5	794.8	1067.8	1324.1
110°	202.1	209.1	224.2	248.6	282.3	333.4	417.0	558.8	763.2	1003.7	1248.8



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	222.6	230.5	244.6	268.1	302.7	352.0	431.0	559.7	742.8	959.1	1180.0
115°	255.6	262.5	276.5	299.7	331.1	381.0	451.9	564.6	720.2	903.8	1095.5
117.5°	287.4	294.4	306.7	329.0	361.5	407.7	474.2	572.9	709.3	868.9	1031.8
120°	307.8	314.8	325.3	348.5	381.0	426.3	489.1	578.5	702.8	850.3	1000.2
122.5°	326.4	333.4	344.8	368.0	401.5	444.0	502.1	585.0	699.1	834.5	975.1
125°	352.0	359.0	372.9	396.1	428.7	470.5	522.8	594.8	692.4	812.0	938.6
127.5°	373.6	383.4	398.7	421.0	454.4	495.1	542.0	604.8	688.4	791.1	902.6
130°	385.7	397.3	413.6	436.8	469.3	510.0	554.1	612.2	686.5	777.2	879.4
132.5°	397.8	410.3	427.5	451.7	484.2	523.0	566.2	619.6	685.6	766.0	857.1
135°	413.6	427.5	444.9	471.6	504.2	541.3	582.0	628.5	684.2	750.4	825.9
137.5°	430.3	444.2	462.8	489.3	519.5	556.2	594.1	636.4	684.0	739.5	801.1
140°	441.4	455.4	474.0	499.5	529.7	564.6	600.6	640.1	683.1	733.0	785.3
142.5°	452.6	465.6	484.2	508.8	537.2	571.1	606.2	642.9	683.1	726.5	772.3
145°	471.6	483.3	500.7	523.9	549.5	580.8	613.4	645.9	680.7	717.9	753.9
147.5°	490.0	501.1	517.2	536.5	559.2	588.7	617.3	646.8	676.6	709.1	739.8
150°	503.0	512.3	527.4	544.8	565.7	592.5	619.2	645.9	673.8	701.6	729.5
152.5°	514.2	523.4	536.7	553.2	572.2	596.2	620.1	644.0	669.1	695.1	719.3
155°	532.0	539.0	551.8	564.6	582.0	601.7	621.5	641.2	661.0	683.1	705.1
157.5°	547.4	553.0	564.1	574.3	589.0	605.7	621.5	635.9	652.6	671.7	688.6
160°	557.6	562.2	571.5	580.8	593.6	607.6	621.5	633.1	647.1	663.3	678.4
162.5°	566.0	570.6	578.0	586.4	596.4	608.5	620.6	630.3	642.4	655.9	668.2
165°	577.4	579.7	586.6	592.5	599.4	609.9	618.0	625.0	633.1	643.6	652.9
167.5°	586.9	589.0	593.4	597.6	602.0	609.6	616.4	619.6	625.0	631.5	638.2
170°	592.5	593.6	597.1	599.4	602.9	608.7	614.5	616.8	620.3	625.0	630.8
172.5°	597.1	596.4	599.9	601.3	603.8	607.8	611.7	613.1	614.8	618.5	622.4
175°	601.7	600.6	602.9	602.9	604.1	606.4	608.7	607.6	608.7	609.9	613.4
177.5°	603.1	602.2	604.1	604.1	604.1	605.0	606.9	605.0	604.1	605.0	606.9
180°	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1	604.1



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8	1074.8
2.5°	1112.4	1116.3	1118.1	1118.1	1120.2	1119.3	1118.4
5°	1176.3	1183.4	1184.9	1191.6	1196.5	1195.0	1195.7
7.5°	1239.9	1251.3	1262.6	1267.7	1268.6	1271.6	1272.7
10°	1279.0	1288.4	1305.9	1303.3	1316.4	1323.8	1311.5
12.5°	1316.7	1329.3	1341.5	1344.8	1352.2	1354.6	1349.7
15°	1350.7	1357.4	1358.2	1356.3	1358.6	1356.7	1349.6
17.5°	1318.9	1308.0	1285.9	1275.4	1267.1	1254.9	1250.0
20°	1266.3	1234.2	1196.9	1181.9	1164.4	1130.0	1138.2
22.5°	1152.8	1116.2	1078.9	1035.2	1014.4	981.8	979.9
25°	976.2	913.1	843.6	795.0	766.7	734.2	720.0
27.5°	759.0	679.5	622.6	593.8	567.5	541.8	540.7
30°	616.2	556.4	512.4	487.7	471.7	460.8	463.1
32.5°	519.4	478.4	448.7	428.3	416.4	408.2	408.1
35°	424.6	396.6	377.5	369.0	360.4	354.4	354.8
37.5°	363.4	346.5	335.9	326.5	321.1	318.2	316.5
40°	332.0	318.2	310.0	304.4	299.9	295.8	295.0
42.5°	307.2	295.8	287.5	283.1	279.0	276.0	275.3
45°	272.6	263.3	255.8	250.9	249.1	246.5	246.5
47.5°	242.5	233.3	227.5	224.4	221.2	219.5	219.4
50°	222.2	215.1	209.9	208.0	205.4	204.3	203.9
52.5°	204.0	198.7	194.9	193.7	192.5	191.1	191.3
55°	179.2	176.3	174.8	173.6	171.8	169.5	171.0
57.5°	158.4	155.9	151.8	148.3	146.6	145.0	145.6
60°	143.8	138.5	133.3	129.2	128.1	124.7	124.7
62.5°	125.3	117.9	111.5	109.2	108.1	106.5	106.2
65°	96.3	93.4	91.9	90.4	89.6	89.6	88.9
67.5°	79.8	78.6	77.0	76.6	75.9	75.7	75.4
70°	70.6	69.1	68.3	68.0	67.2	67.6	66.5
72.5°	61.6	60.4	60.3	59.3	58.9	58.9	58.1
75°	48.5	48.5	48.2	47.8	47.1	46.7	47.1
77.5°	37.3	37.4	36.7	36.7	36.6	36.7	36.3
80°	29.9	30.2	29.9	29.5	29.1	29.5	29.1
82.5°	23.6	23.1	23.0	22.9	22.9	22.6	22.6
85°	13.4	13.8	13.4	13.1	13.1	13.1	13.4
87.5°	12.0	12.5	12.7	12.7	12.7	12.7	12.4
90°	34.9	37.2	38.3	38.3	38.3	38.3	38.3
92.5°	86.9	77.1	69.9	69.0	65.3	66.2	64.4
95°	233.5	184.7	159.1	144.0	134.8	131.3	132.4
97.5°	581.1	455.4	371.5	316.0	287.4	270.4	260.7
100°	916.6	757.4	616.8	520.4	470.5	436.8	415.9
102.5°	1257.6	1141.2	992.3	887.5	802.3	760.2	731.9
105°	1542.7	1557.8	1519.5	1447.4	1375.4	1325.5	1309.2
107.5°	1521.8	1642.6	1698.8	1707.9	1703.9	1693.9	1672.3
110°	1456.7	1605.4	1700.7	1750.6	1772.7	1783.2	1782.0



TEST NUMBER: P331671

CATALOG NUMBER: SA2XXRDIP-C485D1080U835-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	1379.6	1538.5	1647.7	1717.2	1754.1	1773.9	1780.1
115°	1274.4	1426.5	1546.2	1628.7	1682.1	1712.3	1722.8
117.5°	1188.9	1326.9	1439.1	1523.2	1579.6	1611.5	1620.3
120°	1144.2	1267.4	1373.1	1454.4	1509.0	1542.7	1554.3
122.5°	1107.1	1223.7	1319.2	1392.1	1445.8	1475.8	1485.5
125°	1058.3	1160.5	1247.6	1315.0	1359.2	1388.2	1397.5
127.5°	1010.9	1107.3	1187.7	1246.5	1287.8	1312.9	1320.4
130°	979.3	1071.1	1147.7	1204.7	1244.2	1267.4	1276.7
132.5°	949.6	1033.9	1105.9	1161.9	1201.4	1222.8	1231.1
135°	902.6	979.3	1044.3	1094.3	1132.6	1153.5	1158.2
137.5°	865.2	926.1	982.8	1028.3	1061.3	1079.7	1086.6
140°	841.1	894.5	945.6	982.8	1013.0	1030.4	1037.4
142.5°	819.7	865.7	908.4	943.7	971.2	986.7	988.1
145°	792.3	828.3	862.0	889.8	909.6	921.2	924.7
147.5°	770.0	798.1	822.7	845.7	861.5	869.4	871.5
150°	755.1	779.5	800.4	817.8	831.8	838.7	839.9
152.5°	743.0	763.7	781.8	795.5	807.6	812.7	812.9
155°	723.7	741.1	753.9	766.7	774.8	779.5	777.2
157.5°	704.2	718.8	728.8	737.9	744.6	746.7	746.7
160°	691.2	704.0	712.1	720.2	726.0	727.2	727.2
162.5°	679.1	690.0	696.3	704.4	708.4	709.5	708.6
165°	661.0	669.1	673.8	678.4	683.1	683.1	681.9
167.5°	644.5	650.1	654.3	656.3	658.9	658.7	657.3
170°	634.3	638.9	641.2	642.4	645.9	644.7	642.4
172.5°	625.0	628.7	630.1	631.3	632.9	631.7	630.3
175°	614.5	615.7	616.8	616.8	618.0	616.8	614.5
177.5°	606.9	607.8	607.8	607.8	607.8	606.9	605.0
180°	604.1	604.1	604.1	604.1	604.1	604.1	604.1

(END OF REPORT)