

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331666

Luminaire Tested: **SA2XXRDIP-C485D925U835-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331666
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C485D925U835-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5399.3 lumens
Efficiency: N/A
Efficacy: 121.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 44.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331666
CATALOG NUMBER: SA2XXRDIP-C485D925U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

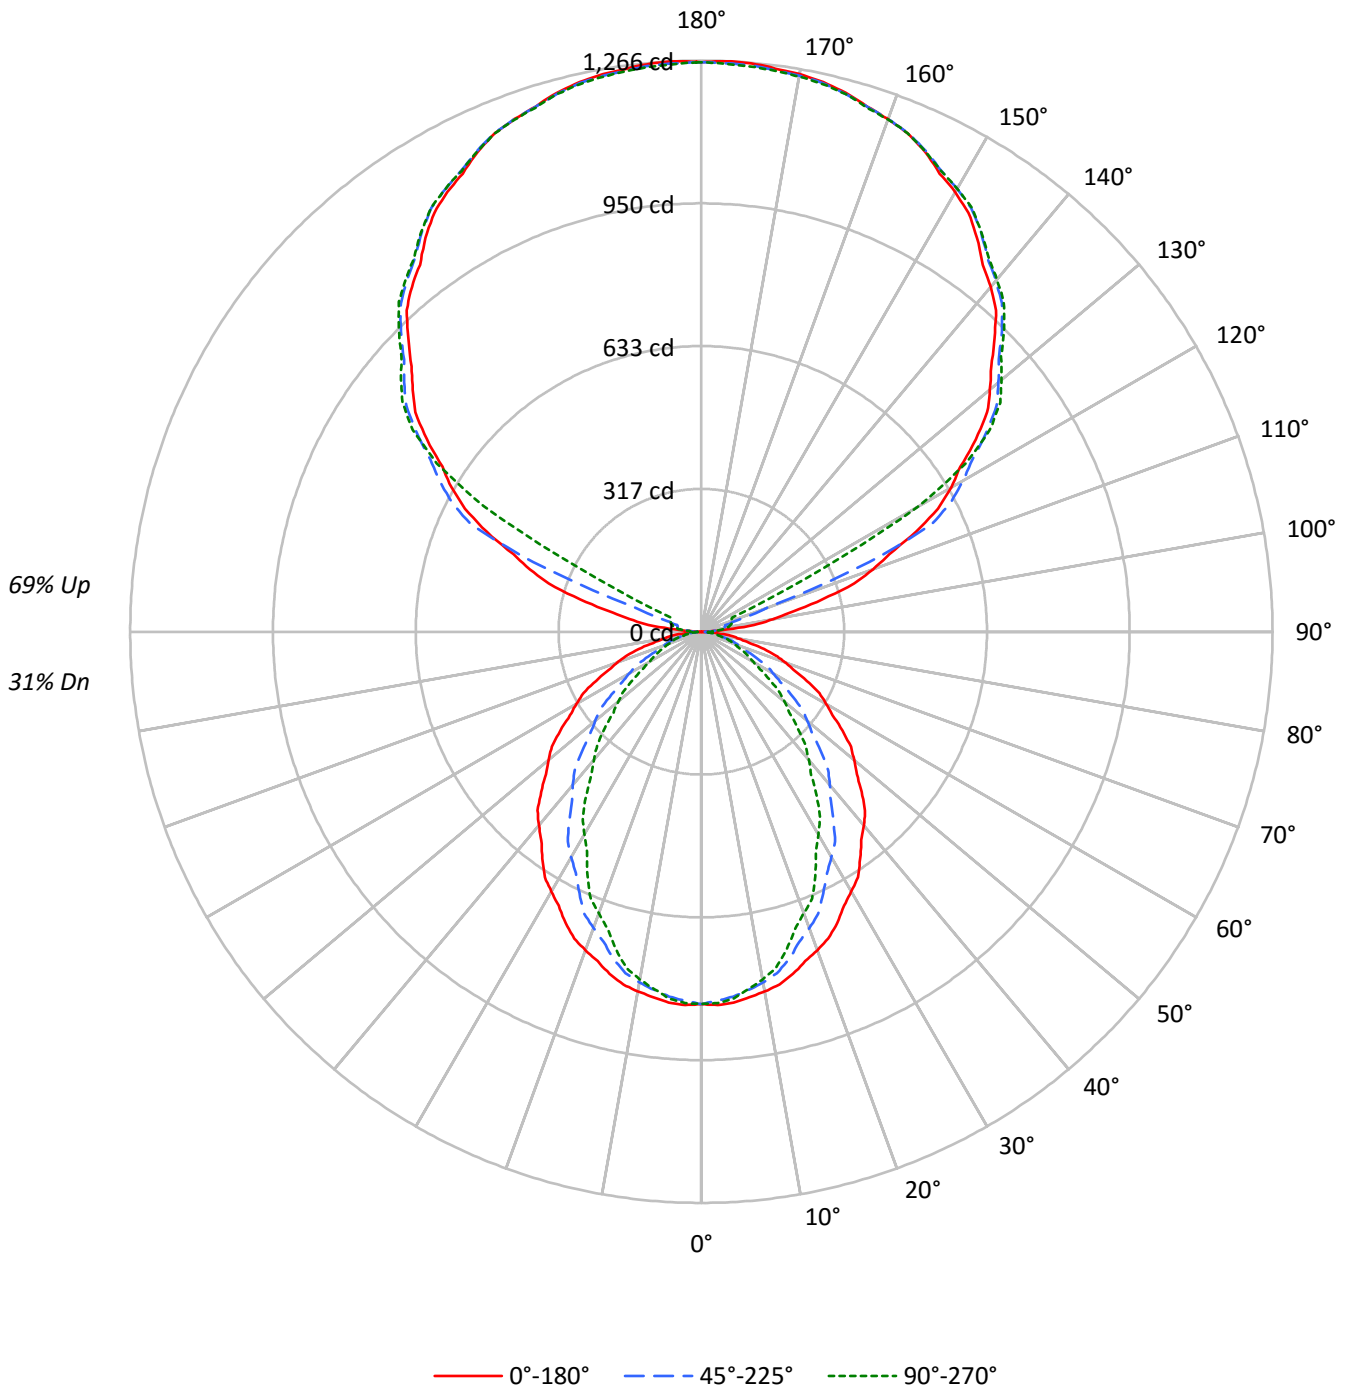



TEST NUMBER: P331666

CATALOG NUMBER: SA2XXRDIP-C485D925U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	39	39	39	31
1	94	90	86	83	84	81	78	75	64	62	60	49	48	47	35	34	34	27
2	86	79	73	68	77	71	66	62	57	53	50	43	41	39	31	30	29	23
3	78	69	63	57	70	63	57	52	50	46	43	39	36	34	28	26	25	20
4	72	62	54	48	64	56	49	44	45	40	37	35	31	29	25	23	22	17
5	66	55	47	41	59	50	43	38	40	35	32	31	28	25	23	21	19	15
6	61	49	42	36	54	45	38	33	36	31	28	28	25	22	21	19	17	14
7	56	44	37	32	50	40	34	29	33	28	24	26	22	20	19	17	15	12
8	52	40	33	28	47	37	30	26	30	25	22	23	20	18	17	15	14	11
9	48	37	30	25	44	33	27	23	27	23	19	22	18	16	16	14	12	10
10	45	34	27	22	41	31	25	21	25	21	17	20	17	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13324	13324	13324
5°	13374	13157	13230
10°	13273	12942	12832
15°	13120	12558	12197
20°	12909	12010	11407
25°	12693	11389	10644
30°	12392	10750	9663
35°	12100	10054	8803
40°	11805	9335	7807
45°	11460	8526	6907
50°	11105	7709	6021
55°	10742	6832	5171
60°	10320	5909	4292
65°	9845	4963	3908
70°	9272	4088	3597
75°	8571	3724	3356
80°	7569	3329	3059
85°	5947	2631	2631



TEST NUMBER: P331666

CATALOG NUMBER: SA2XXRDIP-C485D925U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.2	1.4
10°-20°	212.1	3.9
20°-30°	297.8	5.5
30°-40°	324.8	6.0
40°-50°	298.6	5.5
50°-60°	234.5	4.3
60°-70°	152.9	2.8
70°-80°	78.8	1.5
80°-90°	23.6	0.4
90°-100°	42.1	0.8
100°-110°	154.4	2.9
110°-120°	412.7	7.6
120°-130°	681.3	12.6
130°-140°	724.5	13.4
140°-150°	673.4	12.5
150°-160°	541.4	10.0
160°-170°	348.9	6.5
170°-180°	120.1	2.2
0°-30°	587.2	10.9
0°-40°	912.0	16.9
0°-60°	1445.1	26.8
0°-90°	1700.5	31.5
90°-120°	609.2	11.3
90°-150°	2688.4	49.8
90°-180°	3699.0	68.5
0°-180°	5399.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	825	825	825	825	825	
5°	825	821	812	818	816	78
15°	785	776	751	738	730	221
25°	712	687	639	610	598	327
35°	614	574	510	465	447	384
45°	502	450	373	322	302	387
55°	382	322	243	200	184	341
65°	258	197	130	106	102	255
75°	137	87	60	55	54	145
85°	32	17	14	14	14	38
90°	1	11	18	23	25	4
95°	59	31	36	40	39	73
105°	278	290	56	65	69	297
115°	525	541	564	160	75	517
125°	742	755	772	778	781	662
135°	919	933	942	950	949	709
145°	1066	1066	1080	1086	1082	666
155°	1174	1166	1176	1181	1174	541
165°	1237	1232	1234	1240	1234	349
175°	1265	1259	1260	1266	1258	120
180°	1262	1262	1262	1262	1262	



TEST NUMBER: P331666

CATALOG NUMBER: SA2XXRDIP-C485D925U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	828.2	827.6	826.9	826.2	825.6	824.5	823.1	821.6	820.1	818.7	820.0
5°	825.2	824.4	823.6	822.8	821.9	820.4	818.3	816.1	814.0	811.8	813.3
7.5°	816.7	815.7	814.7	813.6	812.6	810.8	808.3	805.8	803.3	800.8	801.2
10°	809.6	808.4	807.2	806.1	804.9	802.7	799.4	796.0	792.7	789.4	788.9
12.5°	800.6	799.2	797.7	796.3	794.9	792.1	787.8	783.6	779.3	775.1	774.2
15°	784.9	783.1	781.3	779.4	777.6	773.9	768.2	762.6	757.0	751.3	748.2
17.5°	765.7	762.9	760.1	757.3	754.5	749.5	742.3	735.0	727.8	720.5	716.8
20°	751.3	748.0	744.7	741.4	738.0	732.2	723.9	715.6	707.3	699.0	694.9
22.5°	735.8	732.1	728.3	724.6	720.9	714.4	705.0	695.6	686.3	676.9	671.6
25°	712.5	707.2	701.9	696.5	691.2	683.1	672.1	661.2	650.2	639.3	632.5
27.5°	684.4	678.6	672.8	667.1	661.3	652.2	639.9	627.5	615.2	602.8	594.9
30°	664.7	658.4	652.1	645.8	639.5	629.7	616.4	603.1	589.8	576.6	568.1
32.5°	645.6	638.2	630.8	623.5	616.1	605.6	592.1	578.5	565.0	551.5	541.8
35°	613.9	605.4	597.0	588.5	580.0	568.5	553.9	539.3	524.7	510.1	499.6
37.5°	582.2	572.9	563.6	554.3	545.1	532.6	517.1	501.5	485.9	470.4	458.8
40°	560.1	550.2	540.2	530.3	520.3	507.3	491.2	475.1	459.0	442.9	431.1
42.5°	537.4	526.9	516.4	506.0	495.5	481.9	465.3	448.6	432.0	415.4	403.2
45°	501.9	490.8	479.6	468.5	457.4	443.1	425.7	408.3	390.8	373.4	361.6
47.5°	467.2	455.4	443.7	431.9	420.1	405.2	387.2	369.2	351.2	333.2	321.5
50°	442.1	430.3	418.6	406.8	395.0	380.0	361.7	343.5	325.2	306.9	295.5
52.5°	417.6	405.3	393.0	380.7	368.4	353.3	335.4	317.6	299.7	281.9	270.8
55°	381.6	368.7	355.7	342.8	329.9	314.4	296.5	278.6	260.6	242.7	232.8
57.5°	344.7	331.5	318.2	304.9	291.6	276.4	259.2	241.9	224.7	207.5	198.3
60°	319.6	306.4	293.1	279.8	266.5	251.4	234.3	217.2	200.1	183.0	174.5
62.5°	295.1	281.9	268.6	255.3	242.0	227.3	211.0	194.7	178.4	162.1	154.0
65°	257.7	244.2	230.8	217.3	203.9	189.7	174.8	159.8	144.9	129.9	124.3
67.5°	221.5	208.2	194.8	181.5	168.1	154.7	141.3	127.9	114.4	101.0	98.4
70°	196.4	183.5	170.5	157.6	144.6	132.4	121.0	109.5	98.1	86.6	85.0
72.5°	172.5	160.1	147.7	135.3	122.9	112.1	102.9	93.7	84.5	75.3	73.9
75°	137.4	125.8	114.2	102.6	90.9	82.3	76.7	71.0	65.4	59.7	58.6
77.5°	102.9	92.7	82.5	72.3	62.2	55.7	53.0	50.3	47.5	44.8	44.1
80°	81.4	72.9	64.5	56.0	47.5	42.5	40.8	39.2	37.5	35.8	35.2
82.5°	61.7	55.1	48.5	41.9	35.3	31.4	30.3	29.1	28.0	26.9	26.5
85°	32.1	28.6	25.1	21.7	18.2	16.2	15.7	15.2	14.7	14.2	14.2
87.5°	9.7	9.1	8.5	7.9	7.3	7.1	7.5	7.8	8.1	8.4	8.5
90°	0.9	3.1	5.4	7.6	9.8	11.8	13.4	15.0	16.6	18.3	19.3
92.5°	18.4	18.2	18.0	17.8	17.6	17.9	18.8	19.6	20.4	21.2	21.7
95°	59.4	52.7	46.0	39.3	32.6	29.9	31.4	32.8	34.2	35.6	36.6
97.5°	117.8	98.9	80.1	61.2	42.3	34.5	37.8	41.1	44.4	47.7	48.5
100°	161.7	133.8	106.0	78.2	50.4	38.3	41.7	45.2	48.6	52.1	53.7
102.5°	209.9	204.0	198.1	192.2	186.3	169.0	140.1	111.2	82.4	53.5	55.6
105°	277.6	283.7	289.8	295.9	302.0	277.3	221.9	166.5	111.1	55.7	57.9
107.5°	354.9	359.8	364.7	369.6	374.6	343.8	277.3	210.9	144.4	78.0	75.7
110°	404.6	408.9	413.1	417.4	421.6	394.4	335.8	277.1	218.5	159.8	139.5



TEST NUMBER: P331666

CATALOG NUMBER: SA2XXRDIP-C485D925U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	451.3	455.1	458.9	462.7	466.4	461.1	446.6	432.1	417.6	403.1	329.1
115°	525.1	528.6	532.0	535.5	538.9	543.2	548.3	553.4	558.4	563.5	469.5
117.5°	591.1	594.9	598.8	602.7	606.5	610.2	613.7	617.2	620.7	624.1	601.4
120°	639.3	642.3	645.4	648.4	651.5	654.8	658.5	662.1	665.8	669.4	671.9
122.5°	680.2	683.4	686.6	689.8	693.0	696.6	700.6	704.6	708.6	712.6	714.0
125°	742.5	745.1	747.8	750.4	753.1	756.3	760.2	764.0	767.9	771.7	773.2
127.5°	798.9	801.9	804.8	807.7	810.6	813.5	816.4	819.3	822.2	825.1	827.1
130°	834.8	838.0	841.2	844.5	847.7	850.5	852.7	854.9	857.2	859.4	861.6
132.5°	871.3	874.0	876.8	879.6	882.3	884.8	887.1	889.3	891.5	893.7	895.7
135°	918.8	922.0	925.3	928.5	931.8	934.3	936.1	938.0	939.8	941.6	943.6
137.5°	966.8	969.1	971.4	973.6	975.9	978.1	980.1	982.2	984.3	986.4	988.3
140°	998.2	999.9	1001.5	1003.1	1004.7	1006.7	1008.9	1011.1	1013.4	1015.6	1017.4
142.5°	1024.5	1026.0	1027.5	1028.9	1030.4	1032.4	1034.9	1037.5	1040.1	1042.6	1044.3
145°	1065.8	1065.6	1065.4	1065.2	1065.0	1066.6	1070.1	1073.5	1077.0	1080.4	1081.8
147.5°	1101.8	1101.0	1100.3	1099.5	1098.7	1100.0	1103.4	1106.9	1110.3	1113.7	1114.7
150°	1125.2	1123.8	1122.3	1120.9	1119.5	1120.4	1123.7	1126.9	1130.2	1133.4	1134.6
152.5°	1144.9	1143.3	1141.7	1140.2	1138.6	1139.3	1142.4	1145.5	1148.6	1151.7	1152.9
155°	1173.6	1171.8	1169.9	1168.1	1166.3	1166.6	1169.0	1171.5	1173.9	1176.3	1177.5
157.5°	1196.0	1194.5	1193.0	1191.4	1189.9	1190.0	1191.7	1193.4	1195.1	1196.8	1198.2
160°	1209.2	1208.0	1206.8	1205.5	1204.3	1204.3	1205.5	1206.8	1208.0	1209.2	1210.4
162.5°	1220.9	1219.7	1218.5	1217.2	1216.0	1215.9	1217.0	1218.0	1219.1	1220.2	1221.5
165°	1236.6	1235.4	1234.2	1232.9	1231.7	1231.4	1232.0	1232.6	1233.3	1233.9	1235.3
167.5°	1248.3	1247.1	1245.9	1244.6	1243.4	1243.1	1243.7	1244.2	1244.8	1245.4	1246.8
170°	1254.9	1253.6	1252.4	1251.2	1250.0	1249.6	1250.0	1250.4	1250.8	1251.2	1252.6
172.5°	1259.2	1258.0	1256.8	1255.6	1254.4	1254.0	1254.4	1254.8	1255.2	1255.6	1257.0
175°	1264.9	1263.5	1262.1	1260.6	1259.2	1258.7	1259.1	1259.5	1259.9	1260.3	1261.8
177.5°	1265.8	1264.7	1263.6	1262.4	1261.3	1260.8	1261.0	1261.1	1261.3	1261.4	1262.6
180°	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2



TEST NUMBER: P331666

CATALOG NUMBER: SA2XXRDIP-C485D925U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	821.3	822.7	824.0	824.5	824.3	824.0	823.7	823.5
5°	814.8	816.3	817.8	818.3	817.8	817.3	816.8	816.3
7.5°	801.6	802.0	802.5	802.3	801.4	800.5	799.7	798.8
10°	788.4	787.9	787.4	786.7	785.7	784.7	783.7	782.7
12.5°	773.3	772.4	771.5	770.2	768.5	766.9	765.2	763.6
15°	745.0	741.9	738.7	736.3	734.6	733.0	731.3	729.7
17.5°	713.0	709.3	705.5	702.2	699.4	696.5	693.7	690.8
20°	690.7	686.6	682.4	678.5	674.9	671.2	667.6	663.9
22.5°	666.2	660.9	655.6	651.5	648.8	646.1	643.4	640.6
25°	625.7	618.9	612.1	607.4	604.9	602.4	600.0	597.5
27.5°	587.0	579.0	571.1	565.2	561.2	557.3	553.3	549.4
30°	559.6	551.2	542.7	536.2	531.7	527.3	522.8	518.3
32.5°	532.1	522.5	512.8	505.9	501.7	497.5	493.2	489.0
35°	489.2	478.7	468.3	461.2	457.6	453.9	450.3	446.6
37.5°	447.3	435.8	424.3	416.4	412.3	408.1	403.9	399.7
40°	419.3	407.5	395.7	387.7	383.4	379.1	374.7	370.4
42.5°	391.0	378.8	366.7	358.5	354.3	350.1	345.9	341.7
45°	349.8	338.1	326.3	318.4	314.4	310.4	306.4	302.5
47.5°	309.8	298.1	286.4	278.7	275.1	271.5	267.8	264.2
50°	284.0	272.6	261.1	253.7	250.2	246.7	243.2	239.7
52.5°	259.7	248.7	237.6	230.5	227.3	224.1	220.8	217.6
55°	222.8	212.8	202.9	196.3	193.2	190.0	186.9	183.7
57.5°	189.2	180.1	171.0	165.1	162.4	159.8	157.1	154.4
60°	166.0	157.6	149.1	143.6	140.9	138.2	135.6	132.9
62.5°	145.9	137.9	129.8	125.0	123.4	121.8	120.2	118.6
65°	118.7	113.0	107.4	104.3	103.8	103.3	102.8	102.3
67.5°	95.8	93.2	90.6	89.1	88.5	88.0	87.5	86.9
70°	83.3	81.7	80.0	78.8	78.2	77.5	76.8	76.2
72.5°	72.5	71.1	69.7	68.8	68.4	68.0	67.6	67.2
75°	57.4	56.3	55.1	54.4	54.3	54.1	53.9	53.8
77.5°	43.5	42.8	42.2	41.7	41.4	41.2	40.9	40.6
80°	34.5	33.9	33.2	32.9	32.9	32.9	32.9	32.9
82.5°	26.1	25.7	25.3	25.1	25.1	25.1	25.1	25.1
85°	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2
87.5°	8.6	8.6	8.7	8.8	8.9	9.0	9.0	9.1
90°	20.3	21.3	22.3	23.0	23.4	23.8	24.3	24.7
92.5°	22.2	22.8	23.3	23.7	23.9	24.2	24.4	24.7
95°	37.6	38.7	39.7	40.1	39.9	39.7	39.5	39.3
97.5°	49.3	50.1	50.9	51.4	51.7	51.9	52.2	52.4
100°	55.3	56.9	58.6	59.6	60.0	60.4	60.8	61.2
102.5°	57.7	59.9	62.0	63.3	63.9	64.4	65.0	65.6
105°	60.2	62.4	64.6	66.2	67.0	67.8	68.6	69.4
107.5°	73.4	71.2	68.9	68.2	69.0	69.8	70.6	71.4
110°	119.2	98.9	78.6	68.9	69.7	70.5	71.3	72.2



TEST NUMBER: P331666

CATALOG NUMBER: SA2XXRDIP-C485D925U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	255.1	181.0	107.0	70.3	70.9	71.6	72.2	72.9
115°	375.6	281.6	187.6	133.3	118.7	104.1	89.5	74.9
117.5°	578.7	556.0	533.2	497.8	449.8	401.8	353.8	305.8
120°	674.3	676.8	679.2	666.7	639.3	611.9	584.5	557.1
122.5°	715.5	716.9	718.4	716.5	711.2	705.8	700.5	695.2
125°	774.6	776.0	777.4	778.4	779.0	779.6	780.3	780.9
127.5°	829.2	831.3	833.4	834.4	834.6	834.7	834.8	834.9
130°	863.9	866.1	868.3	869.4	869.2	868.9	868.7	868.5
132.5°	897.6	899.5	901.4	902.2	902.0	901.8	901.6	901.4
135°	945.7	947.7	949.7	950.5	950.1	949.7	949.3	948.9
137.5°	990.3	992.3	994.3	995.0	994.3	993.6	992.9	992.2
140°	1019.2	1021.1	1022.9	1023.3	1022.3	1021.3	1020.3	1019.2
142.5°	1045.9	1047.6	1049.3	1049.6	1048.6	1047.6	1046.6	1045.5
145°	1083.3	1084.7	1086.1	1086.3	1085.3	1084.3	1083.3	1082.3
147.5°	1115.8	1116.8	1117.9	1118.0	1117.1	1116.3	1115.4	1114.6
150°	1135.8	1137.1	1138.3	1138.4	1137.4	1136.3	1135.3	1134.3
152.5°	1154.1	1155.3	1156.5	1156.5	1155.1	1153.8	1152.5	1151.1
155°	1178.8	1180.0	1181.2	1181.0	1179.4	1177.7	1176.1	1174.5
157.5°	1199.5	1200.9	1202.3	1202.2	1200.6	1199.0	1197.4	1195.9
160°	1211.6	1212.9	1214.1	1214.0	1212.5	1211.1	1209.7	1208.3
162.5°	1222.9	1224.3	1225.7	1225.5	1223.8	1222.0	1220.3	1218.5
165°	1236.7	1238.1	1239.5	1239.5	1238.1	1236.7	1235.3	1233.9
167.5°	1248.2	1249.6	1251.1	1250.8	1249.0	1247.2	1245.4	1243.5
170°	1254.1	1255.5	1256.9	1256.7	1254.9	1253.0	1251.2	1249.4
172.5°	1258.4	1259.9	1261.3	1261.1	1259.2	1257.4	1255.6	1253.8
175°	1263.2	1264.6	1266.0	1265.7	1263.7	1261.7	1259.6	1257.6
177.5°	1263.7	1264.9	1266.0	1265.8	1264.4	1262.9	1261.4	1260.0
180°	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2

(END OF REPORT)